



Two-Way, Two Position, Normally Closed

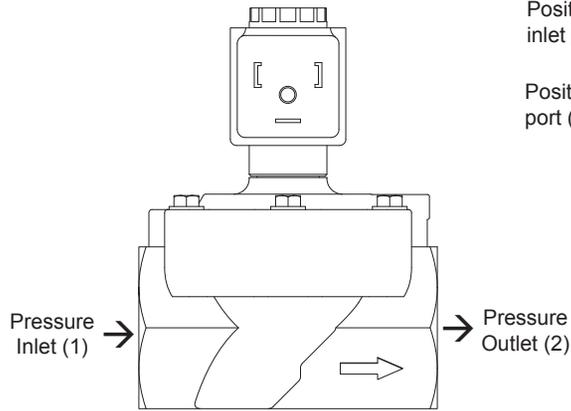


Position 1) Coil De-energized. Pressure inlet port (1) is closed to outlet port (2).

Position 2) Coil Energized. Pressure inlet port (1) is open to outlet port (2).




NOTE: Particulate Screen - 50 Mesh Stainless Steel

Two-Way, Two Position, Normally Closed

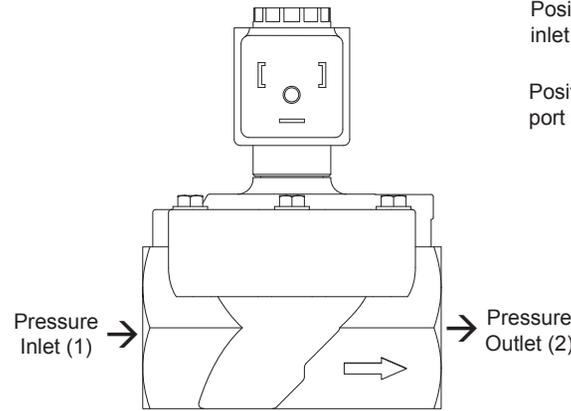


Position 1) Coil De-energized. Pressure inlet port (1) is closed to outlet port (2).

Position 2) Coil Energized. Pressure inlet port (1) is open to outlet port (2).




NOTE: Particulate Screen - 50 Mesh Stainless Steel

Electrical Hook-up

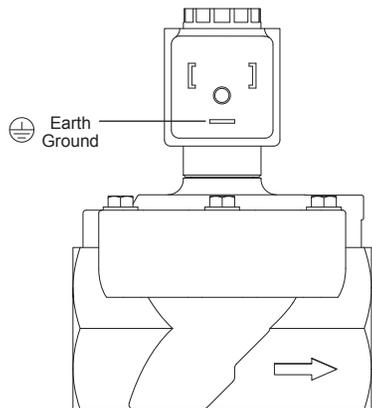

18 mm DIN Connector
Power leads connected to vertical pins on all versions. Not polarity sensitive.

Electrical Hook-up

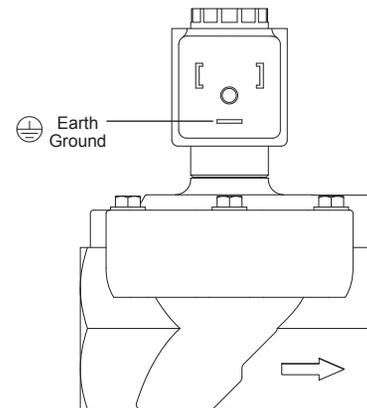

18 mm DIN Connector
Power leads connected to vertical pins on all versions. Not polarity sensitive.



Series DVD-2B Large

Application and
Installation Guide



Series DVD-2B Large

Application and
Installation Guide



Caution

Excessive use of pipe sealant can cause clogging and leakage. Please follow ASME standards for applying pipe sealant and tape. Do not use media, voltage or pressures other than that listed in specifications as valve malfunction could result. Misuse or misapplication of NITRA solenoid valves could cause serious bodily injury or property damage.

www.AutomationDirect.com
1-800-633-0405

3505 Hutchinson Rd., Cumming, GA 30040



Caution

Excessive use of pipe sealant can cause clogging and leakage. Please follow ASME standards for applying pipe sealant and tape. Do not use media, voltage or pressures other than that listed in specifications as valve malfunction could result. Misuse or misapplication of NITRA solenoid valves could cause serious bodily injury or property damage.

www.AutomationDirect.com
1-800-633-0405

3505 Hutchinson Rd., Cumming, GA 30040

