



# ACL1 AC Current Indicator



The ACL1 Current Indicator is a small, inexpensive, simple LED ring which slides over a conductor to give a flashing indication of current flow. This unit is ideal for use in control panels, or wherever you need to substantiate current flow. The ACL1 current indicator is a cost-effective way to detect live conductors and see current flow to fans, heaters, pumps, lighting or other powered devices.

## Applications

### Monitoring Loads

- Provides indication of current draw on monitored loads in a panel

### Operation Confirmation


- Provides confirmation of operation for critical lighting equipment

### Identifying Open Circuits

- Quickly identify open heater circuit connection

## Features

- Low Sensitivity Turn-On Point:** Detect currents as low as 0.5A with a single conductor pass. Eliminates the need to wrap conductors multiple times to increase sensitivity.
- High Visibility Flashing LED:** Flashing LEDs perform better in daylight conditions and from multiple angles than constant on LEDs.
- Five-year warranty





Click on the thumbnail or go to <https://www.automationdirect.com/VID-CT-0001> for a short introductory video on the AcuAmp Current Switches, Transducers and Indicators

| ACL1 AC Current Indicator |                                                                                                  |         |         |         |
|---------------------------|--------------------------------------------------------------------------------------------------|---------|---------|---------|
| Part Number               | Description                                                                                      | Pcs/Pkg | Wt (lb) | Price   |
| ACL1                      | AcuAMP AC current indicator, fixed core, 0.5-100A sensing range, 0.5A non-adjustable trip point. | 1       | 0.3     | \$23.00 |
| Specifications            |                                                                                                  |         |         |         |
| Sensed Current            | AC, 50-400 Hz                                                                                    |         |         |         |
| Output/Indication         | LED (flashing, red)                                                                              |         |         |         |
| Indicating Range          | 0.5-100A                                                                                         |         |         |         |
| LED ON                    | >500mA (factory set)                                                                             |         |         |         |
| Case                      | UL94-V0 Flammability Rated                                                                       |         |         |         |
| Mounting                  | Slides directly onto monitored conductor (can be attached with the supplied wire-tie)            |         |         |         |
| Isolation Voltage         | Max. Primary Circuit Voltage, 300VAC                                                             |         |         |         |
| Environmental             | Operating Temperature: -58 to 122°F [-50 to 50°C]                                                |         |         |         |
|                           | Relative Humidity: 0-95% RH, Non-condensing                                                      |         |         |         |
|                           | Pollution Degree 2                                                                               |         |         |         |
|                           | Altitude 2000 meters                                                                             |         |         |         |
| Sensing Aperture          | 0.30" [7.6 mm] dia.                                                                              |         |         |         |
| Certifications            | cULus listed (E222847). CE                                                                       |         |         |         |

## Application Example

### Dimensions

Inches [mm]

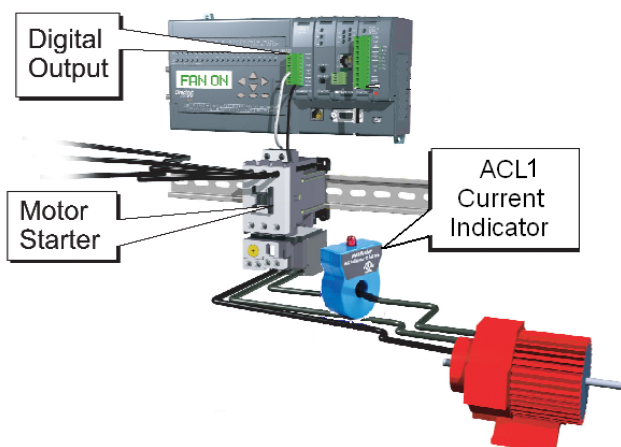



# AC Current Switches, Transducers and Indicators

## Overview

The AcuAMP series of AC current sensors is a family of high-performance current sensors offering outstanding features, flexibility, and durability at an incredible Price. Choose from a wide selection of current transducers, switches and indicators, all designed in a rugged industry-standard feed-through package, including both fixed core and split core models.

AcuAMP current sensors are available with a broad selection of input sensing ranges for maximum flexibility across many current ratings. The current transducer output choices include 4-20 mA, 24VDC loop-powered, and 0 to 10 volt self-powered analog outputs. The Current Switch outputs include isolated solid state switches available in Normally Open and Normally Closed configurations or SPDT relays.

Models with output time delay are also offered in the Current Switch series. The ACL1 Current Indicator senses AC current ranging from 0.5 to 100A and requires no power for the indicating LED.

These current sensors can be mounted in a panel or attached to the monitored conductor with a wire tie. Use the Selection Guide below to find the best sensor for your requirements.



**AcuAMP AC Current Transducer Selection Guide**

| Specifications          | Single-Phase Transducer                                                                                                                                                                                                                                                                                                                  | Single-Phase Transducer (True RMS)                                                                                                                                                                                                                                                                                                                                                                                          | 3-Phase Transducer                                                                                                                                     | 3-Phase Transducer (True RMS)                                                                                                                             |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series                  | ACT                                                                                                                                                                                                                                                                                                                                      | ACTR                                                                                                                                                                                                                                                                                                                                                                                                                        | 3ACT                                                                                                                                                   | 3ACTR                                                                                                                                                     |
| <b>Sensing Range</b>    | Selectable:<br>ACT005: 0 to 2A<br>0 to 5A<br>ACT050: 0 to 10A<br>0 to 20A<br>0 to 50A<br>ACT200: 0 to 100A<br>0 to 150A<br>0 to 200A<br>ACT750: 0 to 375A<br>0 to 500A<br>0 to 750A<br>ACT2000: 0 to 1000A<br>0 to 1333A<br>0 to 2000A<br>Fixed range:<br>ACT400 0 to 400A<br>ACT600 0 to 600A<br>ACT800 0 to 800A<br>ACT1200 0 to 1200A | Selectable:<br>ACTR005: 0 to 2A<br>0 to 5A<br>ACTR050: 0 to 10A<br>0 to 20A<br>0 to 50A<br>ACTR200: 0 to 100A<br>0 to 150A<br>0 to 200A<br>ACTR750: 0 to 375A<br>0 to 500A<br>0 to 750A<br>ACTR2000: 0 to 1000A<br>0 to 1333A<br>0 to 2000A<br>Fixed range:<br>ACTR400: 0 to 400A<br>ACTR500: 0 to 500A<br>ACTR600: 0 to 600A<br>ACTR800: 0 to 800A<br>ACTR1000: 0 to 1000A<br>ACTR1200: 0 to 1200A<br>ACTR2000: 0 to 2000A | Selectable:<br>3ACT030: 0 to 10A<br>0 to 15A<br>0 to 30A<br>3ACT100: 0 to 30A<br>0 to 50A<br>0 to 100A<br>3ACT200: 0 to 100A<br>0 to 150A<br>0 to 200A | Selectable:<br>3ACTR030: 0 to 10A<br>0 to 15A<br>0 to 30A<br>3ACTR100: 0 to 30A<br>0 to 50A<br>0 to 100A<br>3ACTR200: 0 to 100A<br>0 to 150A<br>0 to 200A |
| <b>Output</b>           | -10 models: 0-10 VDC, self-powered<br>-42L models: 4-20 mA, loop-powered                                                                                                                                                                                                                                                                 | 4-20 mA, loop-powered True RMS                                                                                                                                                                                                                                                                                                                                                                                              | 4 -20 mA, loop-powered                                                                                                                                 | 4-20 mA, loop-powered True RMS                                                                                                                            |
| <b>Frequency Range</b>  | -10 models: 50 to 60 Hz<br>-42L models up to 200A: 20 to 100 Hz<br>-42L models 400, 600, 800, 1200A: 50 to 60 Hz sinusoidal waveforms only                                                                                                                                                                                               | 20 to 400 Hz; (40 to 400 Hz flexible split core models)<br>sinusoidal and non-sinusoidal waveforms                                                                                                                                                                                                                                                                                                                          | 50 to 60 Hz sinusoidal waveforms only                                                                                                                  | 30 to 100 Hz sinusoidal and non-sinusoidal waveforms                                                                                                      |
| <b>Sensing Aperture</b> | ACT005, ACT050, ACT200:<br>Fixed core: 0.75 in [19mm] dia.<br>Split core: 0.85 in [21.6 mm] sq.<br>ACT750, ACT2000:<br>Fixed core: 3.0 in [76.2 mm] dia.<br>ACT400, ACT600, ACT800:<br>Split core: 2.22 X 1.19 in [56.3 X 30.2 mm]<br>ACT1200 Split core: 3.44 X 2.31 in [87.3 X 58.8 mm]                                                | ACTR005, ACTR050, ACTR200:<br>Fixed core: 0.75 in [19mm] dia.<br>Split core: 0.85 in [21.6 mm] sq.<br>ACTR750, ACTR2000:<br>Fixed core: 3.0 in [76.2 mm] dia.<br>ACTR500, ACTR1000, ACTR2000:<br>Flexible split core: 4.5 in [114.3 mm] dia.<br>ACTR400, ACTR600, ACTR800:<br>Split core: 2.22 X 1.19 in [56.3 X 30.2 mm]<br>ACTR1200 Split core: 3.44 X 2.31 in [87.3 X 58.8 mm]                                           | 3x - Fixed core: 0.86 in [21.8 mm] dia.                                                                                                                | 3x - Fixed core: 0.86 in [21.8 mm] dia.                                                                                                                   |



# AC Current Switches, Transducers and Indicators


## AcuAMP AC Current Switch Selection Guide

| Specifications               | AC Current Switches                                                  |                                                                      |                                                                                                                                                                   |                                                                                                                                                       |                                                                                                                                                                                                                |                                                                                              |                                                                                                          |                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series                       | ACSN100                                                              | ACSN250                                                              | ACS150                                                                                                                                                            | ACSL                                                                                                                                                  | ACS200                                                                                                                                                                                                         | ACS050/ACS200                                                                                | ACS035/ACS400                                                                                            | ACSX                                                                                                                                                                                                         |
| <b>Sensing Range</b>         | 0 to 100A                                                            | 0 to 250A                                                            | Fixed core: 1 to 150A<br>Split core: 1.75 to 150A                                                                                                                 | 0 to 50A                                                                                                                                              | Jumper Selectable:<br><br>Fixed core: 1 to 6A<br>6 to 40A<br>40 to 175A<br>Split core: 1.75 to 6A<br>6 to 40A<br>40 to 200A                                                                                    | 1 to 200A                                                                                    | 2 to 400A                                                                                                | Jumper Selectable:<br><br>Fixed core: 1.5 to 12A<br>12 to 55A<br>55 to 175A<br>Split core: 2 to 12A<br>12 to 55A<br>55 to 200A                                                                               |
| <b>Setpoint (Trip Point)</b> | Non-adjustable: 0.5 A                                                | Non-adjustable: Fixed core: 0.75A<br>Split core: 1.25A               | Adjustable:<br>Fixed core: 1-150 A (15-turn potentiometer)<br>Split core: 1.75-150 A (4-turn potentiometer)<br>Monitored load current required to adjust setpoint | Adjustable (3/4-turn potentiometer):<br>ACSL010: 1-10A<br>ACSL020: 2-20A<br>ACSL050: 10-50A<br>Monitored load current not required to adjust setpoint | Adjustable:<br>(4-turn or 15-turn potentiometer)<br>Fixed core: 1-175A<br>Split core: 1.75-200A<br>Monitored load current required to adjust setpoint                                                          | Adjustable:<br>(Single turn potentiometer):<br>ACS050: 1-50A<br>ACS200: 4-200A               | Adjustable:<br>(3/4-turn potentiometer):<br>ACS035: 2-35A<br>ACS400: 25-400A                             | Adjustable:<br>Fixed core: 1.5-175A (15-turn potentiometer)<br>Split core: 2-200A (4-turn potentiometer)<br>Monitored load current required to adjust setpoint                                               |
| <b>Output</b>                | Isolated solid state:<br><br>Normally Open<br>0.15 A @ 120VAC or VDC | Isolated solid state:<br><br>Normally Open<br>0.15 A @ 240VAC or VDC | Isolated solid state:<br><br>Normally Open<br>0.15 A @ 240VAC or VDC<br><br>Normally Closed<br>0.2 A @ 135VAC or VDC                                              | Isolated solid state:<br><br>Normally Open<br>AC: 0.15 A @ 240VAC                                                                                     | Isolated solid state:<br><br>Normally Open or Normally Closed<br>AC model:<br>1A @ 240VAC<br><br>Normally Open AC model:<br>3A @ 120VAC<br><br>Normally Open or Normally Closed<br>DC model:<br>0.15 A @ 30VDC | Isolated solid state:<br>Normally Open<br>1A @ 240VAC                                        | Two Independent Single Pole, Double Throw electro-mechanical relays<br>AC: 1A @ 120VAC<br>DC: 2A @ 30VDC | Isolated solid state:<br><br>Normally Open or Normally Closed<br>AC model:<br>1A @ 240VAC<br><br>Normally Open AC/DC model:<br>0.15 A @ 240 VAC/ VDC<br>Normally Closed AC/DC model:<br>0.2 A @ 135 VAC/ VDC |
| <b>Frequency Range</b>       | 50 to 400 Hz                                                         | 6 to 100 Hz                                                          | 6 to 100 Hz                                                                                                                                                       | 10 to 100 Hz                                                                                                                                          | 6 to 100 Hz                                                                                                                                                                                                    | 40 to 100 Hz                                                                                 | 40 to 65 Hz                                                                                              | 50 to 100 Hz                                                                                                                                                                                                 |
| <b>Response Time</b>         | N/A                                                                  | 120ms                                                                | 120ms                                                                                                                                                             | 100ms & 2s inrush delay                                                                                                                               | 40 to 250 ms                                                                                                                                                                                                   | 0.50 sec. 5% over set point<br>0.20 sec. 50% over set point<br>0.15 sec. 100% over set point | 40 - 120ms                                                                                               | Field adjustable time delay:<br>0.12 to 15 seconds                                                                                                                                                           |
| <b>Sensing Aperture</b>      | 0.30 in [8.13 mm] dia.                                               | Fixed core: 0.75 in [19mm] dia.<br>Split core: 0.85 in [21.7 mm] sq. | Fixed core: 0.75 in [19mm] dia.<br>Split core: 0.85 in [21.7 mm] sq.                                                                                              | Fixed core: 0.55 in [13.97 mm] dia.<br>Split core: 0.85 in [21.7 mm] sq.                                                                              | Fixed core: 0.55 in [13.97 mm] dia.<br>Split core: 0.85 in [21.7 mm] sq.                                                                                                                                       | 0.75 in [19mm] dia.                                                                          | 1.31 in [33.3 mm] dia.                                                                                   | Fixed core: 0.75 in [19mm] dia.<br>Split core: 0.85 in [21.7 mm] sq.                                                                                                                                         |



# AC Current Switches, Transducers and Indicators

| AcuAMP AC Current Transducer/Switch and Indicator Selection Guide |                                                          |                                                                                                                                                                                       |                             |
|-------------------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Specifications                                                    | AC Current Transducer                                    | AC Current Transducer/Switch                                                                                                                                                          | Indicator                   |
| Series                                                            | ACTH                                                     | ACTS                                                                                                                                                                                  | ACL1                        |
| <b>Sensing Range</b>                                              | 0 to 50A                                                 | 1 to 200A                                                                                                                                                                             | 0 to 100A                   |
| <b>Setpoint (Trip Point)</b>                                      | Not Applicable                                           | Adjustable:<br>(Single turn potentiometer):<br><br>ACTS050: 1-50A<br><br>ACTS200: 4-200A                                                                                              | Non-adjustable:<br>0.5 A    |
| <b>Output</b>                                                     | 4 -20 mA, loop-powered adaptive True RMS                 | 4-20mA analog output and isolated solid state:<br>Normally Open<br><br>1A @ 240VAC                                                                                                    | LED Only<br>(flashing, red) |
| <b>Frequency Range</b>                                            | 40 to 400 Hz                                             | 40 to 400 Hz                                                                                                                                                                          | 50 to 400 Hz                |
| <b>Response Time</b>                                              | 400ms at 100% duty cycle, or duty cycle period plus 40ms | Switch:<br>0.50 sec. 5% over set point<br>0.20 sec. 50% over set point<br>0.15 sec. 100% over set point<br><br>Analog:<br>< 0.30 sec. 90% step change<br>< 0.40 sec. 100% step change | N/A                         |
| <b>Sensing Aperture</b>                                           | 0.86 in<br>[21.9 mm] sq.                                 | 0.75 in<br>[19mm] dia.                                                                                                                                                                | 0.30 in<br>[7.6 mm] dia.    |



Click on the thumbnail or go to  
<https://www.automationdirect.com/VID-CT-0001>  
 for a short introductory video on the AcuAmp Current  
 Switches, Transducers and Indicators



# AC Current Sensors, Switches and Transducers Application Guide


## Application Guide

AcuAMP current sensors are a great fit for many applications including material handling, fan and pump applications, and heating systems. With current transducers, current switches and current indicators, this sensor family gives you


valuable data for processes ranging from monitoring loads to preventive maintenance. Models with the ability to read True RMS non-sinusoidal waveforms make it easy to monitor applications using variable frequency drives.

Use the application examples to help choose the best sensor model for your application.

### Pump Jam & Suction Loss Protection

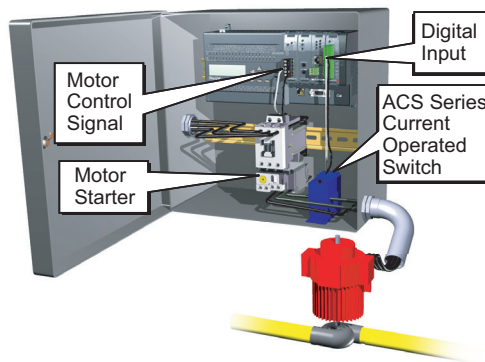


### Heater Life Prediction

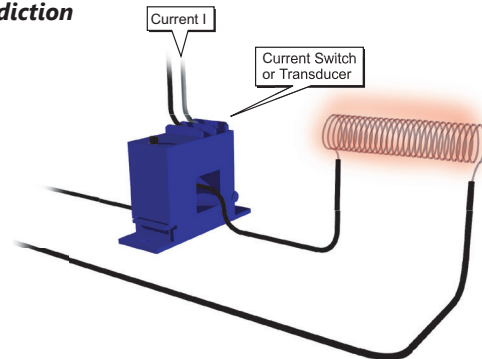


### Crusher/Grinder/Shredder Motor Interlocks

The performance of size reduction equipment like crushers or grinders can be optimized by controlling the in-feed in order to:


- Help prevent jamming
- Improve the uniformity of the resultant product
- Enhance overall production efficiency

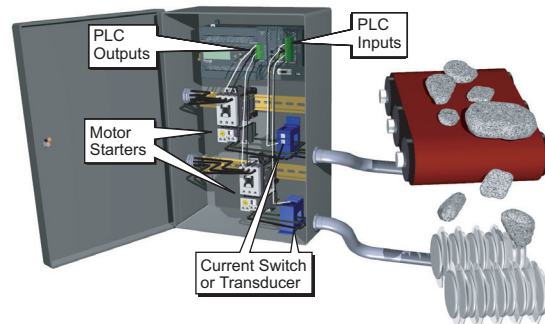

### Pump Load Monitoring

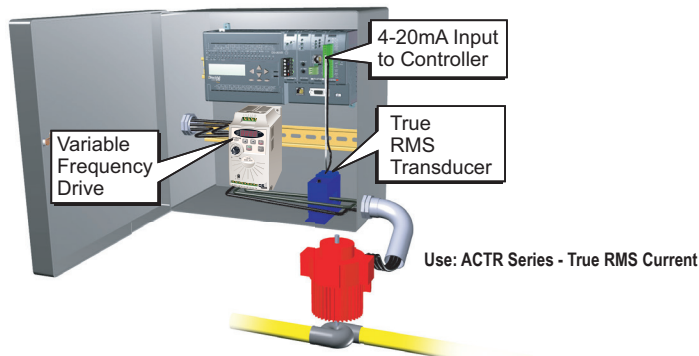

### Lamp Failure Detection

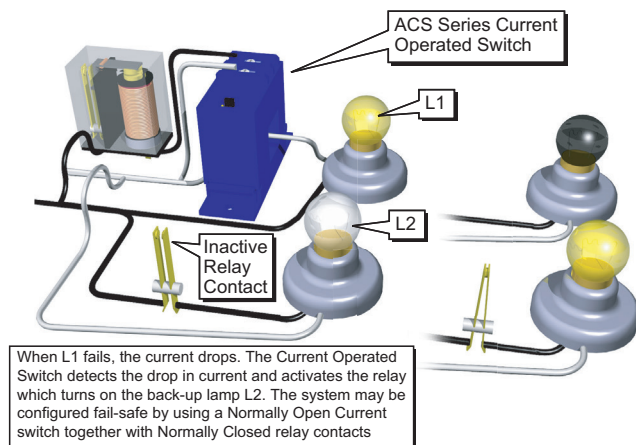

### Electric Motor Load Status

