



AC Current Switches, Transducers and Indicators


Overview

The AcuAMP series of AC current sensors is a family of high-performance current sensors offering outstanding features, flexibility, and durability at an incredible Price. Choose from a wide selection of current transducers, switches and indicators, all designed in a rugged industry-standard feed-through package, including both fixed core and split core models.

AcuAMP current sensors are available with a broad selection of input sensing ranges for maximum flexibility across many current ratings. The current transducer output choices include 4-20 mA, 24VDC loop-powered, and 0 to 10 volt self-powered analog outputs. The Current Switch outputs include isolated solid state switches available in Normally Open and Normally Closed configurations or SPDT relays.

Models with output time delay are also offered in the Current Switch series. The ACL1 Current Indicator senses AC current ranging from 0.5 to 100A and requires no power for the indicating LED.

These current sensors can be mounted in a panel or attached to the monitored conductor with a wire tie. Use the Selection Guide below to find the best sensor for your requirements.

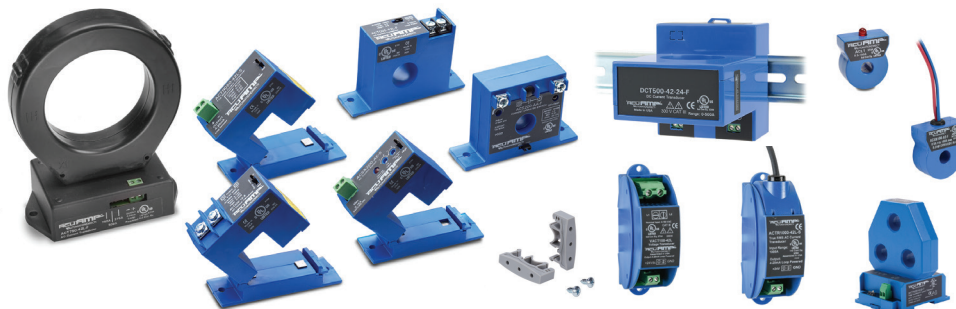

AcuAMP AC Current Transducer Selection Guide

Specifications	Single-Phase Transducer	Single-Phase Transducer (True RMS)	3-Phase Transducer	3-Phase Transducer (True RMS)
Series	ACT	ACTR	3ACT	3ACTR
Sensing Range	Selectable: ACT005: 0 to 2A 0 to 5A ACT050: 0 to 10A 0 to 20A 0 to 50A ACT200: 0 to 100A 0 to 150A 0 to 200A ACT750: 0 to 375A 0 to 500A 0 to 750A ACT2000: 0 to 1000A 0 to 1333A 0 to 2000A Fixed range: ACT400 0 to 400A ACT600 0 to 600A ACT800 0 to 800A ACT1200 0 to 1200A	Selectable: ACTR005: 0 to 2A 0 to 5A ACTR050: 0 to 10A 0 to 20A 0 to 50A ACTR200: 0 to 100A 0 to 150A 0 to 200A ACTR750: 0 to 375A 0 to 500A 0 to 750A ACTR2000: 0 to 1000A 0 to 1333A 0 to 2000A Fixed range: ACTR400: 0 to 400A ACTR500: 0 to 500A ACTR600: 0 to 600A ACTR800: 0 to 800A ACTR1000: 0 to 1000A ACTR1200: 0 to 1200A ACTR2000: 0 to 2000A	Selectable: 3ACT030: 0 to 10A 0 to 15A 0 to 30A 3ACT100: 0 to 30A 0 to 50A 0 to 100A 3ACT200: 0 to 100A 0 to 150A 0 to 200A	Selectable: 3ACTR030: 0 to 10A 0 to 15A 0 to 30A 3ACTR100: 0 to 30A 0 to 50A 0 to 100A 3ACTR200: 0 to 100A 0 to 150A 0 to 200A
Output	-10 models: 0-10 VDC, self-powered -42L models: 4-20 mA, loop-powered	4-20 mA, loop-powered True RMS	4 -20 mA, loop-powered	4-20 mA, loop-powered True RMS
Frequency Range	-10 models: 50 to 60 Hz -42L models up to 200A: 20 to 100 Hz -42L models 400, 600, 800, 1200A: 50 to 60 Hz sinusoidal waveforms only	20 to 400 Hz; (40 to 400 Hz flexible split core models) sinusoidal and non-sinusoidal waveforms	50 to 60 Hz sinusoidal waveforms only	30 to 100 Hz sinusoidal and non-sinusoidal waveforms
Sensing Aperture	ACT005, ACT050, ACT200: Fixed core: 0.75 in [19mm] dia. Split core: 0.85 in [21.6 mm] sq. ACT750, ACT2000: Fixed core: 3.0 in [76.2 mm] dia. ACT400, ACT600, ACT800: Split core: 2.22 X 1.19 in [56.3 X 30.2 mm] ACT1200 Split core: 3.44 X 2.31 in [87.3 X 58.8 mm]	ACTR005, ACTR050, ACTR200: Fixed core: 0.75 in [19mm] dia. Split core: 0.85 in [21.6 mm] sq. ACTR750, ACTR2000: Fixed core: 3.0 in [76.2 mm] dia. ACTR500, ACTR1000, ACTR2000: Flexible split core: 4.5 in [114.3 mm] dia. ACTR400, ACTR600, ACTR800: Split core: 2.22 X 1.19 in [56.3 X 30.2 mm] ACTR1200 Split core: 3.44 X 2.31 in [87.3 X 58.8 mm]	3x - Fixed core: 0.86 in [21.8 mm] dia.	3x - Fixed core: 0.86 in [21.8 mm] dia.



AC Current Switches, Transducers and Indicators

AcuAMP AC Current Switch Selection Guide								
Specifications	AC Current Switches							
Series	ACSN100	ACSN250	ACS150	ACSL	ACS200	ACS050/ACS200	ACS035/ACS400	ACSX
Sensing Range	0 to 100A	0 to 250A	Fixed core: 1 to 150A Split core: 1.75 to 150A	0 to 50A	Jumper Selectable: Fixed core: 1 to 6A 6 to 40A 40 to 175A Split core: 1.75 to 6A 6 to 40A 40 to 200A	1 to 200A	2 to 400A	Jumper Selectable: Fixed core: 1.5 to 12A 12 to 55A 55 to 175A Split core: 2 to 12A 12 to 55A 55 to 200A
Setpoint (Trip Point)	Non-adjustable: 0.5 A	Non-adjustable: Fixed core: 0.75A Split core: 1.25A	Adjustable: Fixed core: 1-150 A (15-turn potentiometer) Split core: 1.75-150 A (4-turn potentiometer) Monitored load current required to adjust setpoint	Adjustable (3/4-turn potentiometer): ACSL010: 1-10A ACSL020: 2-20A ACSL050: 10-50A Monitored load current not required to adjust setpoint	Adjustable: (4-turn or 15-turn potentiometer) Fixed core: 1-175A Split core: 1.75-200A Monitored load current required to adjust setpoint	Adjustable: (Single turn potentiometer): ACS050: 1-50A ACS200: 4-200A	Adjustable: (3/4-turn potentiometer): ACS035: 2-35A ACS400: 25-400A	Adjustable: Fixed core: 1.5-175A (15-turn potentiometer) Split core: 2-200A (4-turn potentiometer) Monitored load current required to adjust setpoint
Output	Isolated solid state: Normally Open 0.15 A @ 120VAC or VDC	Isolated solid state: Normally Open 0.15 A @ 240VAC or VDC	Isolated solid state: Normally Open 0.15 A @ 240VAC or VDC Normally Closed 0.2 A @ 135VAC or VDC	Isolated solid state: Normally Open AC: 0.15 A @ 240VAC	Isolated solid state: Normally Open or Normally Closed AC model: 1A @ 240VAC Normally Open AC model: 3A @ 120VAC Normally Open or Normally Closed DC model: 0.15 A @ 30VDC	Isolated solid state: Normally Open 1A @ 240VAC	Two Independent Single Pole, Double Throw electro-mechanical relays AC: 1A @ 120VAC DC: 2A @ 30VDC	Isolated solid state: Normally Open or Normally Closed AC model: 1A @ 240VAC Normally Open AC/DC model: 0.15 A @ 240 VAC/ VDC Normally Closed AC/DC model: 0.2 A @ 135 VAC/ VDC
Frequency Range	50 to 400 Hz	6 to 100 Hz	6 to 100 Hz	10 to 100 Hz	6 to 100 Hz	40 to 100 Hz	40 to 65 Hz	50 to 100 Hz
Response Time	N/A	120ms	120ms	100ms & 2s inrush delay	40 to 250 ms	0.50 sec. 5% over set point 0.20 sec. 50% over set point 0.15 sec. 100% over set point	40 - 120ms	Field adjustable time delay: 0.12 to 15 seconds
Sensing Aperture	0.30 in [8.13 mm] dia.	Fixed core: 0.75 in [19mm] dia. Split core: 0.85 in [21.7 mm] sq.	Fixed core: 0.75 in [19mm] dia. Split core: 0.85 in [21.7 mm] sq.	Fixed core: 0.55 in [13.97 mm] dia. Split core: 0.85 in [21.7 mm] sq.	Fixed core: 0.55 in [13.97 mm] dia. Split core: 0.85 in [21.7 mm] sq.	0.75 in [19mm] dia.	1.31 in [33.3 mm] dia.	Fixed core: 0.75 in [19mm] dia. Split core: 0.85 in [21.7 mm] sq.



AC Current Switches, Transducers and Indicators

AcuAMP AC Current Transducer/Switch and Indicator Selection Guide			
Specifications	AC Current Transducer	AC Current Transducer/Switch	Indicator
Series	ACTH	ACTS	ACL1
Sensing Range	0 to 50A	1 to 200A	0 to 100A
Setpoint (Trip Point)	Not Applicable	Adjustable: (Single turn potentiometer): ACTS050: 1-50A ACTS200: 4-200A	Non-adjustable: 0.5 A
Output	4 -20 mA, loop-powered adaptive True RMS	4-20mA analog output and isolated solid state: Normally Open 1A @ 240VAC	LED Only (flashing, red)
Frequency Range	40 to 400 Hz	40 to 400 Hz	50 to 400 Hz
Response Time	400ms at 100% duty cycle, or duty cycle period plus 40ms	Switch: 0.50 sec. 5% over set point 0.20 sec. 50% over set point 0.15 sec. 100% over set point Analog: < 0.30 sec. 90% step change < 0.40 sec. 100% step change	N/A
Sensing Aperture	0.86 in [21.9 mm] sq.	0.75 in [19mm] dia.	0.30 in [7.6 mm] dia.



Click on the thumbnail or go to <https://www.automationdirect.com/VID-CT-0001> for a short introductory video on the AcuAmp Current Switches, Transducers and Indicators



AC Current Sensors, Switches and Transducers Application Guide


Application Guide

ACUAMP current sensors are a great fit for many applications including material handling, fan and pump applications, and heating systems. With current transducers, current switches and current indicators, this sensor family gives you


valuable data for processes ranging from monitoring loads to preventive maintenance. Models with the ability to read True RMS non-sinusoidal waveforms make it easy to monitor applications using variable frequency drives.

Use the application examples to help choose the best sensor model for your application.

Pump Jam & Suction Loss Protection

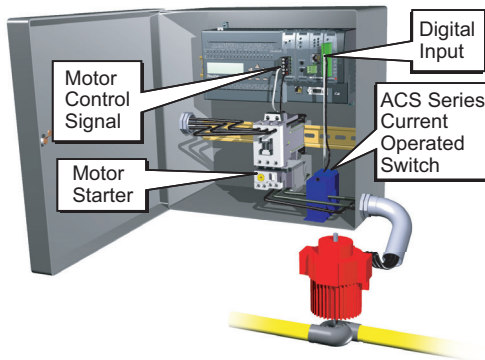


Heater Life Prediction

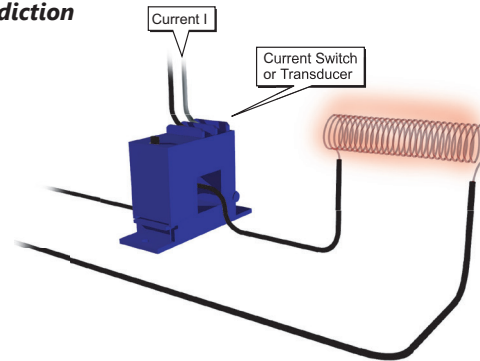


Crusher/Grinder/Shredder Motor Interlocks

The performance of size reduction equipment like crushers or grinders can be optimized by controlling the in-feed in order to:


- Help prevent jamming
- Improve the uniformity of the resultant product
- Enhance overall production efficiency

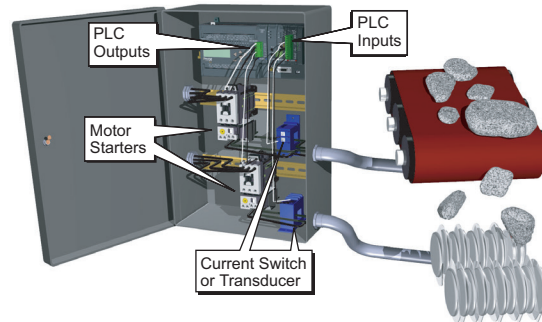


Pump Load Monitoring

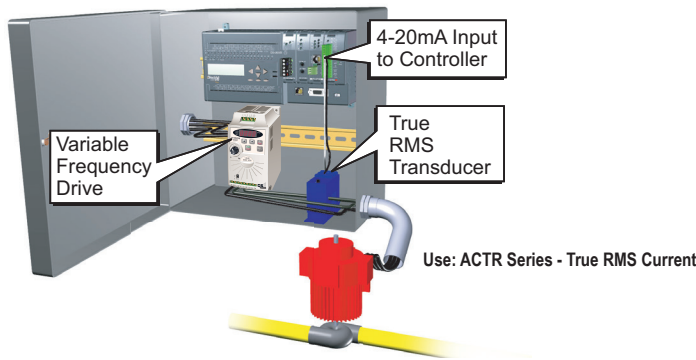

Lamp Failure Detection

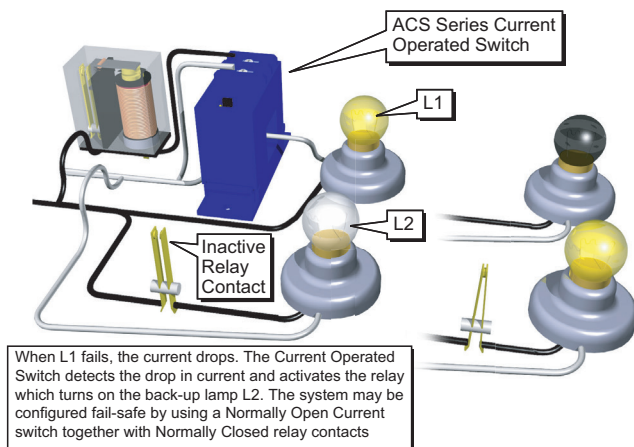

Electric Motor Load Status

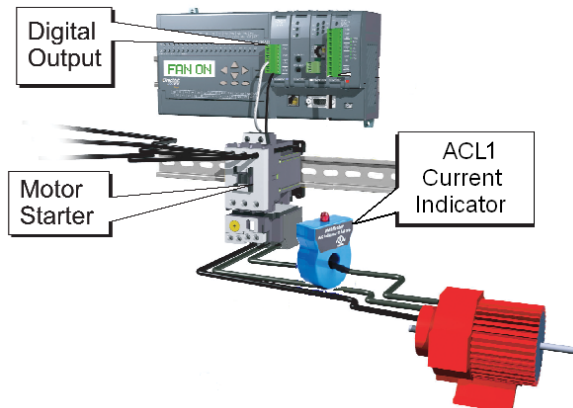



DC Current Switches and Transducers

Overview

The AcuAMP series of DC current sensors is a family of high-performance sensors offering outstanding features, flexibility, and durability at an incredible Price. Choose from a wide selection of current transducers and current switches, all designed in a rugged industry standard feed-through package.

DCT and DCS100 series have multiple input ranges (set by movable jumpers) for maximum flexibility across many current ratings. DCT series include output choices of 4 to 20 mA or +/-10 VDC bidirectional models.

DCS series outputs are available in isolated solid state Normally Open and in Single Pole Double Throw (SPDT) relay configurations.

DCT series current transducers combine a Hall Effect sensor and signal conditioner into a single package for use in DC current applications up to 400A. DCT series are available in split-core or fixed-core enclosures.

DCS100 series combine a Hall effect sensor, signal conditioner and a limit alarm into a single package. DCS100 series models are available in a fixed

core case with the choice of a relay or universal solid-state output.

All models are panel-mountable; convenient DIN-rail adapter accessories are available. Use the Selection Guide below to find the best sensor for your requirements.



Selection Guide

AcuAMP DC Current Sensors Specifications by Model Type			
Specifications	Transducer		Switch
Model	DCT	DCT 500 to 750A Large Aperture	DCS100
Power Supply	20-45 VDC*, 22-38 VAC	24 VAC/DC, Use Class 2 power supply	20-28 VAC/VDC
Power Consumption	2VA		
Setpoint (Trip point)	N/A	N/A	11-Turn Potentiometer
Output Signal	4-20 mA Sourcing +/- 10VDC (Bidirectional models only)	4-20 mA Sourcing	N/A
Output Limit	4-20 mA: 23mA 0-10 VDC: 11.5 VDC	23mA	N/A
Output Loading	4-20 mA: 500Ω max 0-10 VDC: 50kΩ min.	500Ω max	N/A
Output Switch	N/A		AE models: Normally Open Solid State 1C models: Single Pole Double Throw (SPDT) Relay
Switch Rating	N/A		AE models: Solid State N.O. (0.15 A @ 240 VAC/ VDC) 1C models: SPDT (Form C) Relay 5A General Purpose @ 240VAC 3A Inductive @ 240VAC 3A @ 30VDC 1/8 HP @ 240VAC
Off State Leakage	N/A		AE: <10μA; 1C: None
Accuracy	Fixed core: 1% FS, Split core: 2% FS	2% FS	N/A
Current Ranges	Jumper Selectable: DCT100-42: 0-50A, 0-75A, 0-100A DCT200-42: 0-100A, 0-150A, 0-200A DCT400-42: 0-200A, 0-300A, 0-400A DCT500-42: 0-500A Fixed: DCT100-10B: 0-100A Bidirectional DCT200-10B: 0-200A Bidirectional DCT300-10B: 0-300A Bidirectional	Fixed: DCT500-42: 0-500A DCT750-42: 0-750A	5-15, 10-50 and 20-100 A, Jumper Selectable
Repeatability	1% FS	1% FS	0.5% FS
Response Time	Fixed core: 20ms (to 90% of step change) Split core: 100ms (to 90% of step change)	100ms (to 90% of step change)	100ms (10% above setpoint), 20ms (100% above setpoint)
Hysteresis Approx	N/A		5% of setpoint
Isolation Voltage	3KV		
Frequency Range	DC		
Case	UL 94V-0 Flammability Rated		
Environmental	Operating Temperature: -4 to 122°F [-20 to 50°C]		Operating Temperature: AE = -40 to 140°F [-40 to 60°C]; 1C = -4 to 122°F [-20 to 50°C]
	Relative Humidity: 0-95% RH, Non-condensing		
	Pollution Degree 2		
	Altitude to 2000 meters		
Sensing Aperture	Fixed core: 0.75" [19.1 mm] dia. Split core: 0.85" [21.6 mm] sq	1.77" [45mm] dia.	0.75" [19.1 mm] dia.

* DC only for -10B Bidirectional models



DC Current Switches and Transducers Applications


Application Guide

AcuAMP DC current sensors are a great fit for many applications, including battery charge systems, solar panels, and Uninterruptible Power Systems. With both current transducers and current switches, this sensor family gives you valuable data for processes ranging from monitoring loads to preventive maintenance.


The bi-directional models allow the monitoring of batteries while they are being charged or consumed and can be used to trigger a warning if critical low levels are reached. They can also monitor the output of a photovoltaic array to make sure there is enough energy being generated to keep the process running.

Transducer

Battery Charging System - Bidirectional Output

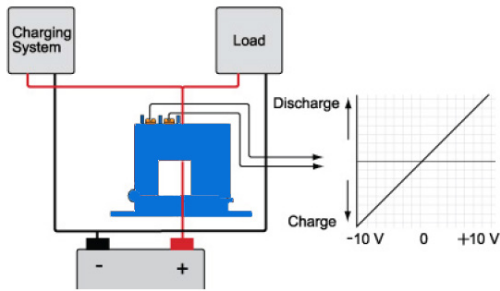


Failure Detection

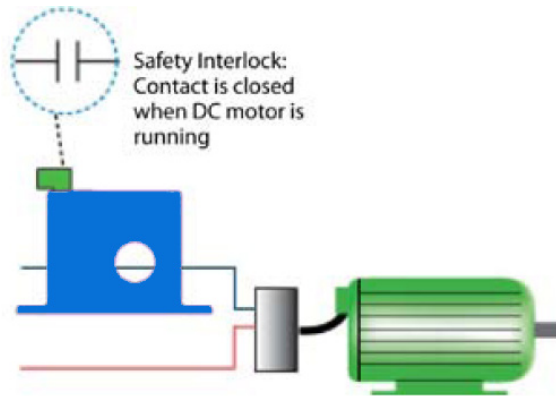

Switches

Solar Panel - Current Drop

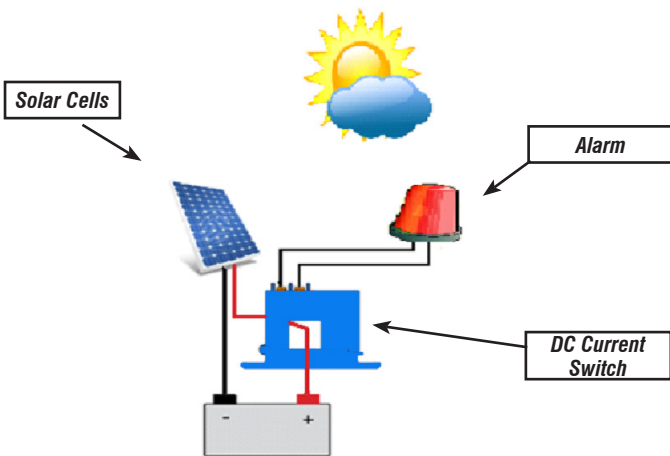

When the sun is blocked, the current drops. The Current Operated Switch detects the drop in current and activates the relay which turns on the alarm light.



Click on the thumbnail or go to <https://www.automationdirect.com/VID-CT-0001> for a short introductory video on the AcuAmp Current Switches, Transducers and Indicators