



Smart encoders &amp; actuators

# AQ5x Series Programmable Incremental Encoders

## Features


- Programmable incremental encoder
- Configurable resolution from 1 to 16,384 PPR (1024 default)
- Selectable index length of 90 or 180°
- Counting direction programmable CW or CCW
- Universal output circuit: 5–30 VDC Push-Pull (Totem Pole), or NPN/PNP open collector (HTL), or Line Driver (TTL)
- Quadrature output signals with index (ABZ, /ABZ)
- Programmable via USB cable and LIKA-IP-IQ software (free download at AutomationDirect on the AQ58S and AQ59H store pages)
- IP65 environmental rating



AQ5x Series Medium Duty Incremental (Quadrature) Encoders								
Part Number	Price	Pulses per Revolution	Dimensional Drawing	Shaft Type	Body Diameter	Input Voltage	Cable	Output
<a href="#">AQ58S-PRG-HZCP9-M12</a>	\$145.00	Up to 16,384 (14-bit)	<a href="#">PDF</a>	3/8" solid	58mm	5-30 VDC	M12 male	Universal circuit: Push-Pull (Totem Pole), or NPN/PNP open collector (HTL), or Line Driver (TTL)
<a href="#">AQ59H-PRG-HZC15-M12</a>	\$145.00		<a href="#">PDF</a>	6 to 15 mm hollow	59mm			

### Configurable Hollow Shaft Sizing

The AQ59H encoder features a hollow shaft that can be resized using removable bushings. The images below show the installation of a [BR1-12](#) bushing. See the "Accessories - AQ5x Series" on page tECD-9 for all available options.

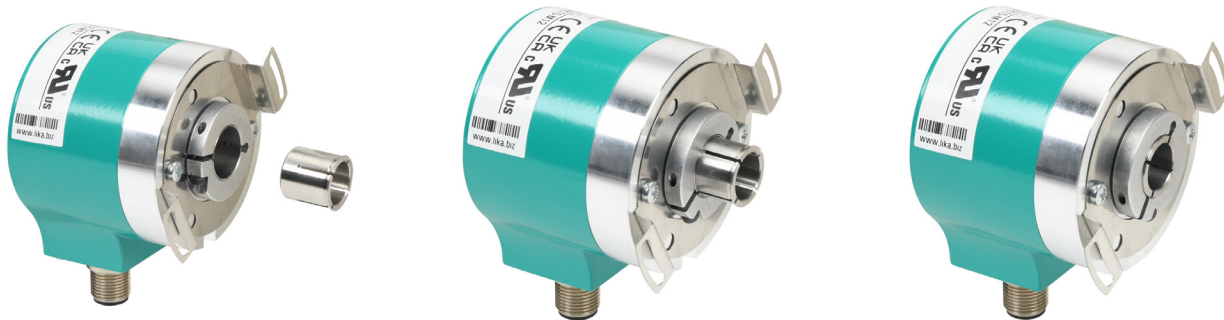

### How to Configure your Encoder

Use one of the following cable(s) to configure the encoder:

- [KIT-IP/IQ58-USB-M12](#) programming cable
- Combination of [KIT-IP/IQ58](#) and [EC-IP/IQ58-M12](#)
- Combination of [KIT-IP/IQ58](#) and [EC-M12F12-LKT12-05](#) or [EC-M12F12-LKT12-10](#)
- Download the software from the [AQ58S-PRG-HZCP9-M12](#) or [AQ59H-PRG-HZC15-M12](#) store page




Smart encoders &amp; actuators

# AQ5x Series Programmable Incremental Encoders

## Accessories - AQ5x Series

Accessories for AQ5x Series Encoders		
Part Number	Price	Description
<a href="#"><u>BR1-6</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 6mm, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-6.35</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 1/4in, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-8</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 8mm, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-9.52</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 3/8in, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-10</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 10mm, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-11</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 11mm, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-12</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 12mm, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>BR1-12.7</u></a>	\$7.00	Lika Electronic reducer bushing, 15mm to 1/2in, metal. For use with Lika Electronic AQ59 series encoders.
<a href="#"><u>PF4256</u></a>	\$35.00	Lika Electronic round mounting flange, 61mm bolt hole circle, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF0408</u></a>	\$129.00	Lika Electronic spring-loaded encoder mount, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF4257</u></a>	\$19.00	Lika Electronic right angle bracket, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF4259</u></a>	\$22.00	Lika Electronic square mounting flange, 92mm bolt hole circle, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF4274</u></a>	\$99.00	Lika Electronic round mounting flange, 70mm bolt hole circle, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF4258</u></a>	\$19.00	Lika Electronic round mounting flange, 75mm and 100mm bolt hole circle, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>PF5000-A</u></a>	\$16.00	Lika Electronic square mounting flange, 70mm bolt hole circle, metal. For use with Lika Electronic AQ58 series encoders. Mounting hardware included.
<a href="#"><u>LKM-386</u></a>	\$9.00	Lika Electronic servo mount clamp, metal. For use with Lika Electronic AQ58 and A41 series encoders. Mounting hardware included.
<a href="#"><u>KIT-XX59</u></a>	\$9.00	Lika Electronic servo mount clamp, metal. For use with Lika Electronic AQ58 and AQ59 series encoders. Mounting hardware included.
<a href="#"><u>KIT-IP/IQ58</u></a>	\$139.00	Lika Electronic programming cable, USB A to 4-position terminal block, 4.9ft/1.5m cable length. For use with Lika Electronic AQ58 and AQ59 series encoders. Requires Lika Electronic EC-IP/IQ58-M12 programming or EC-M12F12-LKT12-xx encoder cable.
<a href="#"><u>EC-IP/IQ58-M12</u></a>	\$29.00	Lika Electronic programming cable, M12 axial female to pigtail, 2ft cable length. For use with Lika Electronic AQ58 and AQ59 series encoders. Requires Lika Electronic KIT-IP/IQ58 programming cable.
<a href="#"><u>KIT-IP/IQ58-USB-M12</u></a>	\$99.00	Lika Electronic programming cable, USB A to M12 axial female, 1.6ft/0.5m cable length. For use with Lika Electronic AQ58 and AQ59 series encoders.
<a href="#"><u>EC-M12F12-LKT12-05</u></a>	\$55.00	Lika Electronic encoder cable, M12 axial female to pigtail, shielded, 16.4ft/5m cable length. For use with Lika Electronic AQ58 and AQ59 series encoders.
<a href="#"><u>EC-M12F12-LKT12-10</u></a>	\$75.00	Lika Electronic encoder cable, M12 axial female to pigtail, shielded, 32.8ft/10m cable length. For use with Lika Electronic AQ58 and AQ59 series encoders.

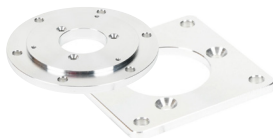**Bore Reducers****Mounting Flanges****PF0408****LKM-386****PF4257****KIT-IP/IQ58****EC-IP/IQ58-M12****KIT-IP/IQ58-USB-M12****EC-M12F12-LKT12-05****KIT-XX59**



Smart encoders &amp; actuators

# AQ5x Series Programmable Incremental Encoders

## Specifications - AQ5x Series

Electrical Specifications	
<b>Resolution (PPR)</b>	Programmable from 1 to 16,384 (default 1024 PPR)
<b>Accuracy</b>	$\pm 0.15^\circ$
<b>Output Signals</b>	Quadrature output signals with index (ABZ, /ABZ)
<b>Counting Frequency</b>	500kHz maximum
<b>Output Circuits</b>	Universal circuit: Push-Pull (Totem Pole), or NPN/PNP open collector (HTL), or Line Driver (TTL)
<b>Power Supply</b>	+5VDC to +30VDC
<b>Consumption</b>	60mA (typical)
<b>Output Current (each channel)</b>	40mA maximum
<b>Protection</b>	Against inversion of polarity and short circuit
<b>EMC</b>	Electro-magnetic immunity according to EN61000-4-2 and EN61000-4-4
Mechanical Specifications	
<b>Shaft Diameter</b>	$\varnothing 9.52$ mm (3/8")
<b>Hollow Shaft Diameter</b>	$\varnothing 15$ mm (available bore reducer sleeves for 6mm, 1/4", 8mm, 3/8", 10mm, 11mm, 12mm, 1/2")
<b>Shaft Loading (axial, radial)</b>	100N maximum
<b>Shaft Rotational Speed</b>	Typical 6000 rpm, temporary 12000 rpm maximum
<b>Starting Torque (@20°C)</b>	AQ58: 0.15 Ncm AQ59: 0.4 Ncm
<b>Bearings Life</b>	400 x 10 <sup>6</sup> rev. min (10 <sup>9</sup> rev. min. with shaft loading limited to 20N)
<b>Electrical Connections</b>	M12
<b>Weight</b>	200g (7 oz)
Materials	
<b>Flange</b>	Anticorodal, UNI EN AW-6082
<b>Housing</b>	Anticorodal, UNI EN AW-6082
<b>Bearings</b>	ABEC 5
<b>Shaft</b>	Stainless steel, non-magnetic, UNI EN 4305
Environmental Specifications	
<b>Shock</b>	100g, 6ms acc.
<b>Vibrations</b>	10g, 5-2000 Hz acc.
<b>Protection</b>	IP65
<b>Operating Temperature Range</b>	-40°C to 85°C (-40°F to 185°F)
<b>Storage Temperature Range</b>	-40°C to 100°C (-40°F to 212°F) (98% relative humidity without condensation)
<b>Approvals</b>	CE, UKCA, <sub>C</sub> UR <sub>US</sub> , RoHS



Smart encoders &amp; actuators

# Windows Configuration Software

## Lika Configuration Software

AQ58S and AQ59H programmable incremental encoders can use software expressly developed and released by Lika Electronic to easily program and configure the device.

This software is for use with the AQ58S and AQ59H programmable encoders only.

Use one of the following methods to configure the AQ58S or AQ59H encoder:

- KIT-IP/IQ58-USB-M12 programming cable.
- Combination of KIT-IP/IQ58 and EC-IP/IQ58-M12 programming kit.
- Combination of KIT-IP/IQ58 and EC-M12F12-LKT12-xx cable.

Lika Electronic Windows Configuration Software			
Part Number	Price	Requires	Use With
<a href="#"><u>LIKA-IP-IQ</u></a>	\$0.00	KIT-IP/IQ58-USB-M12 or KIT-IP/IQ58 programming cable	AQ58 and AQ59 series Lika encoders.

The screenshot shows the 'Lika Encoder set up' window. It features a dark grey background with white text and green accents. The interface is divided into sections: 'Interface type', 'Encoder', 'Internal pos. register', and 'Programmable parameters'. The 'Interface type' and 'Encoder' sections each have a dropdown menu and a 'Connect' button. The 'Internal pos. register' section has a text input field with the value '0' and a play button. The 'Programmable parameters' section includes fields for 'Resolution' (2000), 'Count direction' (Standard), 'Index length' (90°el (gated A, B)), and 'Index position' (set). The 'Index position' field has a green checkmark next to it. The 'Max rpm' field is set to '12000rpm (400KHz)'. The 'Encoder status' section shows 'Read' with a green checkmark and 'No error'. There are also buttons for 'Advanced diagnostics' and 'Clear error'. Red arrows point to specific elements with annotations: one points to the play button in the 'Internal pos. register' section with the text 'Read Only (Press play to make it update constantly)'; another points to the 'Resolution' field with the text 'Configurable'; and a third points to the green checkmark next to the 'Index position' field with the text 'Acts like a pushbutton. The check mark appears after the position is reset.'