

DURAPULSE GS20(X) AC Drives – Introduction



DURAPULSE GS20(X) AC Drives													
Motor Rating	HP	1/4	1/2	1	2	3	5	7.5	10	15	20	25	30
	kW	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22
120V Single-phase		✓	✓	✓									
230V Single-phase		✓	★	★	★	★							
230V Three-phase		✓	★	★	★	★	★	★	✓	✓	✓		
460V Three-phase			★	★	★	★	★	★	✓	✓	✓	✓	✓
575V Three phase				✓	✓	✓	✓	✓	✓	✓			

✓ = GS20 model available ★ = GS20 and GS20X models available

Overview

The DuraPulse GS20(X) new generation high performance vector control drives provide many standard and advanced functions—all in a compact unit that has been reduced 40% in size. A NEMA 4X version provides service in the harshest of environments.

The drives include many of the same standard features as our GS family of drives including dynamic braking, PID, removable keypad, and RS-485 Modbus communication.

The GS20(X) drive expands the *DURAPULSE* family by adding single-phase input capability (ALL 230VAC drives can be supplied single-phase), a built-in PLC, and optional EtherNet/IP and ModbusTCP communication card. The drive supports up to four (4) independent IM motor parameter sets or supports control of a single AC PM motor.

DURAPULSE GS20(X) AC drives offer several different speed control modes: standard V/Hz with pulse input feedback, sensorless vector (SVC) for Induction Motors (IM) and Permanent Motors (PM), and ultra precise Field Oriented Vector control (FOC) for maximum open loop speed regulation control.

DURAPULSE GS20(X) offers two analog inputs, one analog output, one frequency output, seven digital inputs (including one pulse train input up to 33kHz), two digital outputs, one SPDT relay output, and two STO inputs. All of the analog and digital I/O can be configured for a wide variety of input or output functions. One option card slot is available for either the backup control power option card or Ethernet/IP and Modbus TCP communication option card.

Features

- Broad offering from 1/4 to 30 hp
- NEMA 4X available up to 10hp
- Single-phase 120VAC up to 1hp
- Single-phase/three-Phase 230VAC up to 20HP
- Three-phase 460VAC and 575VAC
- Single-phase UL Ratings – 230VAC input for 1 to 20 hp models (see selection tables for derated output)
- Dual rating design – CT/VT Ratings (Light & Heavy Duty)
- “Zero Stack” side-by-side zero gap installation
- Compact Design
- Spring clamp terminal blocks
- Speed control potentiometer built in
- Flexible carrier frequency to 15khz and output frequency to 600Hz
- STO – Safe Torque Off (TUV Certified)
- Built-in PLC to support up to 2K steps
- Built-in USB port for fast & easy programming
- Free downloadable software for drive configuration and PLC programming
- Field-upgradable firmware (drive & communication option card)
- Optional LCD text-based advanced keypad (IP66/NEMA 1) can be remotely mounted
- Local/Remote control mode selection or digital/comm input with Hand/Off/Auto control
- Display custom values on keypad
- Momentary power loss restarts
- 100kA Short Circuit Current Rating
- DC Bus Connection Terminals (except 120VAC models)
- Conduit Box(s) for NEMA 1
- Analog I/O – configurable 2 Inputs and 1 Output
- Multi-Motor Control (4 total)
- Built-in Dynamic Braking – optional resistors
- PID Controller – including sleep and wake
- Password protection
- RTD and/or PTC input motor protection
- GS2 mode duplicates exact parameter configuration of GS2
- Modularized design eases maintenance and expansion, including quick replacement of cooling fan
- High speed communication interfaces

with MODBUS RTU built in, with optional EtherNet/IP and ModbusTCP Communication Card

- Circuit boards have conformal coating for improved environmental tolerance
- Excellent heat-sink design; able to operate at 50°C ambient temperature
- Fire Mode – Run fire mode during emergencies to have uninterrupted smoke removal and system pressure
- Two-year warranty
- CE, TUV, UL, cUL

Accessories

- AC line reactors
- dV/dT output filters
- EMI filters
- RF filter
- Braking resistors
- Fuses
- Conduit boxes
- Mounting Kits
- Replacement cooling fans
- Replacement keypad
- Extension cable for remote keypad placement
- Optional advanced LCD keypad (and remote-mount bezel kit)
- EtherNet/IP and ModbusTCP comm card
- Four and eight-port RS-485 multi-drop termination boards
- GSoft2 drive configuration software
- GSLogic PLC programming software
- Type A to B USB cable
- Detailed descriptions and specifications for GS accessories are available in the “GS/ DURAPulse Accessories” section.

Typical Applications

- Conveyors
- Compressors
- Material handling
- Extruding
- Grinding
- Shop tools
- Fans
- Pumps
- HVAC
- Mixing

DURAPULSE GS20(X) AC Drives – Selection

Selecting the Proper Drive Rating

Selecting the Proper Drive Rating																						
Determine Motor Voltage and Full-Load Amperage (FLA)																						
Motor voltage and FLA are located on the nameplate of the motor. <i>NOTE: FLA of motors that have been rewound may be higher than stated.</i>																						
Determine Motor Overload Requirements																						
Many applications experience temporary overload conditions due to starting requirements or impact loading. Most AC drives are designed to operate at 150% overload for 60 seconds. If the application requires an overload greater than 150% or longer than 60 seconds, the AC drive must be oversized. <i>NOTE: Applications that require replacement of existing motor starters with AC drives may require up to 600% overload.</i>																						
Determine Application Type: Constant Torque or Variable Torque																						
This torque requirement has a direct effect on which drive to select. Variable Torque applications are generally easier to start; typically fans and pumps. Most other applications outside fans and pumps fall into the Constant Torque category (machine control, conveyors, etc.). If you are unsure of the application, assume Constant Torque. The specification, derating, and selection tables are generally segregated by Constant Torque and Variable Torque.																						
Installation Altitude																						
AC drives rely on air flow for cooling. As the altitude increases, the air becomes less dense, and this drop in air density decreases the cooling properties of the air. Therefore, the AC drive must be oversized to compensate for the decrease in cooling. GS20(X) drives are designed to operate at 100% capacity at altitudes up to 1000 meters. <i>NOTE: For use above 1000m, the AC drive must be derated as described below.</i>																						
Derate Output Current Based on Altitude Above 1000 Meters																						
<ul style="list-style-type: none"> • If the AC drive is installed at an altitude of 0–1000m, follow normal operation restrictions. • If installed at an altitude of 1000–2000m, decrease 1% of the rated current or lower 0.5°C of temperature for every 100m increase in altitude. • Maximum altitude for Corner Grounded is 2000m. If installation at an altitude higher than 2000m is required, please contact AutomationDirect. 																						
<p>Derating for Altitude</p> <table border="1"> <caption>Derating for Altitude Data</caption> <thead> <tr> <th>Altitude (m)</th> <th>Current Rated Ratio (%) - 50°C (IP20/UL Open Type)</th> <th>Current Rated Ratio (%) - 40°C (IP66/NEMA 4X/UL Type 4X)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> <td>100</td> </tr> <tr> <td>1000</td> <td>100</td> <td>100</td> </tr> <tr> <td>1500</td> <td>95</td> <td>90</td> </tr> <tr> <td>2000</td> <td>90</td> <td>90</td> </tr> <tr> <td>2000</td> <td>90</td> <td>70</td> </tr> <tr> <td>2500</td> <td>90</td> <td>70</td> </tr> </tbody> </table>		Altitude (m)	Current Rated Ratio (%) - 50°C (IP20/UL Open Type)	Current Rated Ratio (%) - 40°C (IP66/NEMA 4X/UL Type 4X)	0	100	100	1000	100	100	1500	95	90	2000	90	90	2000	90	70	2500	90	70
Altitude (m)	Current Rated Ratio (%) - 50°C (IP20/UL Open Type)	Current Rated Ratio (%) - 40°C (IP66/NEMA 4X/UL Type 4X)																				
0	100	100																				
1000	100	100																				
1500	95	90																				
2000	90	90																				
2000	90	70																				
2500	90	70																				

DURAPULSE GS20(X) AC Drives – Selection

Selecting the Proper Drive Rating, continued

Determine Maximum Enclosure Internal Temperature



AC drives generate a significant amount of heat and can cause the internal temperature of an enclosure to exceed the rating of the GS20(X) drive, even when the ambient temperature is less than 104°F (40°C). Enclosure ventilation and/or cooling may be required to reduce maximum internal temperature to 104°F (40°C) or less. Ambient temperature measurements/calculations should be made for the maximum expected temperature.

NOTE: For use above 104°F (40°C), the AC drive must be derated as described below.

Derate Output Current Based on Temperature Above 104°F (40°C) or 122°F (50°C)

Drive Derating by Temperature and Protection Level	
Protection Level	Derating
UL Open Type / IP20*	When the GS20(X) drive is operating at rated current, the ambient temperature has to be between -10°C and +50°C. When ambient temperature exceeds 50°C, decrease the rated current by 2.5% for every 1°C temperature increase. Maximum allowable temperature is 60°C.
UL Type 4X / NEMA 4X / IP66*	When the GS20(X) drive is operating at rated current, the ambient temperature has to be between -10°C and +40°C. When ambient temperature exceeds 40°C, decrease the rated current by 2.5% for every 1°C temperature increase. Maximum allowable temperature is 50°C.

* For more information about environmental ratings, refer to the "Operating Temperature and Protection Level" table (pg.tGSX-37).

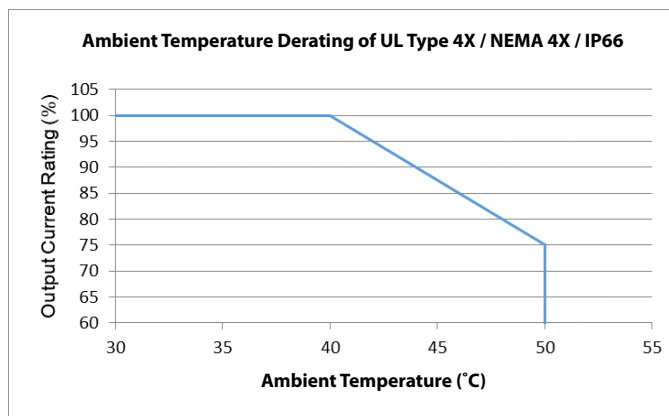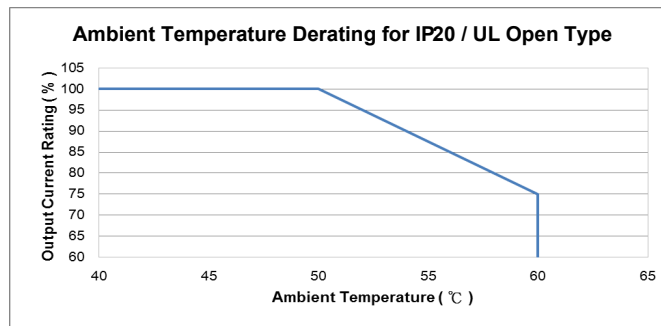

DURAPULSE GS20(X) AC Drives – Selection

Selecting the Proper Drive Rating, continued

Derate Output Current Based on Carrier Frequency (if necessary)	
Carrier Frequency Effects	
AC Drives rectify the incoming 50 or 60Hz line power resulting in DC power at 0Hz. The resulting DC power is then pulse-width modulated and supplied to the motor by the drive's power electronics. IGBTs invert the DC power, simulating a sine wave at the desired frequency (that's what allows variable speed in AC induction motors). The speed at which the IGBTs are turned ON and OFF is called Carrier Frequency. In GS20(X) drives, the Carrier Frequency can range from 2kHz to 15kHz. Though Carrier Frequency can be adjusted, there are trade-offs between high Carrier Frequencies and low Carrier Frequencies.	
Benefits of Higher Carrier Frequencies:	
<ul style="list-style-type: none"> • Better efficiency (lower harmonic losses) in the motor • Lower audible noise 	
Benefits of Lower Carrier Frequencies:	
<ul style="list-style-type: none"> • Better efficiency in the drive • Lower EMI (electrical noise) • Reduced reflective wave peak voltage <p>As a general rule, the Carrier Frequency should be set as low as possible without creating unacceptable audible noise in the motor. Smaller systems can have higher Carrier Frequencies, but larger drives (>20 or 30hp) should not have Carrier Frequencies set higher than 6kHz. Heavy duty applications typically run around 2–4 kHz.</p>	
Derating Tables	
<p>The tables below show the derating curves for both GS20 and GS20X drives running in two different modes under variable torque and constant torque conditions.</p> <p>Line 1: Ta = 50°C / Load = 100%</p> <p>Line 2: Ta = 50°C / Load = 75% or Ta = 40°C / Load = 100%</p> <p>Line 3: Ta = 50°C / Load = 50% or Ta = 35°C / Load = 100%</p> <p>Set PWM mode via P11.41. SVPWM = Space Vector Pulse Width Modulation mode DPWM = Two Phase Pulse Width Modulation mode</p>	
Variable Torque Carrier Frequency Derating	
SVPWM Mode	DPWM Mode
Constant Torque Carrier Frequency Derating	
SVPWM Mode	DPWM Mode

DURAPULSE GS20(X) AC Drives – Selection

Replacing GS2 with GS20

If using the GS20 as a replacement for existing GS2 drives, review the following requirements to ensure compatibility.

- Use the chart below to match the GS2 model with equivalent GS20 model.
- Only models specified in chart below allow “GS2-mode” parameter setup.
- 230V GS2 models using single-phase input power should be replaced with GS21 single-phase input models for equivalent power output. See chart below.
- Some GS20 models can be up to 12mm deeper than prior GS2 models. Check depth dimensions if depth is tight in existing panel space.
- GS2 and GS20 footprints do not match. New mounting holes will be required.
- GS2 has top entry power vs GS20 bottom entry power. Use GS20A-MPx accessory for top entry.
- GS2 has 2 relay outputs vs GS20 1 relay output and 2 transistor outputs.
- GS20 control wire terminal accepts 18 AWG maximum.
- See GS20 fusing chart for required fuse changes.
- If remote mounting a keypad, GS2 keypad is larger than GS20 keypad.



Replace this GS2 . . .

. . . with this
GS20



GS2 Model	GS2 Input Amp Rating	GS2 Fuse Rating	GS2 Output VT Amp Rating	Compatible GS20 Model	GS20 Input Amp Rating	GS20 Fuse Rating	GS20 Output VT Amp Rating
GS2-10P2	6.0	20	1.6	GS21-10P2	6.8	10	1.8
GS2-10P5	9.0	20	2.5	GS21-10P5	10.1	10	2.7
GS2-11P0	16.0	20	4.2	GS21-11P0	20.6	25	5.5
GS2-20P5 (1PH)	6.3	20	2.5	GS21-20P5	8.3	15	3.2
GS2-20P5 (3PH)	3.2	10	2.5	GS23-20P5	3.8	15	3.2
GS2-21P0 (1PH)	11.5	30	5.0	GS21-21P0	11.3	20	5.0
GS2-21P0 (3PH)	6.3	20	5.0	GS23-21P0	6.0	20	5.0
GS2-22P0 (1PH)	15.7	45	7.0	GS21-22P0	18.5	35	8.5
GS2-22P0 (3PH)	9.0	25	7.0	GS23-22P0	9.6	35	8.5
GS2-23P0 (1PH)	27.0	60	10.0	GS21-23P0	27.5	50	12.5
GS2-23P0 (3PH)	12.5	40	10.0	GS23-23P0	15.0	50	12.5
GS2-25P0	19.6	60	17.0	GS23-25P0	23.4	80	19.5
GS2-27P5	28.0	100	25.0	GS23-27P5	32.4	60	27.0
GS2-41P0	4.2	10	3.0	GS23-41P0	3.3	15	3.0
GS2-42P0	5.7	15	4.0	GS23-42P0	5.1	20	4.6
GS2-43P0	6.0	20	5.0	GS23-43P0	7.2	25	6.5
GS2-45P0	8.5	30	8.2	GS23-45P0	11.6	45	10.5
GS2-47P5	14.0	50	13.0	GS23-47P5	17.3	35	15.7
GS2-4010	23.0	70	18.0	GS23-4010	22.6	45	20.5
GS2-51P0	2.4	6	1.7	GS23-51P0	2.4	6	2.1
GS2-52P0	4.2	10	3.0	GS23-52P0	4.2	10	3.6
GS2-53P0	5.9	15	4.2	GS23-53P0	5.8	10	5.0
GS2-55P0	7.0	15	6.6	GS23-55P0	9.3	20	8.0
GS2-57P5	10.5	20	9.9	GS23-57P5	13.4	25	11.5
GS2-5010	12.9	30	12.2	GS23-5010	17.5	30	15.0

DURAPULSE GS20 AC Drives – Selection Specifications

GS20 Drive Model Selection Tables

GS20 120V ^{1,4} 1-Phase Specifications – Frame Sizes A, C							
Model Name		GS21-10P2		GS21-10P5		GS21-11P0	
Price		\$157.00		\$167.00		\$187.00	
Frame Size		A		A		C	
Drawing		PDF		PDF		PDF	
Output Rating	Max Motor Output	hp	1/4	1/2	1		
		kW	0.2	0.4	0.75		
	CT	Rated Output Capacity	kVA	0.6	1	1.8	
		Rated Output Current	A	1.6	2.5	4.8	
		Carrier Frequency ³	kHz	2–15 (default 4)			
	VT	Rated Output Capacity	kVA	0.7	1	2.1	
Rated Output Current		A	1.8	2.7	5.5		
Carrier Frequency ³		kHz	2–15 (default 4)				
Input Rating ²	CT	Rated Input Current	A	6	9.4	18	
	VT	Rated Input Current	A	6.8	10.1	20.6	
	Rated Voltage/Frequency		One-phase: 100–120 VAC (-15% to +10%), 50/60 Hz				
	Operating Voltage Range (VAC)		85–132				
Frequency Tolerance (Hz)		47–63					
IE2 Efficiency - Relative Power Loss		4.9%		3.5%		3.0%	
Weight (kg [lb])		0.65 [1.43]		0.74 [1.63]		1.24 [2.73]	
Cooling Method		Convective				Fan	
IP Rating		IP20					

1 - For Use With Three-Phase Motors Only.
 2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.
 3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".
 4 - DC Common bus and DC reactor terminals are not available on 120V models. See the GS20(X) User Manual "Main Terminals" section for more details.
 Note: DC Common bus and DC reactor terminals are not available on 120V models.

GS20 230V ¹ 1-Phase Specifications – Frame Sizes A, B, C												
Model Name		GS21-20P2		GS21-20P5		GS21-21P0		GS21-22P0		GS21-23P0		
Price		\$147.00		\$151.00		\$168.00		\$204.00		\$253.00		
Frame Size		A		A		B		C		C		
Drawing		PDF		PDF		PDF		PDF		PDF		
Output Rating	Max Motor Output	hp	1/4	1/2	1	2	3					
		kW	0.2	0.4	0.75	1.5	2.2					
	CT	Rated Output Capacity	kVA	0.6	1.1	1.8	2.9	4.2				
		Rated Output Current	A	1.6	2.8	4.8	7.5	11				
		Carrier Frequency ³	kHz	2–15 (default 4)								
	VT	Rated Output Capacity	kVA	0.7	1.2	1.9	3.2	4.8				
Rated Output Current		A	1.8	3.2	5	8.5	12.5					
Carrier Frequency ³		kHz	2–15 (default 4)									
Input Rating ²	CT	Rated Input Current	A	5.1	7.3	10.8	16.5	24.2				
	VT	Rated Input Current	A	5.8	8.3	11.3	18.5	27.5				
	Rated Voltage/Frequency		One-phase 200-240 VAC (-15% to +10%) 50/60 Hz									
	Operating Voltage Range (VAC)		170–265									
Frequency Tolerance (Hz)		47–63										
IE2 Efficiency - Relative Power Loss		5.2%		3.4%		2.9%		2.6%		2.4%		
Weight (kg [lb])		0.65 [1.43]		0.76 [1.68]		0.95 [2.09]		1.24 [2.73]		1.24 [2.73]		
Cooling Method		Convective						Fan				
IP Rating		IP20										

1 - For Use With Three-Phase Motors Only.
 2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.
 3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".

DURAPULSE GS20 AC Drives – Selection Specifications

GS20 Drive Model Selection Tables, continued

GS20 230V ¹ 3-Phase Specifications – Frame Sizes A, B, C								
Model Name			GS23-20P2	GS23-20P5	GS23-21P0	GS23-22P0	GS23-23P0	
Price			\$171.00	\$179.00	\$184.00	\$213.00	\$266.00	
Frame Size			A	A	A	B	C	
Drawing			PDF	PDF	PDF	PDF	PDF	
Output Rating	Max Motor Output (3-phase [1-phase]) ⁴	hp	0.25 [0.1]	0.5 [0.25]	1 [0.5]	2 [1]	3 [1.5]	
		kW	0.2 [0.1]	0.4 [0.2]	0.75 [0.375]	1.5 [0.75]	2.2 [1.1]	
	CT	Rated Output Capacity (3-phase [1-phase])	kVA	0.6 [0.3]	1.1 [0.55]	1.8 [0.9]	2.9 [1.5]	4.2 [2.1]
		Rated Output Current (3-phase [1-phase])	A	1.6 [0.8]	2.8 [1.4]	4.8 [2.4]	7.5 [3.75]	11 [5.5]
		Carrier Frequency ³	kHz	2–15 (default 4)				
	VT	Rated Output Capacity	kVA	0.7	1.2	1.9	3	4.8
Rated Output Current		A	1.8	3.2	5	8	12.5	
Carrier Frequency ³		kHz	2–15 (default 4)					
Input Rating ²	CT	Rated Input Current	A	1.9	3.4	5.8	9	13.2
	VT	Rated Input Current	A	2.2	3.8	6	9.6	15
	Rated Voltage/Frequency		3-phase or 1-phase 200–240 VAC (-15% to +10%), 50/60 Hz					
Operating Voltage Range (VAC)		170–265						
Frequency Tolerance (Hz)		47-63						
IE2 Efficiency - Relative Power Loss			5.2%	3.4%	2.9%	2.5%	2.5%	
Weight (kg [lb])			0.65 [1.43]	0.65 [1.43]	0.81 [1.79]	1.05 [2.31]	1.24 [2.73]	
Cooling Method			Convective			Fan		
IP Rating			IP20					
See table below for notes.								

GS20 230V ¹ 3-Phase Specifications – Frame Sizes C, D, E, F								
Model Name			GS23-25P0	GS23-27P5	GS23-2010	GS23-2015	GS23-2020	
Price			\$276.00	\$418.00	\$511.00	\$635.00	\$887.00	
Frame Size			C	D	E	E	F	
Drawing			PDF	PDF	PDF	PDF	PDF	
Output Rating	Max Motor Output (3-phase [1-phase]) ⁴	hp	5 [2.5]	7.5 [3.5]	10 [5]	15 [7.5]	20 [10]	
		kW	3.7 [1.85]	5.5 [2.75]	7.5 [3.75]	11 [5.5]	15 [7.5]	
	CT	Rated Output Capacity (3-phase [1-phase])	kVA	6.5 [3.25]	9.5 [4.75]	12.6 [6.3]	18.7 [9.35]	24.8 [12.4]
		Rated Output Current (3-phase [1-phase])	A	17 [8.5]	25 [12.5]	33 [16.5]	49 [24.5]	65 [32.5]
		Carrier Frequency ³	kHz	2–15 (default 4)				
	VT	Rated Output Capacity	kVA	7.4	10.3	13.7	19.4	26.3
Rated Output Current		A	19.5	27	36	51	69	
Carrier Frequency ³		kHz	2–15 (default 4)					
Input Rating ²	CT	Rated Input Current	A	20.4	30	39.6	58.8	78
	VT	Rated Input Current	A	23.4	32.4	43.2	61.2	82.8
	Rated Voltage/Frequency		3-phase or 1-phase 200–240 VAC (-15% to +10%), 50/60 Hz					
Operating Voltage Range (VAC)		170–265						
Frequency Tolerance (Hz)		47-63						
IE2 Efficiency - Relative Power Loss			2.2%	2.3%	2.5%	2.2%	2.1%	
Weight (kg [lb])			1.24 [2.73]	2.07 [4.56]	3.97 [8.75]	3.97 [8.75]	6.25 [13.78]	
Cooling Method			Fan					
IP Rating			IP20					

1 - For Use With Three-Phase Motors Only.
 2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.
 3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".
 4 - Three phase models can be powered with 1-phase or 3-phase input power. If using 1-phase input power, GS21 models up to 3HP provide higher output power than equivalent GS23 models with 1-phase.

DURAPULSE GS20 AC Drives – Selection Specifications

GS20 Drive Model Selection Tables, continued

GS20 460V ¹ 3-Phase Specifications – Frame Sizes A, B, C								
Model Name			GS23-40P5	GS23-41P0	GS23-42P0	GS23-43P0	GS23-45P0	
Price			\$193.00	\$198.00	\$228.00	\$255.00	\$310.00	
Frame Size			A	A	B	C	C	
Drawing			PDF	PDF	PDF	PDF	PDF	
Output Rating	Max Motor Output	hp	1/2	1	2	3	5	
		kW	0.4	0.75	1.5	2.2	3.7	
	CT	Rated Output Capacity	kVA	1.1	2.1	3.2	4.2	6.9
		Rated Output Current	A	1.5	2.7	4.2	5.5	9
		Carrier Frequency ³	kHz	2–15 (default 4)				
	VT	Rated Output Capacity	kVA	1.4	2.3	3.5	5	8
Rated Output Current		A	1.8	3	4.6	6.5	10.5	
	Carrier Frequency ³	kHz	2–15 (default 4)					
Input Rating ²	CT	Rated Input Current	A	1.7	3	5.8	6.1	9.9
	VT	Rated Input Current	A	2	3.3	6.4	7.2	11.6
	Rated Voltage/Frequency		Three-phase 380-480 VAC (-15% to +10%), 50/60 Hz					
Operating Voltage Range (VAC)		323–528						
Frequency Tolerance (Hz)		47–63						
IE2 Efficiency - Relative Power Loss			4.0%	2.6%	2.3%	2.3%	2.0%	
Weight (kg [lb])			0.75 [1.65]	0.81 [1.79]	1 [2.20]	1.24 [2.73]	1.24 [2.73]	
Cooling Method			Convective			Fan		
IP Rating			IP20					
<p>1 - For Use With Three-Phase Motors Only.</p> <p>2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.</p> <p>3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".</p>								

GS20 460V ¹ 3-Phase Specifications – Frame Sizes D, E, F									
Model Name			GS23-47P5	GS23-4010	GS23-4015	GS23-4020	GS23-4025	GS23-4030	
Price			\$425.00	\$480.00	\$635.00	\$756.00	\$935.00	\$1,069.00	
Frame Size			D	D	E	E	F	F	
Drawing			PDF	PDF	PDF	PDF	PDF	PDF	
Output Rating	Max Motor Output	hp	7 1/2	10	15	20	25	30	
		kW	5.5	7.5	11	15	18.5	22	
	CT	Rated Output Capacity	kVA	9.9	13	19.1	24.4	29	34.3
		Rated Output Current	A	12	17	25	32	38	45
		Carrier Frequency ³	kHz	2–15 (default 4)					
	VT	Rated Output Capacity	kVA	12	15.6	21.3	27.4	31.6	37.3
Rated Output Current		A	15.7	20.5	28	36	41.5	49	
	Carrier Frequency ³	kHz	2–15 (default 4)						
Input Rating ²	CT	Rated Input Current	A	14.3	18.7	27.5	35.2	41.8	49.5
	VT	Rated Input Current	A	17.3	22.6	30.8	39.6	45.7	53.9
	Rated Voltage/Frequency		Three-phase 380-480 VAC (-15% to +10%), 50/60 Hz						
Operating Voltage Range (VAC)		323–528							
Frequency Tolerance (Hz)		47–63							
IE2 Efficiency - Relative Power Loss			2.0%	1.9%	1.8%	1.7%	1.5%	1.5%	
Weight (kg [lb])			2.07 [4.56]	2.07 [4.56]	3.97 [8.75]	3.97 [8.75]	6.25 [13.78]	6.25 [13.78]	
Cooling Method			Fan						
IP Rating			IP20						
<p>1 - For Use With Three-Phase Motors Only.</p> <p>2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.</p> <p>3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".</p>									

DURAPULSE GS20 AC Drives – Selection Specifications

GS20 Drive Model Selection Tables, continued

GS20 575V ¹ 3-Phase Specifications – Frame Sizes A, B, C, D									
Model Name			GS23-51P0	GS23-52P0	GS23-53P0	GS23-55P0	GS23-57P5	GS23-5010	
Price			\$227.00	\$261.00	\$308.00	\$398.00	\$522.00	\$590.00	
Frame Size			A	B	C	C	D	D	
Drawing			PDF	PDF	PDF	PDF	PDF	PDF	
Output Rating	Max Motor Output	hp	1	2	3	5	7 1/2	10	
		kW	0.75	1.5	2.2	3.7	5.5	7.5	
	CT	Rated Output Capacity	kVA	1.7	3	4.2	6.6	9.9	12.2
		Rated Output Current	A	1.7	3	4.2	6.6	9.9	12.2
		Carrier Frequency ³	kHz	2–15 (default 4)					
	VT	Rated Output Capacity	kVA	2.1	3.6	5	8	11.5	15
Rated Output Current		A	2.1	3.6	5	8	11.5	15	
Carrier Frequency ³		kHz	2–15 (default 4)						
Input Rating ²	CT	Rated Input Current	A	2	3.5	4.9	7.7	11.5	14.2
	VT	Rated Input Current	A	2.4	4.2	5.8	9.3	13.4	17.5
	Rated Voltage/Frequency		Three-phase 500–600 VAC (-15% to +10%), 50/60 Hz						
	Operating Voltage Range (VAC)		425–660						
Frequency Tolerance (Hz)		47–63							
IE2 Efficiency - Relative Power Loss			3.9%	2.7%	2.3%	1.9%	2.0%	1.9%	
Weight (kg [lb])			0.85 [1.87]	0.87 [1.92]	1.18 [2.60]	1.29 [2.84]	2.04 [4.50]	2.04 [4.50]	
Cooling Method			Convective		Fan				
IP Rating			IP20						
<p>1 - For Use With Three-Phase Motors Only.</p> <p>2 - If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS20(X) AC Drives User Manual, Chapter 2. Please refer to "GS20(X) DURApulse Accessories – Fusing" (pg.tGSX-83) for input fusing information.</p> <p>3 - The carrier frequency is a factory default. Decrease the current value if you need to increase the carrier frequency. Refer to "Derate Output Current Based on Carrier Frequency".</p>									

DURAPULSE GS20(X) AC Drives – General Specifications

GS20(X) Drive Model Selection Tables, continued

GS20(X) General Specifications (Applicable to All Models)			
Control Characteristics	Control Method	V/F, Sensorless Vector (SVC), Field Oriented Control (FOC) Sensorless, Volt/Frequency with Pulse Generator input (VFPG), Torque (TQC Sensorless)	
	Applicable Motor	3-phase AC Induction Motor, 3-phase Permanent Magnet AC motor	
	Starting Torque¹	150% / 3Hz 100% / (motor rated frequency/20) 200% / 0.5 Hz	(V/F, SVC control for IM, CT, rated) (SVC control for PM, CT, rated) (FOC control for IM, CT, rated)
	Torque Accuracy	± 15% TQC Sensorless	
	Torque Limits	120/230/460V	VT: 160% of output current, max CT: 180% of output current, max
		575V	200% of output current, max
	Speed Control Range¹	1: 50 (V/F, SVC control for IM, CT, rated) 1: 20 (SVC control for PM, CT, rated) 1: 100 (FOC control for IM, CT, rated)	
	Max. Output Frequency	0.00–599.00 Hz	
	Overload Capacity	VT: rated output current of 120% 60 sec, 150% 3 sec. CT: rated output current of 150% 60 sec, 200% 3 sec.	
	Frequency Setting Signal	0–10 V / -10–10 V 4–20 mA / 0–10 V 1 channel pulse input (33kHz), 1 channel pulse output (33kHz)	
	Digital Inputs	Seven (7) - 24VDC NPN or PNP, includes 1 pulse train frequency input 33kHz	
	Digital Outputs	Three (3) - (2)-48VDC, (1) Relay-250VAC/30VDC	
	Analog Inputs	Two (2) - (1) voltage, (1) selectable Voltage or Current	
	Analog Outputs	One (1) - selectable voltage or current	
	Frequency Output	One (1) - 30VDC, 33kHz	
	Safe Torque Off	STO1 and STO2 inputs- 24VDC	
	Main Functions	Multiple motor switching (a maximum of four independent motor parameter settings), Fast start-up, Deceleration Energy Back (DEB) function, Wobble frequency function, Fast deceleration function, Master and Auxiliary frequency source selectable, Restart after momentary power loss, Speed tracking, Over-torque detection, 16-step speed (including the master speed), Accel./decel. time switch, S-curve accel./decel., three-wire operation control, JOG frequency, Frequency upper/lower limit settings, DC brake at start-up and stop, PID control, Built-in PLC (2000 steps), and Simple positioning function.	
	Application Macro	Built-in application parameter groups (selected by industry) and user-defined application parameter groups.	
Protection Characteristics	Motor Protection	Over-current, over-voltage, over-heating, phase loss.	
	Stall Prevention	Stall prevention during acceleration, deceleration, and running (independent settings).	
Accessory	Communication Card	GS20A-CM-ENETIP (EtherNet/IP and Modbus TCP)	
	External DC Power Supply	GS20A-BPS (24V power backup supply card)	
Agency Approvals	UL, CE ² , TUV (SIL 2), RoHS, REACH		
1: Control accuracy may vary depending on the environment, application conditions, or different motors. For more information, contact AutomationDirect.			
2: See CE declaration here: https://support.automationdirect.com/docs/GS20A-GS20AX-CE.pdf			

DURAPULSE GS20(X) AC Drives – Environmental Specifications

GS20(X) Environmental Specifications


Environmental Conditions for GS20 AC Drives			
Condition	Operation	Storage	Transportation
Installation Location	IEC 60364-1/ IEC 60664-1 Pollution degree 2, Indoor use only.	n/a	n/a
Ambient Temperature	IP20/UL Open Type: -20–50°C (-20–60°C w/derating)	-40–85°C	-20–70°C
	Non-condensing, non-freezing		
Relative Humidity	90%, no water condensation	95%, no water condensation	
Air Pressure	86–106 kPa	70–106 kPa	
Pollution Level	IEC 60721-3, concentrate prohibited		
	Class 3C2; Class 3S2	Class 2C2; Class 2S2	Class 1C2; Class 1S2
Environmental Air	No corrosive/inflammable gases permitted		
Altitude	<1000 m (For altitudes > 1000 m, derate to use it.)		
Package Drop	n/a	ISTA procedure 1A (according to weight) IEC 60068-2-31	
Vibration	1.0 mm, peak to peak value range from 2–13.2 Hz; 0.7–2.0 G range from 13.2–55 Hz; 2.0 G range from 55–512 Hz. Compliance with IEC 60068-2-6	2.5 G peak, 5 Hz–2 kHz 0.015" maximum displacement	
Impact	15G, 11ms Compliance with IEC/EN60068-2-27	30G	
DO NOT expose the GS20 AC Drive to harsh environments such as dust, direct sunlight, corrosive/flammable gases, humidity, liquid, or vibrations. The salts in the air must be less than 0.01 mg/cm² every year.			

Environmental Conditions for GS20X AC Drives			
Condition	Operation	Storage	Transportation
Installation Location	PCB design is compliant with IEC 60364-1 / IEC 60664-1 Pollution Degree 2. The outer case meets IP66 standard for indoor use. If the drive is for outdoor application, avoid direct sunlight.	n/a	n/a
Ambient Temperature	IP66 / NEMA 4X / UL Type 4X: -20–40°C (-20–50°C w/derating)	-40–85°C	-20–70°C
	Non-condensing, non-freezing		
Relative Humidity	0-100%, no water condensation	95%, no water condensation	
Air Pressure	86–106 kPa	70–106 kPa	
Pollution Level	IEC 60721-3, concentrate prohibited		
	Class 3C2; Class 3S2	Class 2C2; Class 2S2	Class 1C2; Class 1S2
Altitude	<1000m (For altitudes > 1000m, derate to use it.)		
Package Drop	n/a	ISTA procedure 1A (according to weight) IEC 60068-2-31	
Vibration	1.0 mm, peak to peak value range from 2–13.2 Hz; 0.7–2.0 G range from 13.2–55 Hz; 2.0 G range from 55–512 Hz; complies with IEC 60068-2-6.	2.5 G peak, 5 Hz–2 kHz 0.015" maximum displacement	
Impact	15G, 11ms Compliance with IEC/EN60068-2-27	30G	
DO NOT expose the GS20X AC Drive to harsh environments such as direct contact with chemical substance and solvent, and exposure to direct sunlight.			

DURAPULSE GS20(X) AC Drives Specifications

Air Flow and Power (Heat) Dissipation

Minimum Clearances and Air Flow for GS20 Series Drives

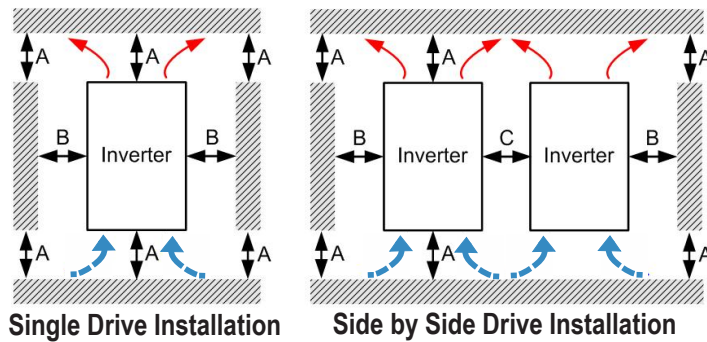

GS20 Minimum Mounting Clearances*					
Installation Method	A (mm)	B (mm)	C (mm)	Operation Temperature (°C)	
				Max (w/out derating)	Max (Derating)
Single drive installation	50	30	-	50	60
Side-by-side horizontal installation	50	30	30	50	60
Zero stack installation	50	30	0	40	50

* Failure to follow the minimum mounting clearances may cause the fan to malfunction and cause a heat dissipation problem.




GS20 Airflow and Power Dissipation

Model Number	Frame Size	Airflow Rate for Cooling		Power Dissipation (Watts)		
		Flow Rate (cfm)	Flow Rate (m³/hr)	Loss External (Heat sink)	Internal	Total
GS21-10P2	A	0.0	0.0	8.0	10.0	18.0
GS21-10P5				14.2	13.1	27.3
GS21-11P0	C	16.0	27.2	29.1	23.9	53.0
GS21-20P2	A	0.0	0.0	8.0	10.3	18.3
GS21-20P5				16.3	14.5	30.8
GS21-21P0	B	16.0	27.2	29.1	20.1	49.2
GS21-22P0	C			29.1	23.9	53.0
GS21-23P0	E	53.7	91.2	70.0	35	105
GS23-2010				244.5	79.6	324.1
GS23-2015	F	67.9	115.2	374.2	86.2	460.4
GS23-2020				492.0	198.2	690.2
GS23-20P2	A	0.0	0.0	8.6	10.0	18.6
GS23-20P5				16.5	12.6	29.1
GS23-21P0	B	10.0	16.99	31.0	13.2	44.2
GS23-22P0				C	50.1	24.2
GS23-23P0	C	16.0	27.2	76.0	30.7	106.7
GS23-25P0				108.2	40.1	148.3
GS23-27P5	D	23.4	39.7	192.8	53.3	246.1
GS23-4010				164.7	55.8	220.5
GS23-4015	E	53.7	91.2	234.5	69.8	304.3
GS23-4020				319.8	74.3	394.1
GS23-4025	F	67.9	115.2	423.5	181.6	605.1
GS23-4030				501.1	200.3	701.4
GS23-40P5	A	10.0	16.99	17.6	11.1	28.7
GS23-41P0				30.5	17.8	48.3
GS23-42P0	B	16.0	27.2	45.9	21.7	67.6
GS23-43P0	C			60.6	22.8	83.4
GS23-45P0	D	23.4	39.7	93.1	42	135.1
GS23-47P5				132.8	39.5	172.3
GS23-5010	A	0.0	0.0	108.4	51	159.4
GS23-51P0				23.5	12.5	36
GS23-52P0	B	10.0	16.99	38.1	19	57.1
GS23-53P0	C			56.6	22.2	68.8
GS23-55P0	C	16.0	27.2	76.1	30	106.1
GS23-57P5				D	93.9	37

- Published flow rates are the result of active cooling using factory installed fans.
- Flow rates of (0.0) are the result of passive cooling in drives without fans.
- The required airflow shown in the chart is for installing a single GS20 drive in a confined space.
- When installing multiple GS20 drives, the required air volume would be the required air volume for a single GS20 drive multiplied by the number of GS20 drives.
- When calculating power dissipation (Watt Loss), use the Total value. Heat dissipation shown in the chart is for installing a single GS20 drive in a confined space.
- When installing multiple drives, the volume of heat/power dissipation should be the heat/power dissipated by a single GS20 drive multiplied by the number of GS20 drives.
- Heat dissipation for each model is calculated by rated voltage, current and default carrier frequency.

DURAPULSE GS20(X) AC Drives Specifications – Terminals




Control Circuit Terminal Names and Definitions

Control Circuit Terminals		
Terminal Symbol	Terminal Function	Description
+24V	Digital control signal common (Source)	+24V ± 10% 100mA
FWD (DI1) REV (DI2) DI3 - DI7	Digital input 1-7 ① Sink Mode with internal power (+24 V _{DC}) 	<p>Source Mode: ON: activation current 3.3 mA ≥ 11VDC OFF: cut-off voltage ≤ 5VDC</p> <p>Sink Mode: ON: activation current 3.3 mA ≤ 13VDC OFF: cut-off voltage ≥ 19VDC</p> <p>DI7: Single pulse input, maximum input frequency=33kHz.</p> <p>Digital inputs can be configured by the user for many different functions. Refer to P02.01-02.07 to program the digital inputs FWD (DI1), REV (DI2), DI3-DI7. When P02.00=0, FWD (DI1) and REV (DI2) can be programmed.</p> <ul style="list-style-type: none"> When P02.00≠0, the functions of FWD (DI1) and REV (DI2) act according to P02.00 setting. When P02.07=0, DI7 is pulse input terminal. DI7 uses pulse input can be used as frequency command source or connect it to the encoder for motor closed-loop control. DI7 motor closed-loop control only supports VFG control mode. <p>See pg.tGSX-42 for sinking/sourcing wiring examples.</p>
DO	Digital frequency signal output 	DO uses pulse voltage as an output monitoring signal; Duty-cycle: 50% Min. load impedance RL: 1kΩ / 100pF Max. current endurance: 30 mA Max. voltage: 30VDC ± 1% (when 30VDC / 30mA / RL=100pF) Max. output frequency: 33kHz Current-limiting resistor R: ≥ 1KΩ Output load impedance RL Capacitive load ≤ 100pF Resistive load ≥ 1kΩ, resistance determines the output voltage value. DO-DCM voltage = external voltage * (RL / (RL+R))
DCM	Digital control / Frequency signal common (Sink)	
DO1	Digital Output 1 (photo coupler)	The AC motor drive outputs various monitoring signals, such as drive in operation, frequency reached, and overload indication through a transistor (open collector). Outputs can be wired as sinking or sourcing. See User manual Appendix D for wiring examples.
DO2	Digital Output 2 (photo coupler)	
DOC	Digital Output Common (photo coupler)	
R10	Relay Output 1 (N.O.)	<p>Resistive Load</p> <ul style="list-style-type: none"> 3A (N.O.) / 3A (N.C.) 250VAC 5A (N.O.) / 3A (N.C.) 30VDC <p>Inductive Load (COS 0.4)</p> <ul style="list-style-type: none"> 1.2 A (N.O.) / 1.2 A (N.C.) 250VAC 2.0 A (N.O.) / 1.2 A (N.C.) 30VDC To output different kinds of monitoring signals such as motor drive in operation, frequency reached, and overload indication.
R1C	Relay Output 1 (N.C.)	
R1	Relay Output 1 Common	
+10V	Potentiometer power supply	Power supply for analog frequency setting: +10.5 ± 0.5 VDC / 20mA

DURAPULSE GS20(X) AC Drives Specifications

- Terminals

Control Circuit Terminal Names and Definitions

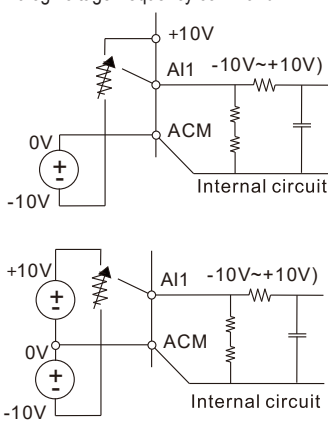Control Circuit Terminals (continued)		
Terminal Symbol	Terminal Function	Description
AI1	Analog voltage frequency command 	Impedance: 20kΩ Range: 0-10 V / -10-10 V = 0-Maximum Operation Frequency (P01.00) Mode switching by setting P03.00, P03.28 AI1 resolution=10 bits
AI2	Analog current frequency command 	Impedance: Current mode=250 Ω, Voltage mode=20kΩ Range: 0-20 mA / 4-20 mA / 0-10 V = 0-Maximum Operation Frequency (P01.00) Mode switching by setting P03.01, P03.29 Switch: The AI2 default is 0-20 mA / 4-20 mA (current mode) AI2 resolution = 12 bits
AO1	Multi-function analog voltage output 	Switch: The AO1 default is 0-10 V (voltage mode). To switch to the current mode, two steps are required: 1. A dip switch must be configured (follow the instructions on the inner side of the front cover). 2. Change P03.31 to 1 or 2 (see Chapter 4 of the GS20(X) User Manual). Voltage mode Range: 0-10 V (P03.31=0) corresponds to the maximum operating range of the control target Max. output current: 2mA Max. Load: 5kΩ Current mode Range: 0-20 mA (P03.31=1) / 4-20 mA (P03.31=2) corresponds to the maximum operating range of the control target, maximum load 500Ω AO1 resolution=10 bits
ACM	Analog Signal Common	Analog signal common terminal
+24V (red)	STO 24V power terminal	
STO1, STO2 (red)	Default: STO1 / STO2 short-circuited to +24V Rated voltage: 24VDC ± 10 %; maximum voltage: 30VDC ± 10 % Rated current: 6.67 mA ± 10 % STO activation mode Input voltage level: 0VDC < STO1-SCM or STO2-SCM < 5VDC STO response time ≤ 20ms (STO1 / STO2 operates until the AC motor drive stops outputting current) STO cut-off mode Input voltage level: 11VDC < STO1-SCM and STO2-SCM < 30VDC Power removal safety function per EN 954-1 and IEC / EN 61508 Note: Refer to Chapter 17 SAFE TORQUE OFF FUNCTION for details.	
SCM (red)	STO Common - Signal Terminal	
SG+	Modbus RS-485	
SG-	Note: Refer to GS20(X) User Manual Chapter 4 Descriptions of Parameter Settings, Parameter Group 09: Communication Parameters for details.	
SGND		
RJ45	PIN 1, 2, 6: Reserved PIN 3, 7: SGND PIN 4: SG- PIN 5: SG+ PIN 8: +10V supply GS4-KPD (provides optional power supply)	The RJ45 port provides a serial communications connection. Max Baud Rate = 115.2 kbps


DURAPULSE GS20(X) AC Drives – Basic Wiring Diagram

Main Circuit Wiring Diagram: GS20(X) All Models

Note: Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to GS20(X) User Manual for additional specific wiring information.)

Note: DC reactors (chokes) are specified but not stocked by AutomationDirect.


Note: DC- and DC+/+1 terminals are not available on 120V series drives.

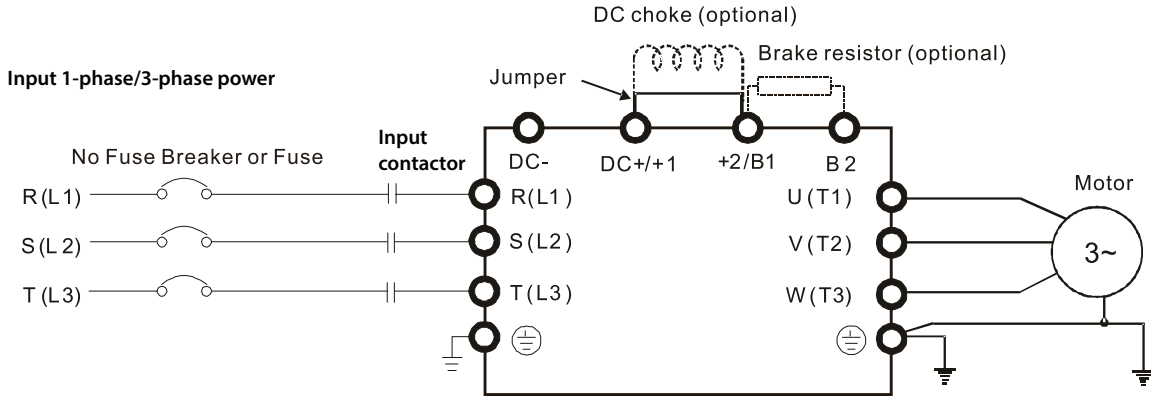


Control Circuit Wiring Diagram: Digital Inputs - Internal Power

Note: Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to GS20(X) User Manual for additional specific wiring information.)

① Sink Mode with internal power (+24 V_{DC})

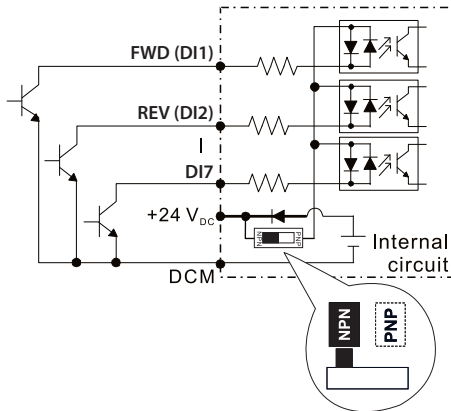


② Source Mode with internal power (+24 V_{DC})

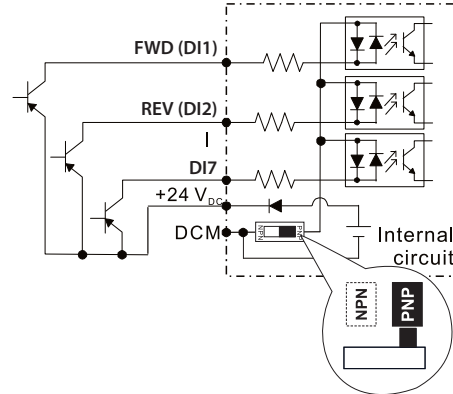


Control Circuit Wiring Diagram: Digital Inputs - External Power

Note: Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to GS20(X) User Manual for additional specific wiring information.)

③ Sink Mode with external power

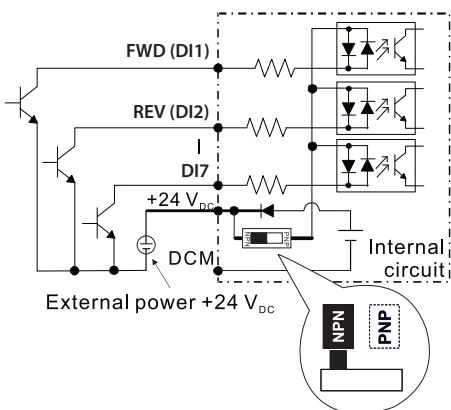


④ Source Mode with external power

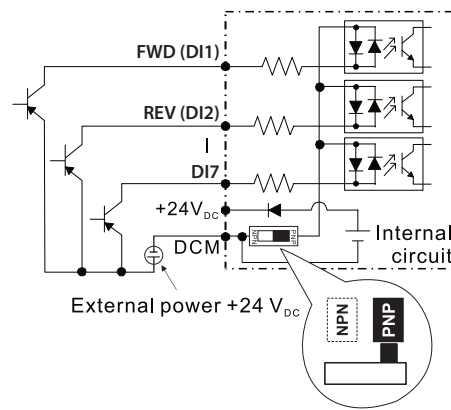

DURAPULSE GS20(X) AC Drives – Basic Wiring Diagram

System Wiring Diagram:

Note: Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to user GS20(X) User Manual for additional specific wiring information.)

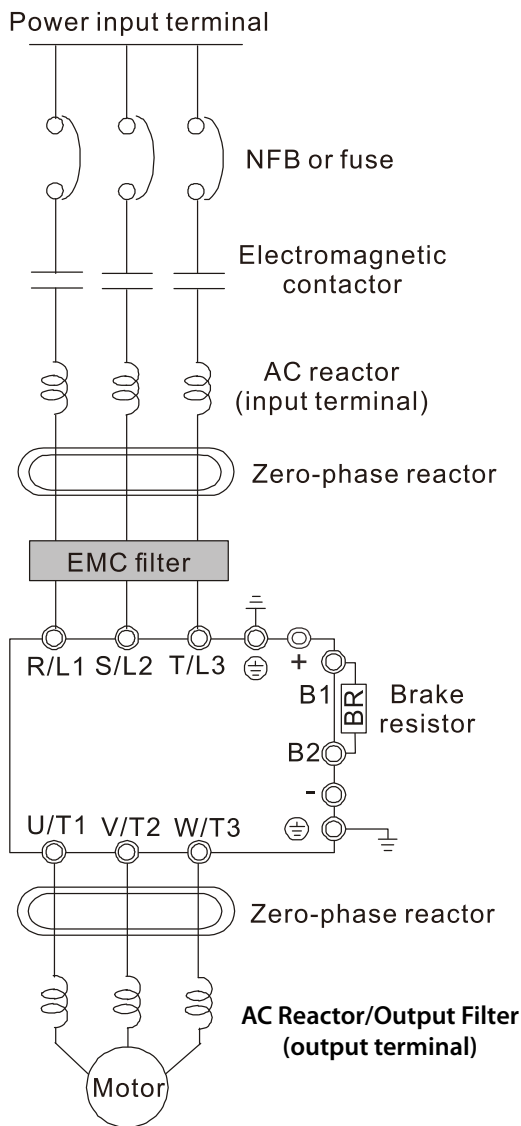


System Wiring Components	
Component	Function
Power input terminal	Supply power according to the rated power specifications indicated in the manual
NFB or fuse	There may be a large inrush current during power on. Select a suitable NFB or Fuse.
Electromagnetic contactor	Switching the power ON/OFF on the primary side of the electromagnetic contactor can turn the drive ON/OFF, but frequent switching can cause drive failure. Do not switch ON/OFF more than once an hour. Do not use the electromagnetic contactor as the power switch for the drive; doing so shortens the life of the drive.
AC reactor (input terminal)	When the main power supply capacity is greater than 500kVA, or when it switches into the phase capacitor, the instantaneous peak voltage and current generated may destroy the internal circuit of the drive. It is recommended that you install an input side AC reactor in the drive. This also improves the power factor and reduces power harmonics. The wiring distance should be within 10 m.
Zero phase reactor	Used to reduce radiated interference, especially in environments with audio devices, and reduce input and output side interference. The effective range is AM band to 10MHz.
EMC filter	Can be used to reduce electromagnetic interference.
Brake module and Brake resistor (BR)	Used to shorten the deceleration time of the motor.
AC Reactor/Output Filter (output terminal)	The motor cable length affects the size of the reflected wave on the motor end. For motor distances greater than 100feet, the VTF series dV/dT filter is recommended.

DURAPULSE GS20(X) AC Drives – Basic Wiring Diagram

Control Wiring Diagram: Full I/O

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS20-UMW for additional specific wiring information.)

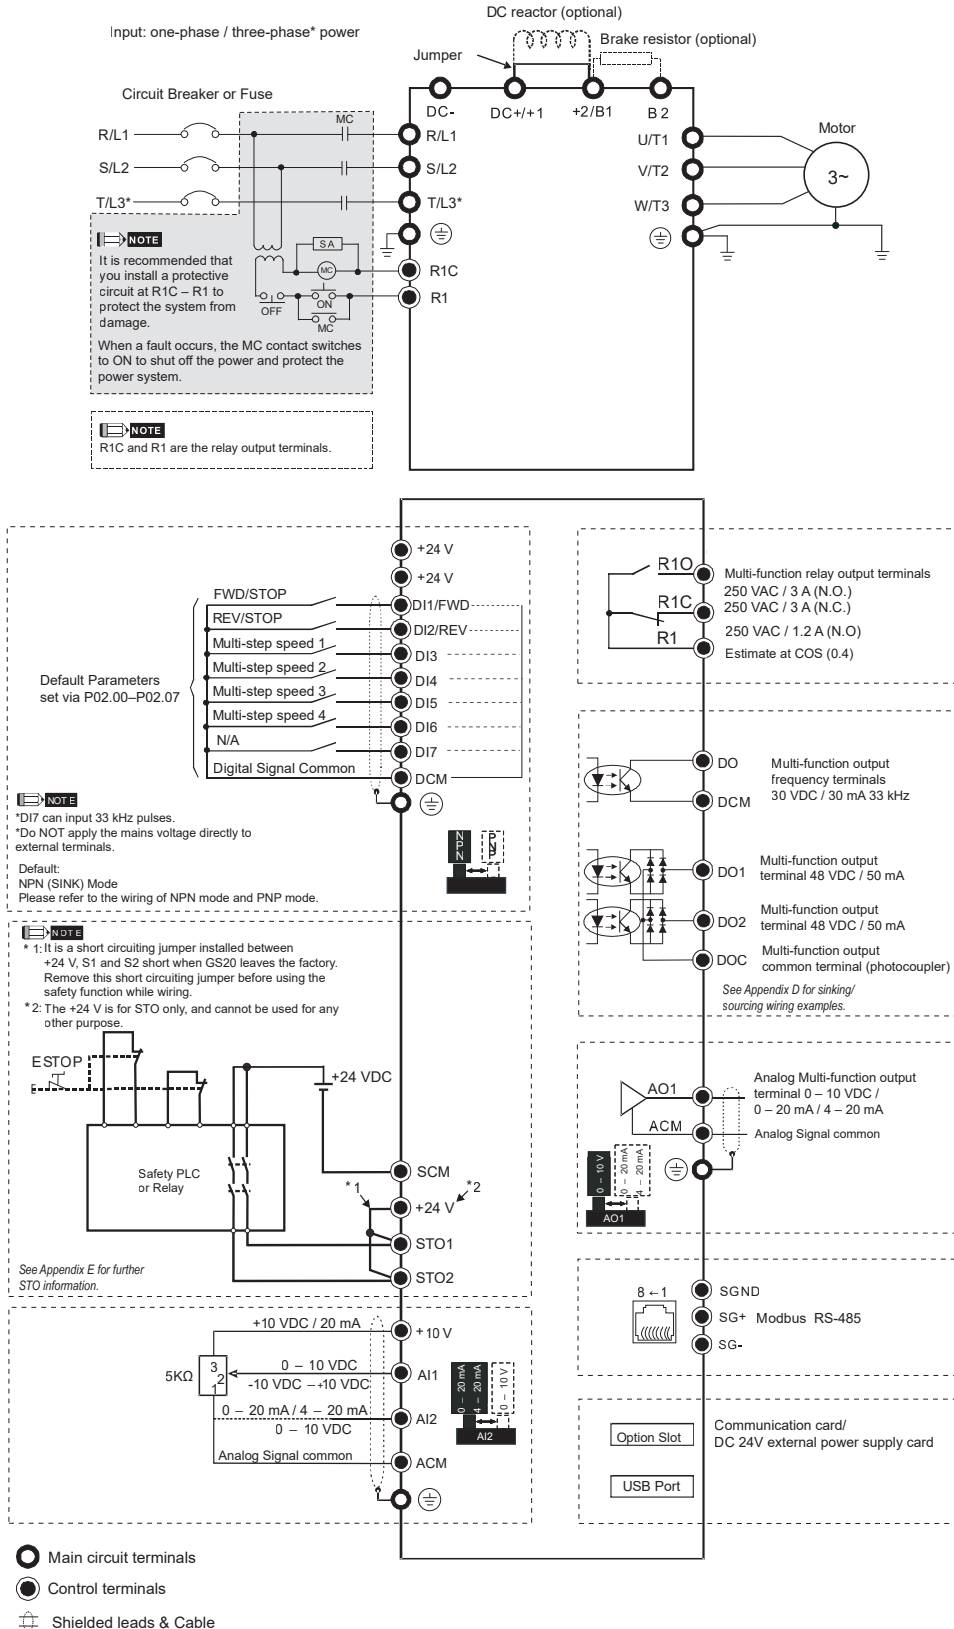

DURAPULSE GS20(X) AC Drives – Optional Accessories

Accessories Available for GS20(X) AC Drives

The table below lists types of accessories available for your GS20 or GS20X series drive. To see if your specific model can use a particular accessory, please click the reference link to go to the accessory page.


GS20(X) AC Drives Available Software and Accessories			
<i>Accessory</i>	<i>GS20 Series Drives</i>	<i>GS20X Series Drives</i>	<i>Reference</i>
GSof2 Drive Software	✓	✓	"GSof2 Drive Configuration Software" on page tGSX-110
GSLogic PLC Software	✓	✓	"GSLOGIC Drive Configuration Software" on page tGSX-111
Backup Power Supply	✓	✓	"GS20A-BPS" on page tGSX-66
Braking Resistors	✓	✓	"GS10/GS20 Braking Resistors" on page tGSX-71
Capacitive Filter	✓	✓	"Capacitive Filter" on page tGSX-86
Communication Module	✓	✓	"GS20A-CM-ENETIP" on page tGSX-66
Conduit Boxes	✓		"GS20 Conduit Boxes" on page tGSX-74
DIN Rail Mounting (A–C frame only)	✓		"DIN Rail Mounting" on page tGSX-92
Disconnect Switch		✓	"GS20(X) Disconnect Switch" on page tGSX-85
Earthing Plates		✓	"GS20X Earthing Plate" on page tGSX-85
EMC Filter	✓	✓	"GS10/GS20 High Performance EMI Input Filters" on page tGSX-80
EMC Shield Plates	✓		"EMC Shield Plate" on page tGSX-86
EMI Filters	✓	✓	"GS10/GS20 High Performance EMI Input Filters" on page tGSX-80
Fuses/Circuit Breakers	✓	✓	"GS20X Fuses/Circuit Breakers" on page tGSX-83
Keypad Extension Cables	✓		"GS20 Keypad Extension Cables" on page tGSX-87
Line/Load Reactor/Voltage Time Filter	✓	✓	"GS20(X) Line Reactors/Voltage Time Filters" on page tGSX-90
Mounting Adapter Plate (A–C frame only)	✓		"Mounting Adapter Plate" on page tGSX-93
Optional Advanced Keypad	✓	✓	"Advanced Keypad" on page tGSX-112
Replacement Fan Kit	✓	✓	"Cooling Fans for GSxx Series Drives (Spare/Replacement)" on page tGSX-94
Replacement Keypad	✓		"GS20(X) Replacement Keypad" on page tGSX-87
RF Filter	✓	✓	"RF Filter" on page tGSX-95

GS20(X) Optional Accessories – Expansion Cards

GS20(X) Optional Modules

The GS20A-BPS is a backup power supply option card that can be used to maintain functionality to your GS20 or GS20X drive when external power is unavailable. The GS20A-CM-ENETIP is a communication module that can be used to enable Modbus TCP and EtherNet/IP communication. Note that only one option module can be installed at a time. Please see the GS20(X) User Manual for additional information and installation instructions.

GS20(X) DURAPULSE Drives I/O and Communication Cards					
Part Number	Price	Description	Features/Specifications	Placement*	GS Drive
<u>GS20A-BPS</u>	\$137.00	DURAPULSE GS20(X) series Backup Power Supply Module	Provides external power supply and supports 24VDC input. Supports parameter read/write and drive status monitoring. When providing backup power, the following functions work normally: <ul style="list-style-type: none"> • Parameter reading and writing • Keypad display • Keys on the keyboard panel (except the RUN key) • Analog input with +10V terminal supply power • Multi-function inputs with +24V terminal or external power supply • Relay output • Pulse sequence frequency command • Testing RS485 communications 	Slot 1	GS20(X) – all
<u>GS20A-CM-ENETIP</u>	\$78.00	DURAPULSE GS20(X) series communication module, EtherNet/IP and Modbus TCP	Features: <ul style="list-style-type: none"> • Supports Modbus TCP and EtherNet/IP protocol • 32/32 words read/write parameters correspondence • User-defined corresponding parameters • MDI/MDI-X auto-detect • IP filter simple firewall function Specifications: <ul style="list-style-type: none"> • RJ45 with Auto MDI/MDIX interface • 1 port (ENETIP) or 2 ports (EIP2) • IEEE 802.3, IEEE 802.3u transmission method with Cat 5e shielding 100MHz cable at 10/100 Mbps Auto-detect transmission speed • Network protocol: ICMP, IP, TCP, UDP, DHCP, HTTP, SMTP, Modbus over TCP/IP, EtherNet/IP, BOOTP • Requires 15VDC provided by AC drive • 500VDC insulation voltage • 0.8 W power consumption • 25g (ENETIP) or 30g (EIP2) weight 	Slot 1	GS20(X) – all
<u>GS20A-CM-EIP2</u>	\$85.00	DURApulse GS20 series communication module, EtherNet/IP and Modbus TCP, 2 ports, (2) Ethernet (RJ45) port(s).	Specifications: <ul style="list-style-type: none"> • RJ45 with Auto MDI/MDIX interface • 1 port (ENETIP) or 2 ports (EIP2) • IEEE 802.3, IEEE 802.3u transmission method with Cat 5e shielding 100MHz cable at 10/100 Mbps Auto-detect transmission speed • Network protocol: ICMP, IP, TCP, UDP, DHCP, HTTP, SMTP, Modbus over TCP/IP, EtherNet/IP, BOOTP • Requires 15VDC provided by AC drive • 500VDC insulation voltage • 0.8 W power consumption • 25g (ENETIP) or 30g (EIP2) weight 	Slot 1	GS20(X) – all

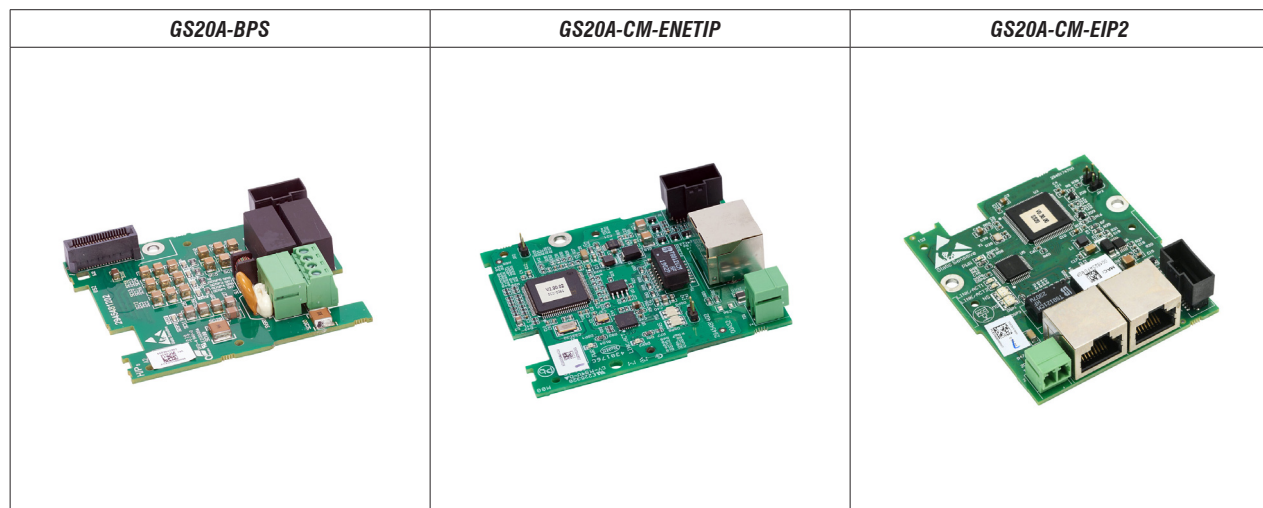

GS20/GS30 Optional Accessories – Expansion Cards

GS20/GS30 Optional Modules

The GS30A-CM-EIPKITP2 allows mounting of GS20 and GS30 series communication and expansion cards in Position 2 (on the outside of the drive) for Frames A - D. This gives the benefit of quick removal of the communication card for access to the main power and control terminals. It does add overall depth to the drive unit. The front cover of the kit must be removed to see the comm card status LEDs.

GS20/GS30 DURApulse Drives Communication Card Mounting				
Part Number	Price	Description	Features/Specifications	Position
GS30A-CM-EIPKITP2	\$22.00	DURApulse GS30 mounting cover, for use with GS20 and GS30 series communication modules. Used when communication module is installed in position 2.	Mounting kit for mounting GS20/GS30 EtherNet/IP communication cards in Position 2 for frames A through D. Not needed for larger frames. GS30A-CM-ECAT comes with a mounting cover.	2



GS30A-CM-EIPKITP2



Drive with GS30A-CM-EIPKITP2 installed

GS20(X) Series Optional Accessories - Braking

GS20(X) Braking Resistors

Use the table below to find the appropriate braking resistor model for your GS20(X) series AC drive. For more information and installation instructions, please see the GS20 User Manual. All listed resistors are available for purchase at www.automationdirect.com.

GS20(X) AC Drive Braking Component Selection											
Drive Voltage	Drive Model	Motor Power (hp)	Drive Brake Capacity - Max Torque		125% Braking Torque @ 10% Duty Cycle*						
			Min Resistor Value (Ω)	Max Total Brake Current (A)	Open Type Braking Resistor				NEMA1 Resistors with Thermal Switch		
					Part #	Qty.	Brake Torque (kg·m)	Total Brake Current (A)	Part #	Qty.	Total Brake Current (A)
120V	GS21-10P2	1/4	190.0	2	GS-BR-080W750	1	0.1	0.5	BR-N1-240W200	1	2.0
	GS21-10P5	1/2	95.0	4	GS-BR-080W200	1	0.3	1.9	BR-N1-240W150	1	2.6
	GS21-11P0	1	63.3	6	GS-BR-080W750	1	0.5		BR-N1-240W200	1	
230V	GS21-20P2	1/4	190.0	2	GS-BR-080W750	1	0.1	0.5	BR-N1-240W200	1	2.0
	GS21-20P5	1/2	95.0	4	GS-BR-080W200	1	0.3	1.9	BR-N1-240W150	1	2.6
	GS21-21P0	1	63.3	6	GS-BR-080W750	1	0.5		BR-N1-280W50	1	
	GS21-22P0	2	47.5	8	GS-BR-200W091	1	1	4.2	BR-N1-240W200	1	2.0
	GS21-23P0	3	38.0	10	GS-BR-300W070	1	1.5	5.4	BR-N1-280W50	1	7.8
	GS23-20P2	1/4	190.0	2	GS-BR-080W750	1	0.1	0.5	BR-N1-240W200	1	
	GS23-20P5	1/2	95.0	4	GS-BR-080W200	1	0.3	1.9	BR-N1-240W150	1	2.6
	GS23-21P0	1	63.3	6	GS-BR-080W750	1	0.5		BR-N1-280W50	1	
	GS23-22P0	2	47.5	8	GS-BR-200W091	1	1	4.2	BR-N1-800W25	1	15.6
	GS23-23P0	3	38.0	10	GS-BR-300W070	1	1.5	5.4	BR-N1-800W18P0	1	21.7
	GS23-25P0	5	19.0	20	GS-BR-400W040	1	2.5	9.5	BR-N1-1K1W15P0	1	26.0
	GS23-27P5	7 1/2	16.5	23	GS-BR-1K0W020	1	3.7	19	BR-N1-1K5W14P0	1	27.9
	GS23-2010	10	14.6	26	GS-BR-1K0W020	1	5.1		GS-BR-1K0W4P3 (x2 series)	2	10.2
	GS23-2015	15	12.6	29	GS-BR-1K5W013	1	7.4	29	BR-N1-250W400	1	2.0
	GS23-2020	20	8.3	46	GS-BR-1K0W750	1	0.3	1	BR-N1-240W200	1	3.9
GS23-40P5	1/2	380.0	2	GS-BR-080W750	1	0.5	GS-BR-200W360		1	1	2.1
GS23-41P0	1	190.0	4	GS-BR-200W360	1	1	2.1	GS-BR-300W250	1	1.5	3
GS23-42P0	2	126.7	6	GS-BR-300W250	1	1.5	3	GS-BR-400W150	1	2.5	5.1
GS23-43P0	3	108.6	7	GS-BR-400W150	1	2.5	5.1	GS-BR-1K0W075	1	3.7	10.2
GS23-45P0	5	84.4	9	GS-BR-1K0W075	1	5.1	10.2	GS-BR-1K5W043	1	7.4	
GS23-47P5	7 1/2	50.7	15	GS-BR-1K5W043	1	7.4	17.6	GS-BR-1K0W016(x2 series)	2	10.2	24
GS23-4010	10	40.0	19	GS-BR-1K0W016(x2 series)	2	12.2	24	GS-BR-1K0W016 (x2 series)	2	12.2	
GS23-4015	15	33.0	23	GS-BR-1K5W013 (x2 series)	2	14.9	29	GS-BR-1K5W013 (x2 series)	2	14.9	29
GS23-4020	20	26.2	29	GS-BR-080W750	1	0.5	1.2	GS-BR-080W750	1	0.5	1.2
GS23-4025	25	26.2	29	GS-BR-200W360	1	1	2.6	GS-BR-200W360	1	1	2.6
GS23-4030	30	23.0	33	GS-BR-300W400	1	1.5	2.3	GS-BR-300W400	1	1.5	2.3
GS23-51P0	1	280.0	4	GS-BR-500W100	1	2.5	9.2	GS-BR-500W100	1	2.5	9.2
GS23-52P0	2	186.7	6	GS-BR-750W140	1	3.7	6.6	GS-BR-750W140	1	3.7	6.6
GS23-53P0	3	160.0	7	GS-BR-1K0W075	1	5.1	12.3	GS-BR-1K0W075	1	5.1	12.3
GS23-55P0	5	93.3	12	GS-BR-080W200	1	0.3	1.9	BR-N1-240W150	1	2.6	
GS23-57P5	7 1/2	80.0	14	GS-BR-200W091	1	1		4.2	BR-N1-280W50		1
GS23-5010	10	70.0	16	GS-BR-300W070	1	1.5	5.4	BR-N1-240W200	1	2.0	
GS20X - 230V	GS21X-20P5	1/2	95.0	4	GS-BR-080W200	1	0.3	1.9	BR-N1-240W150	1	2.6
	GS21X-21P0	1	63.3	6	GS-BR-080W750	1	0.5		BR-N1-280W50	1	
	GS21X-22P0	2	47.5	8	GS-BR-200W091	1	1	4.2	BR-N1-240W200	1	2.0
	GS21X-23P0	3	38.0	10	GS-BR-300W070	1	1.5	5.4	BR-N1-240W150	1	2.6
	GS23X-20P5	1/2	190.0	2	GS-BR-080W200	1	0.1	0.5	BR-N1-280W50	1	
	GS23X-21P0	1	95.0	4	GS-BR-080W200	1	0.3	1.9	BR-N1-240W200	1	2.0
	GS23X-22P0	2	63.3	6	GS-BR-200W091	1	0.5		4.2	BR-N1-240W150	1
	GS23X-23P0	3	47.5	8	GS-BR-300W070	1	1	4.2	BR-N1-280W50	1	7.8
GS23X-25P0	5	38.0	10	GS-BR-400W040	1	1.5	5.4	BR-N1-800W25	1	15.6	
GS23X-27P5	7 1/2	19.0	20	GS-BR-1K0W020	1	2.5	9.5	BR-N1-800W18P0	1	21.7	
GS20X - 460V	GS23X-40P5	1/2	380.0	2	GS-BR-080W750	1	0.3	1	BR-N1-240W200	1	3.9
	GS23X-41P0	1	190.0	4	GS-BR-200W360	1	1		2.1	BR-N1-240W150	1
	GS23X-42P0	2	126.7	6	GS-BR-300W250	1	1.5	3	BR-N1-500W200	1	3.9
	GS23X-43P0	3	108.6	7	GS-BR-400W150	1	2.5	5.1	BR-N1-500W130	1	6.0
	GS23X-45P0	5	84.4	9	GS-BR-1K0W075	1	3.7	6.6	BR-N1-500W130	1	6.0
	GS23X-47P5	7 1/2	50.7	15	GS-BR-1K0W075	1	5.1	10.2	BR-N1-720W85	1	9.2
GS23X-4010	10	40.0	19	GS-BR-1K0W075	1	5.1	10.2	BR-N1-1K2W50	1	15.6	

* 10% Duty Cycle with maximum ON (braking) time for 10 seconds.

GS20 Series Optional Accessories – Conduit Boxes

GS20 – Conduit Selection Table					
Drive		Conduit Box*			Description
Model	Frame	Part #	Price	Drawing	
GS21-10P2 GS21-20P2 GS23-20P2 GS23-20P5	A1, A2	GS20A-N1A1	\$25.50	PDF	GS20 series conduit box, NEMA1
GS21-10P5 GS21-20P5 GS23-40P5 GS23-21P0 GS23-41P0 GS23-51P0	A3-A5	GS20A-N1A3	\$28.00	PDF	
GS23-22P0 GS23-42P0 GS23-52P0 GS21-21P0	B1, B2	GS20A-N1B	\$28.50	PDF	
GS21-11P0 GS21-22P0 GS21-23P0 GS23-23P0 GS23-25P0 GS23-43P0 GS23-45P0 GS23-53P0 GS23-55P0	C1	GS20A-N1C	\$30.00	PDF	
GS23-27P5 GS23-47P5 GS23-4010 GS23-57P5 GS23-5010	D1	GS20A-N1D	\$30.50	PDF	
GS23-2010 GS23-2015 GS23-4015 GS23-4020	E1	GS20A-N1E	\$30.50	PDF	
GS23-2020 GS23-4025 GS23-4030	F1	GS20A-N1F	\$33.00	PDF	

* Conduit Box Kits include mounting hardware; box base, box cover, bushings, and screws.
Conduit box dimensions are shown below and on the following page.

GS20 Conduit Boxes

Optional Conduit Box Kits can be ordered separately. These kits bolt onto the bottom of the applicable GS20 drive to provide a convenient connection point for conduit entry, allowing the GS20 to achieve a NEMA 1/UL type 1 environmental protection rating; especially useful for GS20 drives mounted outside of an electrical control panel.



Example GS20 Conduit Box

GS20(X) Optional Accessories – EMC Filter & Zero Phase Reactor

GS20(X) Standard Footprint EMC Filter and Zero Phase Reactor

If electromagnetic noise is harmful to your manufacturing environment, we recommend that you select an EMC filter as shown below. For some motor drive models, you need to work with zero phase reactors to be compliant with EMC regulations. Refer to the table and figure below for the recommended model, setting method, and maximum motor cable length of the EMC filter and zero phase reactor. The footprint filter allows mounting of the drive on top of the recommended filter, saving panel space and wiring. For more information and installation instructions, please see the GS20(X) User Manual.

GS20(X) EMC Filter and Zero Phase Reactor													
Frame	Drive Model	Input Current (A)	Footprint Filter Model #	Price	Recommended Zero Phase Reactor	Conducted Emission				Radiated Emission			
						C1-motor cable length-30m			C2-motor cable length-100m	C2-motor cable length- 100m			
						Position to Install a Zero Phase Reactor						1	2
A	GS21-10P2	6.8	EMF11AM21A	\$53.00	RF008X00A				N/A				
	GS21-20P2	3.8	EMF11AM21A	\$53.00			✓	✓	N/A		✓	✓	
	GS21-20P5	6.7	EMF11AM21A	\$53.00			✓	✓	N/A		✓	✓	
	GS23-20P2	2.2	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23-20P5	3.8	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23-21P0	6	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23-40P5	2.5	EMF6A0M43A	\$67.00				✓	N/A			✓	
	GS23-41P0	4.2	EMF6A0M43A	\$67.00				✓	N/A			✓	
	GS23-51P0	2.4	EMF6A0M63B	\$154.00					N/A*				
	GS21-10P5	10.1	EMF11AM21A	\$53.00					N/A				
GS20X A	GS21X-20P5	8.3	EMF11AM21A	\$53.00			✓	✓	N/A		✓	✓	
	GS21X-21P0	11.3	EMF11AM21A	\$53.00			✓	✓	N/A		✓	✓	
	GS21X-22P0	18.5	EMF27AM21B	\$94.00				✓	N/A			✓	
	GS23X-20P5	3.8	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23X-21P0	6	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23X-22P0	9.6	EMF10AM23A	\$73.00			✓	✓	N/A		✓	✓	
	GS23X-40P5	2.5	EMF6A0M43A	\$67.00				✓	N/A			✓	
	GS23X-41P0	4.2	EMF6A0M43A	\$67.00				✓	N/A			✓	
	GS23X-42P0	6.4	EMF6A0M43A	\$67.00				✓	N/A			✓	
	GS23X-43P0	7.2	EMF12AM43B	\$118.00					N/A				
B	GS21-21P0	10.5	EMF11AM21A	\$53.00		✓	✓	N/A		✓	✓		
	GS23-22P0	9.6	EMF10AM23A	\$73.00		✓	✓	N/A		✓	✓		
	GS23-52P0	4.2	EMF6A0M63B	\$154.00				N/A*					
	GS23-42P0	6.4	EMF6A0M43A	\$67.00			✓	N/A			✓		
GS20X B	GS21X-23P0	27.5	EMF27AM21B	\$94.00			✓	N/A			✓		
	GS23X-23P0	15	EMF24AM23B	\$115.00		✓	✓	N/A		✓	✓		
	GS23X-25P0	23.4	EMF24AM23B	\$115.00		✓	✓	N/A		✓	✓		
	GS23X-45P0	11.6	EMF12AM43B	\$118.00		✓	✓	N/A		✓	✓		
C	GS21-11P0	20.6	EMF27AM21B	\$94.00				N/A					
	GS21-22P0	17.9	EMF27AM21B	\$94.00			✓	N/A			✓		
	GS21-23P0	26.3	EMF27AM21B	\$94.00			✓	N/A			✓		
	GS23-23P0	15	EMF24AM23B	\$115.00		✓	✓	N/A		✓	✓		
	GS23-25P0	23.4	EMF24AM23B	\$115.00		✓	✓	N/A		✓	✓		
	GS23-43P0	7.2	EMF12AM43B	\$118.00				N/A					
	GS23-53P0	5.8	EMF16AM63B	\$157.00				N/A*					
	GS23-55P0	9.3	EMF16AM63B	\$157.00				N/A					
	GS23-45P0	11.6	EMF12AM43B	\$118.00		✓	✓	N/A		✓	✓		
	GS23X-27P5	32.4	EMF33AM23B	\$167.00		✓	✓	N/A		✓	✓		
GS20X C	GS23X-47P5	17.3	EMF23AM43B	\$161.00		✓	✓	N/A		✓	✓	✓	
	GS23X-4010	22.6	EMF23AM43B	\$161.00		✓	✓	N/A		✓	✓	✓	

Continued on next page

GS20(X) Optional Accessories – EMC Filter & Zero Phase Reactor

GS20(X) Standard Footprint EMC Filter and Zero Phase Reactor, continued

GS20(X) EMC Filter and Zero Phase Reactor (continued)												
Frame	Drive Model	Input Current (A)	Footprint Filter Model #	Price	Recommended Zero Phase Reactor	Conducted Emission			Radiated Emission			
						C1-motor cable length-30m			C2-motor cable length-100m			
						1	2	3	1	2	3	
D	GS23-27P5	32.4	EMF33AM23B	\$167.00	RF008X00A	✓	✓		N/A	✓	✓	
	GS23-47P5	17.3	EMF23AM43B	\$161.00		✓	✓	✓	N/A	✓	✓	
	GS23-57P5	13.4	EMF16AM63B	\$157.00					N/A			
	GS23-5010	17.5	EMF16AM63B	\$157.00					N/A			
	GS23-4010	22.6	EMF23AM43B	\$161.00		✓	✓	✓	N/A	✓	✓	
E	GS23-2010	43.2	n/a	-			✓	✓	N/A		✓	✓
	GS23-2015	61.2	n/a	-			✓	✓	N/A		✓	✓
	GS23-4015	30.8	n/a	-					N/A			
	GS23-4020	39.6	n/a	-			✓	✓	N/A		✓	✓
F	GS23-2020	82.8	n/a	-			✓	✓	N/A		✓	✓
	GS23-4025	45.7	n/a	-		✓	✓	N/A		✓	✓	
	GS23-4030	53.9	n/a	-		✓	✓	N/A		✓	✓	


Note: It is not necessary to add a zero phase reactor for passing the C2 conducted emission test.

* The maximum motor cable length of the conducted emission C2 class for GS23-51P0, GS23-52P0, and GS23-53P0 is 75 meters. All others are 100 meters.


** See diagram below for installation positions.

EMF Series Filter Dimensions

(Units = mm [in])

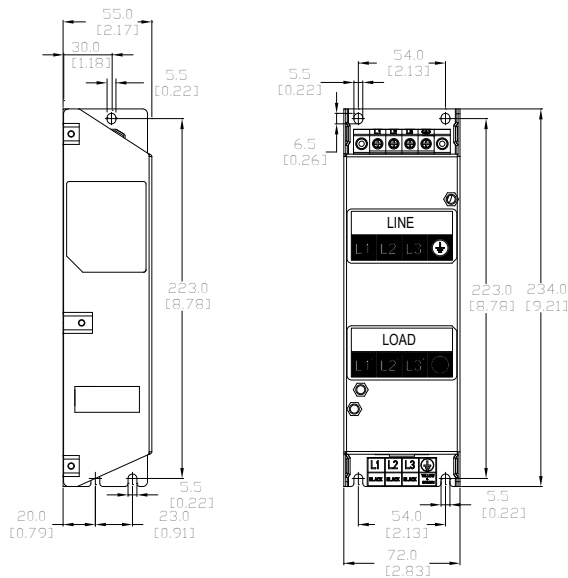

**EMF11AM21A
EMF10AM23A
EMF6A0M43A**

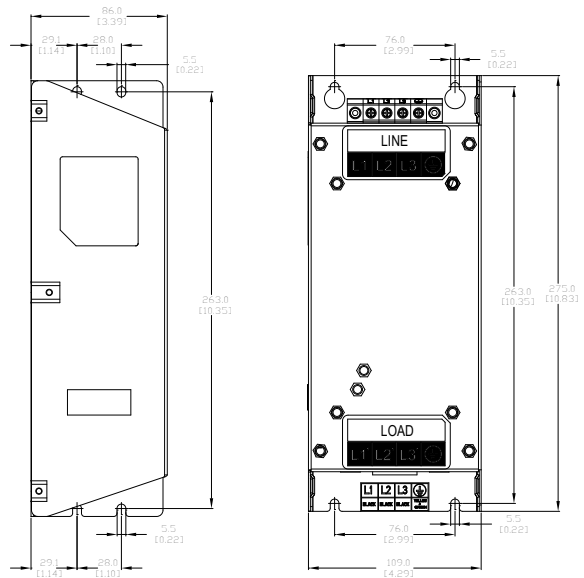

**EMF27AM21B; EMF24AM23B
EMF33AM23B; EMF12AM43B
EMF23AM43B; EMF6A0M63B;
EMF16AM63B**

GS10/GS20 Series Optional Accessories – EMI Input Filters

GS10/GS20 High Performance EMI Input Filters

High performance EMI filters may improve drive performance for certain applications. Use the table below to select the correct filter for your drive. For additional information and installation instructions, please see your GSx series User Manual.

Model		Description	EMI Filter*	
GS10 Drives	GS20(X) Drives		Roxburgh Filters Chassis 1ph	Roxburgh Filters C2 Rated
GS11N-10P2	GS21-10P2	120V 1ph 0.25 hp	RES90F10	MIF10
GS11N-10P5	GS21-10P5	120V 1ph 0.5 hp	RES90F16	MIF16
GS11N-11P0	GS21-11P0	120V 1ph 1.0 hp	RES90S30	MIF23
GS11N-20P2	GS21-20P2	230V 1ph 0.25 hp	RES90F06	MIF06
GS11N-20P5	GS21-20P5	230V 1ph 0.5 hp	RES90F10	MIF10
GS11N-21P0	GS21-21P0	230V 1ph 1.0 hp	RES90F16	MIF16
GS11N-22P0	GS21-22P0	230V 1ph 2.0 hp	RES90S20	MIF23
GS11N-23P0	GS21-23P0	230V 1ph 3.0 hp	RES90S30	MIF330B
GS13N-20P2	GS23-20P2	230V 3ph 0.25 hp	-	KMF306A
GS13N-20P5	GS23-20P5	230V 3ph 0.5 hp	-	KMF306A
GS13N-21P0	GS23-21P0	230V 3ph 1.0 hp	-	KMF306A
GS13N-22P0	GS23-22P0	230V 3ph 2.0 hp	-	KMF318A
GS13N-23P0	GS23-23P0	230V 3ph 3.0 hp	-	KMF318A
GS13N-25P0	GS23-25P0	230V 3ph 5.0 hp	-	KMF325A
GS13N-27P5	GS23-27P5	230V 3ph 7.5 hp	-	KMF336A
n/a	GS23-2010	230V 3ph 10hp	-	KMF350A
	GS23-2015	230V 3ph 15hp	-	KMF370A
	GS23-2020	230V 3ph 20hp	-	KMF3100A
GS13N-40P5	GS23-40P5	460V 3ph 0.5 hp	-	KMF306A
GS13N-41P0	GS23-41P0	460V 3ph 1.0 hp	-	KMF306A
GS13N-42P0	GS23-42P0	460V 3ph 2.0 hp	-	KMF306A
GS13N-43P0	GS23-43P0	460V 3ph 3.0 hp	-	KMF310A
GS13N-45P0	GS23-45P0	460V 3ph 5.0 hp	-	KMF318A
GS13N-47P5	GS23-47P5	460V 3ph 7.5 hp	-	KMF318A
GS13N-4010	GS23-4010	460V 3ph 10hp	-	KMF325A
n/a	GS23-4015	460V 3ph 15hp	-	KMF336A
	GS23-4020	460V 3ph 20hp	-	KMF350A
	GS23-4025	460V 3ph 25hp	-	KMF350A
	GS23-4030	460V 3ph 30hp	-	KMF370A
	GS23-51P0	575V 3ph 1.0 hp	-	KMF306V
	GS23-52P0	575V 3ph 2.0 hp	-	KMF306V
	GS23-53P0	575V 3ph 3.0 hp	-	KMF306V
	GS23-55P0	575V 3ph 5.0 hp	-	KMF310V
	GS23-57P5	575V 3ph 7.5 hp	-	KMF318V
	GS23-5010	575V 3ph 10hp	-	KMF318V
	GS21X-20P5	230V 1ph 0.5 hp	RES90F10	MIF10
	GS21X-21P0	230V 1ph 1.0 hp	RES90F16	MIF16
	GS21X-22P0	230V 1ph 2.0 hp	RES90S20	MIF23
	GS21X-23P0	230V 1ph 3.0 hp	RES90S30	MIF330B
	GS23X-20P5	230V 3ph 0.5 hp	-	KMF306A
	GS23X-21P0	230V 3ph 1.0 hp	-	KMF306A
	GS23X-22P0	230V 3ph 2.0 hp	-	KMF310A
	GS23X-23P0	230V 3ph 3.0 hp	-	KMF318A
	GS23X-25P0	230V 3ph 5.0 hp	-	KMF325A
	GS23X-27P5	230V 3ph 7.5 hp	-	KMF336A
GS23X-40P5	460V 3ph 0.5 hp	-	KMF306A	
GS23X-41P0	460V 3ph 1.0 hp	-	KMF306A	
GS23X-42P0	460V 3ph 2.0 hp	-	KMF306A	
GS23X-43P0	460V 3ph 3.0 hp	-	KMF310A	
GS23X-45P0	460V 3ph 5.0 hp	-	KMF318A	
GS23X-47P5	460V 3ph 7.5 hp	-	KMF318A	
GS23X-4010	460V 3ph 10hp	-	KMF325A	

* All specs for the EMI filters can be found at www.automationdirect.com or by clicking the following links: [-KMF Series Filters](#), [-MIF Series Filters](#), [-RES90 Series Filters](#)

GS20(X) Optional Accessories – Fuses/Circuit Breakers

GS20X Fuses/Circuit Breakers

Protection devices are essential to prevent damage to your GS20(X) drive and application equipment. Please use the fuse specification chart below to select fuses that are applicable to your GS20(X) drive. Only use UL-certified fuses which comply with your local regulations.

Fuse Specification Chart GS20(X) DURAPULSE Drives									
Drive Model	HP	Input Power			Input Fuse			Circuit Breaker	
		Ø	Volts	GS20(X) Input Amps	Fuse Amps	Fast Acting Class T	Edison Class J*	Size	Molded Case CB
GS21-10P2	1/4	1	120	6.8	10	TJN10	JHL10	20	G3P-020
GS21-10P5	1/2	1	120	10.1	10	TJN10	JHL10	25	G3P-025
GS21-11P0	1	1	120	20.6	25	TJN25	JHL25	50	G3P-050
GS21-20P2	1/4	1	230	5.8	10	TJN10	JHL10	15	G3P-015
GS21-20P5	1/2	1	230	8.3	15	TJN15	JHL15	20	G3P-020
GS21-21P0	1	1	230	11.3	20	TJN20	JHL20	30	G3P-030
GS21-22P0	2	1	230	18.5	35	TJN35	JHL35	45	G3P-040
GS21-23P0	3	1	230	27.5	50	TJN50	JHL50	70	G3P-070
GS23-20P2	1/4	3	230	2.2	10	TJN10	JHL10	15	G3P-015
GS23-20P5	1/2	3	230	3.8	15	TJN15	JHL15	15	G3P-015
GS23-21P0	1	3	230	6	20	TJN20	JHL20	15	G3P-015
GS23-22P0	2	3	230	9.6	35	TJN35	JHL35	25	G3P-025
GS23-23P0	3	3	230	15	50	TJN50	JHL50	40	G3P-040
GS23-25P0	5	3	230	23.4	80	TJN80	JHL80	60	G3P-060
GS23-27P5	7 1/2	3	230	32.4	60	TJN60	JHL60	63	G3P-060
GS23-2010	10	3	230	43.2	80	TJN80	JHL80	90	G3P-090
GS23-2015	15	3	230	61.2	110	TJN110	JHL110	125	F3P-125
GS23-2020	20	3	230	82.8	150	TJN150	JHL150	160	BW250JAGU-3P160SB
GS23-40P5	1/2	3	460	2	10	TJS10	JHL10	15	G3P-015
GS23-41P0	1	3	460	3.3	15	TJS15	JHL15	15	G3P-015
GS23-42P0	2	3	460	5.1	20	TJS20	JHL20	15	G3P-015
GS23-43P0	3	3	460	7.2	25	TJS25	JHL25	20	G3P-020
GS23-45P0	5	3	460	11.6	45	TJS45	JHL45	30	G3P-030
GS23-47P5	7 1/2	3	460	17.3	35	TJS35	JHL35	32	G3P-030
GS23-4010	10	3	460	22.6	45	TJS45	JHL45	45	G3P-040
GS23-4015	15	3	460	30.8	60	TJS60	JHL60	60	G3P-060
GS23-4020	20	3	460	39.6	80	TJS80	JHL80	80	G3P-080
GS23-4025	25	3	460	45.7	90	TJS90	JHL90	90	G3P-090
GS23-4030	30	3	460	53.9	110	TJS110	JHL110	100	G3P-100
GS23-51P0	1	3	575	2.4	6	TJS6	JHL6	6	n/a
GS23-52P0	2	3	575	4.2	10	TJS10	JHL10	10	n/a
GS23-53P0	3	3	575	5.8	10	TJS10	JHL10	15	BW125JAGU-3P015SB
GS23-55P0	5	3	575	9.3	20	TJS20	JHL20	30	BW125JAGU-3P030SB
GS23-57P5	7 1/2	3	575	13.4	25	TJS25	JHL25	30	BW125JAGU-3P030SB
GS23-5010	10	3	575	17.5	30	TJS30	JHL30	30	BW125JAGU-3P030SB
GS21X-20P5	1/2	1	230	8.3	15	TJN15	JHL15	16	G3P-015
GS21X-21P0	1	1	230	11.3	20	TJN20	JHL20	25	G3P-025
GS21X-22P0	2	1	230	18.5	35	TJN35	JHL35	45	G3P-040
GS21X-23P0	3	1	230	27.5	50	TJN50	JHL50	63	G3P-060
GS23X-20P5	1/2	3	230	3.8	15	TJN15	JHL15	10	FAZ-C10-3-NA
GS23X-21P0	1	3	230	6	20	TJN20	JHL20	15	G3P-015
GS23X-22P0	2	3	230	9.6	35	TJN35	JHL35	25	G3P-025
GS23X-23P0	3	3	230	15	50	TJN50	JHL50	40	G3P-040
GS23X-25P0	5	3	230	23.4	80	TJN80	JHL80	60	G3P-060
GS23X-27P5	7 1/2	3	230	32.4	60	TJN60	JHL60	63	G3P-060
GS23X-40P5	1/2	3	460	2.5	10	TJS10	JHL10	6	FAZ-C5-3-NA
GS23X-41P0	1	3	460	4.2	15	TJS15	JHL15	10	FAZ-C10-3-NA
GS23X-42P0	2	3	460	6.4	20	TJS20	JHL20	16	G3P-015
GS23X-43P0	3	3	460	7.2	25	TJS25	JHL25	16	G3P-015
GS23X-45P0	5	3	460	11.6	35	TJS35	JHL35	30	G3P-030
GS23X-47P5	7 1/2	3	460	17.3	35	TJS35	JHL35	30	G3P-030
GS23X-4010	10	3	460	22.6	45	TJS45	JHL45	45	G3P-040

* High-speed Class J.


Note: JHL fuses can be used with GS and DURAPULSE drives in non-UL applications. Fuse the drive according to NEC guidelines (NEC Article 430). For UL applications, GS, and DURAPULSE drives require Class T fuses (refer to the drive's user manual for details).

GS20(X) Series Optional Accessories – General

GS20(X) Disconnect Switch

The GS20XA-DSx series disconnect switch provides a local on/off disconnect switch that is easily mounted to the GS20(X) drive. This accessory provides an easy, quick, single hasp lockout point to isolate power to the drive. For more information and installation instructions, see the GS20(X) User Manual.


GS20X Disconnect Switch Selection						
Frame	Part Number	Price	Dimensions (mm [in])			
			A	B	C	D
A	GS20XA-DSA	\$127.00	154.5 [6.08]	145.0 [5.71]	145.2 [5.72]	2x \varnothing 25.0 [\varnothing 0.98]
B	GS20XA-DSB	\$132.00	164.5 [6.48]	165.0 [6.50]	152.5 [6.01]	2x \varnothing 32.4 [\varnothing 1.28]
C	GS20XA-DSC	\$219.00				

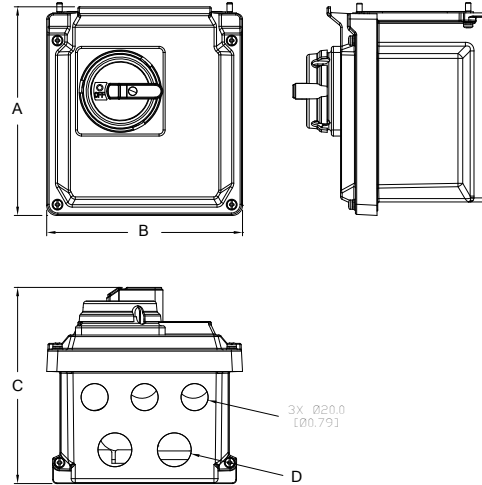

GS20X Earthing Plate

Earthing plates are available for use with shielded cable and your GS20X drive. For GS20 drives, please use EMC shield plates. Each earthing plate is compatible with all GS20X drives of that frame size. For more information and installation instructions, see the GS20(X) User Manual.

Earthing Plate Selection			
Drive Series	Frame	Earthing Plate Model	Price
GS20X	A	GS20XA-EPA	\$40.00
GS20X	B	GS20XA-EPB	\$46.00
GS20X	C	GS20XA-EPC	\$46.50

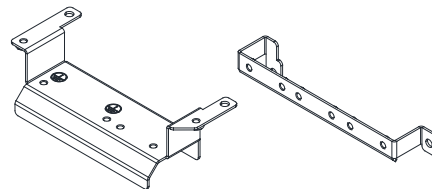

Example Earthing Plate - GS20XA-EPA


DuraPulse Optional Accessories – General

EMC Shield Plate

EMC Shield Plates are available for use with shielded cable and your GS10/GS20/GS30 drive. For GS20X drives, please use Earthing Plates. Each shield plate is compatible with all GS10, GS20, and GS30 drives of that frame size. For more information and installation instructions, see your GSxx series User Manual.

EMC Shield Plate Selection			
Drive Series	Frame	EMC Shield Plate Model	Price
GS10/20/30	A	GS20A-ESP-A	\$25.00
GS10/20/30	B	GS20A-ESP-B	\$26.00
GS10/20/30	C	GS20A-ESP-C	\$26.50
GS10/20/30	D	GS20A-ESP-D	\$27.50
GS20/30	E	GS20A-ESP-E	\$38.50
GS20/30	F	GS20A-ESP-F	\$39.00
GS30	G	GS30A-ESP-G	\$42.00
GS30	H	GS30A-ESP-H	\$45.00
GS30	I	GS30A-ESP-I	\$49.00

EMC Shield Plate Dimensions		
Model	Dimensions mm [inch]	
	a	b
GS20A-ESP-A	69.3 [2.73]	80.0 [3.15]
GS20A-ESP-B	67.7 [2.67]	79.7 [3.14]
GS20A-ESP-C	78.0 [3.07]	91.0 [3.58]
GS20A-ESP-D	103.4 [4.07]	97.0 [3.82]
GS20A-ESP-E	124.3 [4.89]	77.4 [3.05]
GS20A-ESP-F	168.0 [6.61]	80.0 [3.15]
GS30A-ESP-G	243.5 [9.59]	154.9 [6.10]
GS30A-ESP-H	262.0 [10.31]	201.9 [7.95]
GS30A-ESP-I	304.0 [11.97]	260.7 [10.26]

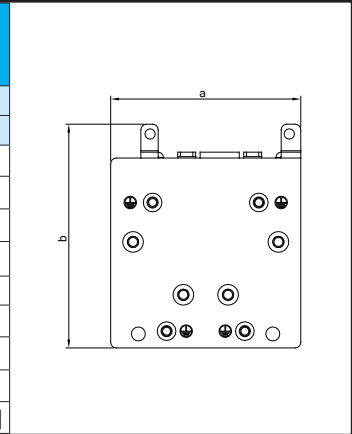


Capacitive Filter

The GS20A-CAPF capacitive filter supports basic filtering and noise interference reduction for all GS10, GS20(X), and G30 models, 460V and below. For more information and installation instructions, please see your GSxx series User Manual.

The GS20A-CAPF cannot be used with 575V models.

Capacitive Filter					
Drive Series	Model	Price	Applicable Voltage	Temperature Range	Capacitance
GS10/ GS20(X)/ GS30	GS20A-CAPF	\$21.50	110–480 VAC	-40–85°C	Cx: 1uF ± 20% Cy: 0.1uF ± 20%

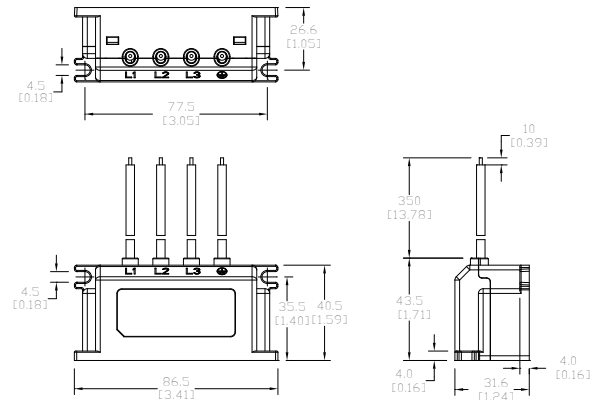


GS20(X) Optional Accessories – Keypad

GS20(X) Replacement Keypad


The GS20A-KPD can be used to replace the keypad that comes with each GS20 drive. The replacement keypad can be plugged directly into the drive (no screws needed) or mounted remotely using M3 screws and a keypad extension cable.



GS20-KPD Replacement Keypad			
Price	Part	Screw	Torque
\$26.00	GS20A-KPD	M3	8–9 kg·cm (6.947.81 lb-in.) [0.78–0.88 N·m]

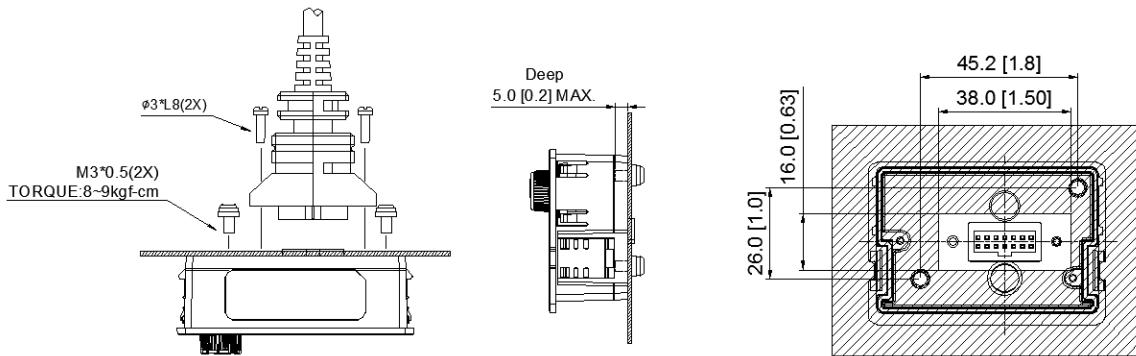

Direct Mounting on Plate

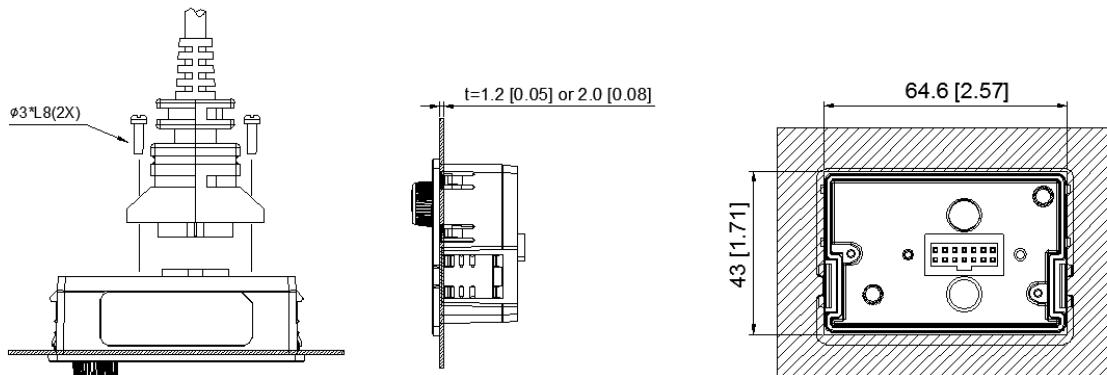

Embedded Mounting in Plate

GS20 Keypad Extension Cables

The default GS20 keypad is removable and can be remote installed if desired. Use one of the cables below to connect the remotely installed keypad back to the GS20 drive.

GS20 Keypad Compatible Extension Cables		
Price	Cable	Length (m [ft])
\$18.00	GS-CBL2-1L	1 [3.28]
\$23.50	GS-CBL2-3L	3 [9.84]
\$28.00	GS-CBL2-5L	5 [16.4]

GS20(X) Optional Accessories – Line Reactors/ VTF Filters

GS20(X) Line Reactors/Voltage Time Filters

Installing an AC Line Reactor on the input side of an AC motor drive can increase line impedance, improve the power factor, reduce input current, increase system capacity, and reduce interference generated from the motor drive.

Installing a load reactor or voltage time filter on the drive's output side can increase the high-frequency impedance to reduce the dV/dT and terminal voltage to protect the motor. Use output filters if the motor cable length exceeds 100ft.

GS20(X) Line/Load Reactor, AC Output Filter, & DC Reactor Selections						
GS20(X) Model	CT Input Amps (rms)	Saturation Amps (rms)	Motor HP	Line Reactor (LR2)**	Load Reactor (LR2)**	AC Output Filter (VTF)**
GS21-10P2	1.6	3.2	1/4	LR2-10P2-1PH	LR2-20P2	VTF-46-DE
GS21-10P5	2.5	5	1/2	LR2-10P5-1PH	LR2-20P5	VTF-246-CFG
GS21-11P0	5	9.6	1	LR2-11P5-1PH	LR2-21P0	VTF-24-FH
GS21-20P2	1.6	3.2	1/4	LR2-20P5-1PH	LR2-20P2	VTF-46-DE
GS21-20P5	2.8	5.6	1/2	LR2-20P5-1PH	LR2-20P5	VTF-246-CFG
GS21-21P0	4.8	9.6	1	LR-23P0	LR2-21P0	VTF-24-FH
GS21-22P0	7.5	15	2	LR2-22P0-1PH	LR-22P0	VTF-246-HKL
GS21-23P0	11	22	3	LR-27P5	LR-25P0	VTF-24-JL
GS23-20P2	1.6	3.2	1/4	LR2-20P2	LR2-20P2	VTF-46-DE
GS23-20P5	2.8	5.6	1/2	LR2-20P5	LR2-20P5	VTF-246-DGH
GS23-21P0	4.8	9.6	1	LR2-20P7	LR2-20P7	VTF-24-FH
GS23-22P0	7.5	15	2	LR-22P0	LR-22P0	VTF-246-HKL
GS23-23P0	11	22	3	LR-25P0	LR-25P0	VTF-24-JL
GS23-25P0	17	34	5	LR-27P5	LR-25P0	VTF-46-LM
GS23-27P5	25	50	7 1/2	LR-2010	LR-2010	VTF-46-NP
GS23-2010	33	66	10	LR-2015	LR-2010	VTF-246-LPQ
GS23-2015	46	92	15	LR-2020	LR-2020	VTF-246-NRS
GS23-2020	65	130	20	LR-2025	LR-2025	VTF-246-PSU
GS23-40P5	1.5	3	1/2	LR2-40P5	LR2-40P5	VTF-46-DE
GS23-41P0	2.7	5.4	1	LR2-41P0	LR2-41P0	VTF-246-CFG
GS23-42P0	4.2	8.4	2	LR2-43P0	LR2-42P0	VTF-24-FH
GS23-43P0	5.5	11	3	LR2-45P0	LR2-43P0	VTF-24-FH
GS23-45P0	9	18	5	LR2-47P5	LR2-45P0	VTF-246-HKL
GS23-47P5	13	26	7 1/2	LR-4010	LR2-47P5	VTF-24-JL
GS23-4010	17	34	10	LR-4015	LR-4010	VTF-24-JL
GS23-4015	25	50	15	LR-4015	LR-4015	VTF-246-LPQ
GS23-4020	32	64	20	LR-4020	LR-4020	VTF-246-LPQ
GS23-4025	38	76	25	LR-4025	LR-4025	VTF-246-MQR
GS23-4030	45	90	30	LR-4030	LR-4030	VTF-246-NRS
GS23-51P0	1.7	3.4	1	LR2-51P0	LR2-51P0	VTF-46-DE
GS23-52P0	3	6	2	LR2-52P0	LR2-52P0	VTF-246-CFG
GS23-53P0	4.2	8.4	3	LR2-53P0	LR2-53P0	VTF-246-DGH
GS23-55P0	6.6	13.2	5	LR2-55P0	LR2-55P0	VTF-246-GJJ
GS23-57P5	9.9	19.8	7 1/2	LR-5010	LR2-57P5	VTF-246-HKL
GS23-5010	12.2	24.4	10	LR-4010	LR-5010	VTF-246-HKL
GS21X-20P5	2.8	5.6	1/2	LR2-20P5-1PH	LR2-20P2	VTF-246-DGH
GS21X-21P0	4.8	9.6	1	LR2-21P0-1PH	LR2-20P7	VTF-24-FH
GS21X-22P0	7.5	15.0	2	LR2-22P0-1PH	LR2-22P0	VTF-246-HKL
GS21X-23P0	11.0	22.0	3	LR-27P5	LR-25P0	VTF-24-JL
GS23X-20P5	2.8	5.6	1/2	LR2-20P2	LR2-20P2	VTF-246-DGH
GS23X-21P0	4.8	9.6	1	LR2-21P5	LR2-21P0	VTF-24-FH
GS23X-22P0	7.5	15.0	2	LR2-22P0	LR2-22P0	VTF-246-GJJ
GS23X-23P0	11.0	22.0	3	LR-25P0	LR-25P0	VTF-24-JL
GS23X-25P0	17.0	34.0	5	LR-27P5	LR-27P5	VTF-4-M
GS23X-27P5	25.0	50.0	7 1/2	LR-2010	LR-2010	VTF-246-KMN
GS23X-40P5	1.5	3.0	1/2	LR2-40P5	LR2-40P5	VTF-46-DE
GS23X-41P0	2.7	5.4	1	LR2-41P5	LR2-41P0	VTF-246-CFG
GS23X-42P0	4.2	8.4	2	LR2-43P0	LR2-42P0	VTF-24-FH
GS23X-43P0	5.5	11.0	3	LR2-44P0	LR2-43P0	VTF-24-FH
GS23X-45P0	9.0	18.0	5	LR2-47P5	LR2-45P0	VTF-246-HKL
GS23X-47P5	13.0	26.0	7 1/2	LR-4010	LR2-47P5	VTF-24-JL
GS23X-4010	17.0	34.0	10	LR-4015	LR-4010	VTF-46-LM

* Not available at AutomationDirect.com


** Reactor sizing is based on rated HP NEMA motor load, not drive output amp load. Size the reactor based on the motor nameplate current. All specs for the LR2 and VTF can be found at www.automationdirect.com

DuraPulse Optional Accessories – Mounting Kits


DIN Rail Mounting

Frame A, B, and C GS10, GS20, and GS30 drives can be DIN rail mounted using a DIN rail mounting kit. One kit is used for A and B frame drives, while a second kit is used for C frame drives. Please see the GSxx series User Manual for additional information and installation instructions.

GSxx DIN Rail Mounting Compatibility					
Drive Model			Frame	DIN Rail Kit	Price
GS10 Series	GS20 Series	GS30 Series			
GS11N-10P2	GS21-10P2	–	A1	GS20A-DR-AB	\$5.25
GS11N-20P2	GS21-20P2	–	A1		
GS13N-20P2	GS23-20P2	–	A1		
GS13N-20P5	GS23-20P5	GS31-20P5	A2		
–	–	GS33-20P5	A2		
–	–	GS33-40P5	A2		
GS11N-10P5	GS21-10P5	GS33-21P0	A3		
GS11N-20P5	GS21-20P5	GS33-41P0	A3		
GS13N-40P5	GS23-40P5	–	A4		
GS13N-21P0	GS23-21P0	–	A5		
–	GS23-41P0	–	A5		
–	GS23-51P0	–	A5		
GS13N-41P0	–	–	A6		
GS13N-22P0	GS23-22P0	GS33-22P0	B1		
GS13N-42P0	GS23-42P0	GS33-42P0	B1		
–	GS23-52P0	–	B1		
GS11N-21P0	GS21-21P0	GS31-21P0	B2		
GS11N-22P0	GS21-11P0	GS31-22P0	C1		
GS11N-23P0	GS21-22P0	GS33-23P0	C1		
GS13N-23P0	GS21-23P0	GS33-25P0	C1		
GS13N-25P0	GS23-23P0	GS33-43P0	C1		
GS11N-11P0	GS23-25P0	GS33-45P0	C1		
GS13N-43P0	GS23-43P0	–	C1		
GS13N-45P0	GS23-45P0	–	C1		
–	GS23-53P0	–	C1		
–	GS23-55P0	–	C1		

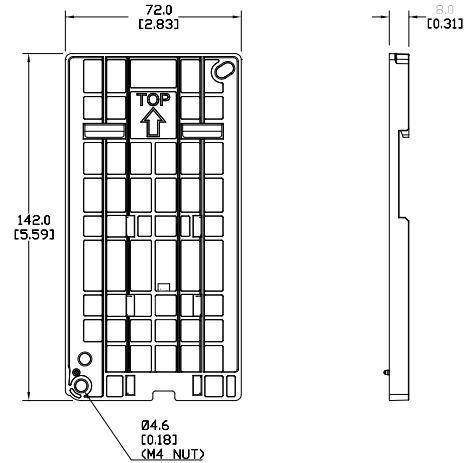

GS20A-DR-AB

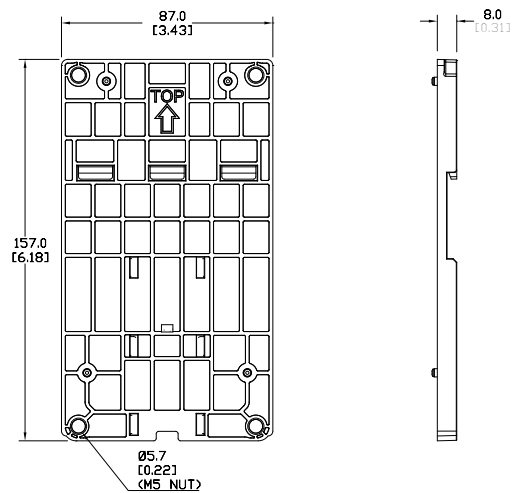


GS20A-DR-C

DuraPulse Optional Accessories – Mounting Kits


Mounting Adapter Plate

The mounting adapter plate can be used to change the wiring orientation for the GS10, GS20, and GS30 series and provides flexibility for installation. This accessory changes the wiring method from the “bottom-mains input/ bottom-motor output” to the “top-mains input/bottom-motor output” for GS10/GS20/GS30. Use the table below to select the correct mounting plate for your drive. Please see your GSxx series User Manual for additional information and installation instructions.

GSxx Mounting Adapter Compatibility							
Drive Model			Frame	Mounting Plate	Price		
GS10 Series	GS20 Series	GS30 Series					
GS11N-10P2	GS21-10P2	-	A1	GS20A-MP-AB	\$46.00		
GS11N-20P2	GS21-20P2	-	A1				
GS13N-20P2	GS23-20P2	-	A1				
GS13N-20P5	GS23-20P5	GS31-20P5	A2				
-	-	GS33-20P5	A2				
-	-	GS33-40P5	A2				
GS11N-10P5	GS21-10P5	GS33-21P0	A3				
GS11N-20P5	GS21-20P5	GS33-41P0	A3				
GS13N-40P5	GS23-40P5	-	A4				
GS13N-21P0	GS23-21P0	-	A5				
-	GS23-41P0	-	A5				
-	GS23-51P0	-	A5				
GS13N-41P0	-	-	A6				
GS13N-22P0	GS23-22P0	GS33-22P0	B1			GS20A-MP-C	\$54.00
GS13N-42P0	GS23-42P0	GS33-42P0	B1				
-	GS23-52P0	-	B1				
GS11N-21P0	GS21-21P0	GS31-21P0	B2				
GS11N-22P0	GS21-11P0	GS31-22P0	C1				
GS11N-23P0	GS21-22P0	GS33-23P0	C1				
GS13N-23P0	GS21-23P0	GS33-25P0	C1				
GS13N-25P0	GS23-23P0	GS33-43P0	C1				
GS11N-11P0	GS23-25P0	GS33-45P0	C1				
GS13N-43P0	GS23-43P0	-	C1				
GS13N-45P0	GS23-45P0	-	C1				
-	GS23-53P0	-	C1				
-	GS23-55P0	-	C1				

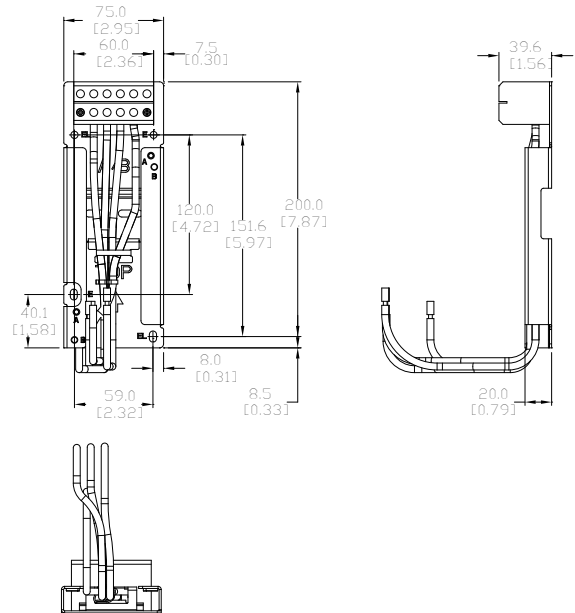

GS20A-MP-AB

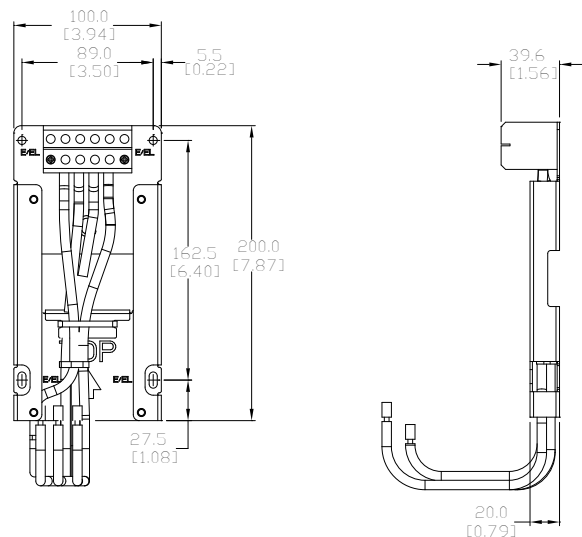

GS20A-MP-C

DuraPulse Optional Accessories – Replacement Cooling Fans

Cooling Fans for GSxx Series Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS10, GS20(X), and GS30 AC Drive, and are also available for purchase separately as spare/replacement components.

GS10, GS20(X), GS30 – Fan Selection Table							
Drive Model			Fan Model *		Description	Size	Voltage
GS10 Series	GS20(X) Series	GS30 Series	Part #	Price			
GS13N-22P0 GS13N-42P0	GS23-22P0 GS23-42P0 GS23-52P0	GS31-21P0 GS33-22P0 GS33-42P0	GS20A-FAN-B	\$21.50	GS20 series main cooling fan, replacement.	40x40x15 mm	12VDC
-	GS21X-23P0 GS23X-23P0 GS23X-25P0 GS23X-45P0	-	GS20XA-FAN-B	\$51.00	GS20X series main cooling fan, replacement	60x60x25 mm	
GS11N-11P0 GS11N-23P0 GS13N-23P0 GS13N-25P0 GS13N-43P0 GS13N-45P0	GS21-11P0 GS21-22P0 GS21-23P0 GS23-23P0 GS23-25P0 GS23-43P0 GS23-45P0 GS23-53P0 GS23-55P0	GS31-22P0 GS31-23P0 GS33-23P0 GS33-25P0 GS33-43P0 GS33-45P0	GS20A-FAN-C	\$23.50	GS20 series main cooling fan, replacement.	50x50x20 mm	
-	GS23X-27P5 GS23X-47P5 GS23X-4010	-	GS20XA-FAN-C	\$52.00	GS20X series main cooling fan, replacement	60x60x25 mm	
GS13N-27P5 GS13N-47P5 GS13N-4010	GS23-27P5 GS23-47P5 GS23-4010 GS23-57P5 GS23-5010	GS33-27P5 GS33-47P5 GS33-4010	GS20A-FAN-D	\$27.00	GS20 series main cooling fan, replacement.	60x60x25 mm	
-	GS23-2010 GS23-2015 GS23-4015 GS23-4020	GS33-2010 GS33-2015 GS33-4020	GS20A-FAN-E	\$37.50	GS20 series main cooling fan, replacement.	92x92x28 mm	
-	GS23-2020 GS23-4025 GS23-4030	GS33-2020 GS33-4025 GS33-4030	GS20A-FAN-F	\$41.00	GS20 series main cooling fan, replacement.	92x92x38 mm	
-	-	GS33-2025 GS33-2030 GS33-4040	GS30A-FAN-G	\$47.00	GS30 series main cooling fan, replacement	204x87x50 mm	
-	-	GS33-4050 GS33-4060	GS30A-FAN-H	\$89.00	GS30 series main cooling fan, replacement	206x95x50 mm	
-	-	GS33-2040 GS33-2050 GS33-4075 GS33-4100	GS30A-FAN-I	\$137.00	GS30 series main cooling fan, replacement	260x121x50 mm	

* These fans are included with the GSx series drive, and also available separately as spare or replacement components. Electrical connectors are included.



Example GS20A replacement Fan

DuraPulse Optional Accessories – RF Filter

RF Filter

Zero phase reactors, (aka RF noise filters) help reduce radiated noise from the inverter wiring. The wiring must go through the opening to reduce the RF component of the electrical noise. Loop the wires three times (four turns) to attain the full RF filtering effect. For larger wire sizes, place multiple zero-phase reactors (up to four) side by side for a greater filtering effect. These are effective for noise reduction on both the input and output sides of the inverter. Attenuation quality is good in a wide range from 500kHz to 10MHz.




Wiring Method

Wind each wire four times around the core, as shown in diagram A to the right. The reactor must be put at inverter side as closely as possible.

If you are unable to wire as above due to wire size or another aspect of your application, put all wires through four cores in series without winding, as in diagram B to the right.

RF Filter Selection			
Drive Series	Filter Model	Drawing	Price
GS10 / GS20(X) / GS30	RF008X00A	PDF	\$32.00
GS30	RF004X00A	PDF	\$42.00
GS30 (Frame H-I)	RF002X00A	PDF	\$213.00

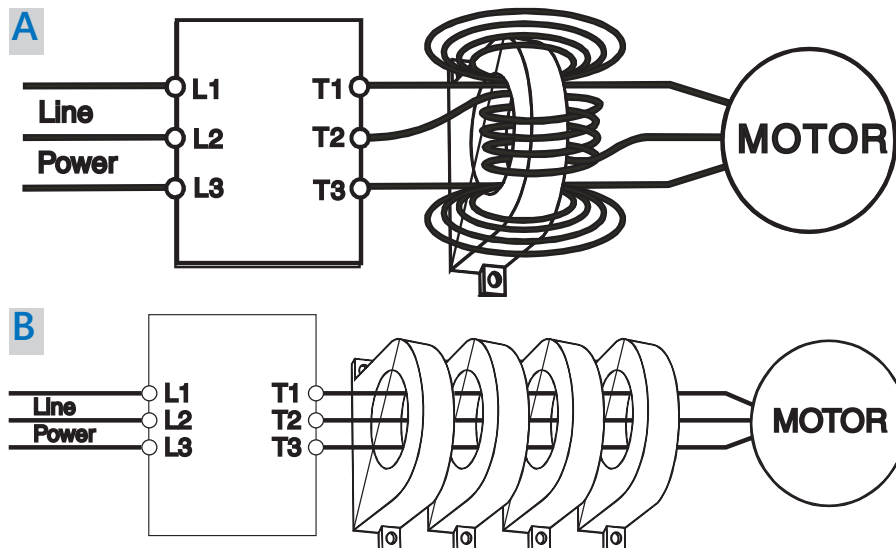

DuraPulse Accessories – Software

GSoft2 Drive Configuration Software

GSoft2 Drive Configuration Software

Available for *FREE* Download

DURAPULSE Drives GSOFT2 Drive Configuration Software			
Part Number	Price*	Description	For GS Drive
GSOFT2	\$10.50	GSOFT2 Windows configuration software, USB or free download. For use with DURApulse GS4, GS10, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter.	GS4 – all GS10 – all GS20(X) – all GS30 – all
USB-485M	\$60.00	PC adapter, USB A to RS-485 (RJ45/RJ12).	GS4/GS10
USB-CBL-AB3	\$12.00	Programming cable, USB A to USB B, 3ft cable length.	GS4 – all (for Drive FW only) GS20(X) – all GS30 – all
* GSOFT2 can be downloaded for <u>free</u> or purchased on USB from AutomationDirect.com (search for GSOFT2).			

GSOFT2 Drive Configuration Software

GSoft2 is the configuration software for the Automation DuraPulse family of drives. It is designed to allow you to connect a personal computer to the drive, and perform a variety of functions.

GSoft2 includes an integral help file with software instructions. GSoft2 can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSoft2).

Functions

- Create new drive configurations
- Upload/download drive configurations
- Edit drive configurations
- Archive/store multiple drive configurations on your PC
- Trend drive operation parameters (not available with GS10)
- Tune the drive PID loop
- View real time key operating parameters
- Real-time trending
- Start/Stop drive and switch directions, provided drive is set up for remote operation
- View drive faults

Computer System Requirements

GSoft2 will run on Windows PCs that meet the following requirements:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, 11
- Edge or Chrome (for HTML help support)
- 32 Mb of available memory
- 10 Mb hard drive space
- Available USB port
- USB to RS485 adapter needed for GS4 and GS10 models



GS4/GS20(X)/GS30 Accessories – Software GSLogic PLC Programming Software

Optional Accessory Software Applicable Only to AC Drive Series:

- GS4
- GS20(X)
- GS30

GSLOGIC Drive Configuration Software

Available for *FREE* Download

GS4/GS20(X)/GS30 DURAPULSE Drives GSLogic PLC Programming Software			
Part Number	Price*	Description	For GS Drive
GSLOGIC	\$10.50	GSLOGIC Windows logic software, USB or free download. For use with DURApulse GS4, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter.	GS4 - all GS20(X) – all GS30 – all
USB-485M	\$60.00	PC adapter, USB A to RS-485 (RJ45/RJ12).	GS4 – all
USB-CBL-AB3	\$12.00	Programming cable, USB A to USB B, 3ft cable length.	GS20(X) – all GS30 – all

* GSLOGIC can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSLOGIC).

PLC Summary

The GS4, GS20(X), and GS30 drives include a built-in PLC. Programmed in ladder logic, the PLC provides a comprehensive set of instructions and 2,000 (GS20(X)), 5,000 (GS30), or 10,000 (GS4) steps of programming capacity. GSLogic PLC software includes a Help File which contains the detailed information needed to use the PLC.

The PLC functionality is included with every GS4, GS20(X), and GS30 drive, and can be accessed over communications by external PLCs (via serial Modbus), or by the drive itself (using built-in PLC instructions). The PLC is perfectly suited for applications where digital and analog I/O requirements are small. For applications with complex PLC programming or large I/O requirements, please consider Click, Productivity, or Do-More/BRX. All of these PLCs can be easily integrated with the GS drive family or PLC. The GS4-KPD keypad is capable of storing multiple PLC programs.

There are two methods for communicating from the PLC to the drive. The first method is to use the WPR and RPR instructions available in the PLC's library. These two instructions can read from or write to any AC drive parameter in the same physical drive. The second method is to use Modbus RTU. The PLC is a Serial Modbus slave only. A Modbus RTU master can communicate with the PLC via serial only; optional communication cards cannot address the PLC. If communication cards (EtherNet/IP or Modbus TCP) are the desired method of communication, the drive includes PLC Buffers parameters that can be used. Simply write the needed information from the PLC into the drive's PLC buffer parameters using the WPR instruction. The Modbus TCP or EtherNet/IP cards can then read the VFD parameters.

GSLogic Introduction

GSLogic is the drive PLC programming software for the AutomationDirect GS4, GS20(X), and GS30 family of drives. It is designed to enable you to perform a variety of drive PLC programming functions. Windows editing functions like cut, copy, paste, multiple windows, etc., are supported. GSLogic also provides for register editing, settings, file reading, saving, online monitoring settings, and other convenience functions, such as:


- Upload/download drive PLC program files to the onboard PLC
- Create new drive PLC programs
- Edit drive PLC programs
- Archive/store multiple drive PLC programs on your PC or the GS4-KPD drive keypad
- Control drive PID loops (FPID instructions)
- View in real time all drive PLC registers
- Print drive PLC program files

GSLogic includes an integral help file that includes software instructions, how to use GSLogic, and how to use the GS drive PLC.

GSLogic System Requirements

GSLogic is a Windows-based programming software environment. Please check the following requirements when choosing your PC configuration:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, **11**
- 300MB free hard-disk space
- USB Port required for project transfer to drive
- USB-485M serial adapter required for GS4 models

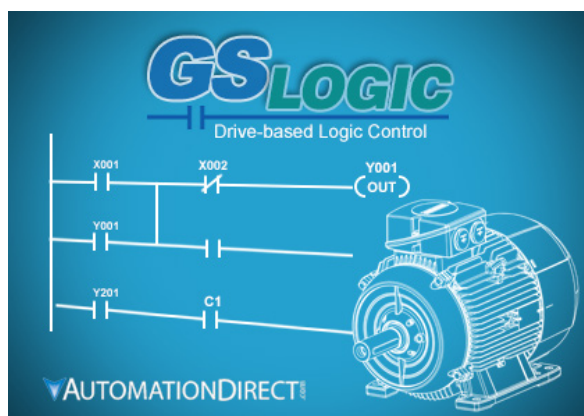

DuraPulse Optional Accessories – Advanced LCD Keypad

Advanced Keypad

NOTE: The keypad described below is included with the GS4 AC Drive, and is also available for purchase separately as a spare/replacement component for GS4, or an optional upgrade for GS10/GS20(X)/GS30.

Keypad Panel-Mounting Kit

NOTE: The keypad panel-mounting kit described below is an optional accessory that is NOT included with the GS10/GS20(X)/GS30 AC drive.

GSx Series DURAPULSE Drives Keypad and Keypad Panel-Mounting Kit			
Part Number	Price	Description	For GS Drive
GS4-KPD*	\$107.00	Spare or replacement keypad for GS4 AC drives; optional advanced keypad for GS20(X) drives; includes RJ45 connector; great for maintenance or back-up programs.	GS4 – all GS10 – all GS20(X) – all GS30 – all
GS4-BZL**	\$29.50	Keypad Panel-Mounting Kit for remote surface mounting or embedded mounting of the AC drive removable keypad; hardware included. Use a standard Cat5e RJ45 patch cable (not included) to connect a remote-mounted keypad to the drive. Max cable length for remote-mounted keypad = 5m.	GS4 – all GS10 – all GS20(X) – all GS30 – all

* A keypad is included with each GS4 AC Drive; additional keypads are available for spare/replacement components.
 ** The keypad mounting kit is an optional accessory that is NOT included with the GS4 AC drive; for mounting the keypad remotely from the drive.
 Note: Keypad firmware can only be upgraded when connected to a GS4 drive.

