



# IronHorse ACN Series Introduction



| IronHorse ACN NEMA 4X Drives                        |    |     |     |     |     |     |     |      |      |      |      |      |
|---|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|
| Motor Rating  | HP | 0.5 | 1.0 | 2.0 | 3.0 | 5.0 | 7.5 | 10.0 | 15.0 | 20.0 | 25.0 | 30.0 |
|   | kW | 0.4 | 0.8 | 1.5 | 2.2 | 4.0 | 5.5 | 7.5  | 11.0 | 15.0 | 18.5 | 22.0 |
| 230V Single-Phase Input/<br>230V Three-Phase Output |    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓   | ✓    |      |      |      |      |
| 230V Three-Phase Input/<br>230V Three-Phase Output  |    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    |      |      |
| 460V Single-Phase Input/<br>460V Three-Phase Output |    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    |      |      |
| 460V Three-Phase Input/<br>460V Three-Phase Output  |    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    | ✓    | ✓    |

## Overview

The Ironhorse ACN sensorless, vector control drives provide many standard and advanced functions in a serviceable NEMA 4X unit, allowing installation in the harshest of environments. The drives include many of the same standard features as our DURAPulse family of drives including dynamic braking, PID, and RS-485 Modbus communication. All 230VAC and 460VAC drives are fully capable of single-phase input capability (with de-rating) and optional EtherNet/IP and Modbus TCP communication card. The drive supports up to two (2) independent IM motor parameter sets or supports control of a single Permanent Magnet AC (PMAC) motor. Ironhorse ACN AC drives offer several different control modes: standard V/Hz, sensorless vector, and torque control. Ironhorse ACN provides two analog inputs, one analog output, one frequency output, five digital inputs (including one pulse train input up to 32kHz), one digital output, one SPDT relay output, and a 2 channel STO input. All of the analog and digital I/O can be configured for a wide variety of input or output functions. One option card slot is available for either the Extension IO option card or Ethernet/IP and Modbus TCP communication option card

## Features

- Broad offering from 1/2 to 30 hp NEMA 4X
- 230VAC: three-phase up to 20Hp, single phase up to 10hp
- 460VAC: three phase up to 30HP, single-phase up to 15hp
- Single-phase UL Ratings – 230 or 460 VAC input
- Lockable, integrated disconnect or no disconnect models
- Constant Torque (Heavy Duty) ratings only
- Flexible carrier frequency to 15kHz
- Output frequency to 400Hz (120Hz sensorless vector)
- STO – Safe Torque Off (SIL2)
- Built in user sequence programming of 18 steps.
- Built-in RJ45 port for fast & easy programming.
- Free downloadable software for drive configuration
- Optional LCD text-based advanced
- Keypad can be remotely mounted with IP66 case.
- Local/Remote control mode selection or digital/comm input with Hand/Off/Auto control
- Momentary power loss restarts
- PCB Conformal Coating
- 100kA Short Circuit Current Rating
- DC Bus Connection Terminals
- Analog I/O – configurable 2 Inputs and 1 Output
- 2-Motor Control
- Built-in Dynamic Braking – optional resistors
- PID Controller – including sleep and wake
- Password protection
- RTD and/or PTC input motor protection
- High speed communication interfaces with MODBUS RTU built in, with optional EtherNet/IP and ModbusTCP Communication Card
- Able to operate at 40°C ambient temperature
- Fire Mode – Run fire mode during emergencies to have uninterrupted smoke removal and system pressure
- 18 month warranty
- CE, TÜV Nord (SIL2), UL, cUL

## Accessories

- AC line reactors
- dV/dT output filters
- EMI filters
- RF filter
- Braking resistors
- Fuses
- Optional advanced LCD keypad
- Remote Keypad Mounting Kits
- EtherNet/IP and ModbusTCP comm card
- Extension IO card
- VFD Suite drive configuration software
- Type A USB to RJ45 programming cable

## Typical Applications

- Conveyors
- Fans
- Pumps
- Shop tools
- Mixer
- Crane and Hoist
- Press
- Auger
- Centrifuge
- Waste Water Rake Drive
- X-Y Positioning
- Vibratory Tables
- Synchronous Machine



# IronHorse ACN Series Selection

## Selecting the Proper Drive Rating

| Selecting the Proper Drive Rating  |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
|--|-------------------------|--------------|-------------------------|---|-----|------|-----|------|----|------|----|------|----|------|---|
| <b>Determine Motor Voltage and Full-Load Amperage (FLA)</b>  |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| Motor voltage and FLA are located on the nameplate of the motor.<br><i>NOTE: FLA of motors that have been rewound may be higher than stated.</i>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <b>Determine Motor Overload Requirements</b>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| Many applications experience temporary overload conditions due to starting requirements or impact loading. Most AC drives are designed to operate at 150% overload for 60 seconds. If the application requires an overload greater than 150% or longer than 60 seconds, the AC drive must be oversized.<br><i>NOTE: Applications that require replacement of existing motor starters with AC drives may require up to 600% overload.</i>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <b>Determine Application Type: Constant Torque or Variable Torque</b>  |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| This torque requirement has a direct effect on which drive to select. Variable Torque applications are generally easier to start; typically fans and pumps. Most other applications outside fans and pumps fall into the Constant Torque category (machine control, conveyors, etc.). If you are unsure of the application, assume Constant Torque.<br>ACN drives are specified with constant torque ratings only.   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <b>Installation Altitude</b>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| AC drives rely on air flow for cooling. ACN drives are designed to operate at 100% capacity at altitudes up to 1000 meters. As the altitude increases, the air becomes less dense. This drop in air density decreases the cooling properties of the air, therefore, the AC drive must be oversized to compensate for the decrease in cooling.<br><i>NOTE: For use above 1000m, the AC drive must be derated as described below.</i>  |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <b>Derate Output Current Based on Altitude Above 1000 Meters</b>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <ul style="list-style-type: none"> <li>• If the AC drive is installed at an altitude of 0–1000m, follow normal operation restrictions.</li> <li>• From 1000 to 4000m, the rated input voltage and rated output current of the drive must be derated by 1% for every 100m.</li> </ul>   |                         |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| <p><b>Derating for Altitude</b></p> <table border="1" style="margin: 10px auto;"> <caption>Data for Derating for Altitude Graph</caption> <thead> <tr> <th>Altitude (m)</th> <th>Current Rated Ratio (%)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> </tr> <tr> <td>1000</td> <td>100</td> </tr> <tr> <td>2000</td> <td>90</td> </tr> <tr> <td>3000</td> <td>80</td> </tr> <tr> <td>4000</td> <td>70</td> </tr> <tr> <td>5000</td> <td>0</td> </tr> </tbody> </table> |                         | Altitude (m) | Current Rated Ratio (%) | 0 | 100 | 1000 | 100 | 2000 | 90 | 3000 | 80 | 4000 | 70 | 5000 | 0 |
| Altitude (m)   | Current Rated Ratio (%) |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 0  | 100                     |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 1000   | 100                     |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 2000   | 90                      |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 3000   | 80                      |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 4000   | 70                      |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |
| 5000   | 0                       |              |                         |   |     |      |     |      |    |      |    |      |    |      |   |



# IronHorse ACN Series Selection

## Selecting the Proper Drive Rating

**Derate Output Current Based on Carrier Frequency (if necessary)**

**Carrier Frequency Effects**

AC Drives rectify the incoming 50Hz or 60Hz line power resulting in DC power. The DC power is then pulse-width modulated and supplied to the motor by the drive's power electronics. IGBTs invert the DC power, simulating a sine wave at the desired frequency (that's what allows variable speed in AC induction motors). The speed at which the IGBTs are turned ON and OFF is called Carrier Frequency. In ACN drives, the Carrier Frequency can range from 2kHz to 15kHz. Though Carrier Frequency can be adjusted, there are trade-offs between high Carrier Frequencies and low Carrier Frequencies.

**Benefits of Higher Carrier Frequencies:**

- Better efficiency (lower harmonic losses) in the motor
- Lower audible noise

**Benefits of Lower Carrier Frequencies:**

- Better efficiency in the drive
- Lower EMI (electrical noise)
- Reduced reflective wave peak voltage

As a general rule, the Carrier Frequency should be set as low as possible without creating unacceptable audible noise in the motor. Smaller systems can have higher Carrier Frequencies, but larger drives (>20 or 30hp) should not have Carrier Frequencies set higher than 6kHz. Heavy duty applications typically run around 2-4 kHz.

**Derating Tables**

| 230V                    |                            | 460V                    |                            |
|-------------------------|----------------------------|-------------------------|----------------------------|
| Carrier Frequency (kHz) | Constant Rated Current (%) | Carrier Frequency (kHz) | Constant Rated Current (%) |
| 1-6                     | 100                        | 1-6                     | 100                        |
| 9                       | 84.4                       | 9                       | 81.1                       |
| 12                      | 76.7                       | 12                      | 71.7                       |
| 15                      | 72.0                       | 15                      | 66.0                       |

**Continuous rated current (constant torque)**

| Carrier Frequency (kHz) | 230V Constant Rated Current (%) | 460V Constant Rated Current (%) |
|-------------------------|---------------------------------|---------------------------------|
| 0 - 6                   | 100.0                           | 100.0                           |
| 9                       | 84.4                            | 81.1                            |
| 12                      | 76.7                            | 71.7                            |
| 15                      | 72.0                            | 66.0                            |



# IronHorse ACN Series Selection Specifications

| ACN 230V Class Constant Torque Specifications; Frame Sizes 1-5 |                                       |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|--|---------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Part Number  | ACN-20P5                              | ACNND-20P5          | ACN-21P0            | ACNND-21P0          | ACN-22P0            | ACNND-22P0          | ACN-23P0            | ACNND-23P0          | ACN-25P0            | ACNND-25P0          | ACN-27P5            | ACNND-27P5          | ACN-2010            | ACNND-2010          | ACN-2015            | ACNND-2015          | ACN-2020            | ACNND-2020          |
| Price  | \$376.00                              | \$242.00            | \$382.00            | \$246.00            | \$490.00            | \$316.00            | \$521.00            | \$336.00            | \$639.00            | \$451.00            | \$912.00            | \$618.00            | \$1,017.00          | \$690.00            | \$1,258.00          | \$852.00            | \$1,432.00          | \$970.00            |
| Frame Size   | 1                                     |                     | 2                   |                     |                     |                     | 3                   |                     | 4                   |                     | 5                   |                     |                     |                     |                     |                     |                     |                     |
| Applied Motor<br>Max Motor Output<br>(3-phase [1-phase])       | 1/2hp<br>[1/6hp]                      | 1hp<br>[1/2hp]      | 2hp<br>[1hp]        | 3hp<br>[1-1/2hp]    | 5hp<br>[2hp]        | 7-1/2hp<br>[3hp]    | 10hp<br>[5hp]       | 15hp<br>[7-1/2hp]   | 20hp<br>[10hp]      |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | 0.4kW<br>[0.1kW]                      | 0.8kW<br>[0.4kW]    | 1.5kW<br>[0.8kW]    | 2.3kW<br>[1.1kW]    | 4.0kW<br>[1.5kW]    | 5.6kW<br>[2.3kW]    | 7.5kW<br>[3.8kW]    | 11.2kW<br>[5.6kW]   | 15.0kW<br>[7.5kW]   |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Output Rating<br>Rated Capacity-3ph input (kVA)                | 1.0                                   | 1.9                 | 3.0                 | 4.2                 | 6.5                 | 9.1                 | 12.2                | 17.5                | 22.9                |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | Rated Current<br>(3-phase [1-phase])  | 2.5A<br>[1.5A]      | 5A<br>[2.8A]        | 8A<br>[4.6A]        | 11A<br>[6.1A]       | 17A<br>[9.3A]       | 24A<br>[13A]        | 32A<br>[18A]        | 46A<br>[26A]        | 60A<br>[33A]        |                     |                     |                     |                     |                     |                     |                     |                     |
| Input Rating<br>Working Voltage-3ph input                      | 0.1-400 Hz (IM Sensorless: 0-120 Hz)  |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | 3-phase 200-240 VAC                   |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Input Rating<br>Working Voltage-1ph input                      | 3-phase 200-240 VAC (-15% to +10%)    |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | 1-phase 240VAC (-5% to +10%)          |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Input Rating<br>Input Frequency-3ph input                      | 50-60 Hz (±5%)                        |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | 60Hz (±5%)                            |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Input Rating<br>Rated Current-1 or 3ph input (A)               | 2.2                                   | 4.9                 | 8.4                 | 11.8                | 18.5                | 25.8                | 34.9                | 50.8                | 66.7                |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | Forced Fan-Internal                   |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Cooling Method   | Forced Fan-Internal & Single External |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|  | Forced Fan-Internal & Dual External   |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| Drawing Link   | <a href="#">PDF</a>                   | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> |

- All specifications are for Constant Torque duty.
- The standard motor capacity is based on a standard 4-pole motor.
- The standard used for 230V series drives is based on a 220V supply voltage.
- The rated output current is limited based on the carrier frequency set at Cn.04.
- The output voltage becomes 20~40% lower during no-load operations to protect the drive from the impact of the motor closing and opening (0.5-5 hp models only).



**ACN-20P5**  
(with disconnect)



**ACNND-20P5**  
(without disconnect)



# IronHorse ACN Series Selection Specifications

| ACN 460V Class Constant Torque Specifications; Frame Sizes 1-3 |  |                                      |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|--|--|--------------------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------------------|----------------------------|--------------------------|----------------------------|
| Part Number  | <a href="#">ACN-40P5</a>                 | <a href="#">ACNND-40P5</a>           | <a href="#">ACN-41P0</a> | <a href="#">ACNND-41P0</a> | <a href="#">ACN-42P0</a> | <a href="#">ACNND-42P0</a> | <a href="#">ACN-43P0</a> | <a href="#">ACNND-43P0</a> | <a href="#">ACN-45P0</a> | <a href="#">ACNND-45P0</a> | <a href="#">ACN-47P5</a>             | <a href="#">ACNND-47P5</a> | <a href="#">ACN-4010</a> | <a href="#">ACNND-4010</a> |
| Price  | \$458.00                                 | \$296.00                             | \$467.00                 | \$304.00                   | \$502.00                 | \$325.00                   | \$570.00                 | \$402.00                   | \$996.00                 | \$527.00                   | \$1,117.00                           | \$688.00                   | \$1,239.00               | \$762.00                   |
| Frame Size   | 1  |                                      |                          |                            | 2                        |                            |                          |                            | 3                        |                            |                                      |                            |                          |                            |
| Applied Motor<br><i>Max Motor Output (3-phase [1-phase])</i>   | 1/2hp [1/6hp]                            | 1hp [1/2hp]                          | 2hp [3/4hp]              | 3hp [1hp]                  | 5hp [2hp]                | 7-1/2hp [3hp]              | 10hp [5hp]               |                            |                          |                            |                                      |                            |                          |                            |
|  | 0.4kW [0.1kW]                            | 0.8kW [0.4kW]                        | 1.5kW [0.6kW]            | 2.3kW [0.8kW]              | 4.0kW [1.5kW]            | 5.5kW [2.3kW]              | 7.5kW [3.8kW]            |                            |                          |                            |                                      |                            |                          |                            |
| Output Rating  | <i>Rated Capacity-3ph input (kVA)</i>    | 1.0                                  | 1.9                      | 3.0                        | 4.2                      | 6.5                        | 9.1                      | 12.2                       |                          |                            |                                      |                            |                          |                            |
|  | <i>Rated Current (3-phase [1-phase])</i> | 1.3A [0.8A]                          | 2.5A [1.5A]              | 4A [2.3A]                  | 5.5A [3.1A]              | 9A [5.4A]                  | 12A [7.1A]               | 16A [9.5A]                 |                          |                            |                                      |                            |                          |                            |
|  | <i>Output Frequency</i>                  | 0.1-400 Hz (IM Sensorless: 0-120 Hz) |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|  | <i>Output Voltage</i>                    | 3-phase 380-480 VAC                  |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
| Input Rating   | <i>Working Voltage-3ph input</i>         | 3-phase 380-480 VAC (-15% to +10%)   |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|  | <i>Working Voltage-1ph input</i>         | 1-phase 480VAC (-5% to +10%)         |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|  | <i>Input Frequency-3ph input</i>         | 50-60 Hz (±5%)                       |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|  | <i>Input Frequency-1ph input</i>         | 60Hz (±5%)                           |                          |                            |                          |                            |                          |                            |                          |                            |                                      |                            |                          |                            |
|  | <i>Rated Current-1 or 3ph input (A)</i>  | 1.1                                  | 2.4                      | 4.2                        | 5.9                      | 9.8                        | 12.9                     | 17.5                       |                          |                            |                                      |                            |                          |                            |
| Weight (lb)  | 7.9                                      | 7.9                                  | 11.5                     | 11.9                       | 12.13                    | 18.9                       | 19.2                     |                            |                          |                            |                                      |                            |                          |                            |
| Cooling Method   | Forced Fan-Internal                      |                                      |                          |                            |                          |                            |                          |                            |                          |                            | Forced Fan-Internal & SingleExternal |                            |                          |                            |
| Drawing Link   | <a href="#">PDF</a>                      | <a href="#">PDF</a>                  | <a href="#">PDF</a>      | <a href="#">PDF</a>        | <a href="#">PDF</a>      | <a href="#">PDF</a>        | <a href="#">PDF</a>      | <a href="#">PDF</a>        | <a href="#">PDF</a>      | <a href="#">PDF</a>        | <a href="#">PDF</a>                  | <a href="#">PDF</a>        | <a href="#">PDF</a>      | <a href="#">PDF</a>        |

- All specifications are for Constant Torque duty.
- The standard motor capacity is based on a standard 4-pole motor.
- The standard used for 460V series drives is based on a 440V supply voltage.
- The rated output current is limited based on the carrier frequency set at Cn.04.
- The output voltage becomes 20~40% lower during no-load operations to protect the drive from the impact of the motor closing and opening (0.5~5 hp models only).



**ACN-40P5**  
(with disconnect)



**ACNND-40P5**  
(without disconnect)



# IronHorse ACN Series Selection Specifications

| ACN 460V Class Constant Torque Specifications; Frame Sizes 4-5 |   |                                      |                     |                     |                     |                     |                     |                     |                     |
|--|---|--------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Part Number  |   | ACN-4015                             | ACNND-4015          | ACN-4020            | ACNND-4020          | ACN-4025            | ACNND-4025          | ACN-4030            | ACNND-4030          |
| Price  |   | \$1,312.00                           | \$807.00            | \$1,591.00          | \$979.00            | \$1,620.00          | \$997.00            | \$1,731.00          | \$1,065.00          |
| Frame Size   |   | 4                                    |                     |                     | 5                   |                     |                     |                     |                     |
| Applied Motor  | Max Motor Output<br>(3-phase [1-phase]) | 15hp<br>[7-1/2hp]                    | 20hp<br>[10hp]      | 25hp<br>[10hp]      | 30hp<br>[15hp]      |                     |                     |                     |                     |
|  |   | 11.0kW<br>[5.6kW]                    | 15.0kW<br>[7.5kW]   | 18.5kW<br>[7.5kW]   | 22.0kW<br>[11.2kW]  |                     |                     |                     |                     |
| Output Rating  | Rated Capacity-3ph input (kVA)          | 18.3                                 | 22.9                | 29.7                | 34.3                |                     |                     |                     |                     |
|  | Rated Current<br>(3-phase [1-phase])    | 24A<br>[15A]                         | 30A<br>[18A]        | 39A<br>[23A]        | 45A<br>[27A]        |                     |                     |                     |                     |
|  | Output Frequency                        | 0.1-400 Hz (IM Sensorless: 0-120 Hz) |                     |                     |                     |                     |                     |                     |                     |
|  | Output Voltage                          | 3-phase 380-480 VAC                  |                     |                     |                     |                     |                     |                     |                     |
| Input Rating   | Working Voltage-3ph input               | 3-phase 380-480 VAC (-15% to +10%)   |                     |                     |                     |                     |                     |                     |                     |
|  | Working Voltage-1ph input               | 1-phase 480VAC (-5% to +10%)         |                     |                     |                     |                     |                     |                     |                     |
|  | Input Frequency-3ph input               | 50-60 Hz (±5%)                       |                     |                     |                     |                     |                     |                     |                     |
|  | Input Frequency-1ph input               | 60Hz (±5%)                           |                     |                     |                     |                     |                     |                     |                     |
|  | Rated Current-1 or 3ph input (A)        | 26.5                                 | 33.4                | 43.6                | 50.7                |                     |                     |                     |                     |
| Weight (lb)  |   | 20.7                                 | 21.2                | 26.9                | 26.9                |                     |                     |                     |                     |
| Cooling Method   |   | Forced Fan-Internal & Dual External  |                     |                     |                     |                     |                     |                     |                     |
| Drawing Link   |   | <a href="#">PDF</a>                  | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> | <a href="#">PDF</a> |

- All specifications are for Constant Torque duty.
- The standard motor capacity is based on a standard 4-pole motor.
- The standard used for 460V series drives is based on a 440V supply voltage.
- The rated output current is limited based on the carrier frequency set at Cn.04.



**ACN-4015**  
(with disconnect)



**ACNND-4015**  
(without disconnect)



# IronHorse ACN Series General Specifications

## ACN General Specifications

| IronHorse ACN Series General Specifications (All Models) |   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|--|---|---|---------------------------------------|-------------------------|--------------------------------|-------------------|-----------------|-------------------|--------------------|---------------------|---|------------------------|-----------------------|------------------|---------------------|---------------------------|---------------|---------------------|------------------------|-----------------------------------|---------------------|------------------|-------------------|-------------------|-----------------------|--------------------|-------------------|---------------------|------------------------|--|
| <b>Control Characteristics</b>                           | <b>Control Method</b>   | V/F, Slip Compensation, Sensorless Vector (IM or PM), Torque  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Applicable Motor</b>   | AC Induction Motor(IM), AC Permanent Magnet Motor(PM)   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Frequency Settings Power Resolution</b>  | Digital command: 0.01 Hz; Analog command: 0.06 Hz (60Hz standard)   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Starting Torque</b>  | 150% / 3Hz (V/F)<br>150% / 0.1 Hz (IM Sensorless)<br>100% / 3Hz (PM Sensorless)   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Speed Regulation</b>   | ± 3% of max freq (V/F)<br>± 0.3% of max freq (IM Sensorless)<br>± 1% of max freq (PM Sensorless)  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Speed Control Range</b>  | 40:1 (V/F)<br>100:1 (IM Sensorless)<br>20:1 (PM Sensorless)   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Torque Mode Accuracy</b>   | ± 10%   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Torque Mode Limits</b>   | ± 180%  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>V/F Pattern</b>  | Linear, square reduction, user V/F  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Overload Capacity</b>  | Constant Torque rated current: 150% for 1 minute; 200% for 4 sec  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Torque Boost</b>   | Manual torque boost, automatic torque boost   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>Operation Characteristics</b>  | <b>Operation Command Signal</b>   | Keypad, Digital, Serial Communication |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Frequency Setting Signal</b>                          |   | Analog type: -10~10 V, 0~10 V, 4~20 mA<br>Digital type: keypad, pulse train input<br>Serial Communication   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Main Functions</b>                                    |   | <table border="0"> <tr> <td>PID control</td> <td>DC braking</td> </tr> <tr> <td>3-wire operation</td> <td>Frequency jump</td> </tr> <tr> <td>Frequency limit</td> <td>Slip compensation</td> </tr> <tr> <td>Second function</td> <td>Automatic restart</td> </tr> <tr> <td>Anti-forward and reverse direction rotation</td> <td>Automatic tuning</td> </tr> <tr> <td>Commercial transition</td> <td>Energy buffering</td> </tr> <tr> <td>Speed search</td> <td>Flux braking</td> </tr> <tr> <td>Power braking</td> <td>Fire mode</td> </tr> <tr> <td>Leakage reduction</td> <td>Programmable User Sequence</td> </tr> <tr> <td>Up-down operation</td> <td></td> </tr> </table>  | PID control                           | DC braking              | 3-wire operation               | Frequency jump    | Frequency limit | Slip compensation | Second function    | Automatic restart   | Anti-forward and reverse direction rotation | Automatic tuning       | Commercial transition | Energy buffering | Speed search        | Flux braking              | Power braking | Fire mode           | Leakage reduction      | Programmable User Sequence        | Up-down operation   |                  |                   |                   |                       |                    |                   |                     |                        |  |
| PID control  |   | DC braking  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| 3-wire operation   |   | Frequency jump  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Frequency limit  |   | Slip compensation   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Second function  |   | Automatic restart   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Anti-forward and reverse direction rotation              |   | Automatic tuning  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Commercial transition                                    | Energy buffering  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Speed search   | Flux braking  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Power braking  | Fire mode   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Leakage reduction  | Programmable User Sequence  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Up-down operation  |   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Digital Inputs</b>                                    | Five (5) - 24VDC NPN or PNP, includes 1 configurable 32kHz frequency input  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Digital Outputs</b>                                   | Two (2) - (1)-26VDC,100mA, configurable as 32kHz Pulse Output ; (1) Relay-250VAC/30VDC, 1A  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Analog Inputs</b>                                     | Two (2) - (1) voltage or potentiometer, (1) selectable Voltage or Current   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Analog Outputs</b>                                    | One (1) - selectable voltage (0-10 V) or current (0-20 mA)  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Safe Torque Off</b>                                   | SA and SB inputs- 24VDC   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Function Characteristics</b>                          | <b>Trip</b>   | <table border="0"> <tr> <td>External signal trip</td> <td>Temperature sensor trip</td> </tr> <tr> <td>ARM short circuit current trip</td> <td>Inverter overheat</td> </tr> <tr> <td>Overheat trip</td> <td>Option trip</td> </tr> <tr> <td>Input imaging trip</td> <td>Output imaging trip</td> </tr> <tr> <td>Ground trip</td> <td>Inverter overload trip</td> </tr> <tr> <td>Motor overheat trip</td> <td>Fan trip</td> </tr> <tr> <td>I/O board link trip</td> <td>Pre-PID operation failure</td> </tr> <tr> <td>No motor trip</td> <td>External break trip</td> </tr> <tr> <td>Parameter writing trip</td> <td>Low voltage trip during operation</td> </tr> <tr> <td>Emergency stop trip</td> <td>Low voltage trip</td> </tr> <tr> <td>Command loss trip</td> <td>Safety A (B) trip</td> </tr> <tr> <td>External memory error</td> <td>Analog input error</td> </tr> <tr> <td>CPU watchdog trip</td> <td>Motor overload trip</td> </tr> <tr> <td>Motor normal load trip</td> <td></td> </tr> </table> | External signal trip                  | Temperature sensor trip | ARM short circuit current trip | Inverter overheat | Overheat trip   | Option trip       | Input imaging trip | Output imaging trip | Ground trip                                 | Inverter overload trip | Motor overheat trip   | Fan trip         | I/O board link trip | Pre-PID operation failure | No motor trip | External break trip | Parameter writing trip | Low voltage trip during operation | Emergency stop trip | Low voltage trip | Command loss trip | Safety A (B) trip | External memory error | Analog input error | CPU watchdog trip | Motor overload trip | Motor normal load trip |  |
|  | External signal trip  | Temperature sensor trip   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | ARM short circuit current trip  | Inverter overheat   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Overheat trip  | Option trip   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Input imaging trip                                       | Output imaging trip   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Ground trip  | Inverter overload trip  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Motor overheat trip                                      | Fan trip  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| I/O board link trip                                      | Pre-PID operation failure   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| No motor trip  | External break trip   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Parameter writing trip                                   | Low voltage trip during operation   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Emergency stop trip                                      | Low voltage trip  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Command loss trip  | Safety A (B) trip   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| External memory error                                    | Analog input error  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| CPU watchdog trip  | Motor overload trip   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| Motor normal load trip                                   |   |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Alarm</b>   | Command loss trip alarm, overload alarm, normal load alarm, drive overload alarm, fan operation alarm, resistance braking rate alarm, number of corrections on rotor tuning error |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>PCB Conformal Coating</b>                             | IEC 60721-3-3(3C2), IEC 60068-2-43, IEC 60068-2-60  |   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Accessory</b>   | <b>Communication Card</b>   | EtherNet/IP and Modbus TCP ( <a href="#">ACN-ETH</a> )  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
|  | <b>IO Extension</b>   | 3 DI, 2 DO, 2 AI, 1 AO ( <a href="#">ACN-EIO</a> )  |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |
| <b>Agency Approvals</b>                                  |   | UL, cUL, CE, TÜV NORD (SIL 2)   |                                       |                         |                                |                   |                 |                   |                    |                     |   |                        |                       |                  |                     |                           |               |                     |                        |                                   |                     |                  |                   |                   |                       |                    |                   |                     |                        |  |





# IronHorse ACN Series General Specifications

## ACN Environmental Specifications

| Environmental Conditions for IronHorse ACN Series AC Drives |   |
|---|---|
| <b>Installation Location</b>                                | IEC60529 standard IP66; NEMA standard 4X for indoor use. Not suitable for use in direct sunlight.   |
| <b>Cooling</b>  | Forced fan cooling structure<br>Forced cooling type: 0.4-15 kW 230V/0.4-22 kW 460V (excluding some models)  |
| <b>Ambient Temperature</b>                                  | -10 to 40°C (14 to 104°F); No ice or frost should be present.   |
| <b>Storage Temperature*</b>                                 | -20° to 65°C (-4 to 149°F)  |
| <b>Relative Humidity</b>                                    | Max 90% (to avoid condensation)   |
| <b>Air Pressure</b>   | 70 to 106 kPa   |
| <b>Pollution Level</b>                                      | Pollution level 3 environment: Prevent contact with corrosive gases, inflammable gases, oil stains, dust, and other pollutants.   |
| <b>Altitude</b>   | No higher than 3280ft (1000m). From 1000 to 4000m, the rated input voltage and rated output current of the drive must be derated by 1% for every 100m.  |
| <b>Vibration</b>  | Less than 9.8 m/sec <sup>2</sup> (1G)   |
| <b>Installation Orientation</b>                             | Max allowed offset angle = 0 degrees. (Vertical orientation only).<br>Do not install the drive on the floor or mount it sideways against a wall. The drive MUST be installed vertically, on a wall or inside a panel, with its rear flat on the mounting surface. |

\* The ambient temperature is the temperature measured at a point 2" (5 cm) from the surface of the drive.

## ACN Watt Loss and Efficiency

| IronHorse ACN Watt Loss and Efficiency |         |                     |                |                     |                        |                               |                       |
|--|---------|---------------------|----------------|---------------------|------------------------|-------------------------------|-----------------------|
| Model Number<br>ACN(ND)-xxxx           | Voltage | Rated Power<br>(kW) | Efficiency (%) | Total Losses<br>(W) | Internal Losses<br>(W) | External (Heat)<br>Losses (W) | Heat Losses<br>(Kcal) |
| 20P5                                   | 230     | 0.4                 | 96.6           | 21.6                | 12.6                   | 9                             | 7.7                   |
| 21P0                                   | 230     | 0.8                 | 96.7           | 42.4                | 12.6                   | 29.8                          | 25.6                  |
| 22P0                                   | 230     | 1.5                 | 96.9           | 76.5                | 16.8                   | 59.7                          | 51.3                  |
| 23P0                                   | 230     | 2.2                 | 97             | 110                 | 16.8                   | 93.2                          | 80.2                  |
| 25P0                                   | 230     | 4                   | 97.3           | 188                 | 18.9                   | 169.1                         | 145.4                 |
| 27P5                                   | 230     | 5.5                 | 97.5           | 247.5               | 38.7                   | 208.8                         | 179.6                 |
| 2010                                   | 230     | 7.5                 | 97.5           | 337.5               | 38.7                   | 298.8                         | 257                   |
| 2015                                   | 230     | 11                  | 97.8           | 462                 | 38.7                   | 423.3                         | 364                   |
| 2020                                   | 230     | 15                  | 98             | 600                 | 38.7                   | 561.3                         | 482.7                 |
| 40P5                                   | 460     | 0.4                 | 96.7           | 21.2                | 12.6                   | 8.6                           | 7.4                   |
| 41P0                                   | 460     | 0.8                 | 96.7           | 42.4                | 12.6                   | 29.8                          | 25.6                  |
| 42P0                                   | 460     | 1.5                 | 96.9           | 76.5                | 16.8                   | 59.7                          | 51.3                  |
| 43P0                                   | 460     | 2.2                 | 97             | 110                 | 16.8                   | 93.2                          | 80.2                  |
| 45P0                                   | 460     | 4                   | 97.3           | 188                 | 21                     | 167                           | 143.6                 |
| 47P5                                   | 460     | 5.5                 | 97.4           | 253                 | 43                     | 210                           | 180.6                 |
| 4010                                   | 460     | 7.5                 | 97.5           | 337.5               | 43                     | 294.5                         | 253.3                 |
| 4015                                   | 460     | 11                  | 97.5           | 495                 | 43                     | 452                           | 388.7                 |
| 4020                                   | 460     | 15                  | 97.5           | 675                 | 43                     | 632                           | 543.5                 |
| 4025                                   | 460     | 18.5                | 97.6           | 814                 | 43                     | 771                           | 663.1                 |
| 4030                                   | 460     | 22                  | 97.7           | 946                 | 43                     | 903                           | 776.6                 |



This watt loss and efficiency data were measured under the following test conditions:

- Operation at 60Hz and room temperature
- 100% load
- Carrier Frequency (Default value)





# IronHorse ACN Series Mounting Clearances

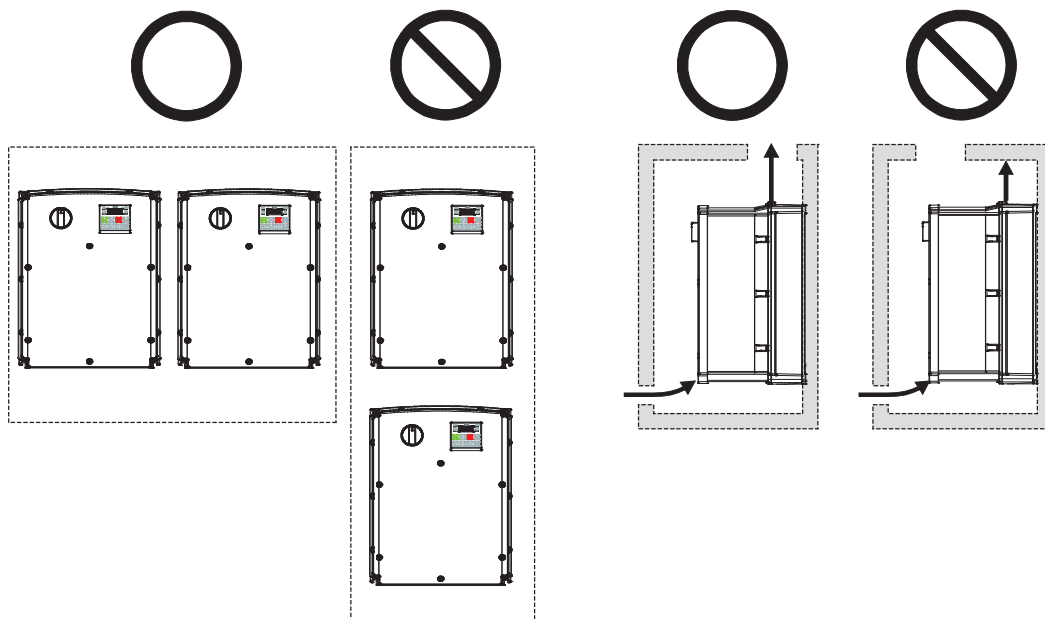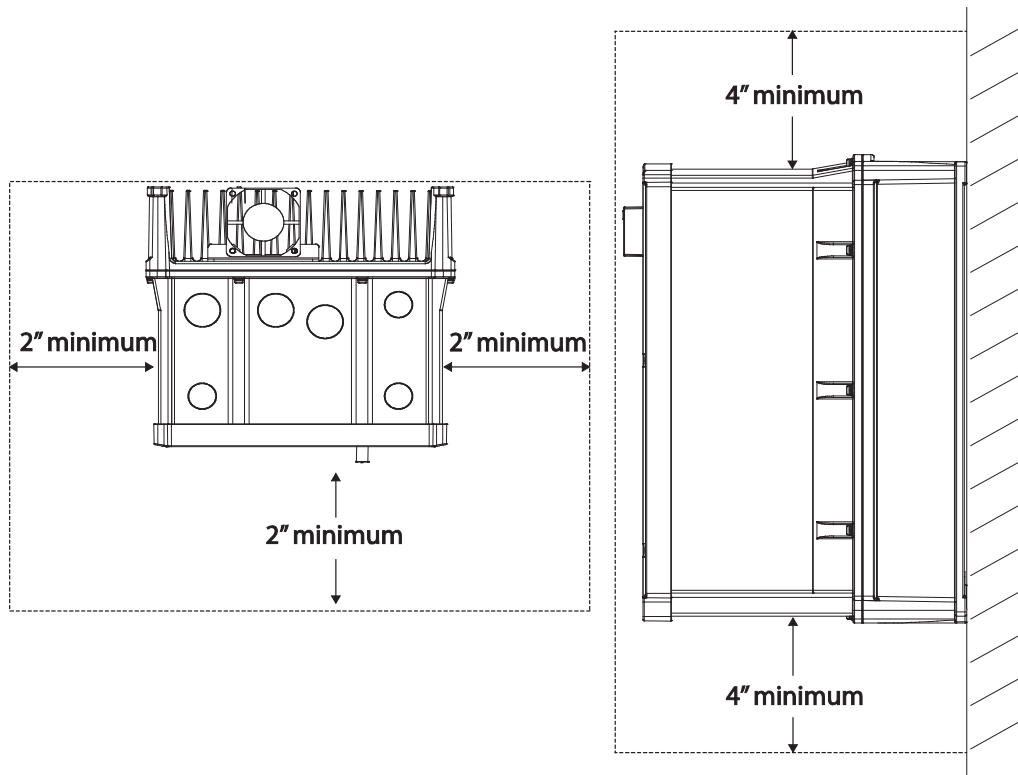



# IronHorse ACN Series Input Terminals

| Input Terminal Labels and Descriptions                     |         |   |  |
|--|---------|---|--|
| Function   | Label   | Name  | Description  |
| <b>Multi-function digital input terminal configuration</b> | P1-P5   | Multi-function Input 1-5                                | Configurable for multi-function input terminals. Factory default terminals and setup are as follows:<br>P1: Fx<br>P2: Rx<br>P3: BX<br>P4: RST<br>P5: Speed-L<br>Use NPN/PNP dip switch to set terminal Sink/Source configuration<br><br>NPN (Sink) : Px-CM, internal 24V (22~27V)<br>On = 0V (CM)<br>Off = 22V~27V (Internal 24V)<br>PNP (Source) : Px-24V-CM, using external source<br>On : $\geq 9V$<br>Off : $\leq 1.5 V$ |
|  | CM      | Common Sequence   | Common terminal for analog and digital terminal inputs and outputs.  |
| <b>Analog input configuration</b>                          | VR      | Potentiometer frequency reference input                 | Used to setup or modify a frequency reference via analog voltage or current input.<br>Maximum Voltage Output: 12V<br>Maximum Current Output: 100mA<br>Potentiometer: 1~5 k $\Omega$  |
|  | V1      | Voltage input for frequency reference input             | Used to setup or modify a frequency reference via analog voltage input terminal.<br>Unipolar: 0~10V (12V Max.)<br>Bipolar: -10~10V ( $\pm 12V$ Max.)   |
|  | I2      | Voltage/current input for frequency reference input     | Used to setup or modify a frequency reference via analog voltage or current input terminals.<br>Switch between voltage (V2) and current (I2) modes using a control board switch (SW2).<br>V2 Mode:<br>Unipolar: 0~10V (12V Max.) I2 Mode<br>Input current: 4~20mA<br>Maximum Input current: 24mA<br>Input resistance: 249 $\Omega$   |
|  | P5 (TI) | Pulse input for frequency reference input (pulse train) | Setup or modify frequency references using pulse inputs from 0 to 32kHz.<br>Low Level: 0~2.5 V<br>High Level: 3.5~12 V<br>(Pulse input TI and Multi-function terminal P5 share the same terminal. Set the In.69 P5 Define to 54(TI).)  |
| <b>Safety functionality configuration</b>                  | SA      | Safety input A  | Used to block the drive output in an emergency.  |
|  | SB      | Safety input B  | Conditions:<br>Normal Operation: Both the SA and SB terminals are connected to the SC terminal.<br>Output Block: One or both of the SA and SB terminals open connection with the SC terminal.  |
|  | SC      | Safety input power source                               | DC 24V, < 25mA   |




# IronHorse ACN Series Output/ Communication Terminals

| Output/Communication Terminal Labels and Descriptions |          |  |   |              |  |              |                 |  |                |    |   |    |    |   |
|---|----------|--|---|--------------|--|--------------|-----------------|--|----------------|----|---|----|----|---|
| Function  | Label    | Name                                   | Description   |              |  |              |                 |  |                |    |   |    |    |   |
| Analog output   | AO       | Voltage/Current Output                 | Configurable Analog Output to send drive output information to external devices: output frequency, output current, output voltage, or a DC voltage.<br>Operate switch (SW3) to select the signal output type (voltage or current) at the AO terminal. Use terminal CM for common connection.<br>Output Signal Specifications:<br>Output voltage: 0–10V<br>Maximum output voltage/current: 12V/10mA<br>Output current: 0–20mA<br>Maximum output current: 24mA<br>Factory default output: Frequency   |              |  |              |                 |  |                |    |   |    |    |   |
|   | Q1 (TO)  | Pulse Output                           | Configurable pulse signals to external devices to provide a single output value from the drive: output frequency, output current, output voltage, or DC voltage.<br>Output Signal Specifications:<br>Output frequency: 0–32kHz<br>Output voltage: 0–12V<br>Factory default output: Frequency<br>(Pulse output TO and Multi-function output Q1 share the same terminal. Set the OU.33-Q1 Define to 38(TO).)<br>Duty cycle 50% (0.01Hz) ~ 55% (60Hz)<br><br>Connect a pulse between ACN drives as follows:<br><table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>ACN Drive #1</th> <th></th> <th>ACN Drive #2</th> </tr> <tr> <th>Output Terminal</th> <th></th> <th>Input Terminal</th> </tr> </thead> <tbody> <tr> <td>Q1</td> <td>→</td> <td>P5</td> </tr> <tr> <td>EG</td> <td>→</td> <td>CM</td> </tr> </tbody> </table> | ACN Drive #1 |  | ACN Drive #2 | Output Terminal |  | Input Terminal | Q1 | → | P5 | EG | → |
| ACN Drive #1  |          | ACN Drive #2                           |   |              |  |              |                 |  |                |    |   |    |    |   |
| Output Terminal                                       |          | Input Terminal                         |   |              |  |              |                 |  |                |    |   |    |    |   |
| Q1  | →        | P5                                     |   |              |  |              |                 |  |                |    |   |    |    |   |
| EG  | →        | CM                                     |   |              |  |              |                 |  |                |    |   |    |    |   |
| Digital output  | Q1       | Multi-function Output (open collector) | DC 26V, 100mA or less<br>Factory default output: Run  |              |  |              |                 |  |                |    |   |    |    |   |
|   | EG       | Common                                 | Common ground contact for an open collector (with external power source)  |              |  |              |                 |  |                |    |   |    |    |   |
|   | 24       | External 24V power source              | Maximum output current: 150mA   |              |  |              |                 |  |                |    |   |    |    |   |
|   | A1/C1/B1 | Multi Function Output (Relay)          | Configurable Relay output signal via Parameter OU.31.<br>Contact Rating: AC 250V <1A, DC 30V < 1A<br>Signal ON operation: A1-C1 contact closed, B1-C1 contact open<br>Signal OFF operation: B1-C1 contact closed, A1-C1 contact open  |              |  |              |                 |  |                |    |   |    |    |   |
| Communication   | S+/S-/SG | RS-485 signal line                     | Used to send or receive RS-485 signals. Use the Terminating Resistor dip switch to set the end of line resistor in a communication network.   |              |  |              |                 |  |                |    |   |    |    |   |
|   | N/A      | RJ45 Connector                         | Serial Connection to LCD keypad or PC software  |              |  |              |                 |  |                |    |   |    |    |   |



# IronHorse ACN Series Basic Wiring

## Main Circuit Wiring Diagram: All Models

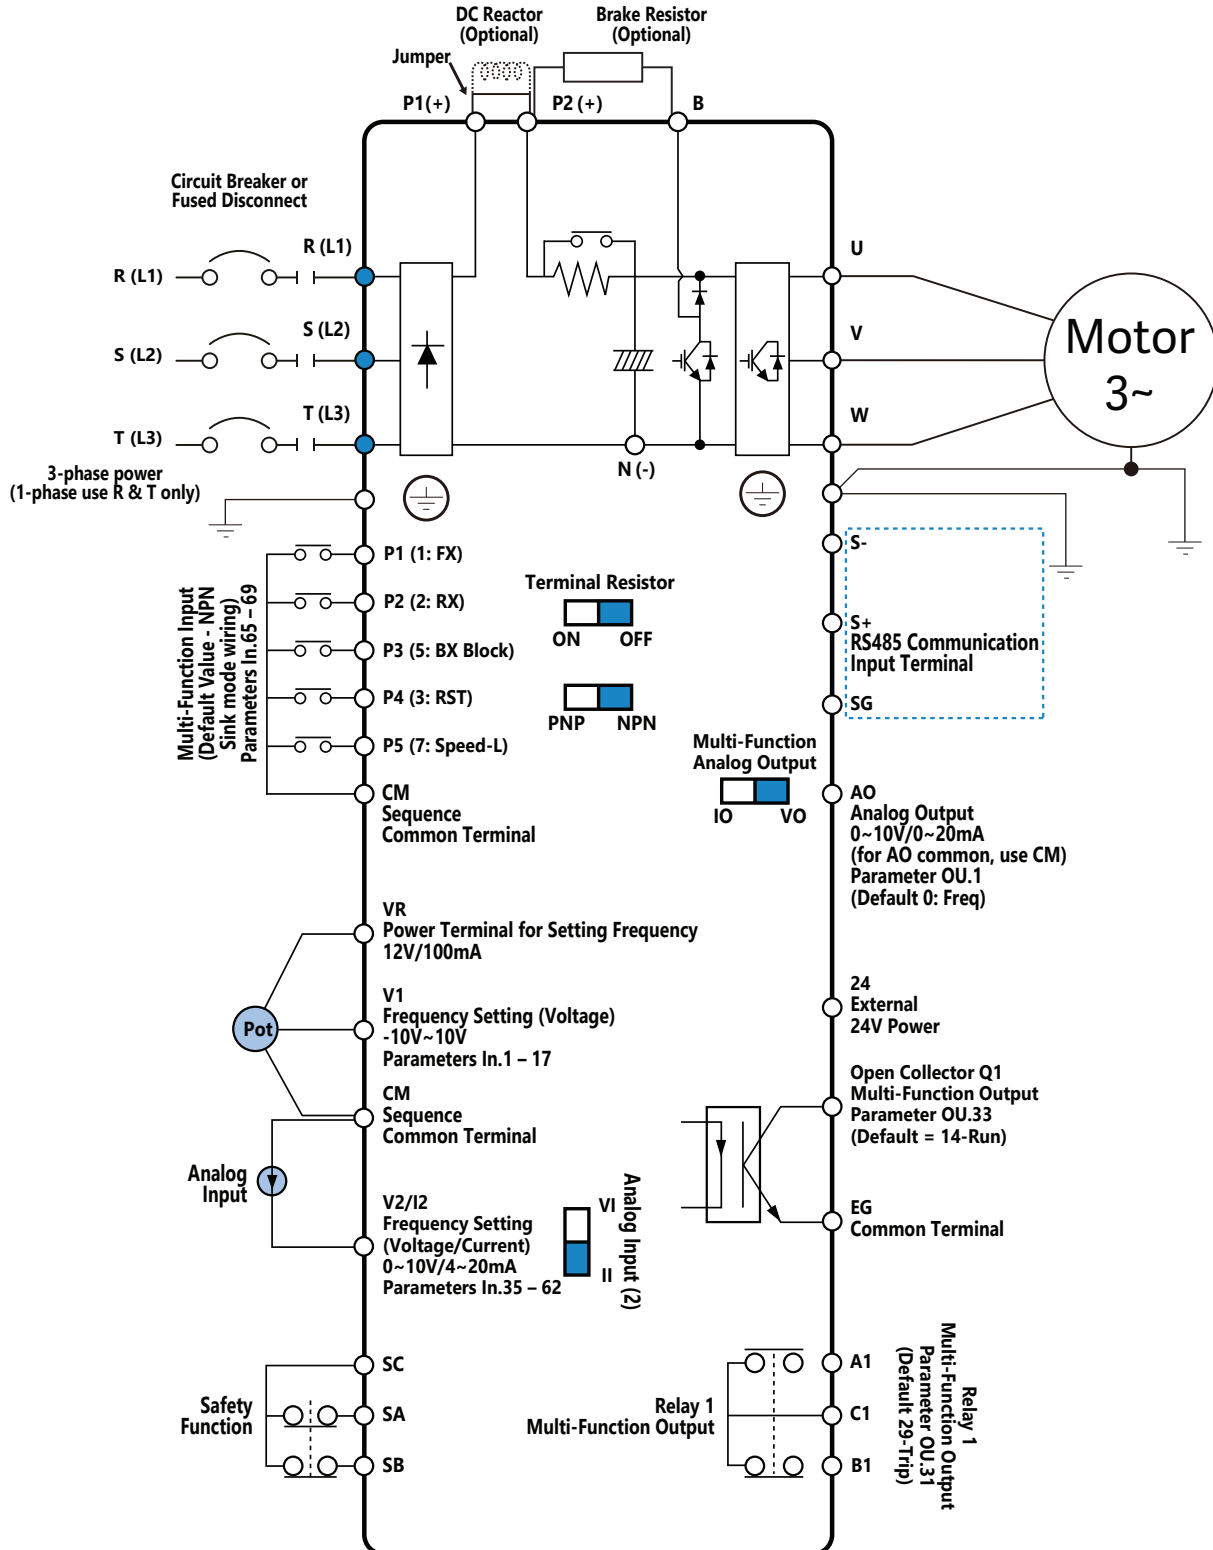


NOTE: Default is marked in blue.




# IronHorse ACN Series Basic Wiring

## Control Circuit Wiring Diagram: Digital Inputs

Select PNP using the PNP/NPN selection switch (SW1). Note that the factory default setting is NPN mode. CM is the common ground terminal for all analog inputs at the terminal, and P24 is 24V internal source. If you are using an external 24V source, build a circuit that connects the external source (-) and the CM terminal.

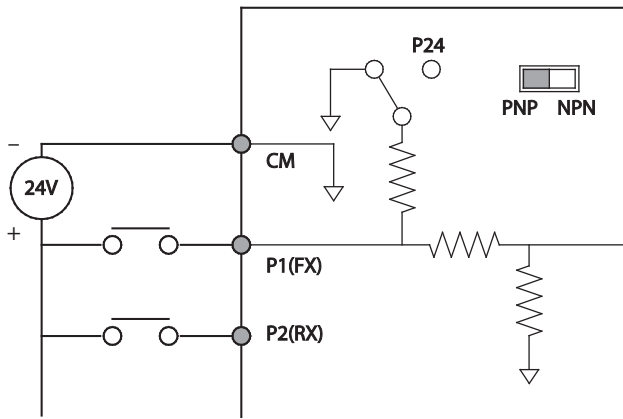

PNP Mode (Source)

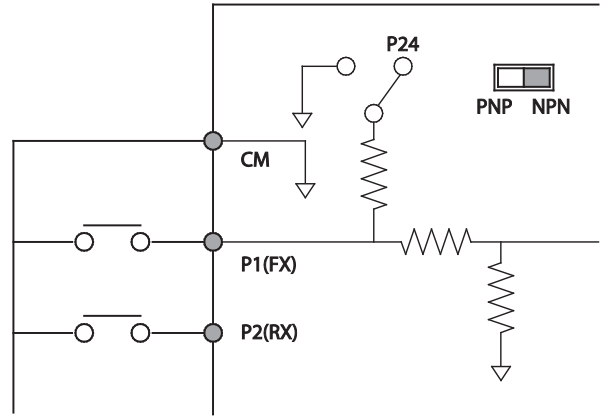

NPN Mode (Sink)

## 2 and 3 Wire Control

| 2-Wire Control |  |
|----------------|--|
|                | <p>2-wire control consists of maintained run signals. This can be accomplished via toggle switches, relays, jumpers, etc. Default parameters support this operation.</p> <p>P1=Forward Run (Fx)<br/>P2=Reverse Run (Rx)<br/>CM=Common</p>  |
| 3-Wire Control |  |
|                | <p>3-Wire control consists of momentary push buttons to run and stop the VFD. The Forward and Reverse buttons are Normally Open while the Stop button is Normally Closed. Set parameter In.67=14 if using P3 (like below) for the Stop button.</p> <p>P1 = Forward Run (Fx)<br/>P2 = Reverse Run (Rx)<br/>P3 = Stop (3-Wire)<br/>CM = CommonFrequency Reference Wiring</p> |




# IronHorse ACN Series Basic Wiring


## Digital Output Wiring

**NOTE:** Ensure device current does not exceed 100mA.

### External Power

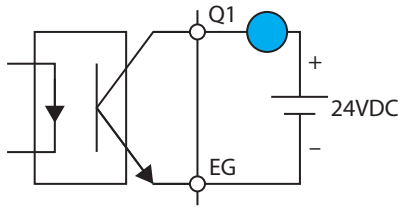


### Internal Power

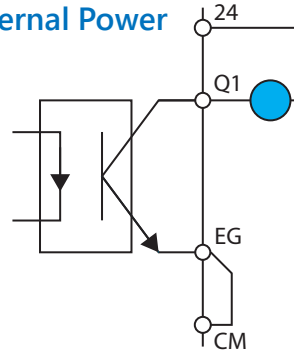


## 4-20mA Analog Input Wiring

**Transducer (4-20mA):** Transducers are typically 4-20mA devices which require a 24VDC power source. For 2-wire transducers connect to the 24VDC and 4-20mA input terminals listed below. Connect the positive lead of the device to the 24V terminal and the signal lead to the analog input terminal (I2).

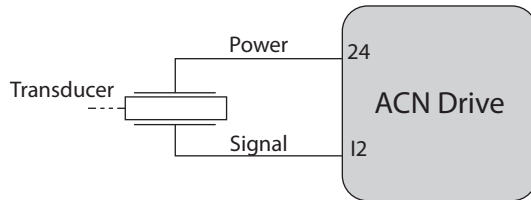


**NOTE:** Verify that SW2 dip switch on the terminal board to 'II' (down) for 4-20mA signal.

**PLC (4-20mA):** The wiring for connecting a PLC's 4-20mA output to the analog input of a VFD differs slightly from the transducer wiring discussed above. The positive (signal) lead is wired to the corresponding analog input while the negative (common) lead is wired to the drives common. Reference the figure below.

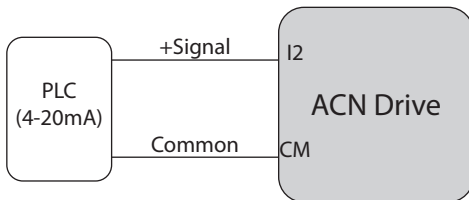


## 0-10VDC Analog Input Wiring

**Speed POT/Rheostat (0-10VDC):** Speed potentiometers have three wires which must be connected to properly vary a 0-10VDC signal. The required terminal connections will vary slightly depending on the drive series. Reference the figure below. The wiper of the speed POT should always be connected to the analog input.

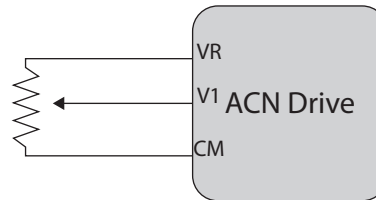


**PLC (0-10VDC):** The wiring for connecting a PLC's 0-10VDC output to the analog input of a VFD differs slightly from the speed POT wiring discussed above. The positive (signal) lead is wired to the corresponding analog input while the negative (common) lead is wired to the drives common. Reference the figure below.

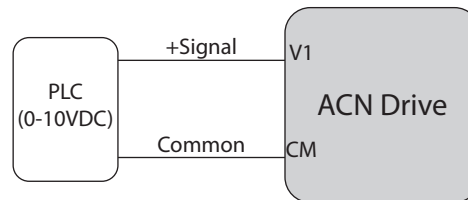

## AO Wiring

Wire the drive analog out as follows:

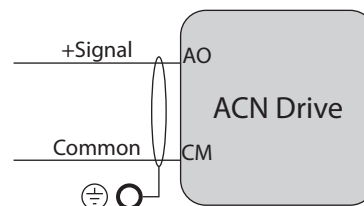



# IronHorse ACN Series Accessories

## Accessories Available for ACN Drives

| ACN Drives Available Software and Accessories                                       |   |
|---|---|
| Accessory   | Reference   |
| <b>Ethernet Module:</b> <a href="#">ACN-ETH</a>                                     | <a href="#">ACN Extension I/O and Ethernet Module on page tIHA-16</a> |
| <b>Extension I/O:</b> <a href="#">ACN-EIO</a>                                       |   |
| <b>Remote Keypad:</b> <a href="#">ACN-LCD</a>                                       | <a href="#">Remote Keypad on page tIHA-18</a>                         |
| <b>Remote Keypad Mount Kit w/Cable:</b> <a href="#">ACN-3MRC</a>                    |   |
| <b>Remote Keypad NEMA4X Mount Kit w/Cable:</b> <a href="#">ACN-LCDKM</a>            |   |
| <b>Replacement Fans:</b> <a href="#">ACN-FAN-FR3</a> , <a href="#">ACN-FAN-FR45</a> | <a href="#">ACN Replacement Fans on page tIHA-40</a>                  |
| <b>Fuses/Circuit Breakers</b>   | <a href="#">Fuses/Circuit Breakers on page tIHA-20</a>                |
| <b>EMI Filters</b>  | <a href="#">High Performance EMI Input Filters on page tIHA-21</a>    |
| <b>Braking Resistors</b>  | <a href="#">Braking Resistors on page tIHA-23</a>                     |
| <b>Line Reactors/Voltage Time Filters</b>   | <a href="#">Line Reactors/Voltage Time Filters on page tIHA-22</a>    |
| <b>VFD Suite</b>  | <a href="#">VFD Suite on page tIHA-45</a>                             |
| <b>USB to RJ45 Port Cable:</b> <a href="#">ACN-232C</a>                             | <a href="#">Communication Cable on page tIHA-45</a>                   |

## ACN Extension I/O and Ethernet Module

The [ACN-EIO](#) Extension IO option card provides additional discrete and analog IO points for any ACN(ND) series drives. The [ACN-ETH](#) is an option module for connecting any ACN series drive to an ethernet network. The module supports both the EtherNet/IP and Modbus TCP protocols.

| ACN Extension I/O and Ethernet Module |          |  |
|---------------------------------------|----------|--|
| Part Number                           | Price    | Description  |
| <a href="#">ACN-EIO</a>               | \$205.00 | IronHorse ACN series relay/analog combo module, Analog Input: 2-channel, current/voltage, Analog Output: 1-channel, current/voltage, Discrete Input: 3-point, sinking/sourcing, Discrete Output: 2-point, relay, (2) Form C (SPDT) relays. |
| <a href="#">ACN-ETH</a>               | \$113.00 | IronHorse ACN series communication module, EtherNet/IP and Modbus TCP, 1 port, (1) Ethernet (RJ45) and (1) RS-232 (RJ45) port(s). For use with IronHorse ACN series drives. Mounting hardware included.                                    |



**[ACN-EIO](#)**



**[ACN-ETH](#)**





# IronHorse ACN Series Accessories

## Remote Keypad

The Remote LCD keypad provides advanced functionality for use with the ACN series drives. The unit provides enhanced text descriptions of each parameter and enhanced failure status monitoring. The unit allows backup and download of drive parameters.

| ACN Remote Keypad                |          |  |                     |
|----------------------------------|----------|--|---------------------|
| Part Number                      | Price    | Description  | Drawing Links       |
| <a href="#"><u>ACN-LCD</u></a>   | \$65.00  | IronHorse ACN series remote keypad, for use with IronHorse ACN series drives.  | <a href="#">PDF</a> |
| <a href="#"><u>ACN-3MRC</u></a>  | \$23.50  | IronHorse ACN series keypad mount, for use with <a href="#"><u>ACN-LCD</u></a> remote keypad. (1) 9.8ft/3m Ethernet patch cable included.          | <a href="#">PDF</a> |
| <a href="#"><u>ACN-LCDKM</u></a> | \$109.00 | IronHorse ACN series keypad mount, NEMA 4X. For use with <a href="#"><u>ACN-LCD</u></a> remote keypad. (1) 9.8ft/3m Ethernet patch cable included. | <a href="#">PDF</a> |



[ACN-3MRC](#)



[ACN-LCD](#)



[ACN-LCDKM](#)



# IronHorse ACN Series Accessories

## ACN Replacement Fans

The ACN-FAN-xxxx fans are replacement kits for the ACN drive fan(s) that comes installed with the drive.

| ACN Replacement Fans         |         |   |                     |
|------------------------------|---------|---|---------------------|
| Part Number                  | Price   | Description   | Drawing Links       |
| <a href="#">ACN-FAN-FR3</a>  | \$36.00 | IronHorse ACN series main cooling fan, replacement, 60 x 60 x 25mm, 24 VDC. For use with ACN series 7-1/2hp - 10hp AC drives. | <a href="#">PDF</a> |
| <a href="#">ACN-FAN-FR45</a> | \$55.00 | IronHorse ACN series main cooling fan, replacement, 80 x 80 x 25mm, 24 VDC. For use with ACN series 15hp - 30hp AC drives.    | <a href="#">PDF</a> |



[ACN-FAN-FR3](#)



[ACN-FAN-FR45](#)



# IronHorse ACN Series Accessories

## Fuses/Circuit Breakers

Protection devices are essential to prevent damage to your ACN drive and application equipment. Please use the fuse specification chart below to select fuses that are applicable to your ACN drive. Only use UL-certified 600V fuses which comply with your local regulations.

| Drive                        | Drive Voltage | HP (CT) | Fuse Amps (Class H or RK5) | Suggested ADC Class RK5 Fuses | Circuit Breaker |            |
|------------------------------|---------------|---------|----------------------------|-------------------------------|-----------------|------------|
|                              |               |         |                            |                               | Size            | Model*     |
| <a href="#">ACN(ND)-20P5</a> | 200-240       | 0.5     | 10                         | ECSR10                        | 5               | UTE10033C  |
| <a href="#">ACN(ND)-21P0</a> | 200-240       | 1       | 10                         | ECSR10                        | 10              |            |
| <a href="#">ACN(ND)-22P0</a> | 200-240       | 2       | 15                         | ECSR15                        | 15              |            |
| <a href="#">ACN(ND)-23P0</a> | 200-240       | 3       | 20                         | ECSR20                        | 20              |            |
| <a href="#">ACN(ND)-25P0</a> | 200-240       | 5       | 50                         | ECSR50                        | 30              |            |
| <a href="#">ACN(ND)-27P5</a> | 200-240       | 7.5     | 50                         | ECSR50                        | 50              | UTE10053C  |
| <a href="#">ACN(ND)-2010</a> | 200-240       | 10      | 63                         | ECSR60                        | 60              | UTE10063C  |
| <a href="#">ACN(ND)-2015</a> | 200-240       | 15      | 80                         | ECSR80                        | 100             | UTE100103C |
| <a href="#">ACN(ND)-2020</a> | 200-240       | 20      | 100                        | ECSR100                       | 125             |            |
| <a href="#">ACN(ND)-40P5</a> | 380-480       | 0.5     | 10                         | ECSR10                        | 3               | UTE10033C  |
| <a href="#">ACN(ND)-41P0</a> | 380-480       | 1       | 10                         | ECSR10                        | 5               |            |
| <a href="#">ACN(ND)-42P0</a> | 380-480       | 2       | 10                         | ECSR10                        | 10              |            |
| <a href="#">ACN(ND)-43P0</a> | 380-480       | 3       | 15                         | ECSR15                        | 10              |            |
| <a href="#">ACN(ND)-45P0</a> | 380-480       | 5       | 32                         | ECSR30                        | 20              |            |
| <a href="#">ACN(ND)-47P5</a> | 380-480       | 7.5     | 32                         | ECSR30                        | 30              |            |
| <a href="#">ACN(ND)-4010</a> | 380-480       | 10      | 35                         | ECSR35                        | 30              |            |
| <a href="#">ACN(ND)-4015</a> | 380-480       | 15      | 50                         | ECSR50                        | 50              |            |
| <a href="#">ACN(ND)-4020</a> | 380-480       | 20      | 63                         | ECSR60                        | 60              | UTE10063C  |
| <a href="#">ACN(ND)-4025</a> | 380-480       | 25      | 70                         | ECSR70                        | 75              | UTE100103C |
| <a href="#">ACN(ND)-4030</a> | 380-480       | 30      | 100                        | ECSR100                       | 100             |            |

\* Manufactured by LS Electric. Not available at [AutomationDirect.com](http://AutomationDirect.com)



**CAUTION: ONLY USE 600V CLASS H OR RK5, UL LISTED INPUT FUSES AND UL LISTED CIRCUIT BREAKERS. SEE THE TABLE ABOVE FOR THE CURRENT RATINGS FOR FUSES AND CIRCUIT BREAKERS.**

**MAXIMUM ALLOWED PROSPECTIVE SHORT-CIRCUIT CURRENT AT THE INPUT POWER CONNECTION IS DEFINED IN IEC 60439-1 AS 100 KA. DEPENDING ON THE SELECTED MCCB, THE ACN SERIES IS SUITABLE FOR USE IN CIRCUITS CAPABLE OF DELIVERING A MAXIMUM OF 100 KA RMS SYMMETRICAL AMPERES AT THE DRIVE'S MAXIMUM RATED VOLTAGE. THE FOLLOWING TABLE SHOWS THE RECOMMENDED MCCB FOR RMS SYMMETRICAL AMPERES.**



# IronHorse ACN Series Accessories

## High Performance EMI Input Filters

The optional accessories below are available for use with the ACN drive. Selection of these accessories is application specific and may improve drive performance. Additional information regarding filter installation and operation is available in the AutomationDirect white paper, "Applied EMI/RFI Techniques."

| Drive                        | Drive Voltage | HP (CT) | Roxburgh Filters Chassis Type 1ph *1 | Roxburgh High Performance Filters *2 | Roxburgh Max Performance Filters *3 |
|------------------------------|---------------|---------|--------------------------------------|--------------------------------------|-------------------------------------|
| <a href="#">ACN(ND)-20P5</a> | 200-240       | 0.5     | <a href="#">RES90F03</a>             | <a href="#">KMF306A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-21P0</a> | 200-240       | 1       | <a href="#">RES90F10</a>             | <a href="#">KMF310A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-22P0</a> | 200-240       | 2       | <a href="#">RES90F16</a>             | <a href="#">KMF318A</a>              | <a href="#">MIF316</a>              |
| <a href="#">ACN(ND)-23P0</a> | 200-240       | 3       | <a href="#">RES90F16</a>             | <a href="#">KMF318A</a>              | <a href="#">MIF316</a>              |
| <a href="#">ACN(ND)-25P0</a> | 200-240       | 5       | <a href="#">RES90S20</a>             | <a href="#">KMF325A</a>              | <a href="#">MIF323</a>              |
| <a href="#">ACN(ND)-27P5</a> | 200-240       | 7.5     | -                                    | <a href="#">KMF336A</a>              | <a href="#">MIF350</a>              |
| <a href="#">ACN(ND)-2010</a> | 200-240       | 10      | -                                    | <a href="#">KMF350A</a>              | <a href="#">MIF350</a>              |
| <a href="#">ACN(ND)-2015</a> | 200-240       | 15      | -                                    | <a href="#">KMF370A</a>              | <a href="#">MIF375</a>              |
| <a href="#">ACN(ND)-2020</a> | 200-240       | 20      | -                                    | <a href="#">KMF3100A</a>             | <a href="#">MIF3100</a>             |
| <a href="#">ACN(ND)-40P5</a> | 380-480       | 0.5     | -                                    | <a href="#">KMF306A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-41P0</a> | 380-480       | 1       | -                                    | <a href="#">KMF306A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-42P0</a> | 380-480       | 2       | -                                    | <a href="#">KMF306A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-43P0</a> | 380-480       | 3       | -                                    | <a href="#">KMF310A</a>              | <a href="#">MIF310</a>              |
| <a href="#">ACN(ND)-45P0</a> | 380-480       | 5       | -                                    | <a href="#">KMF318A</a>              | <a href="#">MIF316</a>              |
| <a href="#">ACN(ND)-47P5</a> | 380-480       | 7.5     | -                                    | <a href="#">KMF318A</a>              | <a href="#">MIF323</a>              |
| <a href="#">ACN(ND)-4010</a> | 380-480       | 10      | -                                    | <a href="#">KMF336A</a>              | <a href="#">MIF330B</a>             |
| <a href="#">ACN(ND)-4015</a> | 380-480       | 15      | -                                    | <a href="#">KMF336A</a>              | <a href="#">MIF350</a>              |
| <a href="#">ACN(ND)-4020</a> | 380-480       | 20      | -                                    | <a href="#">KMF350A</a>              | <a href="#">MIF350</a>              |
| <a href="#">ACN(ND)-4025</a> | 380-480       | 25      | -                                    | <a href="#">KMF350A</a>              | <a href="#">MIF350</a>              |
| <a href="#">ACN(ND)-4030</a> | 380-480       | 30      | -                                    | <a href="#">KMF370A</a>              | <a href="#">MIF375</a>              |

\*1 -EMI rating for motor cable length: C2 to 75Ft, C1 to 30ft

\*2 -EMI rating for motor cable length: C2 to 150Ft, C1 to 75ft

\*3 -EMI rating for motor cable length: C2 to 300Ft, C1 to 150ft



# IronHorse ACN Series Accessories

## Line Reactors/Voltage Time Filters

Installing an AC Line Reactor on the input side of an AC motor drive can increase line impedance, improve the power factor, reduce input current, increase system capacity, and reduce interference generated from the motor drive.

Installing a load reactor or voltage time filter on the drive's output side can increase the high-frequency impedance to reduce the dV/dT and terminal voltage to protect the motor. Use output filters if the motor cable length exceeds 100ft

| Line/Load Reactors & AC Output Filters |         |         |              |                       |                          |                          |                          |                          |                             |                             |                                   |
|--|---------|---------|--------------|-----------------------|--------------------------|--------------------------|--------------------------|--------------------------|-----------------------------|-----------------------------|-----------------------------------|
| Drive                                  | Voltage | HP      | Input (Amps) | Output FLA 3ph (Amps) | AC Input Line Reactor    |                          | AC Output Load Reactor   |                          | AC dVdT Output Filter       |                             | DC reactor values Induct./Current |
|  |         |         |              |                       | 3ph                      | 1ph                      | 3ph                      | 1ph                      | 3ph                         | 1ph                         |                                   |
| <a href="#">ACN(ND)-20P5</a>           | 200-240 | 0.5     | 2.2          | 5                     | <a href="#">LR2-20P5</a> | <a href="#">LR2-20P2</a> | <a href="#">LR2-20P5</a> | <a href="#">LR2-20P2</a> | <a href="#">VTF-246-CFG</a> | <a href="#">VTF-46-DE</a>   | 4/8.67                            |
| <a href="#">ACN(ND)-21P0</a>           |         | 1       | 4.9          | 8                     | <a href="#">LR2-21P0</a> | <a href="#">LR2-21P0</a> | <a href="#">LR2-21P0</a> | <a href="#">LR2-20P5</a> | <a href="#">VTF-24-FH</a>   | <a href="#">VTF-246-CFG</a> |                                   |
| <a href="#">ACN(ND)-22P0</a>           |         | 2       | 8.4          | 11                    | <a href="#">LR-23P0</a>  | <a href="#">LR-25P0</a>  | <a href="#">LR2-22P0</a> | <a href="#">LR2-22P0</a> | <a href="#">VTF-246-GJJ</a> | <a href="#">VTF-24-FH</a>   | 3/13.05                           |
| <a href="#">ACN(ND)-23P0</a>           |         | 3       | 11.8         | 17                    | <a href="#">LR-23P0</a>  | <a href="#">LR-23P0</a>  | <a href="#">LR2-22P0</a> | <a href="#">LR2-22P0</a> | <a href="#">VTF-4-M</a>     | <a href="#">VTF-246-GJJ</a> | 1.33/18.45                        |
| <a href="#">ACN(ND)-25P0</a>           |         | 5       | 18.5         | 24                    | <a href="#">LR-25P0</a>  | <a href="#">LR-2010</a>  | <a href="#">LR-25P0</a>  | <a href="#">LR2-22P0</a> | <a href="#">VTF-46-LM</a>   | <a href="#">VTF-246-HKL</a> | 1.33/26.35                        |
| <a href="#">ACN(ND)-27P5</a>           |         | 7.5     | 25.8         | 32                    | <a href="#">LR-2010</a>  | <a href="#">LR-2015</a>  | <a href="#">LR-27P5</a>  | <a href="#">LR-25P0</a>  | <a href="#">VTF-246-KMN</a> | <a href="#">VTF-24-JL</a>   | 1.60/32                           |
| <a href="#">ACN(ND)-2010</a>           |         | 10      | 34.9         | 46                    | <a href="#">LR-2015</a>  | <a href="#">LR-2020</a>  | <a href="#">LR-2010</a>  | <a href="#">LR-25P0</a>  | <a href="#">VTF-246-LPQ</a> | <a href="#">VTF-46-LM</a>   | 1.25/43                           |
| <a href="#">ACN(ND)-2015</a>           |         | 15      | 50.8         | 60                    | <a href="#">LR-2020</a>  | <a href="#">LR-2030</a>  | <a href="#">LR-2015</a>  | <a href="#">LR-2010</a>  | <a href="#">VTF-246-NRS</a> | <a href="#">VTF-46-NP</a>   | 0.95/61                           |
| <a href="#">ACN(ND)-2020</a>           |         | 20      | 66.7         | 1.3                   | <a href="#">LR-2025</a>  | <a href="#">LR-2040</a>  | <a href="#">LR-2020</a>  | <a href="#">LR-2010</a>  | <a href="#">VTF-246-PSU</a> | <a href="#">VTF-246-LPQ</a> | 0.70/75                           |
| <a href="#">ACN(ND)-40P5</a>           |         | 380-480 | 0.5          | 1.1                   | 2.5                      | <a href="#">LR2-40P5</a> |                          |                          |                             | <a href="#">VTF-46-DE</a>   |                                   |
| <a href="#">ACN(ND)-41P0</a>           | 1       |         | 2.4          | 4                     | <a href="#">LR2-41P0</a> |                          |                          |                          | <a href="#">VTF-246-CFG</a> |                             |                                   |
| <a href="#">ACN(ND)-42P0</a>           | 2       |         | 4.2          | 5.5                   | <a href="#">LR2-42P0</a> |                          |                          |                          | <a href="#">VTF-246-DGH</a> |                             | 12/6.41                           |
| <a href="#">ACN(ND)-43P0</a>           | 3       |         | 5.9          | 9                     | <a href="#">LR2-43P0</a> |                          |                          |                          | <a href="#">VTF-24-FH</a>   |                             | 8/8.9                             |
| <a href="#">ACN(ND)-45P0</a>           | 5       |         | 9.8          | 12                    | <a href="#">LR2-45P0</a> |                          |                          |                          | <a href="#">VTF-46-DE</a>   |                             | 5.4/13.2                          |
| <a href="#">ACN(ND)-47P5</a>           | 7.5     |         | 12.9         | 16                    | <a href="#">LR2-47P5</a> |                          |                          |                          | <a href="#">VTF-46-DE</a>   |                             | 3.20/17                           |
| <a href="#">ACN(ND)-4010</a>           | 10      |         | 17.5         | 24                    | <a href="#">LR-4010</a>  |                          |                          |                          | <a href="#">VTF-24-JL</a>   |                             | 2.50/25                           |
| <a href="#">ACN(ND)-4015</a>           | 15      |         | 26.5         | 30                    | <a href="#">LR-4015</a>  |                          |                          |                          | <a href="#">VTF-246-KMN</a> |                             | 1.90/32                           |
| <a href="#">ACN(ND)-4020</a>           | 20      |         | 33.4         | 39                    | <a href="#">LR-4020</a>  |                          |                          |                          | <a href="#">VTF-246-LPQ</a> |                             | 1.40/41                           |
| <a href="#">ACN(ND)-4025</a>           | 25      |         | 43.6         | 45                    | <a href="#">LR-4025</a>  |                          |                          |                          | <a href="#">VTF-246-MQR</a> |                             | 1.00/49                           |
| <a href="#">ACN(ND)-4030</a>           | 30      |         | 50.7         | 27                    | <a href="#">LR-4030</a>  |                          |                          |                          | <a href="#">VTF-246-MQR</a> |                             | 0.70/64                           |



# IronHorse ACN Series Accessories

## Braking Resistors

Dynamic braking absorbs the motor regeneration energy when the motor is decelerated faster than it would if it was allowed to coast to a stop. The regeneration energy is dissipated by braking resistors. All drives have the braking function built-in and do not require a separate dynamic braking unit. The recommended open type or NEMA 1 type brake resistors available at AutomationDirect for each drive model are listed in the table below.

| Brake Resistors |                              |                  |                                   |                             |                 |                                     |     |                         |                                     |                              |                         |      |
|-----------------|------------------------------|------------------|-----------------------------------|-----------------------------|-----------------|-------------------------------------|-----|-------------------------|-------------------------------------|------------------------------|-------------------------|------|
| Voltage         | Drive                        | Drive Power (HP) | Drive Braking Capacity-Max Torque |                             |                 | 150% Braking Torque @ 5% Duty Cycle |     |                         |                                     |                              |                         |      |
|                 |                              |                  | Minimum Resistor                  | Max Total Brake Current (A) | Peak Power (kW) | Open Type Resistors                 |     |                         | NEMA1 Resistors with Thermal Switch |                              |                         |      |
|                 |                              |                  |                                   |                             |                 | ADC Part Number                     | Qty | Total Brake Current (A) | ADC Part Number                     | Qty                          | Total Brake Current (A) |      |
| 230             | <a href="#">ACN(ND)-20P5</a> | 0.5              | 250.0                             | 1.6                         | 0.6             | <a href="#">GS-BR-300W250</a>       | 1   | 1.6                     | <a href="#">BR-N1-240W250</a>       | 1                            | 1.6                     |      |
|                 | <a href="#">ACN(ND)-21P0</a> | 1                | 150.0                             | 2.6                         | 1.0             | <a href="#">GS-BR-400W150</a>       | 1   | 2.6                     | <a href="#">BR-N1-240W150</a>       | 1                            | 2.6                     |      |
|                 | <a href="#">ACN(ND)-22P0</a> | 2                | 50.0                              | 7.8                         | 3.0             | <a href="#">GS-BR-300W070</a>       | 1   | 5.6                     | <a href="#">BR-N1-280W50</a>        | 1                            | 7.8                     |      |
|                 | <a href="#">ACN(ND)-23P0</a> | 3                | 43.0                              | 9.1                         | 3.5             | <a href="#">GS-BR-1K5W043</a>       | 1   | 9.1                     | <a href="#">BR-N1-720W50</a>        | 1                            | 7.8                     |      |
|                 | <a href="#">ACN(ND)-25P0</a> | 5                | 25.0                              | 15.6                        | 6.1             | <a href="#">GS-BR-1K2W015</a>       | 2S  | 13.0                    | <a href="#">BR-N1-800W25</a>        | 1                            | 15.6                    |      |
|                 | <a href="#">ACN(ND)-27P5</a> | 7.5              | 18.0                              | 21.7                        | 8.5             | <a href="#">GS-BR-1K0W020</a>       | 1   | 19.5                    | <a href="#">BR-N1-800W18P0</a>      | 1                            | 21.7                    |      |
|                 | <a href="#">ACN(ND)-2010</a> | 10               | 14.0                              | 27.9                        | 10.9            | <a href="#">GS-BR-1K2W015</a>       | 1   | 26.0                    | <a href="#">BR-N1-1K5W14P0</a>      | 1                            | 27.9                    |      |
|                 | <a href="#">ACN(ND)-2015</a> | 15               | 8.6                               | 45.3                        | 17.7            | <a href="#">GS-BR-1K5W012</a>       | 1   | 32.5                    | <a href="#">BR-N1-2K2W08P6</a>      | 1                            | 45.3                    |      |
|                 | <a href="#">ACN(ND)-2020</a> | 20               | 8.0                               | 48.8                        | 19.0            | <a href="#">GS-BR-1K2W015</a>       | 2P  | 52.0                    | <a href="#">BR-N1-2K2W08P6</a>      | 1                            | 45.3                    |      |
| 460             | <a href="#">ACN(ND)-40P5</a> | 0.5              | 400.0                             | 2.0                         | 1.5             | <a href="#">GS-BR-300W400</a>       | 1   | 2.0                     | <a href="#">BR-N1-250W400</a>       | 1                            | 2.0                     |      |
|                 | <a href="#">ACN(ND)-41P0</a> | 1                | 400.0                             | 2.0                         | 1.5             |                                     | 1   |                         | <a href="#">BR-N1-240W250</a>       | 1                            |                         | 3.1  |
|                 | <a href="#">ACN(ND)-42P0</a> | 2                | 250.0                             | 3.1                         | 2.4             |                                     | 1   |                         | <a href="#">BR-N1-500W200</a>       | 1                            | 3.9                     |      |
|                 | <a href="#">ACN(ND)-43P0</a> | 3                | 180.0                             | 4.3                         | 3.4             | <a href="#">GS-BR-200W360</a>       | 2P  | 4.3                     | <a href="#">BR-N1-720W85</a>        | 1                            | 9.2                     |      |
|                 | <a href="#">ACN(ND)-45P0</a> | 5                | 85.0                              | 9.2                         | 7.2             | <a href="#">GS-BR-300W250</a>       | 2P  | 6.2                     | <a href="#">BR-N1-1K2W75</a>        | 1                            | 10.4                    |      |
|                 | <a href="#">ACN(ND)-47P5</a> | 7.5              | 75.0                              | 10.4                        | 8.1             | <a href="#">GS-BR-1K0W075</a>       | 1   | 10.4                    | <a href="#">BR-N1-1K2W50</a>        | 1                            | 15.6                    |      |
|                 | <a href="#">ACN(ND)-4010</a> | 10               | 49.0                              | 15.9                        | 12.4            | <a href="#">GS-BR-1K5W043</a>       | 1   | 18.1                    | <a href="#">BR-N1-1K5W40</a>        | 1                            | 19.5                    |      |
|                 | <a href="#">ACN(ND)-4015</a> | 15               | 40.0                              | 19.5                        | 15.2            | <a href="#">GS-BR-1K5W043</a>       | 1   | 18.1                    | <a href="#">BR-N1-2K3W26</a>        | 1                            | 30.0                    |      |
|                 | <a href="#">ACN(ND)-4020</a> | 20               | 22.0                              | 35.5                        | 27.7            |                                     | 2P  |                         | 36.3                                | <a href="#">BR-N1-2K8W25</a> | 1                       | 31.2 |
|                 | <a href="#">ACN(ND)-4025</a> | 25               | 20.0                              | 39.0                        | 30.4            |                                     | 2P  |                         |                                     | <a href="#">BR-N1-3K6W20</a> | 1                       | 39.0 |
|                 | <a href="#">ACN(ND)-4030</a> | 30               | 20.0                              | 39.0                        | 30.4            |                                     | 2P  |                         |                                     |                              |                         |      |

Note: Where noted in resistor quantity, S = series, P = parallel



# IronHorse AC Series Accessories

## VFD Suite

VFD Suite is the configuration software for the Automation Direct Ironhorse AC family of variable frequency drives, featuring the ACG IP20 series and the ACN Nema4X series. It is designed to allow connection of a personal computer to the drives and perform a variety of functions:

- Create new drive configurations
- Upload/Download drive configurations
- Edit/Compare drive configurations
- Utilize Parameter Wizard for easy configuration
- Archive/Store multiple drive configurations on your PC
- Trend drive operation parameters
- Tune the drive PID loop
- View real time key operating parameters
- Start/Stop drive and switch directions, provided drive is set up for remote operation
- View drive faults
- Program Function blocks for simple control applications (ACN series only, 18 steps maximum)

VFD Suite includes a PDF help file for explanation of the software and features. VFD Suite can be downloaded for free from [Automationdirect.com](http://Automationdirect.com).

## System Requirements

| Category         | Requirement                          |
|------------------|--------------------------------------|
| <b>Windows</b>   | Windows 8/10/11                      |
| <b>Processor</b> | 1 GHz or higher                      |
| <b>RAM</b>       | 1 GB (32-bit) or 2 GB (64-bit)       |
| <b>HDD</b>       | 16 GB (32-bit) or 20 GB (64-bit)     |
| <b>Graphics</b>  | Graphic card supporting MS DirectX 9 |



## Communication Cable

(For ACN series drives only)



**ACN-232C**

| Communication Cable    |         |  |                        |
|------------------------|---------|--|------------------------|
| Part Number            | Price   | Description  | Drive Compatibility    |
| <b><u>ACN-232C</u></b> | \$91.00 | IronHorse programming/communication cable, 3.2ft/1m cable length, RS-232 (RJ45 8P8C) to USB A. Not compatible with Windows 11 software. Instead use USB-485M PC adapter. | ACN series drives only |