
ASO Safety Solutions SENTIR Straight Edge Safety Contact Mats




SENTIR safety contact mats are rectangular sections which are used to safeguard dangerous areas in industrial and production automation settings. Stepping on the mat triggers an immediate "stop" signal in order to prevent endangering movements.

SENTIR Straight Edge mats are designed with flexibility in mind. Two quick disconnect ends allow for easy single or multi-mat wiring in either 4-wire or 2-wire circuits with optional terminating resistor. The straight edge allows butting of additional mats and use of optional metal trim kits for securing to floor.

Features

- Straight edge ideal for trim kits and multi-mat configurations
- Ideal for 2-wire circuits with optional terminating resistor
- Can wire in 2 or 4-wire circuits
- · Male and Female quick disconnect
- Anti-slip surface
- Standard sizes available
- · Available in black and yellow
- Resistant against most contaminants and moisture up to IP65




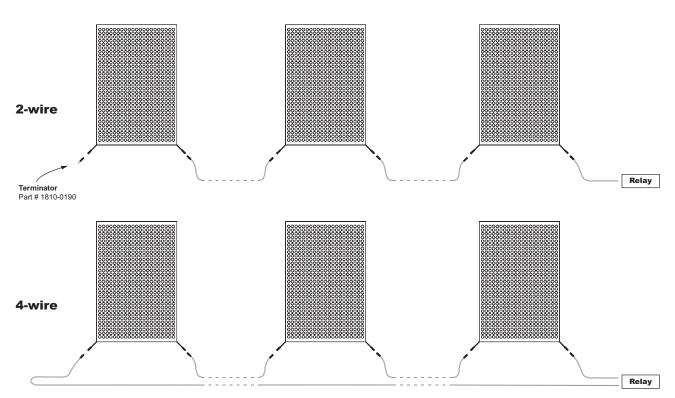

ASO Safety Solutions SENTIR Straight Edge Safety Contact Mats



ASO Safety Solutions Contact Mats - Straight Edge Style						
Part Number	Price	Width (W)	Length (L)	Mat Color	Drawing	
<u>1602-4107</u>	\$177.00	12in [304.8 mm]	24in [609.6 mm]		<u>PDF</u>	
<u>1602-4108</u>	\$217.00	12in [304.8 mm]	36in [914.4 mm]		<u>PDF</u>	
<u>1602-4106</u>	\$258.00	24in [609.6 mm]	24in [609.6 mm]		<u>PDF</u>	
1602-4100	\$360.00	24in [609.6 mm]	36in [914.4 mm]		PDF	
1602-4101	\$447.00	24in [609.6 mm]	48in [1219.2 mm]	Black	<u>PDF</u>	
<u>1602-4102</u>	\$572.00	24in [609.6 mm]	60in [1524.0 mm]		<u>PDF</u>	
<u>1602-4103</u>	\$493.00	36in [914.4 mm]	36in [914.4 mm]		<u>PDF</u>	
1602-4104	\$675.00	36in [914.4 mm]	48in [1219.2 mm]		PDF	
1602-4105	\$789.00	36in [914.4 mm]	60in [1524.0 mm]		PDF	
<u>1602-5390</u>	\$371.00	24in [609.6 mm]	36in [914.4 mm]	Yellow	<u>PDF</u>	
<u>1602-5391</u>	\$460.00	24in [609.6 mm]	48in [1219.2 mm]	I GIIOW	<u>PDF</u>	







4	Q	4	n	-0	4	۵	n
1	o	1	v	-u	ш	IJ	u



ASO Safety Solutions Terminating Resistors						
Part Number	Price	Description	Use With	Contents	Drawing	
<u>1810-0190</u>	\$8.75	Terminating resistor, 8.2 k ohm, 3-pin male M8 connector	Safety contact mats and bumpers	1 resistor	PDF	

ASO Safety Contact Mat Trim Kits and Corners						
Part Number	Price	Description	Material	Use With	Contents	Drawing
<u>2010-0121</u>	\$63.00	Trim kit	Aluminum	12 x 24 in safety mats	4 trim corners and 4 mat trim pieces	<u>PDF</u>
2010-0122	\$75.00	Trim kit	Aluminum	12 x 36 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0120	\$75.00	Trim kit	Aluminum	24 x 24 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0080	\$97.00	Trim kit	Aluminum	24 x 36 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0081	\$107.00	Trim kit	Aluminum	24 x 48 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0082	\$121.00	Trim kit	Aluminum	24 x 60 in safety mats	4 trim corners and 4 mat trim pieces	<u>PDF</u>
2010-0083	\$107.00	Trim kit	Aluminum	36 x 36 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0084	\$119.00	Trim kit	Aluminum	36 x 48 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0085	\$135.00	Trim kit	Aluminum	36 x 60 in safety mats	4 trim corners and 4 mat trim pieces	PDF
2010-0086	\$56.00	Mat trim	Aluminum	Safety contact mats	1 mat trim, 5ft [1.52 m] length	<u>PDF</u>
2010-0087	\$3.75	Trim corner	Polyamide	Safety contact mats	1 corner	PDF





2010-0087

	1	
1		

Straight Edge Safety Contact Mats					
	General Specifications				
Height	14mm [0.55 in] with covering				
Material	Polyurethane				
Weight	24.9 kg/m ² [5.1 lb/ft ²]				
Switching Pressure	g Pressure Test piece Ø 80mm [3.15 in] = approximately 150N				
Inactive Edge 16mm [0.63 in]					
Static Load Max. 2,000N on Ø 80mm [3.15 in], tested according to DIN EN ISO 13856-					
Response Time < 25ms, tested according to DIN EN ISO 13856-1					
Electrical Capacity	24VDC, 100mA				
Connection Cables	One cable has a 3-pin male M8 connector, and the other cable has a 3-pin female M8 connector. Cables are 4.7 in [120mm] in length				
Mechanical Life	>1,000,000 cycles				
Protection Class	IP65				
Temperature Range	-10° to +55°C [+14° to +131°F]				
Agency Approvals	CE, cULus file E329422				

Safety Products



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.