
## ASO Safety Solutions SENTIR Straight Edge Safety Contact Mats

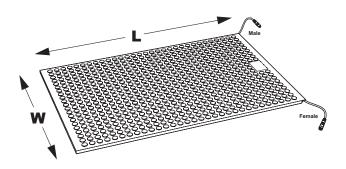


SENTIR safety contact mats are rectangular sections which are used to safeguard dangerous areas in industrial and production automation settings. Stepping on the mat triggers an immediate "stop" signal in order to prevent endangering movements.

SENTIR Straight Edge mats are designed with flexibility in mind. Two quick disconnect ends allow for easy single or multi-mat wiring in either 4-wire or 2-wire circuits with optional terminating resistor. The straight edge allows butting of additional mats and use of optional metal trim kits for securing to floor.

## **Features**

- Straight edge ideal for trim kits and multi-mat configurations
- Ideal for 2-wire circuits with optional terminating resistor
- Can wire in 2 or 4-wire circuits
- · Male and Female quick disconnect
- Anti-slip surface
- Standard sizes available
- · Available in black and yellow
- Resistant against most contaminants and moisture up to IP65



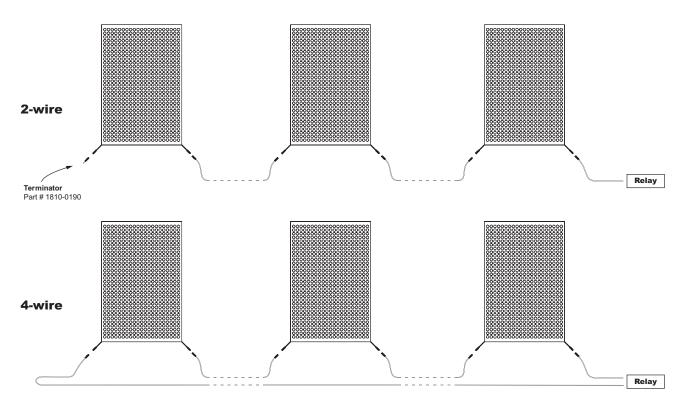

## ASO Safety Solutions SENTIR Straight Edge Safety Contact Mats



1602-410x

| ASO Safety Solutions Contact Mats - Straight Edge<br>Style |          |  |                                    |            |            |  |
|--|----------|--|------------------------------------|------------|------------|--|
| Part Number  | Price    |  |                                    | Mat Color  | Drawing    |  |
| <u>1602-4107</u>   | \$177.00 | 12in [304.8 mm]                        | 24in [609.6 mm]                    |            | <u>PDF</u> |  |
| <u>1602-4108</u>   | \$217.00 | 12in [304.8 mm]                        | 12in [304.8 mm] 36in [914.4 mm] PE |            | <u>PDF</u> |  |
| <u>1602-4106</u>   | \$258.00 | 24in [609.6 mm]                        | 24in [609.6 mm] 24in [609.6 mm] PD |            | <u>PDF</u> |  |
| 1602-4100  | \$360.00 | 24in [609.6 mm] 36in [914.4 mm]        |                                    | PDF        |            |  |
| <u>1602-4101</u>   | \$447.00 | 24in [609.6 mm] 48in [1219.2 mm] Black |                                    | PDF        |            |  |
| <u>1602-4102</u>   | \$572.00 | 24in [609.6 mm] 60in [1524.0 mm]       |                                    | <u>PDF</u> |            |  |
| 1602-4103  | \$493.00 | 36in [914.4 mm]                        | 914.4 mm] 36in [914.4 mm]          |            | PDF        |  |
| 1602-4104  | \$675.00 | 36in [914.4 mm]                        | [914.4 mm] 48in [1219.2 mm] PDF    |            | PDF        |  |
| 1602-4105  | \$789.00 | 36in [914.4 mm]                        | 60in [1524.0 mm]                   |            | PDF        |  |
| 1602-5390  | \$371.00 | 24in [609.6 mm]                        | 36in [914.4 mm]                    | Valla PDF  |            |  |
| <u>1602-5391</u>   | \$460.00 | 24in [609.6 mm]                        | Yellow Yellow                      |            | PDF        |  |







| 40 |    |    |    |   | _ |
|----|----|----|----|---|---|
| 18 | 11 | )- | U1 | 9 | u |



| ASO Safety Solutions Terminating Resistors |        |  |                                 |            |         |  |
|--|--------|--|---------------------------------|------------|---------|--|
| Part Number                                | Price  | Description  | Use With                        | Contents   | Drawing |  |
| <u>1810-0190</u>                           | \$8.75 | Terminating resistor, 8.2 k ohm, 3-pin male M8 connector | Safety contact mats and bumpers | 1 resistor | PDF     |  |
|  |        |  |                                 |            |         |  |
|  |        |  |                                 |            |         |  |

| ASO Safety Contact Mat Trim Kits and Corners |          |             |           |                        |                                      |            |
|--|----------|-------------|-----------|------------------------|--------------------------------------|------------|
| Part Number                                  | Price    | Description | Material  | Use With               | Contents                             | Drawing    |
| <u>2010-0121</u>                             | \$63.00  | Trim kit    | Aluminum  | 12 x 24 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| 2010-0122                                    | \$75.00  | Trim kit    | Aluminum  | 12 x 36 in safety mats | 4 trim corners and 4 mat trim pieces | PDF        |
| 2010-0120                                    | \$75.00  | Trim kit    | Aluminum  | 24 x 24 in safety mats | 4 trim corners and 4 mat trim pieces | PDF        |
| 2010-0080                                    | \$97.00  | Trim kit    | Aluminum  | 24 x 36 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| <u>2010-0081</u>                             | \$107.00 | Trim kit    | Aluminum  | 24 x 48 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| <u>2010-0082</u>                             | \$121.00 | Trim kit    | Aluminum  | 24 x 60 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| 2010-0083                                    | \$107.00 | Trim kit    | Aluminum  | 36 x 36 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| 2010-0084                                    | \$119.00 | Trim kit    | Aluminum  | 36 x 48 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| <u>2010-0085</u>                             | \$135.00 | Trim kit    | Aluminum  | 36 x 60 in safety mats | 4 trim corners and 4 mat trim pieces | <u>PDF</u> |
| <u>2010-0086</u>                             | \$56.00  | Mat trim    | Aluminum  | Safety contact mats    | 1 mat trim, 5ft [1.52 m] length      | <u>PDF</u> |
| 2010-0087                                    | \$3.75   | Trim corner | Polyamide | Safety contact mats    | 1 corner                             | PDF        |





2010-0087

| Straight Edge Safety Contact Mats |  |  |  |  |
|-----------------------------------|--|--|--|--|
|                                   | General Specifications   |  |  |  |
| Height                            | 14mm [0.55 in] with covering   |  |  |  |
| Material                          | Polyurethane   |  |  |  |
| Weight                            | 24.9 kg/m <sup>2</sup> [5.1 lb/ft <sup>2</sup> ]   |  |  |  |
| Switching Pressure                | ure Test piece Ø 80mm [3.15 in] = approximately 150N   |  |  |  |
| Inactive Edge 16mm [0.63 in]      |  |  |  |  |
| Static Load                       | Max. 2,000N on Ø 80mm [3.15 in], tested according to DIN EN ISO 13856-1  |  |  |  |
| Response Time                     | < 25ms, tested according to DIN EN ISO 13856-1   |  |  |  |
| Electrical Capacity               | 24VDC, 100mA   |  |  |  |
| Connection Cables                 | One cable has a 3-pin male M8 connector, and the other cable has a 3-pin female M8 connector.  Cables are 4.7 in [120mm] in length |  |  |  |
| Mechanical Life                   | >1,000,000 cycles  |  |  |  |
| Protection Class                  | IP65   |  |  |  |
| Temperature Range                 | -10° to +55°C [+14° to +131°F]   |  |  |  |
| Agency Approvals                  | CE, cULus file E329422   |  |  |  |

## **Safety Products**



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.