


Analog Current Input Terminals

PX-302 \$306.00

Two-channel, 4-20 mA Analog Input Terminal

The PX-302 (type 3) Analog Input Terminal provides two electrically isolated 4-20 mA inputs with 12-bit resolution and Run and Error LED status.

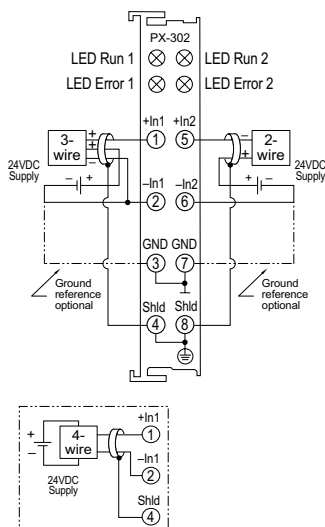

General Specifications	
Operating Temp	32 to 131 °F (0 to 55 °C)
Storage Temp	-13 to 185 °F (-25 to 85 °C)
Relative Humidity	5% to 95%, non-condensing
Environment Air	No corrosive gases permitted
Mounting/ Orientation Restrictions	35mm DIN rail/None
Vibration	Conforms to EN 60068-2-6
Shock	Conforms to EN 60068-2-27/ EN 60068-2-29
Noise Immunity	Conforms to EN 61000-6-2/ EN61000-6-4
Protection Class	IP20
Weight	70g (2.4 oz)
Dimensions (WxHxD)	12 x 100 x 68.8 mm (0.47 x 3.94 x 2.71 in)
Adjacent Mounting on Bus Terminals with Power Contact	Yes
Adjacent Mounting on Bus Terminals without Power Contact	Yes
Passes Terminal Bus Power	No
Passes PE Bus	No
Agency Approvals*	UL/cUL File No. E157382, CE

*To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


Terminal Specifications	
Number of Channels	2
Input Ranges	4 to 20 mA
Resolution	12 bits
Input Type	External ground reference
Data Format	Decimal: 0-32767
Data Bytes Consumed	PX-MOD: 4 bytes input
	PX-TCP1/TCP2: 8 bytes in/ 8 bytes out (not used)
Input Power Source	Loop power external
Current Consumption (from Terminal Power Bus)	NA
Input Impedance	50V internal resistor
Absolute Max Ratings	35VDC surge
Conversion Time	Approx. 2ms
Full Scale Calibration Error	± 0.3% of full scale
Current Consumption (from I/O Bus)	60mA
Electrical Isolation	500Vms (I/O bus/field potential)
Heat Dissipation	1W max
Status Indicators	4, see LED Status chart

LED Status		
LED	LED ON	LED OFF
Green LED: RUN	Normal Operation	Watchdog-timer overflow if no data transmitted within WD set time.
Red LED: ERROR	Broken wire or current is > 21.5 mA	Normal Operation

PX-304 \$272.00

Four-channel, 4-20 mA Analog Input Terminal

The PX-304 (type 1) Analog Input Terminal provides four electrically isolated 4-20 mA inputs with 12-bit resolution and Run and Error LED status.

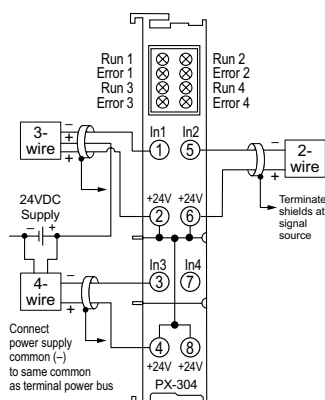

General Specifications	
Operating Temp	32 to 131 °F (0 to 55 °C)
Storage Temp	-13 to 185 °F (-25 to 85 °C)
Relative Humidity	5% to 95%, non-condensing
Environment Air	No corrosive gases permitted
Mounting/ Orientation Restrictions	35mm DIN rail/None
Vibration	Conforms to EN 60068-2-6
Shock	Conforms to EN 60068-2-27/ EN 60068-2-29
Noise Immunity	Conforms to EN 61000-6-2/ EN61000-6-4
Protection Class	IP20
Weight	75g (2.6 oz)
Dimensions (WxHxD)	12 x 100 x 68.8 mm (0.47 x 3.94 x 2.71 in)
Adjacent Mounting on Bus Terminals with Power Contact	Yes, DC only
Adjacent Mounting on Bus Terminals without Power Contact	No
Passes Terminal Bus Power	Yes
Passes PE Bus	No
Agency Approvals*	UL/cUL File No. E157382, CE

*To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Terminal Specifications	
Number of Channels	4
Input Ranges	4 to 20 mA
Resolution	12 bits
Input Type	Single-ended
Data Format	Decimal: 0-32767
Data Bytes Consumed	PX-MOD: 8 bytes input
	PX-TCP1/TCP2: 16 bytes in/ 16 bytes out (not used)
Input Power Source	24VDC provided via terminal power bus
Current Consumption (from Terminal Power Bus)	Load
Input Impedance	< 85V
Absolute Max Ratings	30VDC surge
Conversion Time	Approx. 2ms
Full Scale Calibration Error	± 0.3% of full scale
Current Consumption (from I/O Bus)	85mA
Electrical Isolation	500Vms (I/O bus/field potential)
Heat Dissipation	1W max
Status Indicators	8, see LED Status chart

LED Status		
LED	LED ON	LED OFF
Green LED: RUN	Normal Operation	Watchdog-timer overflow if no data transmitted within WD set time.
Red LED: ERROR	Broken wire or current is > 20.8 mA	Normal Operation

System Installation and Removal

Bus Coupler and Bus Terminal Installation

Bus Coupler Installation:

1. Attach a Bus Coupler by snapping it onto 35mm DIN rail and securing it into position using the DIN rail locking wheel (where applicable) located on the left side of the coupler.

Bus Terminal Installation:

2. To add a bus terminal, insert unit onto right side of Bus Coupler using the tongue and groove at the top and bottom of the unit, pressing gently until it snaps onto the DIN rail.
- A proper connection cannot be made by sliding the units together on the DIN rail. When correctly installed, no significant gap can be seen between the attached units. Bus connection is made through the six slide contacts located on the upper right side of the units. Add up to 64 bus terminals per Bus Coupler, including a bus end terminal.

2

Insert unit using tongue and groove molded guide and press gently until it becomes firmly seated on DIN rail.



Where applicable, rotate Locking Wheel to lock Bus Coupler

1

Align tab with molded guide

Wiring Connections

- Wire connection is made through a spring clamp style terminal. This terminal is designed for a single-conductor solid or stranded wire. Wire connection is made by firmly pushing the screwdriver into the screwdriver slot, inserting the wire into the wire slot and removing the screwdriver, locking the wire into position.



Wiring Specifications


Connection Type	Spring Clamp Terminals
Wire Gauge	28–14 AWG (0.08–2.5 mm ²)
Screwdriver Width	2.5 mm (0.10 in) such as P/N TW-SD-MSL-2
Wire Stripping Length	8mm

* For Thermocouple terminals, thermocouple extension wire is recommended

Removing Bus Coupler and Bus Terminals

- A locking mechanism prevents individual units from being pulled off. For bus terminal removal, pull the orange DIN rail release tab firmly to unlatch the unit from the rail. If attached to other terminal units, slide unit forward until released. For Bus Couplers with locking wheels, release the DIN rail locking wheel, then pull firmly on DIN rail release tab.

Where applicable, rotate Locking Wheel to unlock Bus Coupler

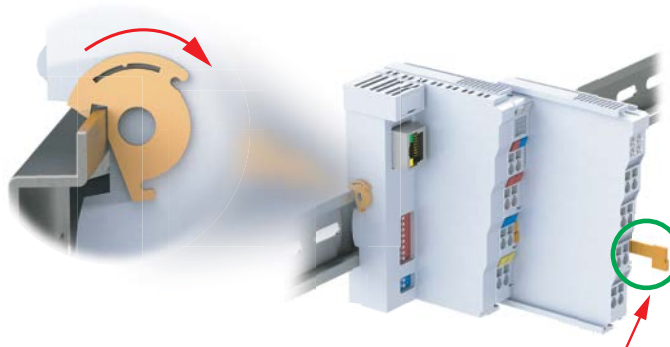



Firmly pull DIN Rail Release Tab to unlatch unit from rail.

Installation Considerations

Terminal Dimensions and Spacing Requirements




Use the following diagrams to make sure the Protos X system can be installed in your application. Protos X terminals require 35mm DIN rail for mounting; there are no orientation restrictions.



To ensure proper airflow for cooling purposes, units should be spaced, at a minimum, as shown. It is also important to check the Protos X dimensions against the conditions required for your application.

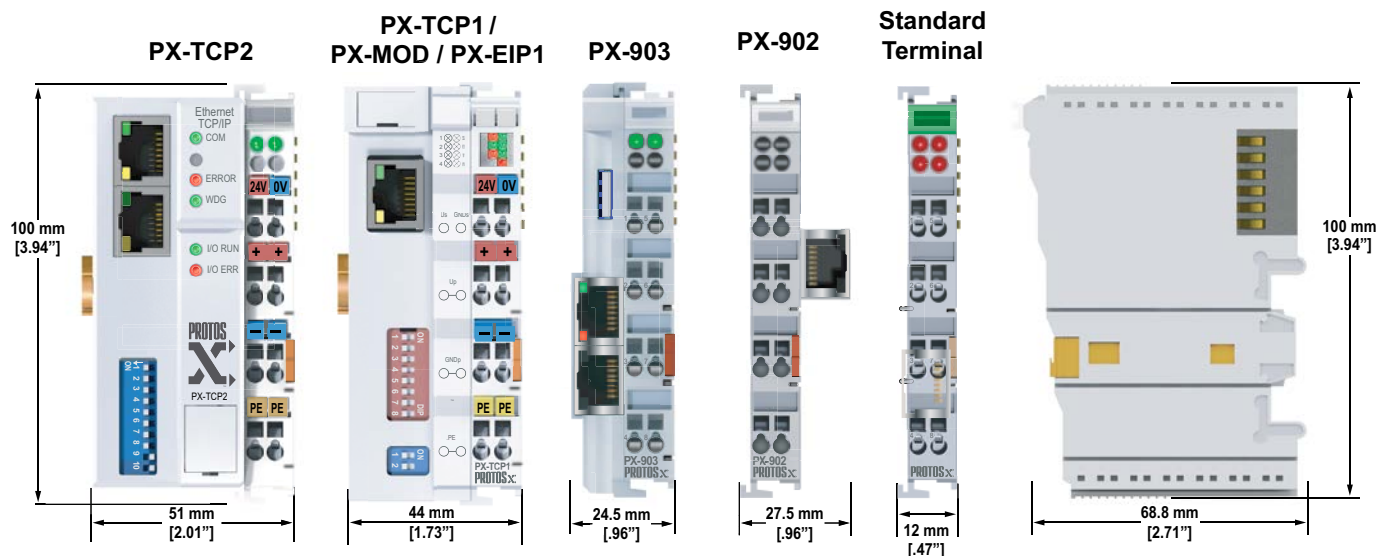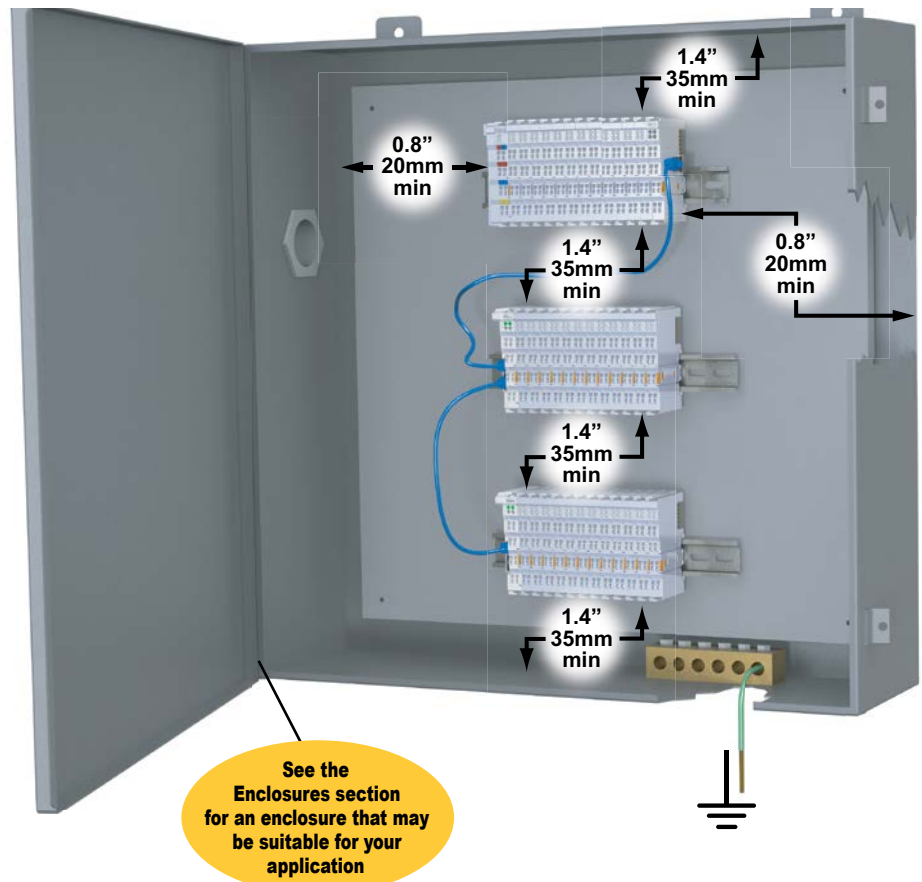

Installation Considerations

Terminal Types

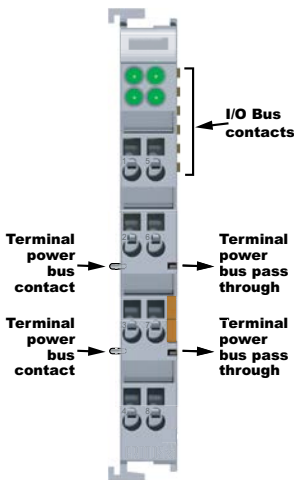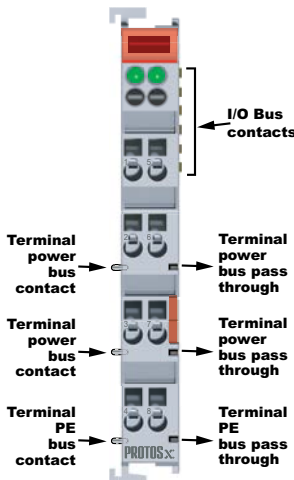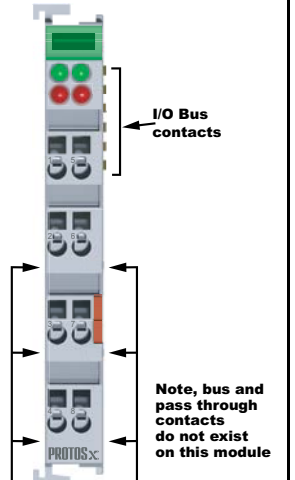TYPE 1	TYPE 2	TYPE 3
 I/O Bus contacts Terminal power bus contact Terminal power bus pass through Terminal power bus contact Terminal power bus pass through	 I/O Bus contacts Terminal power bus contact Terminal power bus pass through Terminal power bus contact Terminal power bus pass through Terminal PE bus contact Terminal PE bus pass through PROTOSx	 I/O Bus contacts Note, bus and pass through contacts do not exist on this module PROTOSx
Type 1: This terminal passes the terminal power bus from the preceding terminal to the next terminal and therefore it must be mounted to a preceding terminal that passes bus power.	Type 2: This terminal passes the terminal power bus and PE from the preceding terminal to the next terminal and therefore it must be preceded by a terminal that passes both terminal power bus and PE.	Type 3: This terminal does not pass the terminal power bus or PE and can be preceded by any terminal, however it will interrupt the terminal power bus and PE.

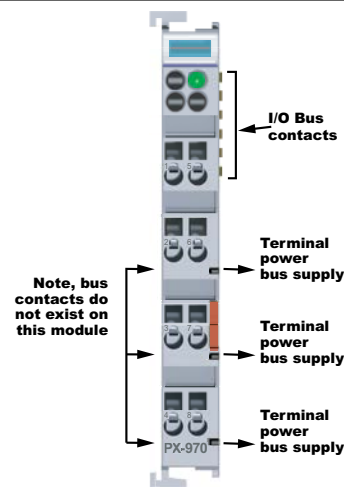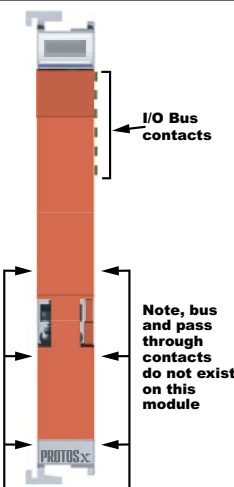TYPE 4	TYPE 5
 I/O Bus contacts Note, bus contacts do not exist on this module Terminal power bus supply Terminal power bus supply Terminal power bus supply PX-970	 I/O Bus contacts Note, bus and pass through contacts do not exist on this module PROTOSx
Type 4: This terminal requires external voltage connection and supplies the terminal power bus to terminals located to its right. The terminals to its right must support the same power bus of 120/230 VAC or 24VDC. This terminal will not pass terminal power or PE from any preceding terminals.	Type 5: This terminal is used to separate the terminal power bus and PE from other terminals and can be mounted next to any terminal.