

# Schmersal Configurable Safety Relays



## SRB-E Electronic Safety Relays

The SRB-E modules are a series of multi-functional, configurable electronic safety relays. Each module can be adjusted to one of multiple preset configurations, which include selecting the type of reset, activating or deactivating cross-wire monitoring, and selecting the monitored contact configuration – all via the rotary dial on the front of the unit.

The SRB-E series provides a higher level of diagnostic capabilities with LEDs for both controller status as well as error fault codes, assisting with troubleshooting safety circuits.

Once the configurations have been set, the lid may be closed and sealed to prevent tampering with the settings.

## Features

- Modules with safe PNP outputs
- Modules with safe relay outputs
- Modules with monitoring of two-hand controls
- Modules with monitored input expansion up to Cat 4 PLE
- Fast cycle times (60 switching cycles/min)
- Modules with high 5.5A PNP switching capacity
- Snap-in blank equipment labels
- Removable terminal blocks for easy wiring

### Schmersal SRB-E Electronic Safety Relays Selection Chart

Part Number	Price	Drawing	Emergency stop monitoring	Safety guard monitoring	Pull wire emergency stop	Magnetic safety sensors	Light curtains	Input expander module for up to 4 sensors	Two hand control panels	Input signals: 1 channel	Input signals: 2 channel	Input signals: antivalent	Cross-wire detection	Start button/ autostart	Start button with edge detection	Safe Stop 0 dry contact	Safe Stop 0 semiconductor	Safe Stop 1 dry contact	Safe Stop 1 semiconductor	Not safe dry contact	Not safe semiconductor	
			✓ ALLOWABLE																			
			Applications						Input Signals				Start Conditions	Output Contacts								
<a href="#">SRB-E-201LC</a>	\$171.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓		2				1	
<a href="#">SRB-E-201ST</a>	\$257.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓		2				1	
<a href="#">SRB-E-201ST-CC</a>	\$269.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓		2				1	
<a href="#">SRB-E-301ST</a>	\$216.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	3					1	
<a href="#">SRB-E-301ST-CC</a>	\$228.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	3					1	
<a href="#">SRB-E-402EM</a>	\$191.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	4					2	
<a href="#">SRB-E-232ST</a>	\$366.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓		2	3			1	1
<a href="#">SRB-E-232ST-CC</a>	\$378.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓		2	3			1	1
<a href="#">SRB-E-322ST</a>	\$366.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓	3				2	1	1
<a href="#">SRB-E-322ST-CC</a>	\$378.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓			✓	✓	✓	✓		✓	3				2	1	1
<a href="#">SRB-E-204ST</a>	\$272.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓		✓		2					4
<a href="#">SRB-E-204ST-CC</a>	\$284.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓		✓		2					4
<a href="#">SRB-E-204PE</a>	\$147.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓			2					4
Combination Module for Two Protective Devices																						
<a href="#">SRB-E-402ST</a>	\$338.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓	2	2				1	1
<a href="#">SRB-E-402ST-CC</a>	\$350.00	<a href="#">PDF</a>	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓	2	2				1	1

**Notes:**

Stop Category 0 (Stop 0) means immediate loss of power. This is often referred to as an uncontrolled stop.

Stop Category 1 (Stop 1) means there is a delay before the loss of power. The control system should bring the machine to a stop prior to the loss of power. This is often referred to as a controlled stop with removal of power.

# Schmersal SRB-E-322

## Configurable Safety Relays



### Features

- Pluggable screw terminals or cage clamps
- SAFE STOP 0 and SAFE STOP 1 function
- 1 or 2-channel control
- Drop-out delay 0 ... 30 s

**SRB-E-322ST**

Safety Data Values per EN ISO 13849-1, EN 62061, IEC 61508	
<b>Performance Level</b>	Up to e
<b>DC Average</b>	High
<b>SIL CL</b>	Up to 3
<b>HFT (Hardware Failure Tolerance)</b>	1
<b>PFH(D)</b>	$\leq 2.66 \times 10^{-9}/h$

### Schmersal SRB-E-322 Selection Chart

Part Number	Price	Type	Voltage	Connection	Delay	Configurations	Safety Input	Safety Output	Monitoring Outputs	Drawing
SRB-E-322ST		Safety relay	24 VDC	Pluggable screw terminals	Yes	10	1 pair digital	3 delayed NO and 2 OSSD	1 NC and 1 status	
SRB-E-322ST-CC			24 VDC	Push-in cage clamp						

### Schmersal SRB-E-322 Specifications


Input/Output Specifications	
<b>Operating Temperature</b>	-25°C [-13°F] to 60°C [140°F]
<b>Storage Temperature</b>	-40°C [-40°F] to 85°C [185°F]
<b>Altitude</b>	2000m [6562ft] max
<b>Vibration Resistance</b>	Tested to EN 60068-2-6
<b>Degree of Protection</b>	IP40
<b>Housing</b>	Glass-fiber reinforced thermoplastic, ventilated
<b>Weight</b>	180g [6.35 oz]
<b>Agency Approvals and Standards</b>	CE, UL (listed number E57648)
<b>Terminal Designation per EN 50005</b>	EN 60947-1
<b>Wire Fixing</b>	Plug-in terminals
<b>Cable Section Min/Max</b>	0.25 mm <sup>2</sup> [24 AWG] - 2.5 mm <sup>2</sup> [14 AWG]
<b>Switching Frequency, Max</b>	0.3 Hz
Input/Output Specifications	
<b>Operating Voltage Range</b>	19.2 to 28.8 VDC
<b>Maximum Consumption</b>	3W (plus load of semiconductor outputs)
<b>Overvoltage Protection</b>	Category III
<b>Control Voltage on S11 etc.</b>	24VDC
<b>Control Current Over S12 etc.</b>	8mA
<b>Mechanical Life</b>	10 <sup>7</sup> operations
<b>Contact Type</b>	Ag-Ni, self-cleaning, positive drive
<b>Operating Delay (Pull-In Delay)</b>	<150ms
<b>Release Delay (Drop-Out Delay)</b>	<10ms
<b>Switching Capacity</b>	Q1 and Q2: 24VDC, max 2A Y1 and Y2: 24VDC / 100mA NO dry contacts: max 250V / 6A

# Schmersal SRB-E-322

## Configurable Safety Relays


Terminal Descriptions	
Pin	Function
A1	Operating voltage +24VDC
A2	Operating voltage 0VDC
X2	Input of start circuit / input two-hand
X3	Input feedback circuit / input two-hand
X7	Input release signal / feedback circuit for two-hand
S11/S21	Test pulse outputs
S12	Input channel 1 / input two-hand
S22	Input channel 2 / input two-hand
Y1	Signalling output (NC) STOP 0
Y2	Signalling contact (NC) STOP 1
41/42	Signalling contact (NC) STOP 0
13/14, 23/24, 33/34	Safety outputs STOP 0
Q1/Q2	Safety outputs STOP 1

LED Indication Descriptions	
LED	Function
RUN	Operating voltage OK – RUN mode
ERR	Error code
In 1	High level at S12
In 2	High level at S22
Out 1	Outputs activated
Out 2	Outputs activated
<b>NOTE: For flash codes, refer to product manual</b>	

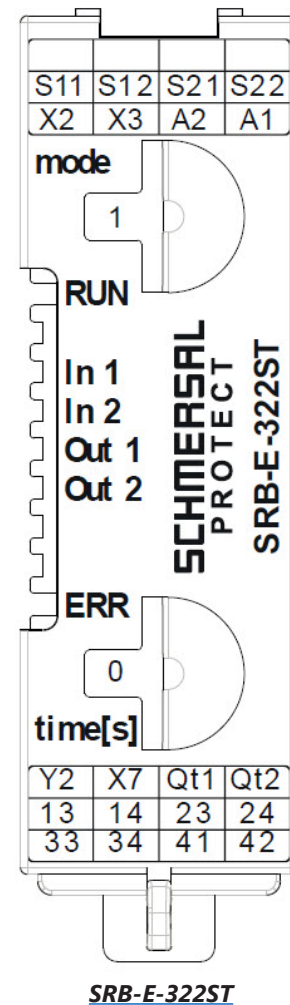

# Schmersal SRB-E-322 Configurable Safety Relays

## Application Example for SRB-E-322ST

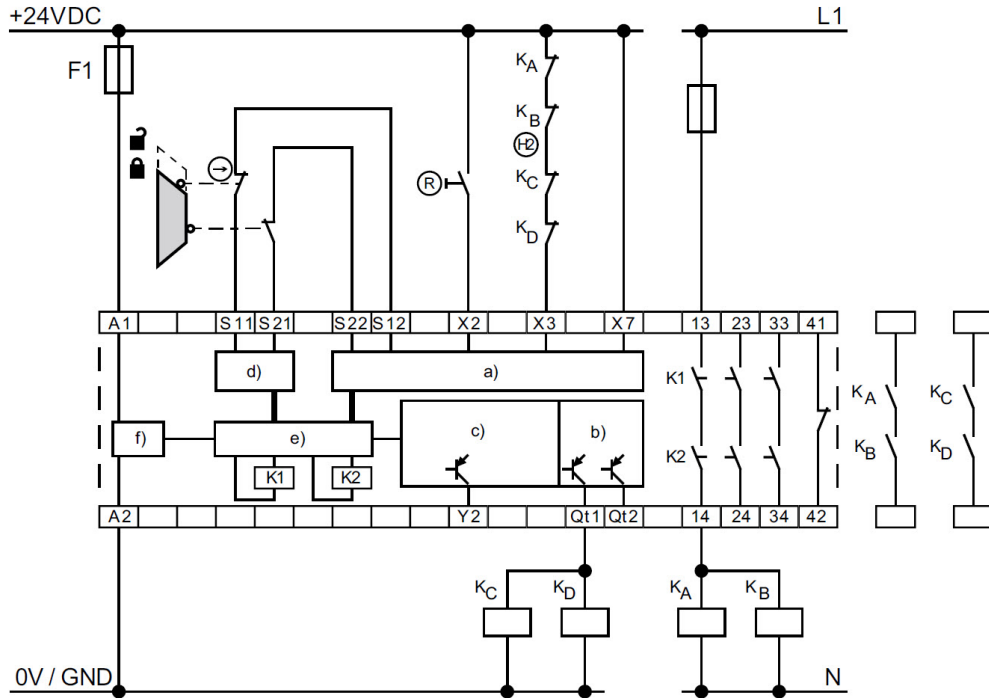

**Key**

- a) Safety inputs
- b) Safety outputs
- c) Signalling outputs
- d) Clock outputs
- e) Processing
- f) Power

Configuration Selection				
Rotary Knob Position	Reset Button	Cross-Wire Monitoring Active	Input / Sensor Configuration	Monitoring of Sensor Channels For Synchronization
C	Configuration Mode			
1	Trailing Edge	Yes	NC / NC	Yes
2	Trailing Edge	Yes	NC / NC	No
3	Trailing Edge	No	NC / NC	Yes
4	Trailing Edge	No	NC / NC	No
5	Trailing Edge	Yes	NC / NO	Yes
6	Autostart	Yes	NC / NO	No
7	Autostart	Yes	NC / NC	Yes
8	Autostart	Yes	NC / NC	No
9	Autostart	No	NC / NC	Yes
10	Autostart	No	NC / NC	No
11	Function two-hand control type IIIC		NC/NO, NC/NO	Yes
12	Function two-hand control type IIIA		NO / NO	Yes

# Safety Products



*Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.*

*AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.*