



WEG SSW07 Series Soft Starters

Overview

Soft Starters are static starting devices designed for the acceleration, deceleration and protection of three-phase, electric induction motors through the control of the voltage applied to the motor. The SSW07, with DSP (Digital Signal Processor) control, was designed to provide great performance on motor starts and stops with an excellent cost-benefit ratio. Easy to set up, the SSW07 simplifies start-up activities and daily operations.

The SSW07 is compact, optimizing space in electric panels. It incorporates all electric motor protections and adapts to customer needs through its easy-to-install optional accessories. Optionally, a keypad, a communication interface or a motor PTC input can be added to the product.

Features

- Universal voltage (220-575 VAC)
- Built-in run rated (AC1) bypass contactor
- Significant reduction of mechanical stresses through the coupling and transmission devices (gearboxes, pulleys, gears, conveyors, etc.) during the start
- Increases motor and machine mechanical equipment lifetime through elimination of mechanical shock
- Easy operation, setup, maintenance and installation
- Simple setpoint programming through trim pots
- Operates in environments up to 131°F (55°C) without current reduction
- Integral electronic motor protection
- Built-in electronic overload relay
- Avoids "water hammer" in pumps
- Limitation of voltage drop during start
- Switch type power supply with EMC filter for the control electronics (110-240 VAC)
- WEG WPS software compatible
- Conformal coated circuit boards
- Advantages
- Reduction of mechanical stresses over the coupling and transmission devices (gearboxes, pulleys, gears, conveyors, etc.) during start-up
- Increases motor and machine mechanical equipment lifetime by reducing mechanical stress
- Easy operation, setup, and maintenance
- Simple electrical installation
- Operates in environments up to 131°F (55°C) without current reduction for all models
- Integral electronic motor protection



- "Kick-Start" function for starting high breakaway torque loads
- Reduces "water hammer" in pump applications
- Limitation of voltage drop during start
- Voltage range of 220 to 575 VAC
- Switched mode power supply with EMC filter for the control of electronics (110-240 VAC)
- Built-in bypass contacts providing size reduction and energy saving
- Voltage monitoring of the electronics

Optional Accessories

- Remote HMI interface with 3m [9.84 ft] or 5m [16.40 ft] cable
- RS-232 communication kit
- RS-485 communication kit
- Motor PTC kit
- Ventilation kit for size 2 (45-85A)
- Ventilation kit for size 3 (130-200A)
- IP20 kit for sizes 3 and 4 (130-412A)

Applications

Typical examples of light/moderate loads

- Centrifugal pumps
- Immersed centrifugal pumps
- Blade vacuum pumps
- Screw compressors
- Paper refiners
- Sieving machines
- Mixers

Typical examples of heavy loads

- Stone crushers
- Centrifuges
- Wood chippers
- Wood slicing machines
- Conveyors
- Axial and centrifugal fans
- Ball mills (ceramic)
- Hammer mills

Standards & Approvals





WEG SSW07 Series Soft Starters

Selecting the Right Soft Starter

SSW07 Soft Starters – Selection – Steps 1 & 2 (of 4)

Step 1: Select the application from the list and follow that column down.		Typical Applications					
		Standard Duty		Medium Duty		Heavy Duty	Light Duty
		Default Agitator Bow Thruster - Zero Pitch Compressor - Rotary Vane Compressor - Scroll Conveyor - Unloaded Fan - Low Inertia < 85A Feeder - screw Lathe machines Mixer - Unloaded	Molding Machine Plastic and textile machines Pump - Submersible Centrifugal Pump - Submersible Rotodynamic Saw - Band Transformers, voltage regulators	Ball mill Bow Thruster - Loaded Compressor - Centrifugal Compressor - Reciprocating Compressor - Rotary Screw Conveyor - Loaded Grinder Hammer mill Mills - Flour, etc. Mixer - Loaded Pelletizers	Pump - Positive displacement Reciprocating Pump - Positive displacement Rotary Pump Jack Rolling mill Roots Blower Saw - Circular Screen - Vibrating Tumblers	*For centrifuges make selection at I(A) = motor FLA x 2.3 Crusher Fan - High Inertia > 85A Shredder Wood chipper Press, flywheel	Unloaded / Lightly loaded motor
Step 2: Confirm the rated starting capability of the soft start against the application.	Trip Class	10	20		30	5	
	Rated Starting Capability	3x Motor Current - 30s 3.5x Motor Current - 15s	4x Motor Current - 20s		4.5x Motor Current - 30s	3x Motor Current - 5s	
	Max Starts per Hour	10 starts/hr	6 starts/hr		4 starts/hr	4 starts/hr	
	Index Rating Standard: AC53b:3-30: 330; Overcurrent = 3x soft starter rated current for 30s; SSW07 frame 2&3 with ventilation kit						

SSW07 Soft Starters – Selection – Step 3 (of 4)

Step 3: Consider the operating environment and make the model selection based on a higher horsepower rating.

Height Above Sea Level	Standard operating height is 3280ft. For every 328ft, increase motor HP by 1%, up to 13,200ft. Example: For a 100HP motor at 4900ft, make model selection based on 105HP (5% higher).
Operating Temperature	Standard operating temperature is 50°C [122°F]. For every 1°F above, increase motor HP by 2.2%, up to 60°C [140°F]. Example: For a 100HP motor at 55.6°C [132°F], make model selection based on 122HP (22% higher).
Increased Starts per Hour	See Stellar Series SR33 or SR55 for more than 10 starts/hr

SSW07 Soft Starters – Selection – Step 4 (of 4)

Step 4: Select SSW07 model based on your motor voltage and horsepower

Motor Size					Soft Starter Size		
In-Line Connection					Application Trip Class		
I (A)	HP @				Class 10	Class 20	Class 30
	230VAC*	460VAC*	575VAC*	Size			
17	5	10	15	1	SSW070017T5SZ	SSW070017T5SZ	SSW070017T5SZ
24	7.5	15	20	1	SSW070024T5SZ	SSW070024T5SZ	SSW070024T5SZ
30	10	20	25	1	SSW070030T5SZ	SSW070030T5SZ	SSW070045T5SZ¹
45	15	30	40	2	SSW070045T5SZ¹	SSW070045T5SZ¹	SSW070061T5SZ¹
61	20	40	50	2	SSW070061T5SZ¹	SSW070085T5SZ¹	SSW070085T5SZ¹
85	30	60	75	2	SSW070085T5SZ¹	SSW070130T5SZ²	SSW070130T5SZ²
130	50	100	125	3	SSW070130T5SZ²	SSW070171T5SZ²	SSW070171T5SZ²
171	60	125	150	3	SSW070171T5SZ²	SSW070200T5SZ²	SSW070200T5SZ²
200	75	150	200	3	SSW070200T5SZ²	SSW070255T5SH1Z	SSW070255T5SH1Z
255	100	200	250	4	SSW070255T5SH1Z	SSW070312T5SH1Z	SSW070312T5SH1Z
312	125	250	300	4	SSW070312T5SH1Z	SSW070365T5SH1Z	SSW070412T5SH1Z
365	150	300	350	4	SSW070365T5SH1Z	SSW070412T5SH1Z	-
412	150	350	400	4	SSW070412T5SH1Z	-	-

* 230VAC=220-240VAC, 460VAC=440-480VAC, 575VAC=575VAC

1) With ventilation kit SSW0708900=KVT-2B

2) With ventilation kit SSW0708900=KVT-3C

WEG Soft Starter Selection Tool Software is available online at automationdirect.com/selectors/softstarters



WEG SSW07 Series Soft Starters

WEG SSW07 Compact Soft Starters Selection Chart ^{1, 4}

Part Number	Price	Motor Volts	Motor HP	Soft Starter Amps	Frame Size	Dimensions (HxWxD) (in [mm])	Approx. Weight (lb [kg])
Input Power Supply: 3-Phase, 220/230VAC							
<u>SSW070017T5SZ</u> ²	\$706.00	220/230VAC	5	17	1	6.4 x 3.7 x 6.2 [162.1 x 95.0 x 157.0]	2.9 [1.3]
<u>SSW070024T5SZ</u> ²	\$757.00		7.5	24	1		
<u>SSW070030T5SZ</u> ²	\$782.00		10	30	1		
<u>SSW070045T5SZ</u> ²	\$891.00		15	45	2	8.2 x 5.6 x 7.9 [208.3 x 141.5 x 201.7]	7.28 [3.3]
<u>SSW070061T5SZ</u> ²	\$1,004.00		20	61	2		
<u>SSW070085T5SZ</u> ²	\$1,215.00		30	85	2		
<u>SSW070130T5SZ</u> ²	\$1,526.00		50	130	3	10.9 x 8.8 x 8.7 [276.9 x 223.5 x 220.0]	16.8 [7.6]
<u>SSW070171T5SZ</u> ²	\$1,938.00		60	171	3		
<u>SSW070200T5SZ</u> ²	\$2,297.00		75	200	3		
<u>SSW070255T5SH1Z</u> ³	\$2,805.00		100	255	4	13.0 x 9.0 x 9.6 [330.2 x 228.6 x 243.9]	25.4 [11.5]
<u>SSW070312T5SH1Z</u> ³	\$3,045.00		125	312	4		
<u>SSW070365T5SH1Z</u> ³	\$3,164.00		150	365	4		
<u>SSW070412T5SH1Z</u> ³	\$3,714.00		150	412	4		
Input Power Supply: 3-Phase, 440/460VAC							
<u>SSW070017T5SZ</u> ²	\$706.00	440/460VAC	10	17	1	6.4 x 3.7 x 6.2 [162.1 x 95.0 x 157.0]	2.9 [1.3]
<u>SSW070024T5SZ</u> ²	\$757.00		15	24	1		
<u>SSW070030T5SZ</u> ²	\$782.00		20	30	1		
<u>SSW070045T5SZ</u> ²	\$891.00		30	45	2	8.2 x 5.6 x 7.9 [208.3 x 141.5 x 201.7]	7.28 [3.3]
<u>SSW070061T5SZ</u> ²	\$1,004.00		40	61	2		
<u>SSW070085T5SZ</u> ²	\$1,215.00		60	85	2		
<u>SSW070130T5SZ</u> ²	\$1,526.00		100	130	3	10.9 x 8.8 x 8.7 [276.9 x 223.5 x 220.0]	16.8 [7.6]
<u>SSW070171T5SZ</u> ²	\$1,938.00		125	171	3		
<u>SSW070200T5SZ</u> ²	\$2,297.00		150	200	3		
<u>SSW070255T5SH1Z</u> ³	\$2,805.00		200	255	4	13.0 x 9.0 x 9.6 [330.2 x 228.6 x 243.9]	25.4 [11.5]
<u>SSW070312T5SH1Z</u> ³	\$3,045.00		250	312	4		
<u>SSW070365T5SH1Z</u> ³	\$3,164.00		300	365	4		
<u>SSW070412T5SH1Z</u> ³	\$3,714.00		350	412	4		
Input Power Supply: 3-Phase, 575VAC							
<u>SSW070017T5SZ</u> ²	\$706.00	575VAC	15	17	1	6.4 x 3.7 x 6.2 [162.1 x 95.0 x 157.0]	2.9 [1.3]
<u>SSW070024T5SZ</u> ²	\$757.00		20	24	1		
<u>SSW070030T5SZ</u> ²	\$782.00		25	30	1		
<u>SSW070045T5SZ</u> ²	\$891.00		40	45	2	8.2 x 5.6 x 7.9 [208.3 x 141.5 x 201.7]	7.28 [3.3]
<u>SSW070061T5SZ</u> ²	\$1,004.00		50	61	2		
<u>SSW070085T5SZ</u> ²	\$1,215.00		75	85	2		
<u>SSW070130T5SZ</u> ²	\$1,526.00		125	130	3	10.9 x 8.8 x 8.7 [276.9 x 223.5 x 220.0]	16.8 [7.6]
<u>SSW070171T5SZ</u> ²	\$1,938.00		150	171	3		
<u>SSW070200T5SZ</u> ²	\$2,297.00		200	200	3		
<u>SSW070255T5SH1Z</u> ³	\$2,805.00		250	255	4	13.0 x 9.0 x 9.6 [330.2 x 228.6 x 243.9]	25.4 [11.5]
<u>SSW070312T5SH1Z</u> ³	\$3,045.00		300	312	4		
<u>SSW070365T5SH1Z</u> ³	\$3,164.00		350	365	4		
<u>SSW070412T5SH1Z</u> ³	\$3,714.00		400	412	4		

Notes: 1) "HP" rating based on UL508. Use as a guide only. Motor FLA may vary with speed and manufacturer. ALWAYS compare motor FLA to Nominal Amps of starter.

2) 90-250 VAC control power supply required.

3) For models from 255A to 412A: 110-130 VAC (-15% to +10%, or 94-143 VAC) .

4) For other technical data, please refer to WEG product manual.



WEG SSW07 Series Soft Starters

Specifications

WEG SSW07 Compact Soft Starters Specifications			
Power supply	Power	220-575 VAC (-15% to +10%) or 187-632 VAC	
	Control Voltage	For models from 17A to 200A: 110-240 VAC (-15% to +10%, or 94-264 VAC) For models from 255A to 412A: 110-130 VAC (-15% to +10%, or 94-143 VAC)	
	Frequency	50/60 Hz +/- 10% (45 to 66 Hz)	
Enclosure		Injected plastic. IP20 in models from 17A to 85A; IP00 in models from 130A to 412A (IP20 as an option)	
Control	Method	Voltage variation over the load (3-phase induction motor)	
	CPU	DSP type microcontroller (Digital Signal Processor)	
	Types of Control	Voltage ramp, current limit	
Capacity	Max Number of Starts Per Hour (Without Ventilation)	10 (1 every 6 minutes; models from 17A to 30A 3 (1 every 20 minutes; models from 45A to 200A 10 (1 every 6 minutes; models from 255A to 412A)	
	Max Number of Starts Per Hour With Optional Ventilation Kit	10 (1 every 6 minutes; models from 45A to 200A)	
	Start Cycle	3 x In of the SSW07 during 30 seconds	
	Trip Class	10-30	
SCCR Rating		See SSW07 Max UL Overcurrent Protection table	
Inputs		3 isolated digital programmable inputs	
Outputs		2 relay outputs with NO contacts, 240VAC, 1A, programmable functions	
Safety Protections	Standard	Overcurrent Overcurrent before bypass Phase loss Inverted phase sequence Overtemperature in power heatsink Motor overload (class 5 to 30)	Locked rotor Excess starting time Over/under frequency Bypass contact open Undervoltage in control supply
	With Accessory	Undercurrent Current imbalance Subcurrent before bypass External defects	Programming error Serial communication error MMI communication error Overtemperature in motor PTC
Standard Functions		Voltage ramp (initial voltage: 30-90%) Current limitation (150-450% of SSW07 rated current) Starting time (1-40 seconds) Kick Start (Off-0.2 to 2 seconds) Deceleration ramp (0-40 seconds)	Motor and SSW07 current relation (50 to 100%) Faults auto-reset Thermal memory auto-reset Factory Standard reset Soft-started built-in bypass
Programming	Command	On, Off / Reset and Function programming	
	Additional functions	Current limitation (30-500% of SSW07 rated current) Motor and SSW07 current relation (30 to 100%) Starting time up to 999s Deceleration time up to 240s	Program enabling password Selection for Local/Remote operation Programmable rated voltage
	Supervision (Reading)	Motor current (%Soft-Starter In) Motor current (%motor in) Motor current (A) Current indication in each phase R-S-T Supply network frequency Apparent power supplied to load (kVA)	Soft-Starter status Digital input and output status Back-up of 4 last errors Soft-Starter software version Heatsink temperature Motor thermal protection status
Accessories and Options		Plug-in type local HMI HMI remote kit 3 and 5m [9.84 and 16.40 ft] cable for remote HMI interconnection RS-232 communication kit SSW07 interconnection cables (PC Serial (RS-232) 3m [9.84 ft] and 10m [32.81 ft]	RS-485 communication kit Motor PTC kit Ventilation kit for size 2 (45-85 A) Ventilation kit for size 3 (130-200 A) IP20 kit for size 3 (130-200 A)
Finishing		Lid: gray ultra matte; cabinet: blue ultra matte	
Conformities and Standards	Safety	UL 508 Standard - Industrial Control Equipment	
	Low Voltage	EN60947-4-2; LVD 2006/95/EC Standard - Low Voltage Directive	
	EMC	EMC 89/336/EEC Directive - Industrial Environment	
	UL (USA)/cUL (Canada)	Underwriters Laboratories Inc. - USA	
	CE (Europe)	Conformity test conducted by EPCOS	

* For the 45-200 A current models using the ventilation kit



WEG SSW07 Series Soft Starters

SSW07 Max UL Overcurrent Protection

SSW07 Series Soft Starters UL Maximum Overcurrent Protection Devices *							
Soft Starter Model Number	Standard Fault Short Circuit Rating $\leq 600V$	Circuit Breaker (CB) - UL489 Any MCCB	Ultra-fast Fuses Fenaz Shawmut/Mersen Flush End Contacts	High Fault Short Circuit Rating $\leq 480V$	Circuit Breaker (DIVQ)	High Fault Short Circuit Rating $\leq 600V$	Circuit Breaker (DIVQ)
<u>SSW070017T5SZ</u>	5kA	$\leq 30A$	6.6URD30TTF0050	65kA	WEG ACW125W-FTU25-3 or UBW225H-FTU30-3A or HFD3030L	18kA	UBW225H-FTU40-3A or HFD3040L
<u>SSW070024T5SZ</u>	5kA	$\leq 40A$	6.6URD30TTF0080	65kA	WEG ACW125W-FTU30-3	18kA	UBW225H-FTU40-3A or HFD3040L
<u>SSW070030T5SZ</u>	5kA	$\leq 40A$	6.6URD30TTF0080	65kA	WEG ACW125W-FTU40-3	18kA	kA UBW225H-FTU40-3A or HFD3040L
<u>SSW070045T5SZ</u>	5kA	$\leq 150A$	6.6URD30TTF0100	65kA	WEG ACW125W-FTU60-3 or UBW225H-FTU150-3A or HFD3150L	18kA	UBW225H-FTU40-3A or HFD3040L
<u>SSW070061T5SZ</u>	5kA	$\leq 150A$	6.6URD30TTF0125	65kA	WEG ACW125W-FTU60-3 or UBW225H-FTU150-3A or HFD3150L	18kA	UBW225H-FTU150-3A or HFD3150L
<u>SSW070085T5SZ</u>	10kA	$\leq 150A$	6.6URD30TTF0200	65kA	WEG ACW125W-FTU60-3 or UBW225H-FTU150-3A or HFD3150L	18kA	UBW225H-FTU150-3A or HFD3150L
<u>SSW070130T5SZ</u>	10kA	$\leq 225A$	6.6URD31TTF0325	65kA	WEG ACW250W-FTU250-3 or UBW225H-FTU225-3A or HFD3225L	18kA	UBW225H-FTU150-3A or HFD3150L
<u>SSW070171T5SZ</u>	10kA	$\leq 250A$	6.6URD32TTF0450	65kA	WEG ACW250W-FTU250-3 or UBW250H-FTU250-3A or HJD3250	30kA	UBW225H-FTU225-3A or HFD3225L
<u>SSW070200T5SZ</u>	10kA	$\leq 250A$	6.6URD32TTF0500	65kA	WEG ACW250W-FTU250-3 or UBW250H-FTU250-3A or HJD3250	30kA	UBW250L-FTU250-3A or JDC3250
<u>SSW070255T5SH1Z</u>	18kA	$\leq 400A$	6.6URD32TTF0400	65kA	WEG ACW400W-FTU400-3 or UBW400H-FTU400-3A or HKD3400	30kA	UBW250L-FTU250-3A or JDC3250
<u>SSW070312T5SH1Z</u>	18kA	$\leq 400A$	6.6URD33TTF0500	65kA	WEG ACW400W-FTU400-3 or UBW400H-FTU400-3A or HKD3400	30kA	UBW400H-FTU400-3A or HKD3400
<u>SSW070365T5SH1Z</u>	18kA	$\leq 600A$	6.6URD33TTF0550	65kA	WEG ACW800W-FTU800-3 or UBW600H-FTU600-3A or HLD3600	42kA	UBW400H-FTU400-3A or HKD3400
<u>SSW070412T5SH1Z</u>	18kA	$\leq 600A$	6.6URD33TTF0700	65kA	WEG ACW800W-FTU800-3 or UBW600H-FTU600-3A or HLD3600	42kA	UBW600L-FTU600-3A or LDC3600

* Maximum trip ratings are for non-time-delay overcurrent protection devices.

* Motor branch circuit protection must be based on MOTOR Full Load Current, and must comply with applicable local electrical codes. The 2008 NEC section 430.52 recommends a maximum of 175% (up to 225% absolute maximum) of motor FLC for time-delay fuses. (Class CC time-delay fuses are permitted up to the non-time-delay fuse maximum rating.)




WEG SSW07 Series Soft Starters

SSW07 Series Dimensions


Inches [mm]

Frame 1

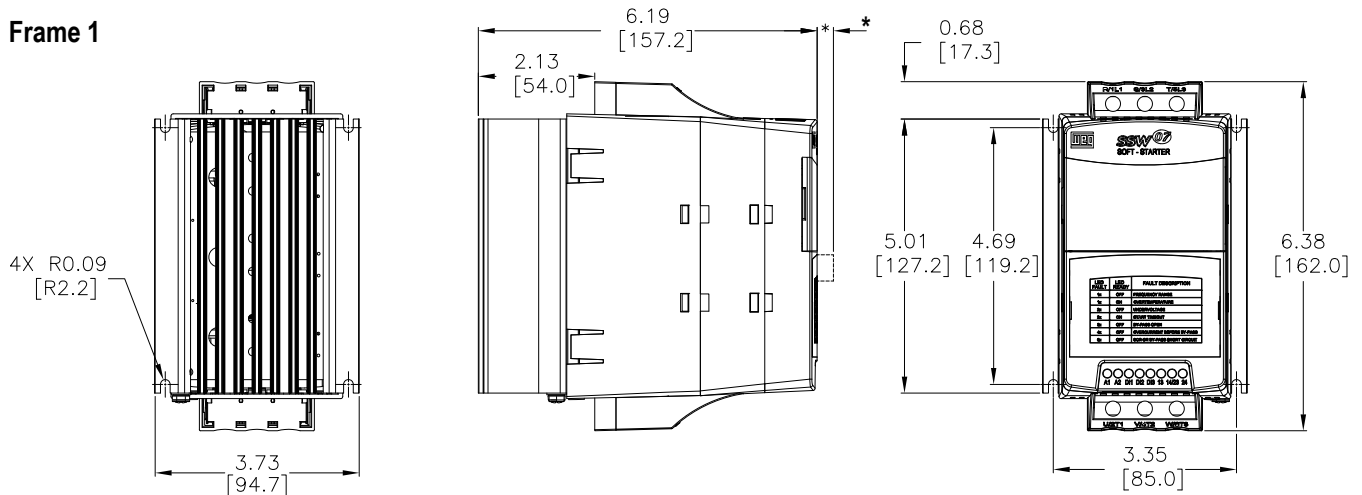

***Optional modules add depth to dimension as follows:**
SSW07-08-KRS-485 and SSW07-08-KRS-232 add 5mm [0.2 in]
SSW07-08-KPTC-MTR adds 5mm [0.2 in]

Frame 2

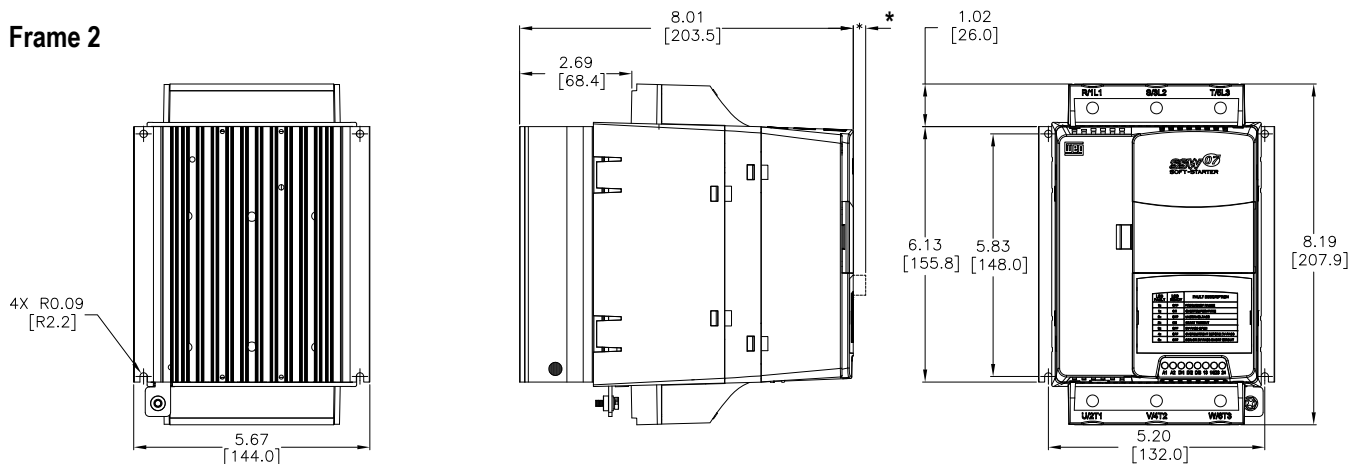

***Optional modules add depth to dimension as follows:**
SSW07-08-KRS-485 and SSW07-08-KRS-232 add 5mm [0.2 in]
SSW07-08-KPTC-MTR adds 5mm [0.2 in]




WEG SSW07 Series Soft Starters

SSW07 Series Dimensions

Inches [mm]

Frame 3

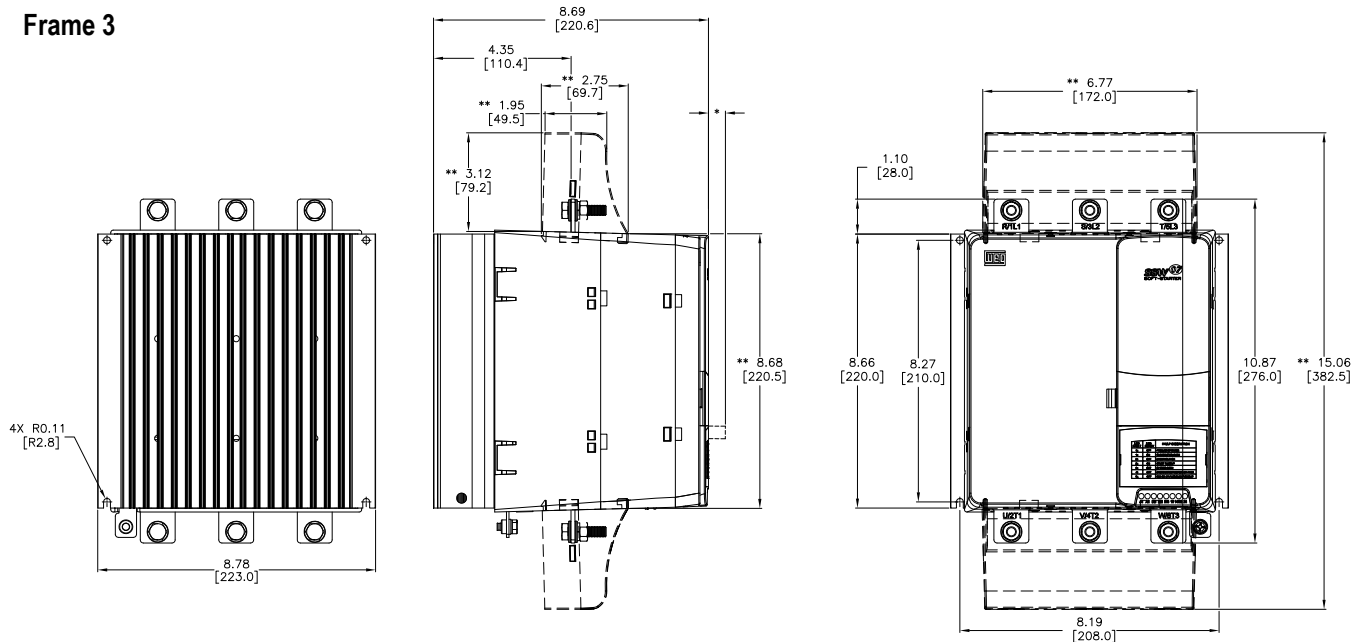


*Optional modules add depth to dimension as follows:
SSW07-08-KRS-485 and SSW07-08-KRS-232 add 5mm [0.2 in]

SSW07-08-KPTC-MTR adds 5mm [0.2 in]

**Indicates dimensions with
optional SSW0708900-IP20-3C

Frame 4

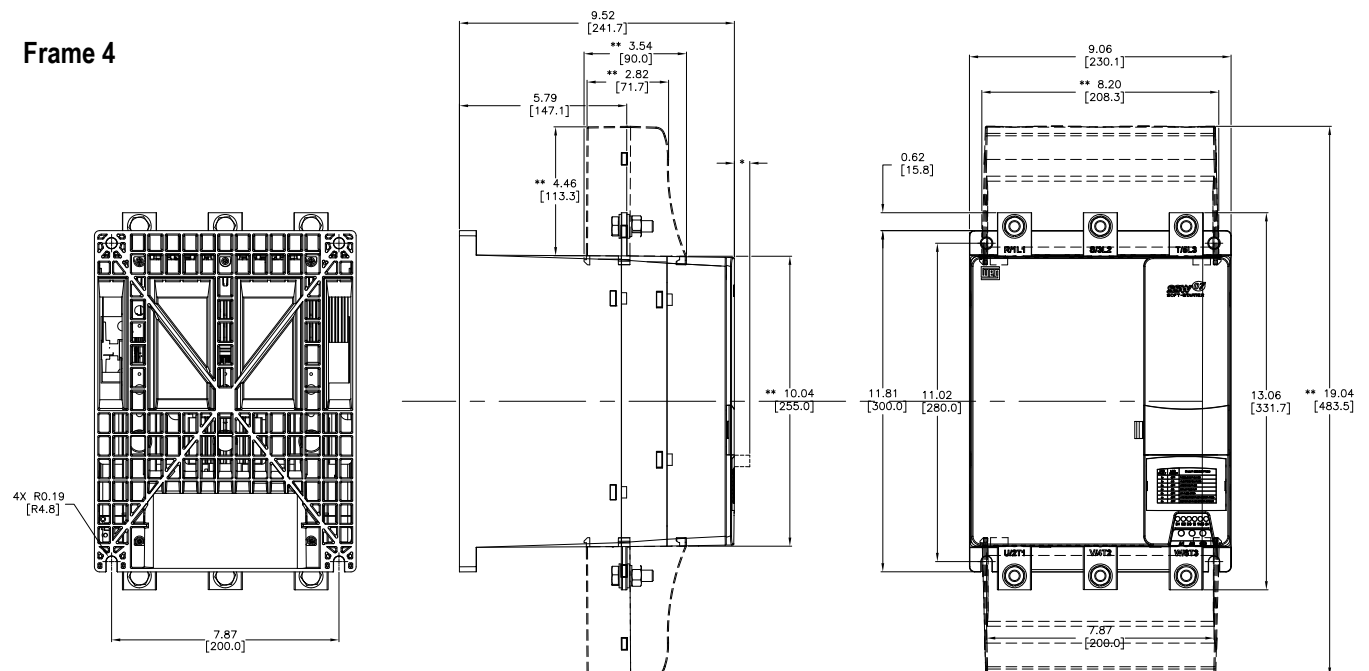

*Optional modules add depth to dimension as follows:
SSW07-08-KRS-485 and SSW07-08-KRS-232 add 5mm [0.2 in]

SSW07-08-KPTC-MTR adds 5mm [0.2 in]

**Indicates dimensions with
optional SSW0708900-IP20-4D

tSSW-15



WEG SSW07 Series Soft Starters

Accessories

SSW07 Series Accessories			
Part Number	Price	Type of Accessory	Description
<u>SSW07-08-HMI-LOC</u>	\$106.00	Keypad	SSW07 keypad HMI
<u>SSW07-HMI-REM</u>	\$208.00		SSW07 remote serial HMI. Remote keypad interface module included.
<u>SSW07-HMI-REM-485</u>	\$261.00		SSW07 remote serial HMI. Remote keypad interface with additional RS485 port module included.
<u>SSW07-08-KRS-485</u>	\$123.00	Communication	SSW07 series communication module, 1 RS-485 (5-pin) port.
<u>SSW07-08-KRS-232</u>	\$73.00		SSW07 series communication module, 1 RS-232 (RJ11) port.
<u>SSW0708900-KVT-2B</u>	\$40.00	Kits	SSW07 series main cooling fan. For use with WEG SSW07 series 45-105A soft starters. Electrical connector included.
<u>SSW0708900-KVT-3C</u>	\$57.00		SSW07 series main cooling fan. For use with WEG SSW07 series 130-200A soft starters. Electrical connector included.
<u>SSW07-08-KPTC-MTR</u>	\$75.00		SSW07 series PTC module, for use with WEG SSW07 series soft starters.
<u>SSW0708900-IP20-3C</u>	\$38.50		SSW07 series touch shield, for use with WEG SSW07 series 130-200A soft starters. Mounting hardware included. Provides IP20 protection rating.
<u>SSW0708900-IP20-4D</u>	\$80.00		SSW07 series touch shield, for use with WEG SSW07 series 255-412A soft starters. Mounting hardware included. Provides IP20 protection rating.



SSW07-08-HMI-LOC



SSW07-08-KRS-485



SSW07-08-KPTC-MTR



SSW07-08-KRS-232



SSW0708900-KVT-2B



SSW0708900-KVT-3C




SSW0708900-IP20-3C



SSW0708900-IP20-4D



SSW07-HMI-REM-485



SSW07-HMI-REM






WEG SSW07 Series Soft Starters


Accessories Dimensions

Inches [mm]

SSW07-08-HMI-LOC

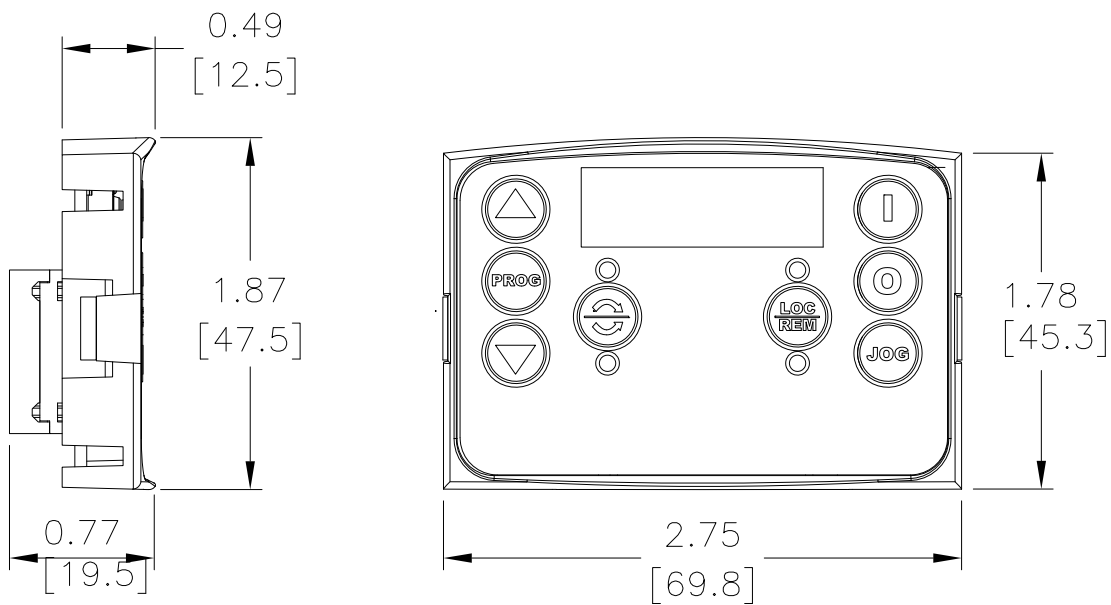

SSW07-HMI-REM

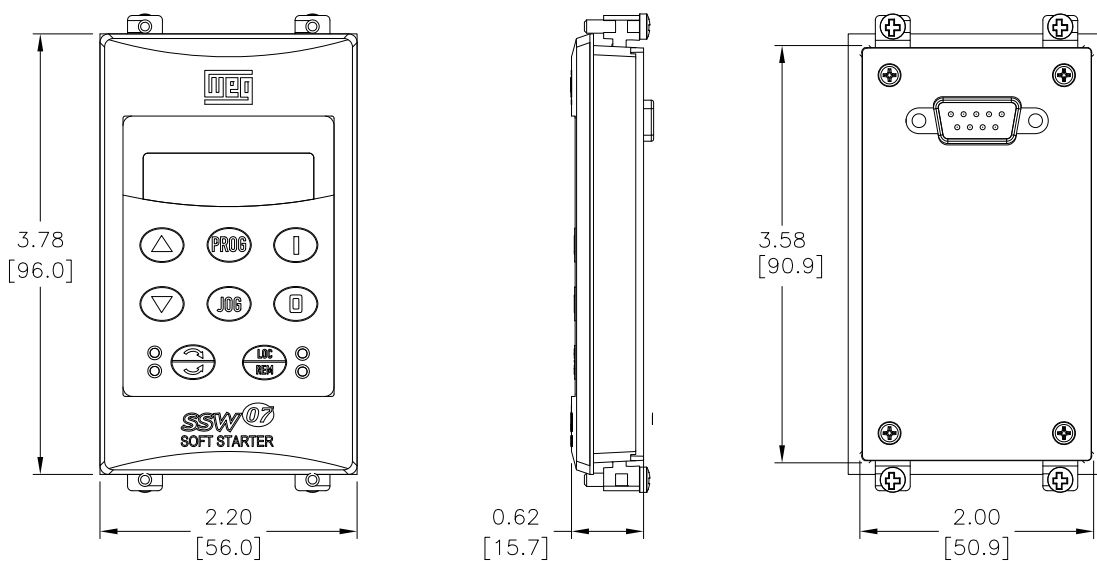



WEG SSW07 Series Soft Starters

SSW07 Overcurrent Protection

Additional Accessories Recommended For Use With WEG SSW07 Series Soft Starters*					
Soft Starter Model Number	Standard Fault Short Circuit Rating $\leq 600V$	Circuit Breaker (CB) - UL489 Any MCCB	Circuit Breaker – Fuji ADC	Class T Fuse	Class T Fuse Holder
<u>SSW070017T5SZ</u>	5kA	$\leq 30A$	<u>BW125JAGU-3P030SB</u> -	<u>TJS30-1</u>	<u>T60030-1SR</u>
<u>SSW070024T5SZ</u>	5kA	$\leq 40A$	<u>BW125JAGU-3P040SB</u> -	<u>TJS40-1</u>	<u>T60060-1CR</u>
<u>SSW070030T5SZ</u>	5kA	$\leq 40A$	<u>BW125JAGU-3P040SB</u> -	<u>TJS40-1</u>	<u>T60060-1CR</u>
<u>SSW070045T5SZ</u>	5kA	$\leq 150A$	<u>BW250JAGU-3P150SB</u> <u>F3P-150</u>	<u>TJS150</u>	<u>T60200-1C</u>
<u>SSW070061T5SZ</u>	5kA	$\leq 150A$	<u>BW250JAGU-3P150SB</u> <u>F3P-150</u>	<u>TJS150</u>	<u>T60200-1C</u>
<u>SSW070085T5SZ</u>	10kA	$\leq 150A$	<u>BW250JAGU-3P150SB</u> <u>F3P-150</u>	<u>TJS150</u>	<u>T60200-1C</u>
<u>SSW070130T5SZ</u>	10kA	$\leq 225A$	<u>BW250JAGU-3P225SB</u> <u>F3P-225</u>	<u>TJS225</u>	<u>T60400-1C</u>
<u>SSW070171T5SZ</u>	10kA	$\leq 250A$	<u>BW250JAGU-3P250SB</u> <u>K3P-250</u>	<u>TJS250</u>	<u>T60400-1C</u>
<u>SSW070200T5SZ</u>	10kA	$\leq 250A$	<u>BW250JAGU-3P250SB</u> <u>K3P-250</u>	<u>TJS250</u>	<u>T60400-1C</u>
<u>SSW070255T5SH1Z</u>	18kA	$\leq 400A$	- <u>L3P-400</u>	<u>TJS400</u>	<u>T60400-1C</u>
<u>SSW070312T5SH1Z</u>	18kA	$\leq 400A$	- <u>L3P-400</u>	<u>TJS400</u>	<u>T60400-1C</u>
<u>SSW070365T5SH1Z</u>	18kA	$\leq 600A$	- <u>L3P-600</u>	<u>TJS600</u>	<u>T60600-1C</u>
<u>SSW070412T5SH1Z</u>	18kA	$\leq 600A$	- <u>L3P-600</u>	<u>TJS600**</u>	<u>T60600-1C</u>

* Maximum trip ratings are for non-time-delay overcurrent protection devices.

* Motor branch circuit protection must be based on MOTOR Full Load Current and must comply with applicable local electrical codes. The 2008 NEC section 430.52 recommends a maximum of 175% (up to 225% absolute maximum) of motor FLC for time-delay fuses. (Class CC time-delay fuses are permitted up to the non-time-delay fuse maximum rating.)

* These products are available at AutomationDirect.com.

** WEG allows maximum 700A fuse rating. 600A is the maximum fuse rating available from AutomationDirect.com.



CFW/SSW Series Software

CFW-WPS Software Package

WEG WPS is the versatile configuration software for all WEG products. The software is compatible with all CFW series AC drives and SSW07/SSW900 soft starters. Powerful features include:

- Configuration and Monitoring Wizards
- Custom Variable Monitoring Windows
- IEC 61131 Ladder Programming
- Advanced Trending & Diagnostics
- FW updates
- Automatic online software updates

And MORE!

WEG WPS requires a PC USB port or RJ45 port and appropriate cables or USB-485M kit. Each drive or softstarter series can connect to the software, through the methods noted below:

CFW100:

- USB via the CFW100-CUSB module
- RS485 via the CFW100-CRS485 module

CFW300:

- USB via the CFW300-CUSB module
- RS485 via the CFW300-CRS485 module
- RS232 via the CFW300-CRS232 module

CFW320:

- USB via the CFW320-CUSB module
- Ethernet via the CFW320-CETH module
- RS485 via the CFW320-CRS485 module
- RS232 via the CFW320-CRS232 module

CFW500:

- RS485 via the included CFW500-IO5 module or optional CFW500-CRS485-B module.
- USB via the CFW500-CUSB module
- Ethernet via the CFW500-CETH-IP or CFW500-CEMB-TCP module
- RS232 via the CFW500-CRS232 module

SSW07:

- RS485 via the SSW07-08-KRS-485 module
- RS232 via the SSW07-08-KRS-232 module

SSW900:

- USB with integrated USB port.
- Ethernet via the SSW900-CETH-W module
- RS485 via the SSW900-CRS485-W module


See the **WPS quick start videos for more information:**

- Drive Parameters:
<https://www.automationdirect.com/VID-DR-0071>

- Configuration, Diagnostics, and Wizards:
<https://www.automationdirect.com/VID-DR-0074>



WEG CFW500 Configuration Software					
Model #	Version	Price	Description	Features/Specifications	CFW500 Drive
CFW-WPS	USB Card	\$10.50	WEG Electric Windows Configuration Software: for all WEG CFW series AC drives and SSW07 and SSW900 series soft starters (PN# CFW-WPS)	USB card containing WEG WPS software.	All
	Download	Free		Download software for free through the AutomationDirect.com website: • CFW-WPS Software	



CFW-WPS
USB Installation Card

WEG AC Drives **tCFW-64**