




# Stepping System Components

## SureStep® System

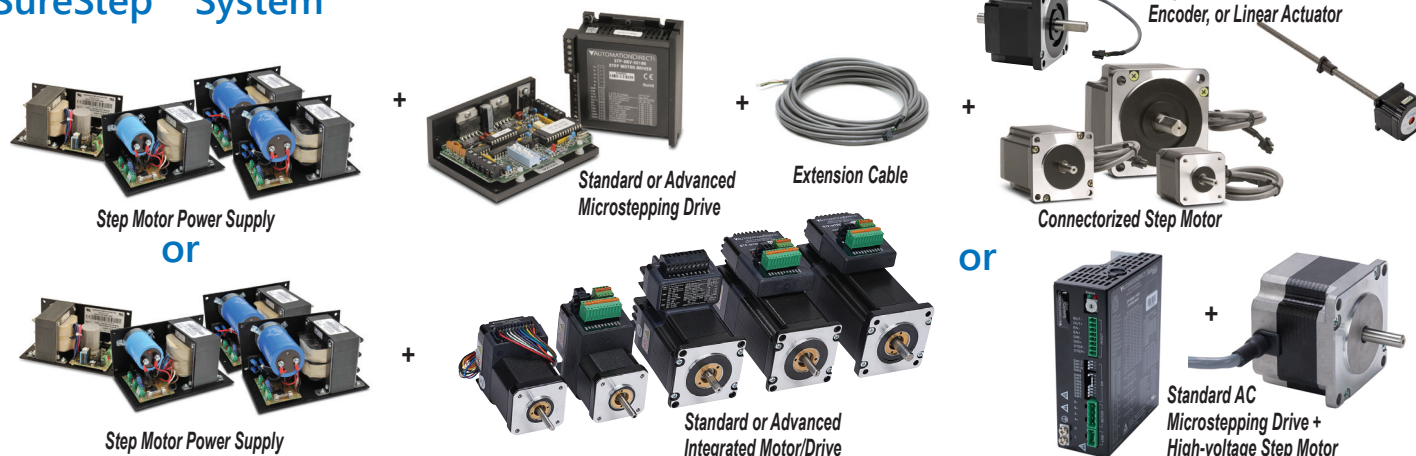

### SureStep stepping family includes:

- Linear step motor power supplies
- DIP-switch configurable microstepping drives
- Software-configurable advanced microstepping drives
- Motor extension cables
- NEMA 14, 17, 23, 24, 34, and 42 frame size step motors in single shaft, dual-shaft, IP65, high bus voltage, or encoder mounted configurations
- NEMA 17, 23, and 24 frame size integrated motor/drives
- NEMA 17 and 23 linear actuators (6", 9", and 12" lengths)
- Variety of step motor accessories including encoders, control cables, and connector kits
- SureStep PC adapter, USB to RS-485
- SureMotion Pro software for advanced drive and integrated motor/drive systems

### Motor features

- Low voltage, high torque, 2-phase, bipolar, 1.8° per step, 4-lead
- High voltage, high torque, 2-phase, bipolar, 1.8° per step, 8-lead
- Available in single-shaft and dual-shaft models
- Connectorized pigtails or integrated 10' cable (STP-MTRAC only)
- Optional encoder feedback (STP-MTR-xxxxE)
- IP65 versions available (STP-MTR-xxxxW)
- High bus voltage versions available (STP-MTRAC-xxxx)
- Linear actuators have lead screws for motor shafts (STP-LExx-xxxxxx)
- Linear actuators ADJ series available with encoder-ready rear shaft and machined journals on screw ends for easy bearing mounting
- Wide variety of NEMA 14, 17, 23, and 34 motors

### Power supply features

- Linear, unregulated DC power supplies
- 120/240 VAC selectable input
- 32V, 48V, 70V DC output models available
- All linear models have additional 5VDC, 500mA regulated logic supply
- Fusing included for both incoming AC and outgoing DC
- 5V supply has electronic overload protection

**NOTE:** If a switching power supply is desired, we recommend the PSB12-xxxS, PSB24-xxxS, or PSB48-xxxS series.

### Standard stepper drive features

**(STP-DRV-4035, -4830, -4845, -6575, STP-MTRD-x, STP-DRVAC-24025)**

- Low cost, digital step motor driver in compact package
- Operates from Step and Direction signals, or Step CW and Step CCW (jumper selectable).
- Fault output and Enable input
- Optically isolated I/O
- Digital filters prevent position error from electrical noise on command signals; jumper selectable: 150 kHz or 2MHz
- Rotary or DIP switch easily selects from many popular motors
- Electronic damping and anti-resonance
- Automatic idle current reduction to reduce heat when motor is not moving; switch selectable: 50% or 90% of running current
- Switch-selectable step resolution: 200–25,600 steps per revolution depending on drive
- Switch-selectable microstep emulation provides smoother, more reliable motion in full- and half-step modes
- Automatic self test (switch selectable)
- Optional external encoder feedback (integrated models)
- Operates from a 24–65 VDC or 12–40 VDC power supply, depending upon model. STP-DRVAC drive operates off AC voltage.
- Running current from 0.35–7.5A

### Advanced stepper drive features

**(STP-DRV-4850, STP-DRV-80100, STP-MTRD-xR, & STP-MTRD-xRE)**

- Max 5A, 48V and max 10A, 80V models available
- Software configurable
- Programmable microsteps
- Internal indexer (via ASCII commands)
- Self test feature
- Idle current reduction
- Anti-resonance
- Torque ripple smoothing
- Step, analog, and serial communication inputs
- Serial communications allow point-to-point positioning
- AB quadrature/encoder following (integrated models)
- Optional internal encoder feedback (integrated models)
- RS-485 communications (integrated models)
- Four 5 to 24 volt digital "Variable I/O" points (NEMA 24 integrated models)
- Controllable via streaming SCL commands

# Stepping System Components

## SureStep Power Supply / DC Input Drive Compatibility

| Drive <sup>(1)(2)</sup>    | Recommended Linear Power Supply <sup>(1)(2)(5)</sup> |              |              |                             |
|----------------------------|------------------------------------------------------|--------------|--------------|-----------------------------|
| Model #                    | STP-PWR-3204                                         | STP-PWR-4805 | STP-PWR-4810 | STP-PWR-7005 <sup>(3)</sup> |
| STP-DRV-4035               | ✓                                                    | No           | No           | No                          |
| STP-DRV-4830               | ✓                                                    | ✓            | ✓            | No                          |
| STP-DRV-4845               | ✓                                                    | ✓            | ✓            | No                          |
| STP-DRV-4850               | ✓                                                    | ✓            | ✓            | No                          |
| STP-DRV-6575               | ✓                                                    | ✓            | ✓            | No                          |
| STP-DRV-80100              | ✓                                                    | ✓            | ✓            | ✓                           |
| STP-MTRD-17 <sup>(4)</sup> | ✓                                                    | ✓            | ✓            | No                          |
| STP-MTRD-23 <sup>(4)</sup> | ✓                                                    | ✓            | ✓            | ✓                           |
| STP-MTRD-24 <sup>(4)</sup> | ✓                                                    | ✓            | ✓            | ✓                           |

- 1) Do NOT use a power supply that exceeds the drive's input voltage range.  
If using a linear power supply, ensure that the unloaded voltage does not float above the drive's maximum input range.
- 2) For best performance, use the lowest voltage power supply that supplies the required speed and torque.
- 3) An unloaded STP-PWR-7005 can float above the allowable input voltages of some drives if it is fed with a high AC input voltage (greater than 120VAC).
- 4) Integrated motor/drives are included here because they include a drive as well as a motor.
- 5) STP-DRVAC-x drives are AC powered and cannot be powered by DC power supplies.

## SureStep Power Supply / DC Input Drive Compatibility

| Drive <sup>(1)(2)</sup>    | Recommended Switching Power Supply <sup>(1)(2)(4)</sup> |            |            |
|----------------------------|---------------------------------------------------------|------------|------------|
| Model #                    | PSB12-xxxS                                              | PSB24-xxxS | PSB48-xxxS |
| STP-DRV-4035               | ✓                                                       | ✓          | No         |
| STP-DRV-4830               | ✓                                                       | ✓          | ✓          |
| STP-DRV-4845               | No                                                      | ✓          | ✓          |
| STP-DRV-4850               | No                                                      | ✓          | ✓          |
| STP-DRV-6575               | No                                                      | ✓          | ✓          |
| STP-DRV-80100              | No                                                      | ✓          | ✓          |
| STP-MTRD-17 <sup>(3)</sup> | ✓                                                       | ✓          | ✓          |
| STP-MTRD-23 <sup>(3)</sup> | ✓                                                       | ✓          | ✓          |
| STP-MTRD-24 <sup>(3)</sup> | ✓                                                       | ✓          | ✓          |

- 1) Do NOT use a power supply that exceeds the drive's input voltage range.
- 2) For best performance, use the lowest voltage power supply that supplies the required speed and torque.
- 3) Integrated motor/drives are included here because they include a drive as well as a motor.
- 4) STP-DRVAC-x drives are AC powered and cannot be powered by DC power supplies.

## SureStep AC Motor/Drive Compatibility

| Model #            | STP-DRVAC-24025    |                      |
|--------------------|--------------------|----------------------|
|                    | Series Wired Motor | Parallel Wired Motor |
| STP-MTRAC-23044(x) | ✓                  | No                   |
| STP-MTRAC-23055(x) | ✓                  | No                   |
| STP-MTRAC-23078(x) | ✓                  | No                   |
| STP-MTRAC-34075(x) | ✓                  | No                   |
| STP-MTRAC-34115(x) | ✓                  | No                   |
| STP-MTRAC-34156(x) | ✓                  | No                   |


NOTE: STP-MTRAC-34156(x) motors have a 5/8" front shaft.

## SureStep DC Input Drive / Motor Compatibility<sup>(3)</sup>

| Motor <sup>(1)</sup>   |                           |                 | Recommended Drive <sup>(1)</sup> |              |              |                             |                             |                              |
|------------------------|---------------------------|-----------------|----------------------------------|--------------|--------------|-----------------------------|-----------------------------|------------------------------|
| Model # <sup>(1)</sup> | Rated Amps <sup>(2)</sup> | Extension Cable | STP-DRV-4035 <sup>(1)</sup>      | STP-DRV-4830 | STP-DRV-4845 | STP-DRV-4850 <sup>(1)</sup> | STP-DRV-6575 <sup>(1)</sup> | STP-DRV-80100 <sup>(1)</sup> |
| STP-MTRL-14026(x)      | 0.35                      | STP-EXTL-0xx    | ✓                                | ✓            | –            | ✓                           | –                           | –                            |
| STP-MTRL-14034(x)      | 0.8                       |                 | ✓                                | ✓            | ✓            | ✓                           | –                           | –                            |
| STP-MTR-17040(x)       | 1.7                       |                 | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTR-17048(x)       | 2.0                       |                 | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTR-17060(x)       | 2.0                       | STP-EXT-0xx     | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTR-23055(x)       | 2.8                       |                 | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTR-23079(x)       | 2.8                       |                 | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTR-34066(x)       | 2.8                       |                 | ✓                                | ✓            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTRAC-42100(x)     | 4.2                       | STP-EXT42       | –                                | –            | ✓            | ✓                           | ✓                           | ✓                            |
| STP-MTRAC-42151(x)     | 6                         | 0xx             |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRAC-42202(x)     | 6                         |                 |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRH-23079(x)      | 5.6                       |                 |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRH-34066(x)      | 6.3                       | STP-EXTH-0xx    |                                  |              | –            |                             | ✓                           | ✓                            |
| STP-MTRH-34097(x)      | 6.3                       |                 |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRH-34127(x)      | 6.3                       |                 |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRACH-42100(x)    | 6                         | STP-EXTH42      |                                  |              |              |                             | ✓                           | ✓                            |
| STP-MTRACH-42151(x)    | 8                         | 0xx             |                                  |              |              |                             | –                           | ✓                            |
| STP-MTRACH-42202(x)    | 8                         |                 |                                  |              |              |                             | –                           | ✓                            |

- 1) The combinations above will perform according to the published speed/torque curves. Using a motor with a current rating higher than the drive's output rating will proportionally limit the motor torque.
- 2) Listed NEMA42 motor amperages are for Bipolar Series wiring. See the NEMA42 motor specs for amperages with other wiring types.
- 3) Table not applicable to integrated motor/drives as drives and motors are already paired.

## Typical Wiring Diagram

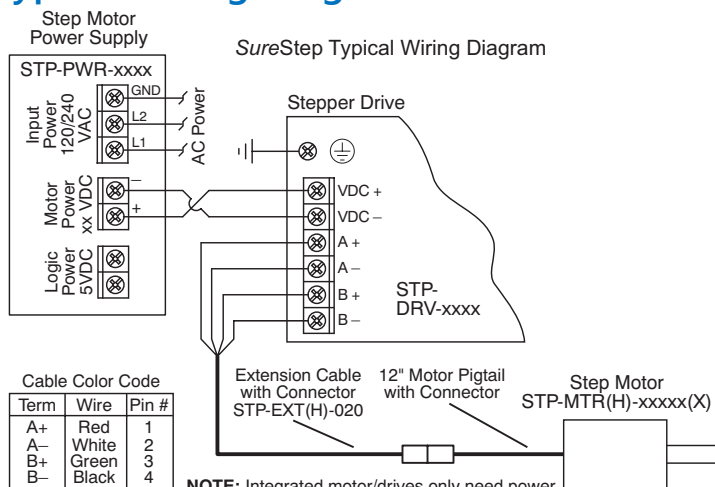

NOTE: Integrated motor/drives only need power since the drive and motor are one unit. MTRAC motors do not need an extension cable, they have 10' leads coming from the motor.

NOTE: STP-MTRAC-23xxx/34xxx motors and STP-DRVAC drives are designed to work with AC input power to the drive. They are not designed to work with DC input power.



# Stepping System Drives

## SureStep Series – Microstepping Drives Features Comparison

| Drive Model                 |                 | Standard Microstepping Drives                   |                                        |                                                                                                             |                                        |                                                                                                          |                                        | Advanced Microstepping Drives                                                                                                                                                                                    |                                        |                                                                                                                                     |
|-----------------------------|-----------------|-------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|                             |                 | STP-DRVAC-24025                                 | STP-DRV-4830                           | STP-DRV-4845                                                                                                | STP-DRV-6575                           | STP-MTRD-x                                                                                               | STP-DRV-4035                           | STP-DRV-4850                                                                                                                                                                                                     | STP-DRV-80100                          | STP-MTRD-xR                                                                                                                         |
| Price                       |                 | \$222.00                                        | \$77.00                                | \$93.00                                                                                                     | \$107.00                               | See Integrated Motor/Drives section                                                                      | Retired                                | \$278.00                                                                                                                                                                                                         | \$332.00                               | See Integrated Motor/Drives section                                                                                                 |
| Drive Type                  |                 | Microstepping drive with pulse input            |                                        |                                                                                                             |                                        | Integrated stepper motor/drive                                                                           | Micro-stepping drive with pulse input  | Advanced microstepping drive with pulse or analog input, serial communication;includes programming/communication cable STP-232RJ11-CBL                                                                           |                                        | Advanced integrated stepper motor/drive with internal encoder                                                                       |
|                             |                 | enclosed                                        |                                        |                                                                                                             |                                        | enclosed                                                                                                 | open-frame                             | enclosed                                                                                                                                                                                                         |                                        | enclosed                                                                                                                            |
| Output Current              |                 | 0.6–2.5 A/phase                                 | 0.35–3.0 A/phase                       | 0.8–4.5 A/phase                                                                                             | 1.0–7.5 A/phase                        | –                                                                                                        | 0.4–3.5 A/phase                        | 0.1–5 A/phase                                                                                                                                                                                                    | 0.1–10 A/phase                         | –                                                                                                                                   |
| Input Voltage               |                 | nominal: 120/240 VAC<br>range: 90–240 VAC       | nominal: 12–48 VDC<br>range: 10–53 VDC | nominal: 24–48 VDC<br>range: 20–60 VDC                                                                      | nominal: 24–75 VDC<br>range: 20–85 VDC | nominal: 12-48 VDC (NEMA 17)<br>12-70 VDC (NEMA 23)<br>range: 10-55 VDC (NEMA 17)<br>11-74 VDC (NEMA 23) | nominal: 12–32 VDC<br>range: 12–42 VDC | nominal: 24–48 VDC<br>range: 18– 53 VDC                                                                                                                                                                          | nominal: 24–80 VDC<br>range: 18–88 VDC | nominal: 12-48 VDC (NEMA 17)<br>12-70 VDC (NEMA 23, 24)<br>range: 10-55 VDC (NEMA 17)<br>11-74 VDC (NEMA 23)<br>10-75 VDC (NEMA 24) |
| Configuration Method        |                 | rotary dial, dip switches, jumpers              |                                        |                                                                                                             |                                        | dip switches                                                                                             |                                        | SureMotion Pro software ( <a href="#">SM-PRO</a> : free download)                                                                                                                                                |                                        |                                                                                                                                     |
| Amplifier Type              |                 | MOSFET, dual H-bridge, 4-quadrant               |                                        |                                                                                                             |                                        | Dual H-bridge, 4 quadrant                                                                                | MOSFET, dual H-bridge, bipolar chopper | MOSFET, dual H-bridge, 4-quadrant                                                                                                                                                                                |                                        | Dual H-bridge, 4 quadrant                                                                                                           |
| Current Control             |                 | 4-state PWM @ 20 kHz                            | 4-state PWM @ 16 kHz                   | 4-state PWM @ 20 kHz                                                                                        |                                        | 4-state PWM @ 16 kHz                                                                                     | 4-state PWM @ 20 kHz                   |                                                                                                                                                                                                                  |                                        |                                                                                                                                     |
| Microstep Resolution        |                 | dipswitch selectable                            |                                        |                                                                                                             |                                        |                                                                                                          | software selectable                    |                                                                                                                                                                                                                  |                                        |                                                                                                                                     |
|                             |                 | 200 to 25,600 steps/rev                         |                                        | 200 to 20,000 steps/rev                                                                                     |                                        | 200 to 25,600 steps/rev                                                                                  | 400 to 10,000 steps/rev                | 200 to 51200 steps/rev                                                                                                                                                                                           |                                        |                                                                                                                                     |
| Modes of Operation          | Step & Dir      | YES                                             | YES                                    | YES                                                                                                         | YES                                    | YES                                                                                                      | YES                                    | YES                                                                                                                                                                                                              | YES                                    | YES                                                                                                                                 |
|                             | CW/CCW          | YES                                             | YES                                    | YES                                                                                                         | YES                                    | YES                                                                                                      | n/a                                    | YES                                                                                                                                                                                                              | YES                                    | YES                                                                                                                                 |
|                             | A/B Quad        | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | YES                                                                                                                                                                                                              | YES                                    | YES                                                                                                                                 |
|                             | Oscillator      | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | YES                                                                                                                                                                                                              | YES                                    | YES                                                                                                                                 |
|                             | Serial Indexing | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | YES                                                                                                                                                                                                              | YES                                    | YES                                                                                                                                 |
| Digital Input Signals       | Step/Pulse      | step & direction, CW/CCW step                   |                                        |                                                                                                             |                                        | step & direction, CW/CCW step                                                                            | step & direction                       | step & direction, CW/CCW step, A/B quadrature, run/stop & direction, jog CW/CCW, CW/CCW limits                                                                                                                   |                                        |                                                                                                                                     |
|                             | Direction       |                                                 |                                        |                                                                                                             |                                        |                                                                                                          |                                        |                                                                                                                                                                                                                  |                                        |                                                                                                                                     |
|                             | Enable          | motor disable                                   |                                        |                                                                                                             |                                        | motor enable                                                                                             | motor disable                          | motor enable, alarm reset, speed select (oscillator mode)                                                                                                                                                        |                                        |                                                                                                                                     |
| Analog Input                |                 | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | speed control                                                                                                                                                                                                    |                                        | signal range, offset, dead band, and filtering                                                                                      |
| Output Signal               |                 | fault                                           | n/a                                    | fault                                                                                                       | fault                                  | fault                                                                                                    | n/a                                    | fault, motion, tach                                                                                                                                                                                              |                                        | brake, fault, motion, tach                                                                                                          |
| Communication Interface     |                 | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | YES (programming/communication cable included)                                                                                                                                                                   |                                        |                                                                                                                                     |
| Non-volatile Memory Storage |                 | n/a                                             | n/a                                    | n/a                                                                                                         | n/a                                    | n/a                                                                                                      | n/a                                    | YES                                                                                                                                                                                                              |                                        |                                                                                                                                     |
| Idle Current Reduction      |                 | YES                                             |                                        |                                                                                                             |                                        |                                                                                                          |                                        |                                                                                                                                                                                                                  |                                        |                                                                                                                                     |
| Self Test                   |                 | YES                                             |                                        |                                                                                                             |                                        |                                                                                                          |                                        |                                                                                                                                                                                                                  |                                        |                                                                                                                                     |
| Additional Features         |                 | Step pulse noise filter, accepts AC power input | Step pulse noise filter                | Load inertia (anti-resonance & damping feature to improve motor performance)<br><br>Step pulse noise filter |                                        |                                                                                                          | n/a                                    | Anti-resonance (Electronic Damping)<br>Auto setup<br>Microstep emulation<br>Torque ripple smoothing<br>(allows for fine adjustment of phase in the range 0.25 to 1.5 rps)<br>Waveform (command signal) smoothing |                                        |                                                                                                                                     |

Refer to Specifications Tables for detailed specifications.

# Stepping System Motors

## SureStep® Stepping Motors

### SureStep Series Part Numbers – Bipolar Stepping Motors, continued

| Bipolar Stepping Motors                            | Price    | Shaft Type | Torque Level                  | Encoder Mounting | Drawing             |
|----------------------------------------------------|----------|------------|-------------------------------|------------------|---------------------|
| <i>Motors listing continued from previous page</i> |          |            |                               |                  |                     |
| <a href="#">STP-MTRAC-23044</a>                    | \$63.00  | single     | High voltage<br>High torque   | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-23044D</a>                   | \$64.00  | dual       |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-23055</a>                    | \$71.00  | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-23055D</a>                   | \$72.00  | dual       |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-23078</a>                    | \$99.00  | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-23078D</a>                   | \$100.00 | dual       |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34075</a>                    | \$265.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34075D</a>                   | \$265.00 | dual       |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34115</a>                    | \$274.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34115D</a>                   | \$275.00 | dual       |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34156</a>                    | \$295.00 | single*    | High voltage<br>Higher torque | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-34156D</a>                   | \$295.00 | dual*      |                               | optional         | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42100</a>                    | \$244.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42100D</a>                   | \$265.00 | dual       |                               | optional**       | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42151</a>                    | \$409.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42151D</a>                   | \$430.00 | dual       |                               | optional**       | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42202</a>                    | \$501.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRAC-42202D</a>                   | \$519.00 | dual       |                               | optional**       | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42100</a>                   | \$244.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42100D</a>                  | \$265.00 | dual       |                               | optional**       | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42151</a>                   | \$409.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42151D</a>                  | \$430.00 | dual       |                               | optional**       | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42202</a>                   | \$501.00 | single     |                               | not available    | <a href="#">PDF</a> |
| <a href="#">STP-MTRACH-42202D</a>                  | \$519.00 | dual       |                               | optional**       | <a href="#">PDF</a> |


\* NOTE: STP-MTRAC-34156(x) motors have a 5/8" front shaft.

\*\* NOTE: NEMA 42 "D" motors require an [STP-MTRA-42ENC](#) adapter plate for AMT13/AMT33 encoder mounting.

**STP-MTRAC-xxxxx**  
(single-shaft)



**STP-MTRAC-xxxxxD**  
(dual-shaft)

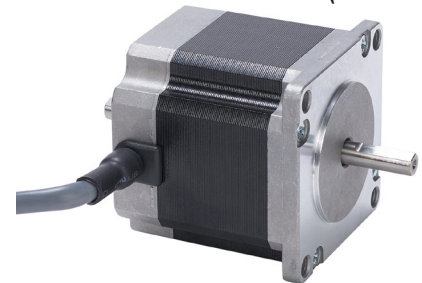

**STP-MTRACH-42xxxD**  
(dual-shaft)



## SureStep® Stepping Motors Mounting Accessories

### Mounting Accessories – for NEMA 17 and NEMA 42 SureStep Stepping Motors

| Part Number                    | Price  | Description                                                                                                                                                                                                                                               | Drawing Links       | Use With                |
|--------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------|
| <a href="#">STP-MTRA-RB-85</a> | \$9.25 | Reducer bushing, 8mm OD to 5mm ID, 16mm length, aluminum alloy. Connects NEMA size 17 stepper motors to Koyo TRD-NH and TRD-SH hollow shaft encoders.                                                                                                     | n/a                 | SureStep NEMA 17 motors |
| <a href="#">STP-MTRA-42ENC</a> | \$9.25 | SureStep encoder mounting plate, metal body. For use with SureStep NEMA 42 stepper motors with dual shafts. Encoder mounting screws and mounting plate screws included. Mounting holes for CUI Devices AMT132/AMT332 encoders and US Digital E6 encoders. | <a href="#">PDF</a> | SureStep NEMA 42 motors |

**STP-MTRA-42ENC**





# Stepping System Motors

## SureStep® Stepping Motors

| SureStep Series Specifications – Connectorized Stepping Motors |                  |                                            |                    |                    |                     |                     |
|----------------------------------------------------------------|------------------|--------------------------------------------|--------------------|--------------------|---------------------|---------------------|
| Stepping Motors                                                |                  | Higher voltage<br>High torque              |                    |                    |                     |                     |
|                                                                |                  | STP-MTRAC-42100(x)                         | STP-MTRAC-42151(x) | STP-MTRAC-42202(x) | STP-MTRACH-42100(x) | STP-MTRACH-42202(x) |
| NEMA Frame Size                                                |                  | 42                                         | 42                 | 42                 | 42                  | 42                  |
| Optional Encoder <sup>1</sup>                                  |                  | Y                                          | Y                  | Y                  | Y                   | Y                   |
| Max Holding Torque (N·m)                                       | Unipolar Series  | 9.7                                        | 19.0               | 26.0               | 9.7                 | 26.0                |
|                                                                | Bipolar Series   | 12.2                                       | 22.0               | 31.0               | 12.3                | 32.0                |
|                                                                | Bipolar Parallel | 12.2                                       | 22.0               | 31.0               | 12.3                | 32.0                |
| Rotor Inertia (g·cm <sup>2</sup> )                             |                  | 5500                                       | 10900              | 16200              | 5500                | 16200               |
| Rated RMS Current (A/phase)                                    | Unipolar Series  | 6                                          | 9.4                | 9                  | 8.5                 | 11.5                |
|                                                                | Bipolar Series   | 4.2                                        | 6                  | 6                  | 6                   | 8                   |
|                                                                | Bipolar Parallel | 8.4                                        | 12                 | 12                 | 12                  | 16                  |
| Resistance (Ω/phase)                                           | Unipolar Series  | 0.6                                        | 0.34               | 0.46               | 0.32                | 0.215               |
|                                                                | Bipolar Series   | 1.19                                       | 0.68               | 0.91               | 0.64                | 0.58                |
|                                                                | Bipolar Parallel | 0.3                                        | 0.17               | 0.23               | 0.159               | 0.144               |
| Inductance (mH/phase)                                          | Unipolar Series  | 5                                          | 3.6                | 5.5                | 2.5                 | 1.9                 |
|                                                                | Bipolar Series   | 19.8                                       | 14.5               | 22                 | 10.1                | 7.6                 |
|                                                                | Bipolar Parallel | 5                                          | 3.6                | 5.5                | 2.5                 | 1.9                 |
| Insulation Class                                               |                  | B                                          |                    |                    |                     |                     |
| Steps per Revolution                                           |                  | 200                                        |                    |                    |                     |                     |
| Basic Step Angle                                               |                  | 1.8°                                       |                    |                    |                     |                     |
| Shaft Runout                                                   |                  | 0.05 mm                                    |                    |                    |                     |                     |
| Max Shaft Radial Play @ 1lb load                               |                  | 1.1 in                                     |                    |                    |                     |                     |
| Connectors                                                     |                  | 8 leads, 18AWG                             |                    |                    |                     |                     |
| Temperature Rise                                               |                  | 80°C max                                   |                    |                    |                     |                     |
| Storage Temp.                                                  |                  | -30°C to 70°C [-22°F to 158°F]             |                    |                    |                     |                     |
| Operating Temperature                                          |                  | -20°C to 40°C [-4°F to 104°F]              |                    |                    |                     |                     |
| Operating Humidity                                             |                  | 5% to 95% non-condensing                   |                    |                    |                     |                     |
| Product Material                                               |                  | Steel motor case, stainless steel shaft(s) |                    |                    |                     |                     |
| Environmental Rating                                           |                  | IP40                                       |                    |                    |                     |                     |
| Weight (lb [kg])                                               |                  | 10.6 [4.8]                                 | 17.6 [8]           | 25.6 [11.6]        | 10.6 [4.8]          | 25.6 [11.6]         |
| Agency Approval                                                |                  | cURus                                      |                    |                    |                     |                     |







1 - Dual-shaft versions only. For US Digital E6 or CUI Devices AMT13/AMT33 encoder mounting, the [STP-MTRA-42ENC](#) encoder adapter plate is required.

# Stepping System Motors

## SureStep® Motor Torque vs. Speed Charts (continued)

STP-MTRAC(H)-42xxx(x) NEMA 42 Step Motors

For all NEMA 42 charts: "S" = Series Bipolar Wiring  
"P" = Parallel Bipolar Wiring

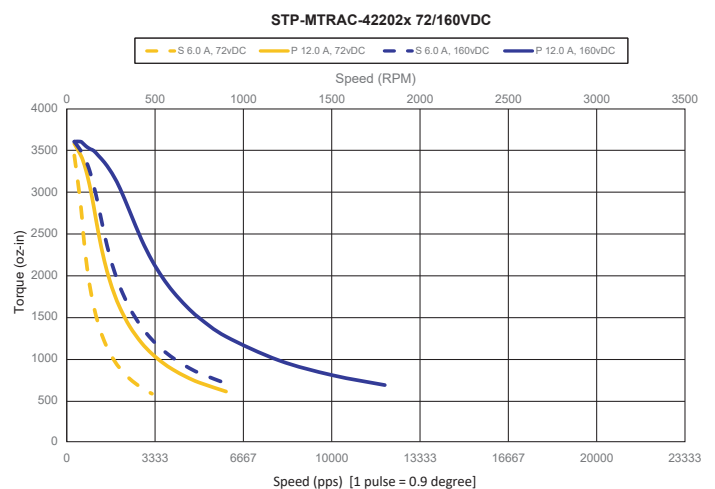
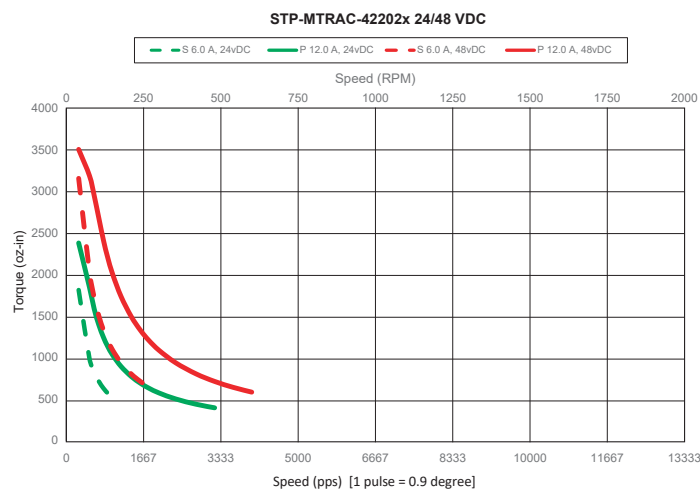
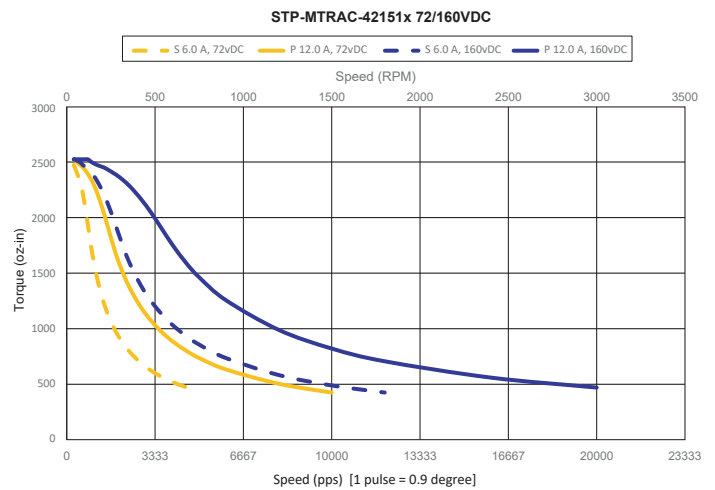
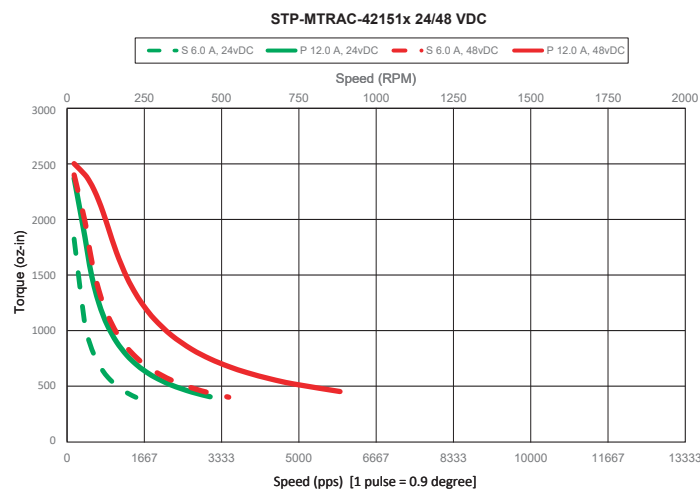
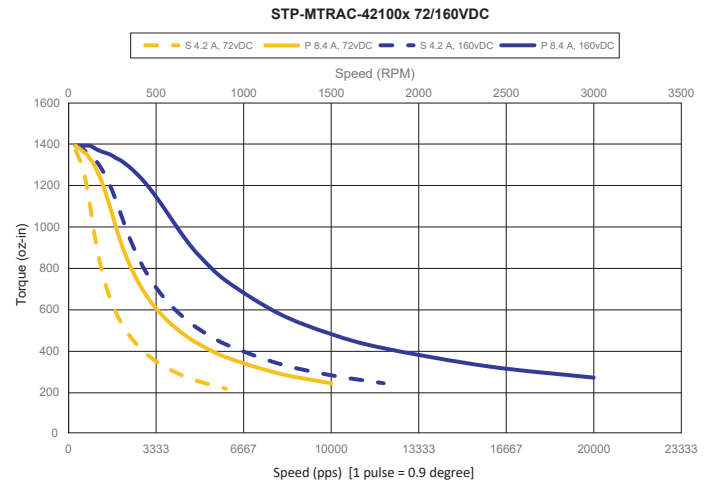
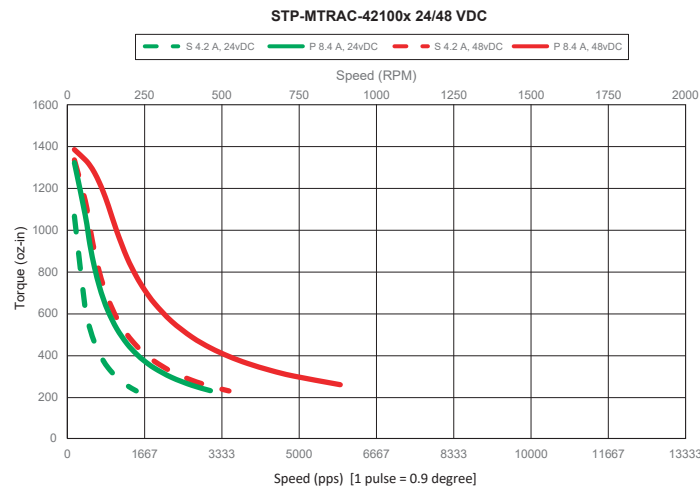


# Stepping System Motors

## SureStep® Motor Torque vs. Speed Charts (continued)




STP-MTRACH(H)-42xxx(x) NEMA 42 Step Motors

For all NEMA 42 charts: "S" = Series Bipolar Wiring  
"P" = Parallel Bipolar Wiring

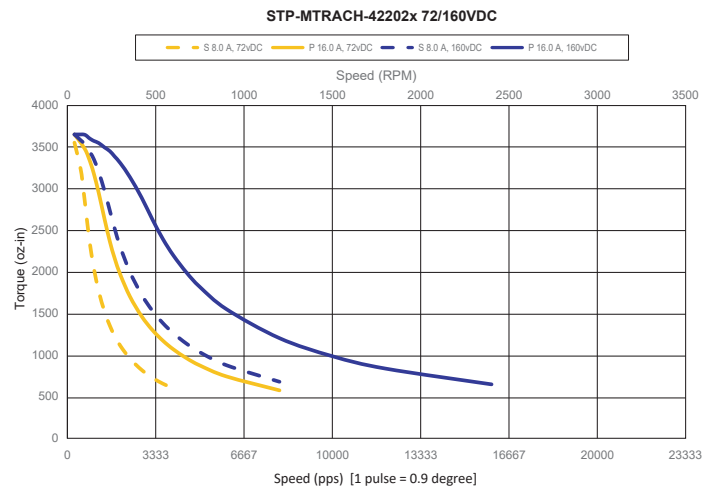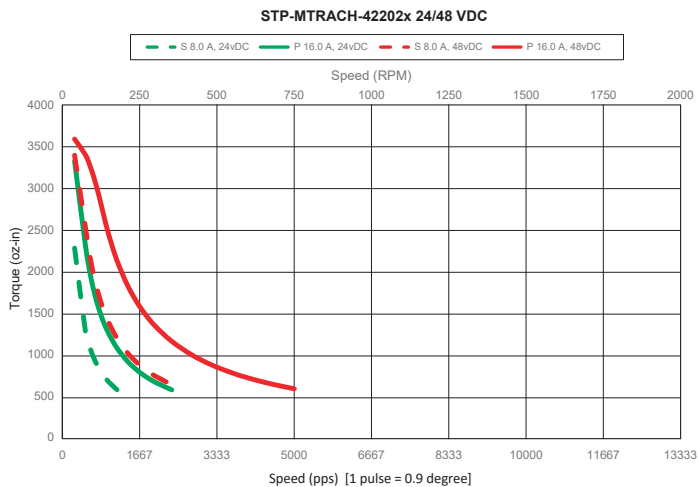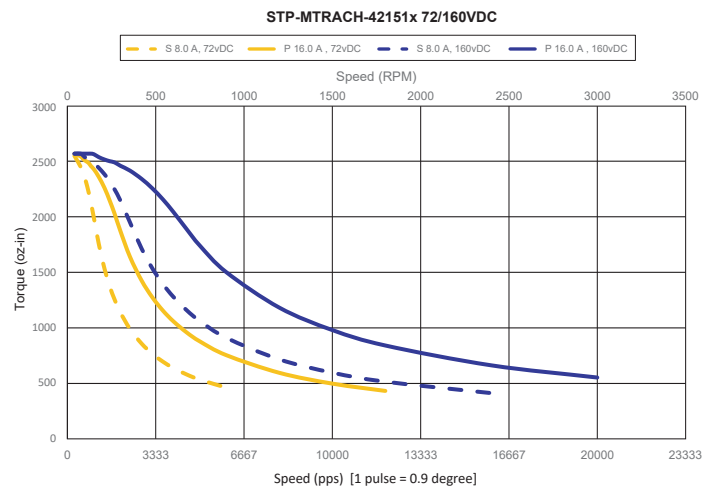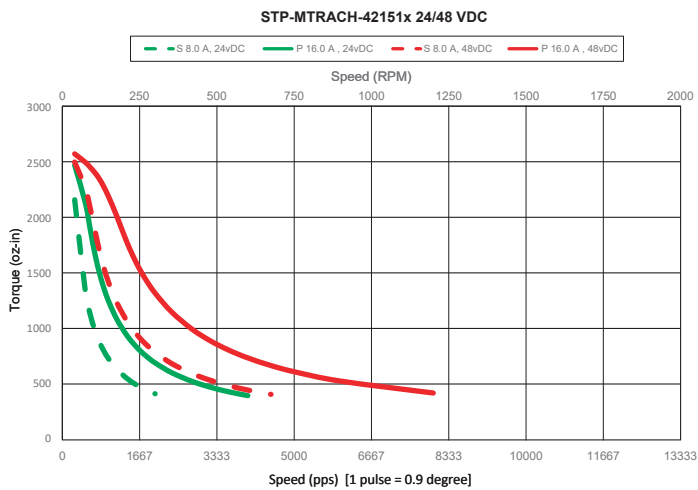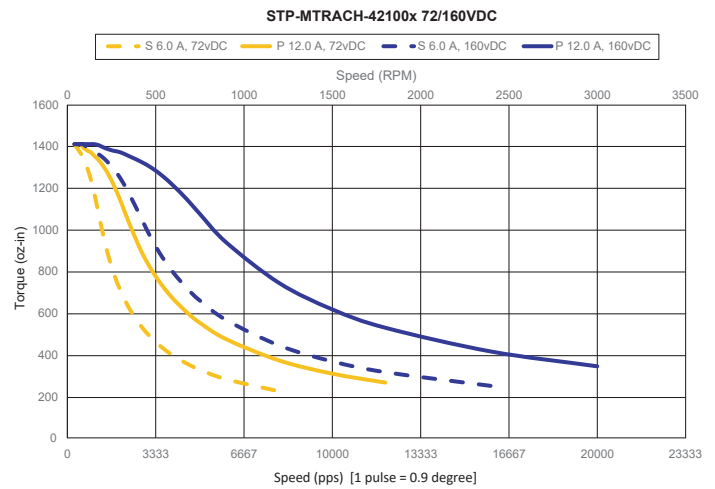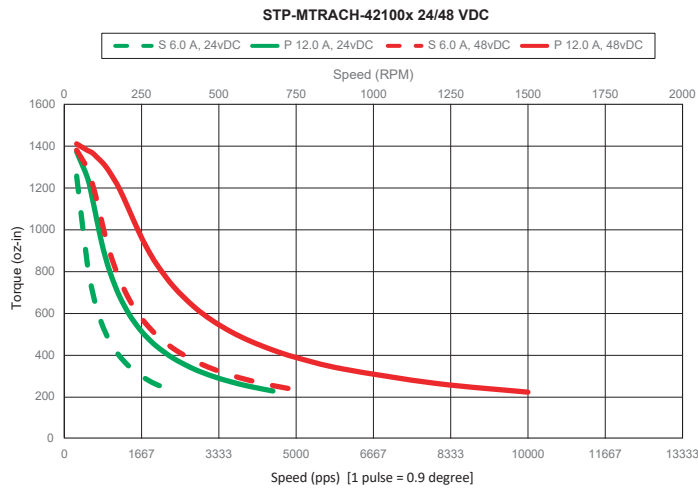

# Stepping System Motors

## STP-MTRAC-42xxx Motors

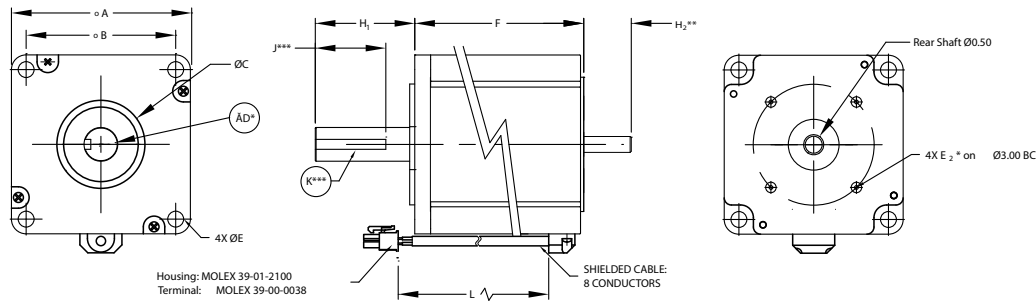


NEMA # 42 (front shaft): KEYED, Key Dimensions 0.188 X 0.188 X 1.377


- \* Dimension D applies only to the front shaft.
- \*\* Dimension H2 applies only to dual-shaft (D) motors.
- \*\*\* Dimensions J & Key do NOT apply to rear shafts of dual-shaft motors

(all rear shafts are round style).


### Uni-polar



### Bi-polar series



### Bi-polar parallel



| SureStep Series Dimensions & Cabling – Higher Voltage Bipolar Stepping Motors |                               |                  |                 |                  |                 |                  |                       |                       |                       |                       |                       |
|-------------------------------------------------------------------------------|-------------------------------|------------------|-----------------|------------------|-----------------|------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Dimensions*<br>(in [mm]*)                                                     | Higher Voltage<br>High Torque |                  |                 |                  |                 |                  |                       |                       |                       |                       |                       |
|                                                                               | STP-MTRAC-42100               | STP-MTRACH-42100 | STP-MTRAC-42151 | STP-MTRACH-42151 | STP-MTRAC-42202 | STP-MTRACH-42202 | STP-MTRAC-42100D      | STP-MTRACH-42100D     | STP-MTRAC-42151D      | STP-MTRACH-42151D     | STP-MTRAC-42202D      |
| A                                                                             | 4.33 [110]                    | 4.33 [110]       | 4.33 [110]      | 4.33 [110]       | 4.33 [110]      | 4.33 [110]       | 4.33 [110]            | 4.33 [110]            | 4.33 [110]            | 4.33 [110]            | 4.33 [110]            |
| B                                                                             | 3.50 [88.9]                   | 3.50 [88.9]      | 3.50 [88.9]     | 3.50 [88.9]      | 3.50 [88.9]     | 3.50 [88.9]      | 3.50 [88.9]           | 3.50 [88.9]           | 3.50 [88.9]           | 3.50 [88.9]           | 3.50 [88.9]           |
| C                                                                             | 2.19 [55.6]                   | 2.19 [55.6]      | 2.19 [55.6]     | 2.19 [55.6]      | 2.19 [55.6]     | 2.19 [55.6]      | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           |
| D**                                                                           | 0.75 [19.05]                  | 0.75 [19.05]     | 0.75 [19.05]    | 0.75 [19.05]     | 0.75 [19.05]    | 0.75 [19.05]     | 0.75 [19.05]          | 0.75 [19.05]          | 0.75 [19.05]          | 0.75 [19.05]          | 0.75 [19.05]          |
| E                                                                             | 0.327 [8.31]                  | 0.327 [8.31]     | 0.327 [8.31]    | 0.327 [8.31]     | 0.327 [8.31]    | 0.327 [8.31]     | 0.327 [8.31]          | 0.327 [8.31]          | 0.327 [8.31]          | 0.327 [8.31]          | 0.327 [8.31]          |
| E2                                                                            | n/a                           | n/a              | n/a             | n/a              | n/a             | n/a              | 4-40 UNC Tap 0.2 Deep | 4-40 UNC Tap 0.2 Deep | 4-40 UNC Tap 0.2 Deep | 4-40 UNC Tap 0.2 Deep | 4-40 UNC Tap 0.2 Deep |
| F                                                                             | 3.88                          | 5.94             | 7.91            | 3.88***          | 5.94***         | 7.91***          |                       |                       |                       |                       |                       |
| H1                                                                            | 2.19 [55.6]                   | 2.19 [55.6]      | 2.19 [55.6]     | 2.19 [55.6]      | 2.19 [55.6]     | 2.19 [55.6]      | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           | 2.19 [55.6]           |
| H2                                                                            | n/a                           | n/a              | n/a             | n/a              | n/a             | n/a              | 1.12 [28.4]           | 1.12 [28.4]           | 1.12 [28.4]           | 1.12 [28.4]           | 1.12 [28.4]           |
| J**                                                                           | 1.37 [34.8]                   | 1.37 [34.8]      | 1.37 [34.8]     | 1.37 [34.8]      | 1.37 [34.8]     | 1.37 [34.8]      | 1.37 [34.8]           | 1.37 [34.8]           | 1.37 [34.8]           | 1.37 [34.8]           | 1.37 [34.8]           |
| L                                                                             | 12 [305]                      |                  |                 |                  |                 |                  |                       |                       |                       |                       |                       |

\* mm dimensions are for reference purposes only.

\*\* Dimension D (shaft diameter), J, and Key do not apply to rear shafts of dual-shaft motors.

\*\*\* For encoder mounting the required STP-MTRA-42ENC bracket will add 0.13 inches [3.2 mm] to the length of the motor.



# Stepping System Cables


## SureStep® Cables, continued

### STP-CBL-EDxx Encoder Cable Wiring Diagram


STP-EDxx CABLES

| PIN# | Function    | Color |
|------|-------------|-------|
| 1    | Ground      | Black |
| 2    | Index       | Green |
| 3    | A Channel   | White |
| 4    | +5VDC Power | Red   |
| 5    | B Channel   | Brown |


| TABLE INFORMATION |                |
|-------------------|----------------|
| CABLE NUMBER      | CABLE LENGTH L |
| STP-CBL-ED6       | 6 Feet         |
| STP-CBL-ED10      | 10 Feet        |
| STP-CBL-ED20      | 20 Feet        |

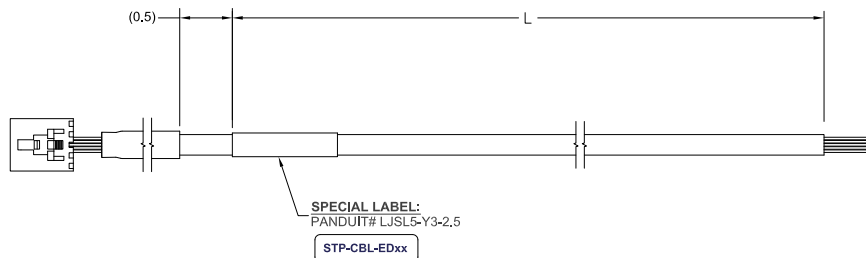


### STP-EXT42(H)-xxx Cable Wiring Diagram

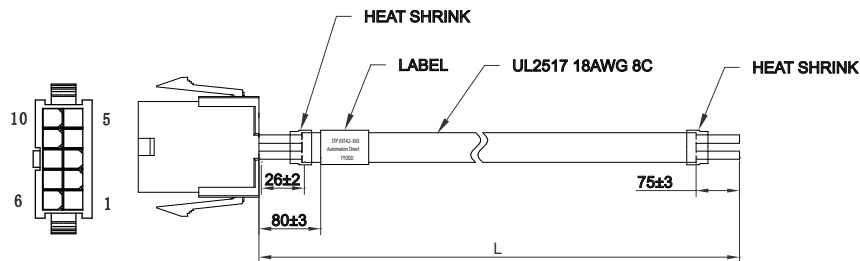


| Pin | Wire Description   |
|-----|--------------------|
| 1   | A - White          |
| 2   | $\bar{A}$ - Orange |
| 3   | C - Green          |
| 4   | $\bar{C}$ - Brown  |
| 5   | B - Red            |
| 6   | $\bar{B}$ - Yellow |
| 7   | D - Black          |
| 8   | $\bar{D}$ - Blue   |
| 9   | GND - Drain wire   |



#### Bi-polar series



#### Bi-polar parallel





# Stepping System Accessories

## SureStep® Microstepping Drives Accessories

### Braking Accessories

As a load rapidly decelerates from a high speed, much of the kinetic energy of that load is transferred back to the motor. This energy is then pushed back to the drive and power supply, resulting in increased system voltage. If there is enough overhauling load on the motor, the DC voltage will go above the drive and/or power supply limits. In general, the more torque the motor is capable of producing then the more energy it can push back into the drive.

When using a regulated/switching power supply, this can trip the overvoltage protection of the power supply or drive, and cause it to shut down.

To solve this problem, AutomationDirect offers a regeneration clamp as an optional accessory. The regen clamp has a built-in 50W braking resistor. The STP-DRVA-RC-050A does not have the ability to use an external resistor.



**Regeneration Clamp [STP-DRVA-RC-050A](#)**

### Regeneration Clamp Features

#### [STP-DRVA-RC-050A](#)

- Built-in 50W power resistor for more continuous current handling
- Mounted on a heat sink
- Voltage range: 24–80 VDC; no user adjustments required
- Power: 50W continuous; 800W peak
- Indicators (LED):  
Green = power supply voltage is present  
Red = clamp is operating (usually when stepper is decelerating)
- Protection: The external power supply is internally connected to an "Input Diode" in the regen clamp that protects the power supply from high regeneration voltages. This diode protects the system from connecting the power supply in reverse. If the clamp circuit fails, the diode will continue to protect the power supply from over-voltage.
- Three drive connections, 7A max per channel, 15A total output current
- Removable terminal blocks (replacement kit STP-CON-4)
- Uses 18-20 AWG wire for connections

### SureStep Damper

A step motor inertia damper can smooth out steps in a typical step motor resulting in a quieter and smoother motion when rotating between steps. Reducing the resonance and possible micro oscillations when moving from step to step is the main purpose of a "hockey puck" style damper, but it can also be used as a hand wheel to directly rotate the position of the rotor when power is removed from the motor. The damper is a properly sized machined piece of aluminum encased in plastic. It is sized and weighted for general damping of the respective frame size motor.



**Damper**

| Sure Step Series Specifications – Microstepping Drives Optional Accessories |         |                                                                                                                     |                     |
|-----------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------|---------------------|
| Part Number                                                                 | Price   | Description                                                                                                         | Drawing             |
| <a href="#">STP-DRVA-RC-050A*</a>                                           | \$61.00 | Regen Clamp: 50W, for DC input stepper and servo drives, enclosed                                                   | <a href="#">PDF</a> |
| <a href="#">STP-MTRA-17DMP</a>                                              | \$15.00 | SureStep damper, metal body. For use with NEMA 17 stepper motors with 5mm shafts. Mounting set screw included.      | <a href="#">PDF</a> |
| <a href="#">STP-MTRA-23DMP</a>                                              | \$34.50 | SureStep damper, metal body. For use with NEMA 23 stepper motors with 1/4 inch shafts. Mounting set screw included. | <a href="#">PDF</a> |

\* Do not use the regeneration clamp in an atmosphere containing corrosive gases.





# Stepping System Accessories

## SureStep® Microstepping Drives Accessories

**Dimensions = in [mm]**

### STP-DRVA-RC-050A

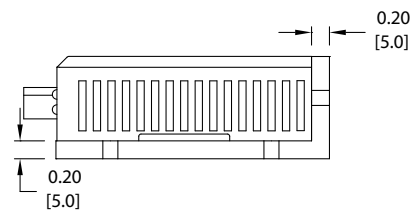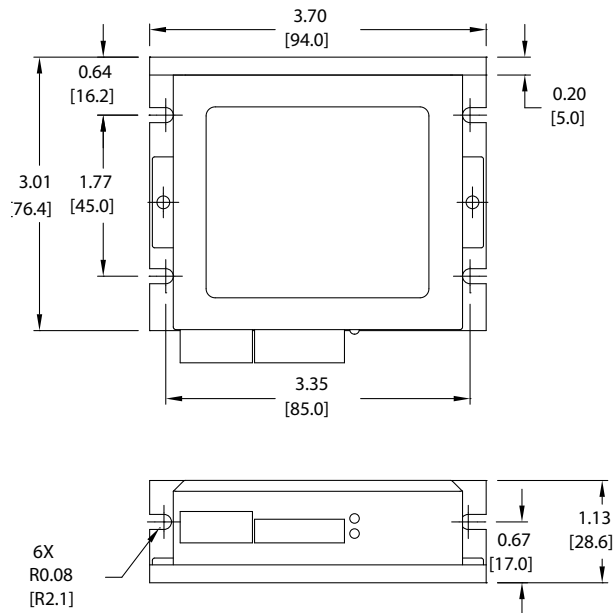



# Stepping System Accessories

## SureStep® Microstepping Drives Accessories

### USB to RS-485 Adapter

The STP-USB485-4W is a USB to RS-232/RS-485 converter that can be used in 2-wire or 4-wire serial networks. Serial communication can be wired up via the 9-pin D-sub connector or through the 6-screw terminals.

The STP-USB485-4W can be set for several different configurations. These modes are set up by the 4 DIP switches on the outside of the case (RS-232/RS-485, full/half duplex) and by the 7 jumpers located inside the case (termination/bias resistors).

SureStep Advanced Drives communicate via RS-232 (for control and for configuration via SureMotion Pro).


The Advanced Integrated motor/drives use RS-485. While the Advanced Integrated motor/drives can be wired for either 2- or 4-wire networks, 4-wire is require for use with SureMotion Pro due to the Firmware Download utility and the Status Monitor Screen.

Depending on the host controller's RS-485 implementation, either 2- or 4-wire RS-485 can be used for control. All RS-485 PLCs that have 2-wire capability (Productivity, BRX, Click, DirectLogic, etc.) can control the Advanced Integrated steppers.



| SureStep PC Adapter - STP-USB485-4W |                                            |
|-------------------------------------|--------------------------------------------|
| Price                               | \$130.00                                   |
| Drawing                             | PDF                                        |
| Communications                      | 2-wire RS-232<br>2- or 4-wire RS-485       |
| Configure With                      | Internal jumpers and external DIP switches |
| Compatible Cables                   | STP-232RJ11-CBL<br>STP-485DB9-CBL-2<br>USB |

### Dimensions = in [mm]

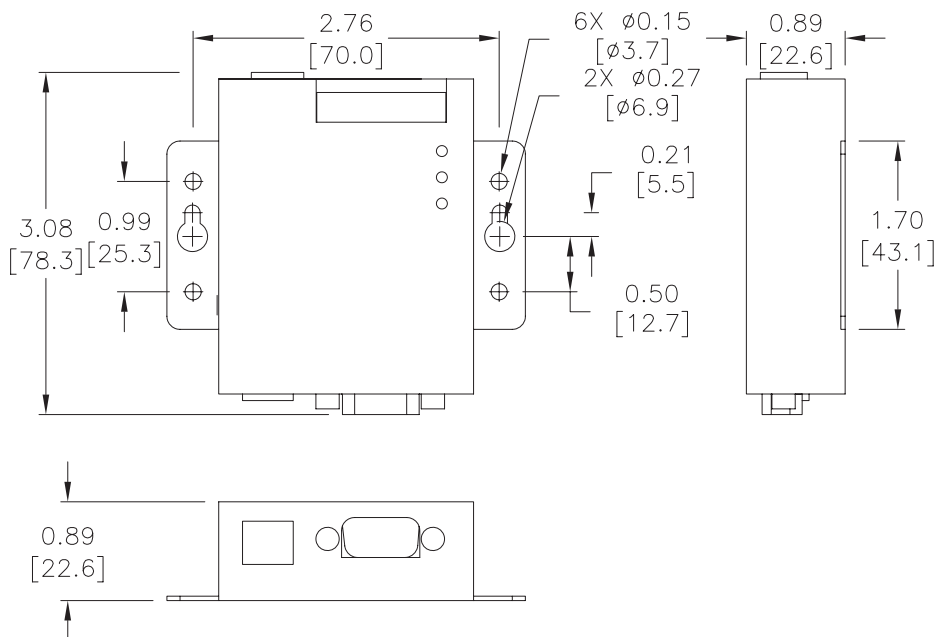



# Stepping System Accessories

## AMT Series Stepping System Encoders


| AMT Series Encoders, continued   |         |                                                                                                                                                                                                                                                        |                            |
|----------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Part Number                      | Price   | Description                                                                                                                                                                                                                                            | Drawing                    |
| <a href="#"><u>AMT132S-V</u></a> | \$34.50 | CUI Devices incremental (quadrature) modular encoder, 5 VDC, radial, push-pull (totem) output, configurable up to 4096 ppr. For use with NEMA 34 and 42 dual shaft motors.                                                                             | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT132Q-V</u></a> | \$38.50 | CUI Devices incremental (quadrature) modular encoder, 5 VDC, radial, line driver (differential) output, configurable up to 4096 ppr. For use with NEMA 34 and 42 dual shaft motors.                                                                    | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT332S-V</u></a> | \$38.50 | CUI Devices incremental (quadrature)/commutation modular encoder, 5 VDC, radial, push-pull (totem) encoder output, configurable up to 4096 ppr, push-pull (totem) commutation output. For use with NEMA 34 and 42 dual shaft motors.                   | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT332D-V</u></a> | \$42.50 | CUI Devices incremental (quadrature)/commutation modular encoder, 5 VDC, radial, line driver (differential) encoder output, configurable up to 4096 ppr, line driver (differential) commutation output. For use with NEMA 34 and 42 dual shaft motors. | <a href="#"><u>PDF</u></a> |

See Accessories section for configuration and signal cables.

CUI Devices Datasheets provide detailed encoder specifications. These datasheets can be found on each encoder's web page at [www.automationdirect.com](http://www.automationdirect.com).



AMT132S-V



AMT332S-V

| AMT Series Encoder Accessories           |        |                                                                                                                                                                                                                                      |
|------------------------------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part Number                              | Price  | Description                                                                                                                                                                                                                          |
| <a href="#"><u>CUI-KIT-1</u></a>         | \$6.50 | CUI Devices encoder accessory kit, replacement. For use with CUI Devices AMT102 encoders. Includes (1) AMT102 base, (1) AMT102 wide base, and (1) AMT10 sleeve kit (9 sleeves sized from 2-8mm).                                     |
| <a href="#"><u>CUI-KIT-2</u></a>         | \$6.50 | CUI Devices encoder accessory kit, replacement. For use with CUI Devices AMT103 encoders. Includes (1) AMT standard base, (1) AMT standard wide base, and (1) AMT10 sleeve kit (9 sleeves sized from 2-8mm).                         |
| <a href="#"><u>CUI-KIT-3</u></a>         | \$6.50 | CUI Devices encoder accessory kit, replacement. For use with CUI Devices AMT11, AMT21, and AMT31 encoders. Includes (1) AMT standard base, (1) AMT standard wide base, and (1) AMT standard sleeve kit (9 sleeves sized from 2-8mm). |
| <a href="#"><u>CUI-KIT-4</u></a>         | \$6.50 | CUI Devices encoder sleeve kit, replacement. For use with CUI Devices AMT13 and AMT33 encoders. Includes (8) sleeves sized from 9-14mm.                                                                                              |
| <a href="#"><u>STP-MTRA-SCRWKT-1</u></a> | \$5.50 | SureStep encoder mounting screw kit, for use with all stepper encoders.                                                                                                                                                              |



CUI-KIT-1



CUI-KIT-2



CUI-KIT-3



CUI-KIT-4



STP-MTRA-SCRWKT-1



# Stepping System Accessories

## AMT Series Stepping System Encoders

| AMT Series Encoder Compatibility     |         |                                                     |                                                |                                                      |                            |                     |                                                                                  |
|--------------------------------------|---------|-----------------------------------------------------|------------------------------------------------|------------------------------------------------------|----------------------------|---------------------|----------------------------------------------------------------------------------|
| Part Number                          | Max PPR | Bore Diameter                                       | Output Type                                    | PLC Compatibility                                    | Encoder Cable              | Configuration Cable | Motor Compatibility                                                              |
| <a href="#">AMT102-V</a>             | 2048    | 2mm, 3mm, 1/8", 4mm, 3/16", 5mm, 6mm, 1/4", 8mm     | push-pull (totem) (radial connector)           | BRX <sup>1</sup> , CLICK C0-1xDxE-D2                 | CUI-3131-x<br>CUI-3132-1FT | n/a                 | NEMA 14, 17, 23 dual-shaft                                                       |
| <a href="#">AMT103-V<sup>2</sup></a> | 2048    |                                                     | push-pull (totem) (axial connector)            |                                                      | CUI-435-x<br>CUI-3934-6FT  |                     |                                                                                  |
| <a href="#">AMT112S-V</a>            | 4096    |                                                     | push-pull (totem)                              |                                                      | AMT-17C-1-x                |                     |                                                                                  |
| <a href="#">AMT112Q-V</a>            | 4096    |                                                     | line driver (differential)                     | P2-HSI, P3-HSI, BRX <sup>1</sup> , CLICK C0-1xDxE-D2 | AMT-17C-1-x                | AMT-PGRM-17C        |                                                                                  |
| <a href="#">AMT312D-V</a>            | 4096    |                                                     | line driver (differential) encoder+commutation | P2-HSI, P3-HSI, BRX <sup>1</sup> , CLICK C0-1xDxE-D2 | AMT-17C-1-x                | AMT-PGRM-17C        |                                                                                  |
| <a href="#">AMT312S-V</a>            | 4096    |                                                     | push-pull (totem) encoder+commutation          | BRX <sup>1</sup> , CLICK C0-1xDxE-D2                 | AMT-17C-1-x                |                     |                                                                                  |
| <a href="#">AMT132S-V</a>            | 4096    | push-pull (totem)                                   | AMT-18C-3-x                                    |                                                      |                            |                     |                                                                                  |
| <a href="#">AMT132Q-V</a>            | 4096    | 9mm, 3/8", 10mm, 11mm, 12mm, 1/2", 13mm, 14mm, 5/8" | line driver (differential)                     | P2-HSI, P3-HSI, BRX <sup>1</sup> , CLICK C0-1xDxE-D2 | AMT-18C-3-x                | AMT-PGRM-18C        | NEMA 34 and 42 <sup>3</sup> dual-shaft<br><br>(Does not fit STP-MTRAC-34 motors) |
| <a href="#">AMT332S-V</a>            | 4096    |                                                     | push-pull (totem) encoder+commutation          | BRX <sup>1</sup> , CLICK C0-1xDxE-D2                 | AMT-18C-3-x                |                     |                                                                                  |
| <a href="#">AMT332D-V</a>            | 4096    |                                                     | line driver (differential) encoder+commutation | P2-HSI, P3-HSI, BRX <sup>1</sup> , CLICK C0-1xDxE-D2 | AMT-18C-3-x                |                     |                                                                                  |


*Note: For specific AutomationDirect PLC and step motor model compatibility, please see Appendix A in the SureStep User Manual.*

1 - Requires FC-ISO-C (see wiring diagrams for DIP switch settings).

2 - For AMT103-V to maintain NEMA23 compatibility, CUI-KIT-2 must be purchased to use the standard wide base for mounting.

3 - For STP-MTRAC(H)-42 series motors, encoder mounting kit STP-MTRA-42ENC is required.


| AMT Series Encoder Signal Cables |         |                                                                                                                                             |                     |
|----------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Part Number                      | Price   | Description                                                                                                                                 | Drawing             |
| <a href="#">CUI-3132-1FT</a>     | \$5.00  | CUI Devices encoder cable, 5-pin connector to pigtail, 1ft cable length. For use with CUI Devices AMT102 encoders.                          | <a href="#">PDF</a> |
| <a href="#">CUI-3131-6FT</a>     | \$10.50 | CUI Devices encoder cable, 5-pin connector to pigtail, shielded, twisted pair, 6ft cable length. For use with CUI Devices AMT102 encoders.  | <a href="#">PDF</a> |
| <a href="#">CUI-3131-10FT</a>    | \$30.00 | CUI Devices encoder cable, 5-pin connector to pigtail, shielded, twisted pair, 10ft cable length. For use with CUI Devices AMT102 encoders. | <a href="#">PDF</a> |
| <a href="#">CUI-3131-20FT</a>    | \$49.00 | CUI Devices encoder cable, 5-pin connector to pigtail, shielded, twisted pair, 20ft cable length. For use with CUI Devices AMT102 encoders. | <a href="#">PDF</a> |
| <a href="#">CUI-435-1FT</a>      | \$5.50  | CUI Devices encoder cable, 5-pin connector to pigtail, 1ft cable length. For use with CUI Devices AMT103 encoders.                          | <a href="#">PDF</a> |
| <a href="#">CUI-3934-6FT</a>     | \$26.50 | CUI Devices encoder cable, 5-pin connector to pigtail, shielded, twisted pair, 6ft cable length. For use with CUI Devices AMT103 encoders.  | <a href="#">PDF</a> |
| <a href="#">CUI-435-10FT</a>     | \$22.00 | CUI Devices encoder cable, 5-pin connector to pigtail, 10ft cable length. For use with CUI Devices AMT103 encoders.                         | <a href="#">PDF</a> |
| <a href="#">CUI-435-20FT</a>     | \$30.00 | CUI Devices encoder cable, 5-pin connector to pigtail, 20ft cable length. For use with CUI Devices AMT103 encoders.                         | <a href="#">PDF</a> |




CUI-435-1FT  
CUI-435-10FT  
CUI-435-20FT



CUI-3131-6FT  
CUI-3131-10FT  
CUI-3131-20FT



CUI-3132-1FT




CUI-3934-6FT




# Stepping System Accessories

## AMT Series Stepping System Encoders

| AMT Series Encoder Signal Cables     |          |                                                                                                                                                         |                            |
|--------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Part Number                          | Price    | Description                                                                                                                                             | Drawing                    |
| <a href="#"><u>AMT-17C-1-036</u></a> | \$40.00  | CUI Devices encoder cable, 17-pin connector to pigtail, shielded, twisted pair, 3ft cable length. For use with CUI Devices AMT112 and AMT312 encoders.  | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT-17C-1-072</u></a> | \$81.00  | CUI Devices encoder cable, 17-pin connector to pigtail, shielded, twisted pair, 6ft cable length. For use with CUI Devices AMT112 and AMT312 encoders.  | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT-17C-1-120</u></a> | \$121.00 | CUI Devices encoder cable, 17-pin connector to pigtail, shielded, twisted pair, 10ft cable length. For use with CUI Devices AMT112 and AMT312 encoders. | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT-18C-3-036</u></a> | \$27.50  | CUI Devices encoder cable, 18-pin connector to pigtail, shielded, twisted pair, 3ft cable length. For use with AMT13 and AMT33 encoders.                | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT-18C-3-072</u></a> | \$67.00  | CUI Devices encoder cable, 18-pin connector to pigtail, shielded, twisted pair, 6ft cable length. For use with AMT13 and AMT33 encoders.                | <a href="#"><u>PDF</u></a> |
| <a href="#"><u>AMT-18C-3-120</u></a> | \$96.00  | CUI Devices encoder cable, 18-pin connector to pigtail, shielded, twisted pair, 10ft cable length. For use with AMT13 and AMT33 encoders.               | <a href="#"><u>PDF</u></a> |



**AMT-17C-1-036**  
**AMT-17C-1-072**  
**AMT-17C-1-120**



**AMT-18C-3-036**  
**AMT-18C-3-072**  
**AMT-18C-3-120**

| AMT Series Encoders Programming Cables |         |                                                                                                                                      |
|----------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------|
| Part Number                            | Price   | Description                                                                                                                          |
| <a href="#"><u>AMT-PGRM-17C</u></a>    | \$27.00 | CUI Devices programming cable, miniB-USB to 17-pin connector, 1ft cable length. For use with CUI Devices AMT112 and AMT312 encoders. |
| <a href="#"><u>AMT-PGRM-18C</u></a>    | \$24.50 | CUI Devices programming cable, miniB-USB to 18-pin connector, 1ft cable length. For use with CUI Devices AMT13 and AMT33 encoders.   |



**AMT-PGRM-17C**



**AMT-PGRM-18C**



# Stepping System Accessories

## SureStep® Microstepping Drives Accessories

### SureMotion Pro Drive Configuration Software - for Advanced Stepper Drives and Advanced Integrated Motor/Drives

#### Free Download

SureMotion Pro configuration software is available as a free download from our website for SureStep advanced components (STP-DRV-4850, -80100, & STP-MTRD-xxxxxR).

- Completely replaces SureStep Pro. Required for integrated motor/drives.
- Used for easy configuration and setup of the drive, including drive, motion control mode, I/O, motor.
- Open, Save, Upload, Download configuration files to Advanced Drives and Drive/Motors.
- Status Monitor screen aids in troubleshooting alarms and faults.
- Self Test Mode verifies motor wiring and functionality.
- SCL Terminal window allows testing/verification of SCL (serial ASCII) commands before PLC programming begins.
- Help files include technical data, application information, advanced setup, serial command instructions.
- Runs on 32-bit/64-bit Windows operating systems.



### SureStep Drive Configuration Software - for Advanced Stepper Drives

| Part Number   | Price   | Description                                                                                                                                                                                                                              |
|---------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SM-PRO</b> | \$10.50 | SureMotion Pro Windows configuration software, USB drive or free download. For use with SureStep stepper drives with serial port. Requires PC serial port, <a href="#">USB-RS232-1</a> or <a href="#">STP-USB485-4W</a> serial adapters. |

\* Available for purchase on USB or can be [downloaded for free](#) from the AutomationDirect Web site ([www.AutomationDirect.com](http://www.AutomationDirect.com)).