

**AUTOMATIONDIRECT**.com

# Motor Controls




pro<sup>sense</sup>

**BRYANT**

**Fuji Electric**

**EATON**

Cutler-Hammer

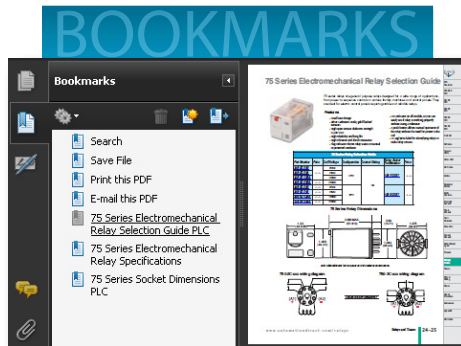

In this interactive PDF you can:

- Use bookmarks to navigate by product category
- Use bookmarks to save, search, print or e-mail the catalog section
- Click on part #s to link directly to our online store for current pricing, specs, stocking information and more

Up-to-date price list:

[www.automationdirect.com/pricelist](http://www.automationdirect.com/pricelist)

FREE Technical Support:

[www.automationdirect.com/support](http://www.automationdirect.com/support)

FREE Videos:


[www.automationdirect.com/videos](http://www.automationdirect.com/videos)

FREE Documentation:

[www.automationdirect.com/documentation](http://www.automationdirect.com/documentation)

FREE CAD drawings:

[www.automationdirect.com/cad](http://www.automationdirect.com/cad)



[www.automationdirect.com/motor-controls/](http://www.automationdirect.com/motor-controls/)

Motor Controls MS-1

# Motor Controls for less from AutomationDirect



## WEG Electric Miniature Contactors (3-Pole & 4-Pole) More Horsepower in a Smaller (45mm) Frame


CWC series mini contactors are a complete solution for controlling motors and switching other loads. The CWC's compact dimensions for its IEC current rating, up to 22A, AC-3 utilization category, allows it to take up less space inside electrical enclosures while still maintaining a powerful 15 hp @ 460V. WEG RW series overload relays are available for use with this series. WEG CWC series miniature contactors start at \$11.

- 7, 9, 12, 16, 22 Amp 3-pole models
- 7, 9, 16 Amp 4-pole models
- Matching direct mount overload relays
- Available auxiliary contact blocks, surge suppressors, Start-Delta electronic timing relays, wiring kits, and mechanical interlock and latch blocks tab placement

## RW Series Overload Relays for CWC Miniature Contactors

WEG RW series overload class 10 thermal overload relays are designed for use with, and as perfect complement to, the CWC miniature contactors.

RW series overload relays are available in compact frame sizes from 0.28 A to 32A. Mounting an RW series overload relay directly to a WEG CWC miniature contactor creates an across-the-line starter capable of controlling motors from fractional to 15 hp @ 460V. WEG RW series overload relays start at \$14.



## Fuji Electric Motor Contactors and Overload Relays

AutomationDirect offers a complete line of Fuji Electric IEC motor controls. The DUO line (SC-E contactors and TK-E overloads) is fully integrated so multiple motor control solutions are possible with a minimum number of components. The SC-E contactors work with either the conventional adjustable overloads or the Manual Motor Starter (MMS) to create starters for a variety of applications. The conventional starters in the DUO line can accommodate motors up to 100 horsepower at 480 VAC. The larger contactors feature the SUPERMAGNET™ coil for greater reliability and positive pick-up and drop-out. Fuji contactors start at just \$15.

- Controls from 1/2 to 100 hp
- 45mm to 115mm frames
- IEC-947, UL, CSA, CE approvals


The Odyssey Series of contactors and overloads also features the SUPERMAGNET™ coil and are available in four sizes with overloads to match any motor to 300 horsepower.

- Controls from 60 to 300 hp
- 138mm to 148mm frames

Both the DUO and Odyssey lines are available in 24VAC, 24VDC, 120VAC, and 240VAC coil versions. Certain models are available with 575V coils. Contactors are rated up to 600VAC, 3-phase.

## Fuji Manual Motor Starters

The DUO series of manual motor starters are circuit breakers for motors that provide optimal protection by integrating the functions of a molded case circuit breaker and thermal overload relay into a compact unit.

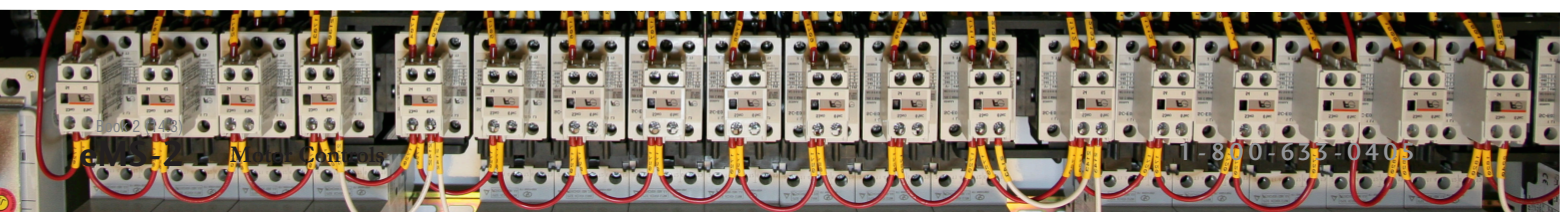



## GH15 Series IEC Contactors / Motor Starters / Overload Relays

The GH15 Series of IEC contactors and bimetallic overload relays are manufactured by Europe's leading maritime contactor company. Motor contactors for ocean-going vessels are built to the most rigid specifications. This same design technology carries over to this line of industrial electric motor controls.

Use these contactors wherever you need a heavy-duty switching device with up to three poles. Add up to eight auxiliary contact blocks for interlocks and feedback. Or, use the optional mechanical interlock to create an inexpensive reversing contactor.

Individual components allow you to use the contactor alone or to assemble a motor starter using accompanying thermal overload relays. Combine a manual motor starter/protector for all-in-one protection.

GH15 contactors are available in 45mm, 60mm, 79mm, 110mm and 145mm sizes, and start at \$43.50.

**EAT•N**

Cutler-Hammer



## Eaton Corp. Cutler-Hammer Contactors / Motor Starters / Overload Relays

The Eaton Corp. CE15 Freedom Series IEC contactors offer big contactor ratings in a compact frame. The 45 mm frame contactors can handle up to 20 hp at 460V. They are easily DIN-rail mountable in either the vertical or horizontal upright position. Eaton Corp./Cutler-Hammer contactors start at \$157.50.

The Eaton Corp. AE16 Series IEC starters are full voltage magnetic starters used for starting polyphase induction motors. These motor starters also provide protection to the motor against running or stalled overcurrents. The 45mm frame starters can handle up to 20 hp at 460V. They are easily DIN-rail mountable in either the vertical or horizontal upright position. Motor starters are comprised of a contactor, overload relay and heater packs. The overload relays have FLA adjustable dials.

**BRYANT®**



## Bryant Manual Motor Controllers/ Motor Disconnects

Bryant has designed a compact motor controller that will also meet the rigorous demands of a motor disconnect. Bryant's motor controllers are listed as "Suitable as Motor Disconnect" under UL Standard 508 – Industrial Control Equipment – qualifying them to perform both operations in one compact package. By utilizing Bryant's compact motor controllers and motor disconnects, you benefit through the convenience of one device fulfilling two needs. AutomationDirect offers three versions of manual motor controllers (MMCs) and industrial motor disconnects, starting at \$23.50:

- Toggle switch AC motor controllers
- Enclosed toggle switch AC motor controllers
- Enclosed NEMA 4X rotary switch AC motor controllers







# CWC Series Miniature Contactors

## Features

- Rated up to 15hp @ 460V
- Direct mounting to the WEG RW17D overload relay
- Frame size is identical for AC and DC coil contactors up to 16A (CWC07-16).
- CWC025 frame available with AC coil only
- Heavy-duty operation
- Tool-free DIN-rail mounting
- WEG 18-month warranty
- Snap-on accessories
- DC coil low consumption: 1.7–2.7 W
- DC coil standard consumption: 2.6–3.7 W
- Mirror contacts per IEC 60947-4-1 (Built-in N.C. and N.C. auxiliary contacts)

The CWC series mini contactors are a complete solution for switching and controlling motors. The CWC's compact dimensions for its IEC current rating, up to 22A, AC-3 utilization category, allows it to take up less space inside electrical enclosures while still maintaining a powerful 15hp @ 460V. Dimensions of the 7A to 16A contactors are the same for both AC or DC coil voltages, making the panel design and assembly easier. DC models feature low consumption coils allowing the CWC to be operated directly from a PLC without interface relays.

## More Horsepower in a Smaller Frame



## Agency Approvals/Certifications

- cULus listed (File No. E202315/E189202)
- CE marked low voltage directive 2006/95/EC

## Standards

- IEC/EN 60947-1
- UL 508
- CSA-C22.2 No. 14








# CWC Series Miniature Contactors

## Overview

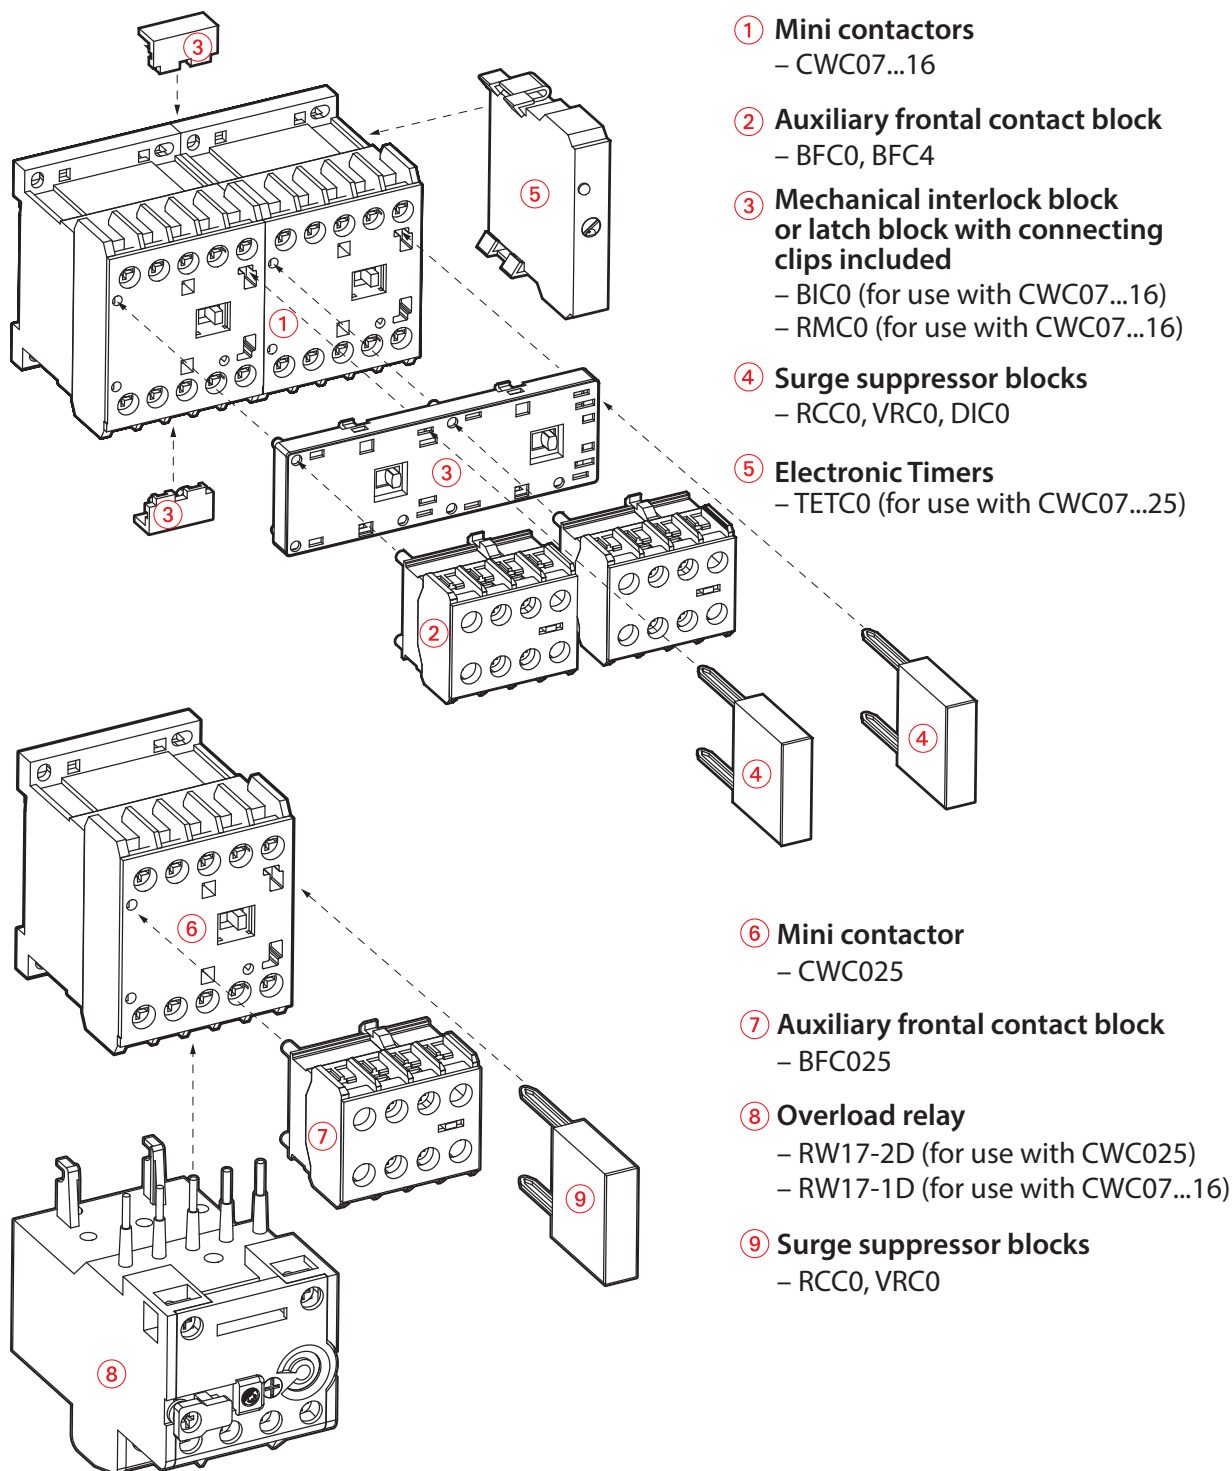



# CWC Series Miniature Contactors Configuration

## Three-Pole Contactors

Three-Pole Mini Contactors with AC Coil (IEC/EN – 60947-1)													
Part Number	Price	Current Rating		Maximum Rated Operational Power						# of Contacts			Coil Voltage and Frequency
				kW [hp]						Main	Built-in Aux Contacts		
		AC-3 (A)	AC-1 (A)	220V 230V	380V	400V 415V	440V	500V	660V 690V		N.O.	N.C.	
CWC07-10-30V04	\$11.00	7	18	1.5 [2]	3 [4]	3 [4]	3.7 [5]	3.7 [5]	3 [4]	3	1	–	24VAC 60Hz
CWC07-10-30V18	\$11.00									3	1	–	120VAC 60Hz/110VAC 50Hz
CWC07-10-30V24	\$11.00									3	1	–	208-240 VAC 60Hz
CWC07-10-30V47	\$11.00									3	1	–	480VAC 60Hz/400-415 VAC 50Hz
CWC07-01-30V04	\$11.00									3	–	1	24VAC 60Hz
CWC07-01-30V18	\$11.00									3	–	1	120VAC 60Hz/110VAC 50Hz
CWC07-01-30V24	\$11.00									3	–	1	208-240 VAC 60Hz
CWC07-01-30V47	\$11.00									3	–	1	480VAC 60Hz/400-415 VAC 50Hz
CWC09-10-30V04	\$12.00	9	20	2.2 [3]	4 [5.4]	4 [5.4]	4.5 [6]	4.5 [6]	4 [5.4]	3	1	–	24VAC 60Hz
CWC09-10-30V18	\$12.00									3	1	–	120VAC 60Hz/110VAC 50Hz
CWC09-10-30V24	\$12.00									3	1	–	208-240 VAC 60Hz
CWC09-10-30V47	\$12.00									3	1	–	480VAC 60Hz/400-415 VAC 50Hz
CWC09-01-30V04	\$12.00									3	–	1	24VAC 60Hz
CWC09-01-30V18	\$12.00									3	–	1	120VAC 60Hz/110VAC 50Hz
CWC09-01-30V24	\$12.00									3	–	1	208-240 VAC 60Hz
CWC09-01-30V47	\$12.00									3	–	1	480VAC 60Hz/400-415 VAC 50Hz
CWC012-10-30V04	\$13.00	12	22	3 [4]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	3	1	–	24VAC 60Hz
CWC012-10-30V18	\$13.00									3	1	–	120VAC 60Hz/110VAC 50Hz
CWC012-10-30V24	\$13.00									3	1	–	208-240 VAC 60Hz
CWC012-10-30V47	\$13.00									3	1	–	480VAC 60Hz/400-415 VAC 50Hz
CWC012-01-30V04	\$13.00									3	–	1	24VAC 60Hz
CWC012-01-30V18	\$13.00									3	–	1	120VAC 60Hz/110VAC 50Hz
CWC012-01-30V24	\$13.00									3	–	1	208-240 VAC 60Hz
CWC012-01-30V47	\$13.00									3	–	1	480VAC 60Hz/400-415 VAC 50Hz
CWC016-10-30V04	\$16.00	16	22	4 [5.4]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	3	1	–	24VAC 60Hz
CWC016-10-30V18	\$16.00									3	1	–	120VAC 60Hz/110VAC 50Hz
CWC016-10-30V24	\$16.00									3	1	–	208-240 VAC 60Hz
CWC016-10-30V47	\$16.00									3	1	–	480VAC 60Hz/400-415 VAC 50Hz
CWC016-01-30V04	\$16.00									3	–	1	24VAC 60Hz
CWC016-01-30V18	\$16.00									3	–	1	120VAC 60Hz/110VAC 50Hz
CWC016-01-30V24	\$16.00									3	–	1	208-240 VAC 60Hz
CWC016-01-30V47	\$16.00									3	–	1	480VAC 60Hz/400-415 VAC 50Hz
CWC025-00-30V04	\$17.00	22	32	5.5 [7.5]	11 [15]	11 [15]	11 [15]	11 [15]	11 [15]	3	–	–	24VAC 60Hz
CWC025-00-30V18	\$17.00									3	–	–	120VAC 60Hz/110VAC 50Hz
CWC025-00-30V24	\$17.00									3	–	–	208-240 VAC 60Hz
CWC025-00-30V47	\$17.00									3	–	–	480VAC 60Hz/400-415 VAC 50Hz
Three-Pole Mini Contactors with DC Coil (IEC/EN – 60947-1)													
CWC07-10-30L02	\$14.00	7	18	1.5 [2]	3 [4]	3 [4]	3.7 [5]	3.7 [5]	3 [4]	3	1	–	12VDC low consumption
CWC07-10-30L03	\$14.00									3	1	–	24VDC low consumption
CWC07-01-30L02	\$14.00									3	–	1	12VDC low consumption
CWC07-01-30L03	\$14.00									3	–	1	24VDC low consumption
CWC09-10-30L02	\$15.50	9	20	2.2 [3]	4 [5.4]	4 [5.4]	4.5 [6]	4.5 [6]	4 [5.4]	3	1	–	12VDC low consumption
CWC09-10-30L03	\$15.50									3	1	–	24VDC low consumption
CWC09-01-30L02	\$15.50									3	–	1	12VDC low consumption
CWC09-01-30L03	\$15.50									3	–	1	24VDC low consumption
CWC012-10-30L02	\$16.00	12	22	3 [4]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	3	1	–	12VDC low consumption
CWC012-10-30L03	\$16.00									3	1	–	24VDC low consumption
CWC012-01-30L02	\$16.00									3	–	1	12VDC low consumption
CWC012-01-30L03	\$16.00									3	–	1	24VDC low consumption
CWC016-10-30L02	\$19.00	16	22	4 [5.4]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	3	1	–	12VDC low consumption
CWC016-10-30L03	\$19.00									3	1	–	24VDC low consumption
CWC016-01-30L02	\$19.00									3	–	1	12VDC low consumption
CWC016-01-30L03	\$19.00									3	–	1	24VDC low consumption
Note: Low consumption 12VDC and 24VDC contactors can only use 2-pole auxiliary contact blocks.													

Note: Low consumption 12VDC and 24VDC contactors can only use 2-pole auxiliary contact blocks.




# CWC Series Miniature Contactors Configuration


## Four-Pole Contactors

Four-Pole Mini Contactors with AC Coil (IEC/EN – 60947-1)												
Part Number	Price	Current Rating		Maximum Rated Operational Power KW [hp]						Number of Main Contacts		Coil Voltage and Frequency
		AC-3 (A)	AC-1 (A)	230V 230V	380V	400V 415V	440V	500V	660V 690V	NO	NC	
CWC07-00-40V04	\$13.00	7	18	1.5 [2]	3 [4]	3 [4]	3.7 [5]	3.7 [5]	3 [4]	4	–	24VAC 60Hz
CWC07-00-40V18	\$13.00									4	–	120VAC 60Hz/110VAC 50Hz
CWC07-00-40V24	\$13.00									4	–	208-240 VAC 60Hz
CWC07-00-40V47	\$13.00									4	–	480VAC 60Hz/400-415 VAC 50Hz
CWC07-00-22V04	\$13.00									2	2	24VAC 60Hz
CWC07-00-22V18	\$13.00									2	2	120VAC 60Hz/110VAC 50Hz
CWC07-00-22V24	\$13.00									2	2	208-240 VAC 60Hz
CWC07-00-22V47	\$13.00									2	2	480VAC 60Hz/400-415 VAC 50Hz
CWC09-00-40V04	\$14.50	9	20	2.2 [3]	4 [5.4]	4 [5.4]	4.5 [6]	4.5 [6]	4 [5.4]	4	–	24VAC 60Hz
CWC09-00-40V18	\$14.50									4	–	120VAC 60Hz/110VAC 50Hz
CWC09-00-40V24	\$14.50									4	–	208-240 VAC 60Hz
CWC09-00-40V47	\$14.50									4	–	480VAC 60Hz/400-415 VAC 50Hz
CWC09-00-22V04	\$14.50									2	2	24VAC 60Hz
CWC09-00-22V18	\$14.50									2	2	120VAC 60Hz/110VAC 50Hz
CWC09-00-22V24	\$14.50									2	2	208-240 VAC 60Hz
CWC09-00-22V47	\$14.50									2	2	480VAC 60Hz/400-415 VAC 50Hz
CWC016-00-40V04	\$19.50	16	22	4 [5.4]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	4	–	24VAC 60Hz
CWC016-00-40V18	\$19.50									4	–	120VAC 60Hz/110VAC 50Hz
CWC016-00-40V24	\$19.50									4	–	208-240 VAC 60Hz
CWC016-00-40V47	\$19.50									4	–	480VAC 60Hz/400-415 VAC 50Hz
CWC016-00-22V04	\$19.50									2	2	24VAC 60Hz
CWC016-00-22V18	\$19.50									2	2	120VAC 60Hz/110VAC 50Hz
CWC016-00-22V24	\$19.50									2	2	208-240 VAC 60Hz
CWC016-00-22V47	\$19.50									2	2	480VAC 60Hz/400-415 VAC 50Hz
Four-Pole Mini Contactors with DC Coil (IEC/EN – 60947-1)												
CWC07-00-40L02	\$16.00	7	18	1.5 [2]	3 [4]	3 [4]	3.7 [5]	3.7 [5]	3 [4]	4	–	12VDC Low consumption
CWC07-00-40L03	\$16.00									4	–	24VDC Low consumption
CWC07-00-22R02	\$16.00									2	2	12VDC Standard consumption
CWC07-00-22R03	\$16.00									2	2	24VDC Standard consumption
CWC09-00-40L02	\$17.50	9	20	2.2 [3]	4 [5.4]	4 [5.4]	4.5 [6]	4.5 [6]	4 [5.4]	4	–	12VDC Low consumption
CWC09-00-40L03	\$17.50									4	–	24VDC Low consumption
CWC09-00-22R02	\$17.50									2	2	12VDC Standard consumption
CWC09-00-22R03	\$17.50									2	2	24VDC Standard consumption
CWC016-00-40L02	\$22.50	16	22	4 [5.4]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	4	–	12VDC Low consumption
CWC016-00-40L03	\$22.50									4	–	24VDC Low consumption
CWC016-00-22R02	\$22.50									2	2	12VDC Standard consumption
CWC016-00-22R03	\$22.50									2	2	24VDC Standard consumption
Note: Low consumption 12VDC and 24VDC contactors can only use 2-pole auxiliary contact blocks.												


Note: Low consumption 12VDC and 24VDC contactors can only use 2-pole auxiliary contact blocks.




**CWC07-10...CWC016-10**




**CWC07-01...CWC016-01**



**CWC025-00**



**CWC07-00-40...CWC016-00-40**




**CWC07-00-22...CWC016-00-22**




# CWC Series Miniature Contactors Configuration

## How to Identify Your Part Number

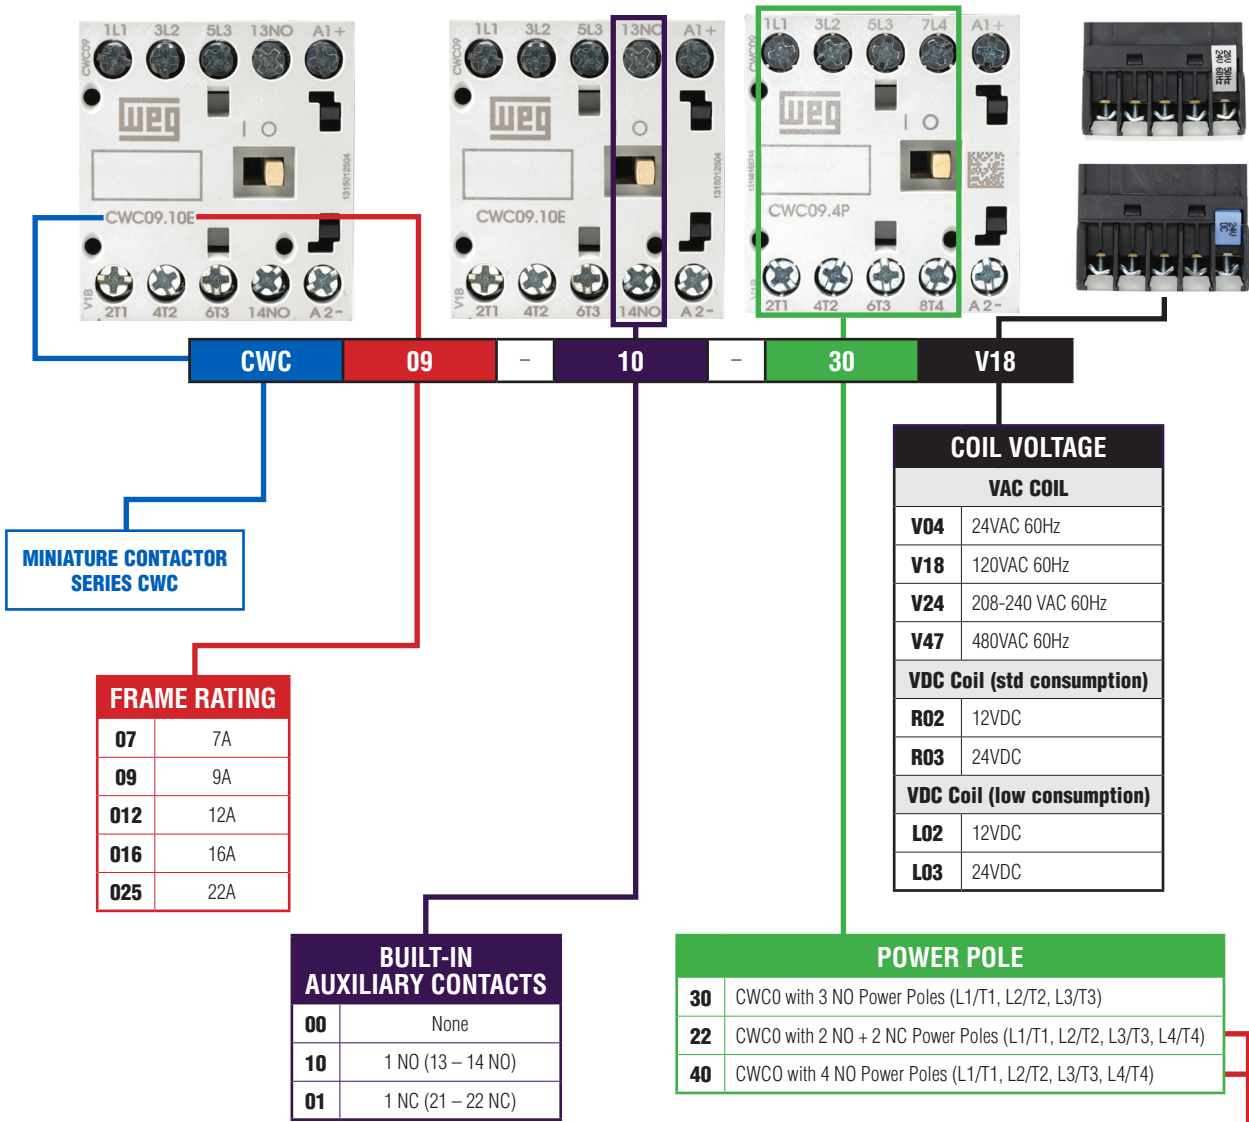

*Note: For reference only. Not intended to build a part number.*

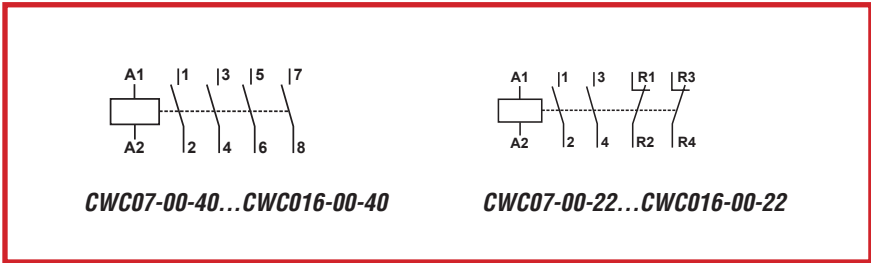



# CWC Series Miniature Contactors

## Technical Characteristics

CWC Miniature Contactors General Technical Characteristics						
Contactor part numbers			CWC07	CWC09	CWC012	CWC016 CWC025
Standards			IEC/EN 60947-1, IEC/EN 60947-4, DIN VDE 0660(102), UL508			
Rated insulation voltage $U_i$ (pollution degree 3)	IEC/EN 60947-4-1, VDE 0660	(V)	690			
	UL, CSA	(V)	600			
Rated impulse withstand voltage $U_{imp}$	(IEC/EN 60947-1)	(kV)	4			
Rated operational frequency (contact switchable)		(Hz)	25–400			
Mechanical lifespan	AC coil Ops x 10 <sup>6</sup>		10			3
	DC coil Ops x 10 <sup>6</sup>		12			—
Electrical lifespan	I <sub>e</sub> AC-3 Ops x 10 <sup>6</sup>		1.4	1.3	1.2	1.1 0.6
Degree of protection (VDE 0160)	Main circuits		IP20			
	Control circuits and auxiliary contacts		IP20			
Mounting			Screw or DIN-rail 35mm (EN 50022)			
Coil terminals			2			
Vibration resistance	Contactor open	(g)	2			
	Contactor closed	(g)	4			
Mechanical shock resistance (½ sinusoid = 11ms)	Contactor open	(g)	6			
	Contactor closed	(g)	10			
Ambient temperature	Operation		-25 to +55°C [-13 to +131°F]			
	Storage		-55 to +80°C [-67 to +176°F]			
Maximum operating altitude (without derating)			up to 3000m [9842.5 ft]			
Altitude derating	0.72 x rated hp		3000 – 4000 m [9842.5 – 13123.4 ft]			
	0.60 x rated hp		4000 – 5000 m [13123.4 – 16404.2 ft]			

UL508 and IEC/EN Specifications						
Contactor part numbers			CWC07	CWC09	CWC012	CWC016 CWC025
Standards			UL508/CSA Ratings			
Rated operating voltage		(V)	600			
UL general purpose rating	(A)		18	20	22	30
Switching motor loads full voltage		(Hz)	50/60			
1-phase	115V	(A)	7.2	7.2	9.8	16 20
	230V	(A)	6.9	8	12	12 17
	115V	(hp)	1/3	1/3	1/2	1 1-1/2
	230V	(hp)	3/4	1	2	2 3
3-phase	208V	(A)	6.9	7.8	11	11 17.5
	230V	(A)	6	9.6	9.6	15.2 22
	460V	(A)	7.6	7.6	11	14 21
	575V	(A)	6.1	9	9	11 17
	208V	(hp)	1-1/2	2	3	3 5
	230V	(hp)	1-1/2	3	3	5 7-1/2
	460V	(hp)	5	5	7-1/2	10 15
	575V	(hp)	5	7-1/2	7-1/2	10 15
Short circuit current rating (SCCR)	600V	(kA)	5	5	5	5 5
Standards			IEC Ratings (IEC/EN 60947)			
Rated operating voltage		(V)	690			
Rated thermal current I <sub>m</sub>	AC-1 (≤ 55°C)	(A)	18	20	22	22 32
	AC-3 (U <sub>e</sub> ≤ 440V)	(A)	7	9	12	16 22
Switching motor loads		(Hz)	50/60			
3-phase	220-240 V	(A)	7	9	12	16 22
	380-400 V	(A)	7	9	12	16 22
	415-440 V	(A)	7	9	12	16 22
	500V	(A)	6.2	7.5	8.8	13 16
	660-690 V	(A)	4.5	5.5	6.6	10 13
	220-240 V	(kW)	1.5	2.2	3	3.7 5.5
	380-400 V	(kW)	3	3.7	5.5	7.5 11
	415-440 V	(kW)	3.7	4.5	5.5	7.5 11
	500V	(kW)	3.7	4.5	5.5	7.5 11
	660-690 V	(kW)	3	3.7	5.5	7.5 11



# CWC Series Miniature Contactors

## Technical Characteristics

Control Circuit - Alternating Current (AC)							
Contactor part numbers			CWC07	CWC09	CWC012	CWC016	CWC025
Rated insulation voltage $U_i$ (pollution degree 3)	IEC/EN 60947-4-1, VDE 0660	(V)	1000				
	UL, CSA	(V)	600				
Coils rated voltage	50Hz	(V)	10-550				
	60Hz	(V)	12-660				
	50/60 Hz	(V)	12-660				
Coil operating limits							
Coil 60Hz	Pick up percent of voltage	(%)	40–76				
	Drop out percent of voltage	(%)	25–65				
Coil 50/60 Hz	Pick up percent of voltage	(%)	50–80				
	Drop out percent of voltage	(%)	20–60				
Average consumption							
Coil 60Hz	Magnetic circuit closed	(VA)	2.5–3.5			10.8–13.2	
	Power factor	(cos $\phi$ )	0.28			0.32	
	Power dissipation per pole	(W)	2.6			–	
	Magnetic circuit closing	(VA)	35			72	
	Power factor	(cos $\phi$ )	0.85			0.93	
Coil 50/60 Hz	Magnetic circuit closed	(VA)	2–3			4.56–5.8	
	Magnetic circuit closing	(VA)	30			58	
Average time	Closing NO contacts	(ms)	8–20			13–16	
	Opening NO contacts	(ms)	6–13			13.5–17	

Control Circuit - Direct Current (DC)					
Contactor part numbers			CWC07, CWC09, CWC012, CWC016		
Coil type			Standard	Low consumption	4P (2P/2R)
Rated insulation voltage $U_i$ (pollution degree 3)	IEC/EN 60947-4-1, VDE 0660	(V)	1000		
	UL, CSA	(V)	600		
Standard voltages		(V)	12–440		
Coil operating limits					
Coil operating limits	Pick up percent of voltage	(%)	40–70		
	Drop out percent of voltage	(%)	15–40		
Power consumption					
Power consumption	Magnetic circuit closed	(W)	2.6–3.7	1.7–2.7	2.9–4
	Magnetic circuit closing	(W)	2.6–3.7	1.7–2.7	2.9–4
Operation time	Closing NO contacts	(ms)	35–45		
	Opening NO contacts	(ms)	7–12		





# CWC Series Miniature Contactors

## Technical Characteristics

CWC Series Miniature Contactors Power Circuit							
Contactor part numbers			CWC07	CWC09	CWC012	CWC016	CWC025
Rated operational current $I_n$	AC-3 ( $U_e \leq 440V$ )	(A)	7	9	12	16	22
	AC-4 ( $U_e \leq 440V$ )	(A)	2.8	3.5	4.5	5	9
	AC-1 ( $\theta \leq 55^\circ C$ , $U_e \leq 690V$ )	(A)	18	20	22	22	32
Rated operational voltage $U_e$	IEC/EN 60947-4-1, VDE 0660	(V)	690				
	UL, CSA <sup>1</sup>	(V)	600				
Rated thermal current $I_{th}$ ( $\theta \leq 55^\circ C$ )		(A)	18	20	22	22	32
Making capacity - IEC/EN 60947		(A)	70	90	120	160	250
Breaking capacity IEC/EN 60947	( $U_e \leq 400V$ )	(A)	50	72	96	128	200
	( $U_e = 500V$ )	(A)	50	72	96	128	200
	( $U_e = 690V$ )	(A)	35	54	72	96	150
Short-time current (no current flowing during recovery time of 10 min and $\theta \leq 40^\circ C$ )	1 sec	(A)	250	250	250	250	—
	5 sec	(A)	125	125	125	125	—
	10 sec	(A)	95	95	95	95	—
	30 sec	(A)	70	70	70	70	—
	1 min	(A)	50	50	50	50	—
	3 min	(A)	40	40	40	40	—
Protection against short-circuits with fuses (IEC gL/gG) <sup>2</sup> or UL Class CC	@ 600V - UL/CSA <sup>1</sup>	(kA)	5				
	Coordination type 1	(A)	35	35	35	35	50
	Coordination type 2	(A)	20	20	25	25	35
Average impedance per pole		(m $\Omega$ )	6	6	5	5	6
Average power dissipation per pole	AC-1	(W)	1.9	2.4	2.4	2.4	6.1
	AC-3	(W)	0.3	0.5	0.7	1.3	3.8
Utilization Category AC-3							
Rated operational current $I_n$ ( $\theta \leq 55^\circ C$ )	( $U_e \leq 440V$ )	(A)	7	9	12	16	22
	( $U_e \leq 500V$ )	(A)	6.2	7.5	8.8	13	16
	( $U_e \leq 690V$ )	(A)	4.5	5.5	6.6	10	13
	( $U_e \leq 1000V$ )	(A)	Not available				
Rated operational power	220/230 V	(kW)	1.5	2.2	3	3.7	5.5
		(hp)	2	3	4	5	7.5
	380V	(kW)	3	3.7	5.5	7.5	11
		(hp)	4	5	7.5	10	15
	400/415 V	(kW)	3	3.7	5.5	7.5	11
		(hp)	4	5	7.5	10	15
	440V	(kW)	3.7	4.5	5.5	7.5	11
		(hp)	5	6	7.5	10	15
	500V	(kW)	3.7	4.5	5.5	7.5	11
		(hp)	5	6	7.5	10	15
	660/690 V	(kW)	3	3.7	5.5	7.5	11
		(hp)	4	5	7.5	10	15
Maximum electrical operations per hour	600 ops/hr	(%)	100	100	100	100	100
	1200 ops/hr	(%)	75	75	75	75	75
	3000 ops/hr	(%)	50	50	50	50	50
Utilization Category AC-4							
Rated operational current $I_n$ AC-4 ( $U_e \leq 440 V$ )		(A)	2.8	3.5	4.5	5	9
Rated operational power (200,000 operations)	220/230 V	(kW)	0.55	0.75	0.75	1.1	2.2
		(hp)	0.7	1	1	1.5	2.9
	380/400 V	(kW)	1.1	1.1	1.8	2.2	4
		(hp)	1.5	1.5	2.4	2.9	5.4
	415V	(kW)	1.1	1.5	2.2	2.2	4.5
		(hp)	1.5	2	2.9	2.9	6
	440V	(kW)	1.1	1.5	2.2	2.2	4.5
		(hp)	1.5	2	2.9	2.9	6
	500V	(kW)	1.1	1.5	2.2	2.2	4.5
		(hp)	1.5	2	2.9	2.9	6
	660/690 V	(kW)	1.1	1.5	2.2	2.2	4.5
		(hp)	1.5	2	2.9	2.9	6

<sup>1</sup>Note: Specifications only valid for 50/60 Hz three-phase, 4 poles WEG standard motors.

<sup>2</sup>Note: Not sold by Automation Direct.



# CWC Series Miniature Contactors

## Technical Characteristics


Built-In Auxiliary Contacts Technical Characteristics			
<b>Standards</b>	IEC 60947-5-1, IEC 60947-4-1		
<b>Rated insulation voltage <math>U_i</math> (pollution degree 3)</b>	IEC, VDE 0660	(V)	690
	UL, CSA	(V)	600
<b>Rated operational voltage <math>U_e</math></b>	IEC, VDE 0660	(V)	690
	UL, CSA	(V)	600
<b>Rated thermal current <math>I_{th}</math> (<math>\theta \leq 55^\circ\text{C}</math>)</b>	(A)		10
<b>Rated operational current <math>I_e</math></b>			
<b>AC-15 (IEC 60947-5-1)</b>	$U_e \leq 240\text{V}$	(A)	10
	380–400 V	(A)	6
	415–440 V	(A)	6
	500V	(A)	4
	660–690 V	(A)	2
UL/CSA			A600
<b>DC-13 (IEC 60947-5-1)</b>	24V	(A)	6
	60V	(A)	2
	110V	(A)	1
	220–240 V	(A)	0.3
UL/CSA			Q600
<b>Making capacity (rms)</b>	$U_e$ 400 V 50/60 Hz - AC-15	(A)	10 x $I_e$ (AC-15)
<b>Breaking capacity (rms)</b>	$U_e$ 400 V 50/60 Hz - AC-15	(A)	10 x $I_e$ (AC-15)
<b>Maximum IEC fuse class gL/gG without welding (short-circuit protection) gL/gG</b>	(A)		10
<b>Control circuit reliability</b>	(V/mA)		17 / 5
<b>Electrical endurance</b>	(millions operations)		1
<b>Mechanical endurance</b>	(millions operations)		10




# CWC Series Miniature Contactors

## Electrical Durability

AC-3 ( $U_e \leq 440\text{VAC}$ )

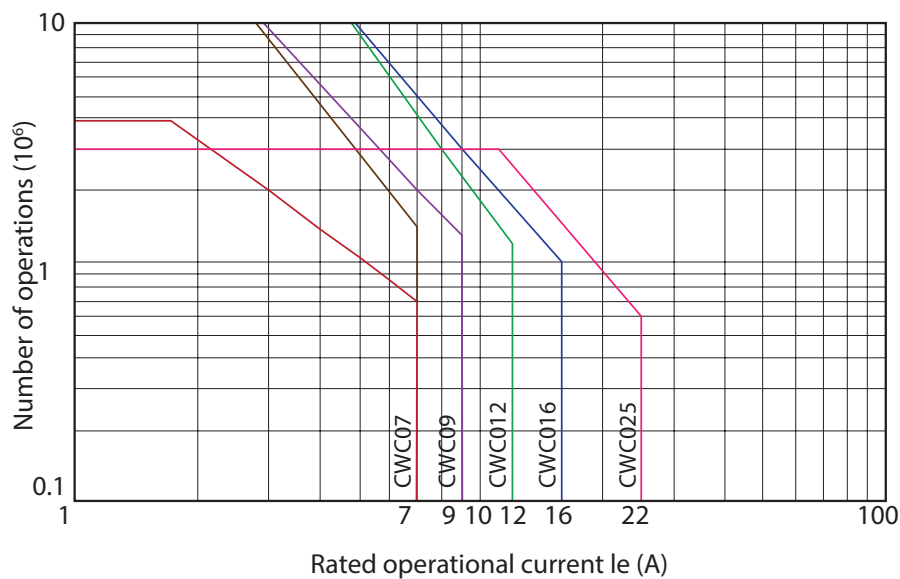

AC-4 ( $U_e \leq 440\text{VAC}$ )

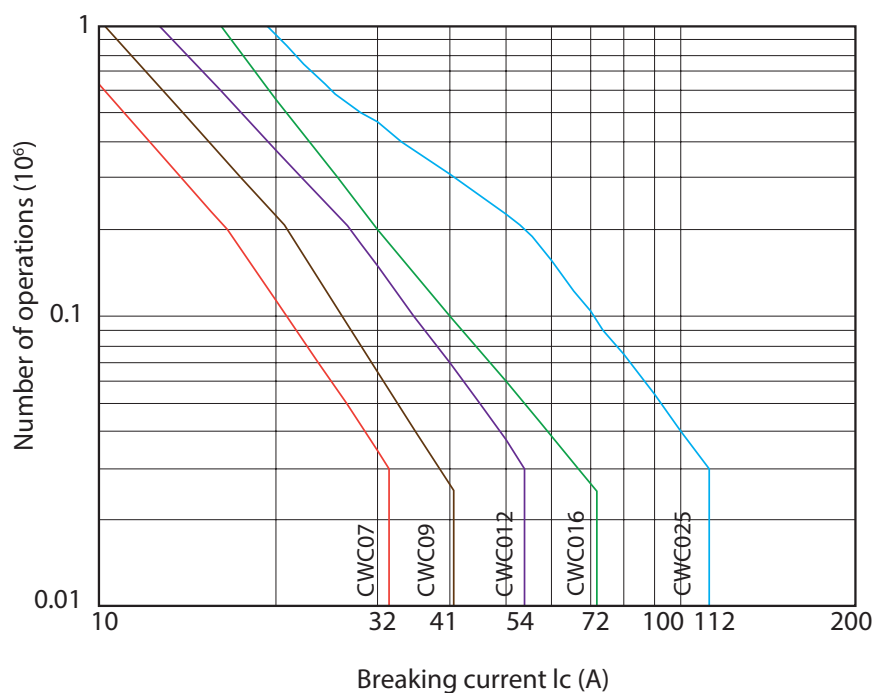







# CWC Series Miniature Contactors

## Dimensions


Dimensions mm [inches]

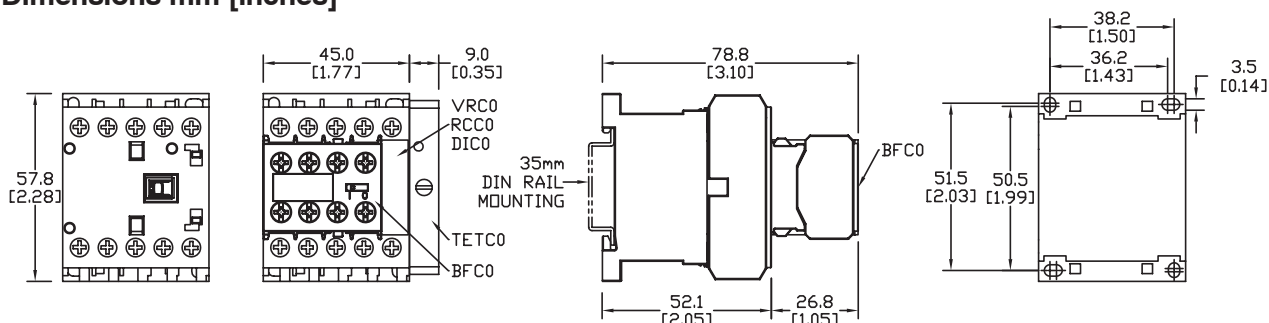

**CWC07, CWC09, CWC012, CWC016 + VRC0/RCC0/DIC0**

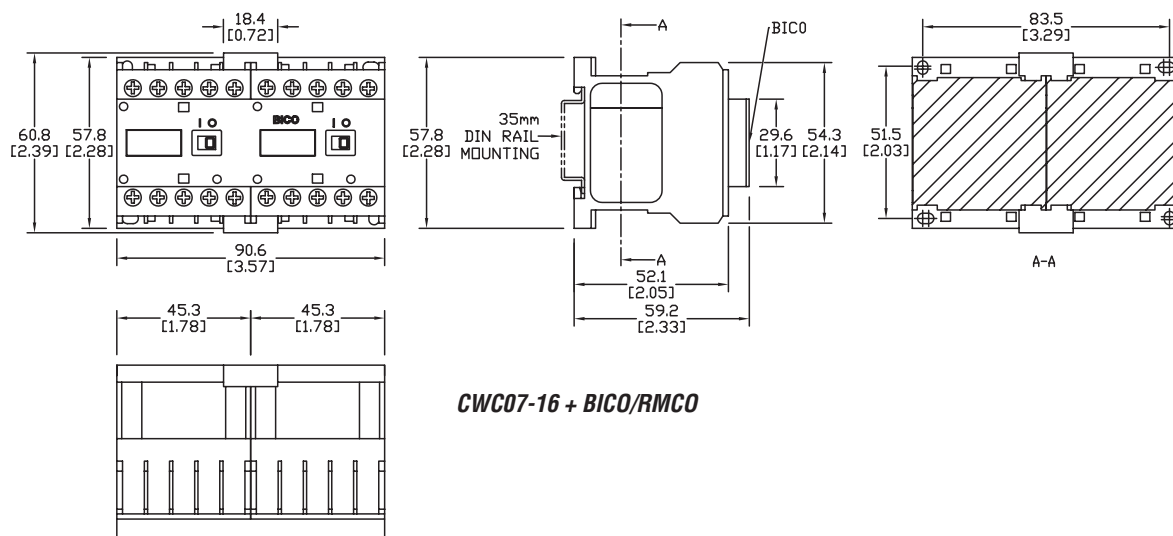


**CWC07-16 + BICO/RMCO**

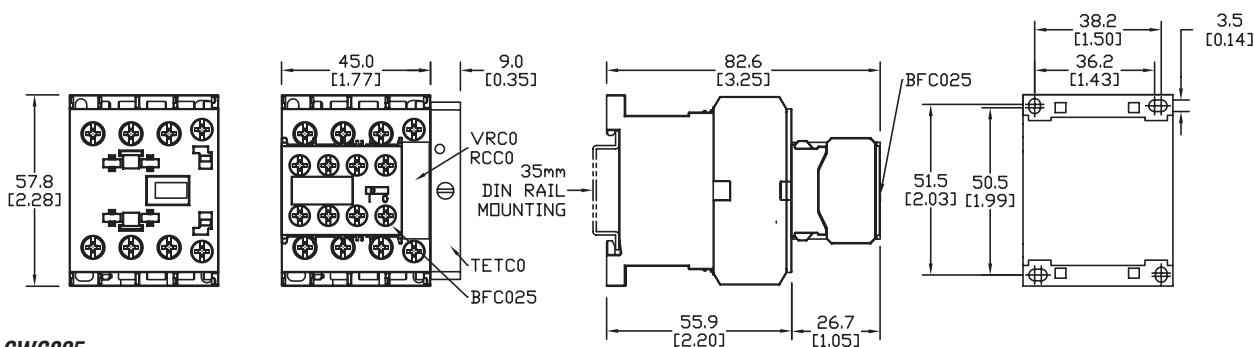

**CWC025**

**Mounting position for CWC miniature contactors**

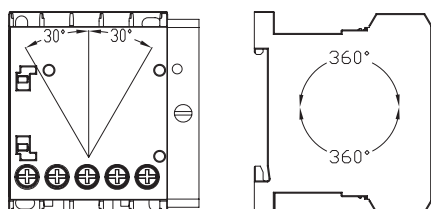




# CWC Series Miniature Contactors

## Accessories

### Front Mounting Auxiliary Contact Blocks

Auxiliary Contact Blocks											
2 Maximum # of Contacts						2 Maximum # of Contacts					
Use With	Auxiliary Contacts		Terminal Markings	Part Number	Price	Use With	Auxiliary Contacts		Terminal Markings	Part Number	Price
	N.O.	N.C.					N.O.	N.C.			
Three-Pole Contactors (CWC07, CWC09, CWC012, CWC016)	2	0		BFC0-20*	\$4.50	Four-Pole Contactors (CWC07, CWC09, CWC016)	2	0		BFC4-20*	\$4.50
	1	1		BFC0-11*	\$4.50		1	1		BFC4-11*	\$4.50
	0	2		BFC0-02*	\$4.50		0	2		BFC4-02*	\$4.50
	4 Maximum # of Contacts						4 Maximum # of Contacts				
	4	0		BFC0-40	\$6.50		4	0		BFC4-40	\$6.50
	2	2		BFC0-22	\$6.50		2	2		BFC4-22	\$6.50
	0	4		BFC0-04	\$6.50		0	4		BFC4-04	\$6.50
	3	1		BFC0-31	\$6.50		3	1		BFC4-31	\$6.50
	1	3		BFC0-13	\$6.50		1	3		BFC4-13	\$6.50
	Three-Pole Contactors CWC025	2 Maximum # of Contacts					*Note: Low consumption 12VDC and 24VDC contactors can only use 2-pole auxiliary contact blocks				
2		0		BFC025-20	\$4.50	 BFC0-11					
1		1		BFC025-11	\$4.50						
0		2		BFC025-02	\$4.50						



# CWC Series Miniature Contactors

## Accessories


### Auxiliary Contact Blocks Technical Specifications

Auxiliary Contacts BFC0/BFC4/BFC025 Technical Specifications			
Standards	IEC 60947-5-1, IEC 60947-4-1		
Rated insulation voltage $U_i$ (pollution degree 3)	IEC, VDE 0660	(V)	1000
	UL, CSA	(V)	600
Rated operational voltage $U_o$	IEC, VDE 0660	(V)	690
	UL, CSA	(V)	600
Rated thermal current $I_m$ ( $\theta \leq 55^\circ\text{C}$ )		(A)	10
Making capacity (rms)	$U_o$ 400V 50/60 Hz - AC-15	(A)	30
Breaking capacity (rms)	$U_o$ 400V 50/60 Hz - AC-15	(A)	3
Maximum IEC fuse class gL/gG without welding (short-circuit protection)		(A)	10
Minimum switching capacity		(V/mA)	17 / 5
Electrical endurance	(millions operations)		1
Mechanical endurance	(millions operations)		10

AC Auxiliary Contact Block Ratings UL/CSA											
Contact Rating Code Designation	Thermal Continuous Current (A)	Maximum Current (A)								Maximum Apparent Power (VA)	
		120V		240V		480V		600V			
		Make	Break	Make	Break	Make	Break	Make	Break	Make	Break
A600	10	60	6	30	3	15	1.5	12	1.2	7200	720
C600	2.5	15	1.5	7.5	0.75	3.75	0.375	3	0.3	1800	180

DC Auxiliary Contact Block Ratings UL/CSA				
Contact Rating Code Designation	Thermal Continuous Current (A)	Maximum Make or Break Current (A)		Maximum Make or Break Apparent Power (VA)
		125V	250V	
Q600	2.5	0.55	0.27	69
R300	1	0.22	0.11	28

### Terminals Capacity and Tightening Torque – Power, Control Circuits, and Auxiliary Contact Blocks







Terminals Capacity and Tightening Torque - Power, Control Circuits and Auxiliary Contact Blocks						
Terminal Type		CWC07...16		CWC025		BFC0/BFC4/BFC025
		Main Contacts	Auxiliary Contacts	Main Contacts	Auxiliary Contacts	Auxiliary Contacts
Solid cable	mm <sup>2</sup>	1x 0.5–2.5	2x 0.5–2.5	1x 0.5–2.5	2x 0.5–2.5 1x 4	–
		2x 0.5–2.5		2x 0.5–2.5		–
Cable without ferrule	mm <sup>2</sup>	1x 0.75–2.5	2x 0.5–2.6	2x 1–2.5	1x 0.75–2.5	1x 0.75–4
		2x 0.75–2.5		2x 2.5–6	2x 0.75–2.5	2x 0.75–2.5
Cable with ferrule	mm <sup>2</sup>	1x 2.5	–	2x 1–2.5	1x 0.5–2.5	1x 0.5–4
		2x 2.5		2x 2.5–6	2x 0.5–2.5	2x 0.5–2.5
Wire gauge	AWG	1 or 2x 18–12	22–14	1 or 2x 18–10	22–14	22–14
Terminal screws		M3 flat/philips	M3.5 flat/philips	M3 flat/philips	M3.5 flat/philips	M3.5 flat/philips
Tightening torque		N·m [lb·in]	1–1.5 [8.85–13.28]	1–1.7 [8.85–15.05]	1–1.5 [8.85–13.28]	0.8–1.5 [7.08–13.28]



# WEG CWC Series Miniature Contactors Accessories

## Surge Suppressors

Surge Suppressors						
Part Number	Price	Circuit Diagram	Voltage	Max. Clamping Voltage @ Current (Ip)	For Use With	
RCC0-1D49	\$1.50		12-24 VAC 50/60 Hz	N/A	RC Resistor/ Capacitor AC Loads (The capacitor is used to absorb the voltage spike)	CWC07 CWC09 CWC012 CWC016 CWC025
RCC0-2D53	\$1.50		24-48 VAC 50/60 Hz			
RCC0-3D55	\$1.50		50-127 VAC 50/60 Hz			
RCC0-4D63	\$1.50		130-250 VAC 50/60 Hz			
RCC0-5D84	\$1.50		275-380 VAC 50/60 Hz			
RCC0-6D73	\$1.50		400-510 VAC 50/60 Hz			
VR0-1E49	\$1.50		12-48 VAC 50/60 Hz / 12-60 VDC	135V @ 10A	MOV Varistor AC or DC Loads  The voltage surge is limited to 3 times the voltage rating of the suppressor (300% of the rated coil voltage). Clamps voltage	CWC07 CWC09 CWC012 CWC016 CWC025
VR0-2E34	\$1.50		50-127 VAC 50/60 Hz / 60-180 VDC	395V @ 10A		
VR0-3E50	\$1.50		130-250 VAC 50/60 Hz / 180-300 VDC	710V @ 10A		
VR0-4E41	\$1.50		277-380 VAC 50/60 Hz / 300-510 VDC	650V @ 10A		
VR0-5D73	\$1.50		400-510 VAC 50/60 Hz	775V @ 10A		
DIC0-1C33	\$1.50		12-600 VDC (1N4007)	N/A	Diode DC Loads The diode allows the remaniscnt current to flow from a DC coil very smoothly and avoids an increase in voltage through the coil. Flyback suppression	CWC07 CWC09 CWC012 CWC016



**RCC0-5D84**

## Electronic Timing Relays (CWC07...CWC025)


Star-Delta (TETCO) with LED Status Indication				
Part Number	Price	Voltage	Timing	Function
<b>TETCO-U030S-D52</b>	\$34.00	24-28 VDC 50/60 Hz	3 to 30 seconds	Star-Delta
<b>TETCO-U030S-D61</b>	\$34.00	110-130 VDC 50/60 Hz		
<b>TETCO-U030S-D66</b>	\$34.00	220-240 VDC 50/60 Hz		

Note: Right side mounting




**TETCO-U030S-XXX**




**Timing Diagram**

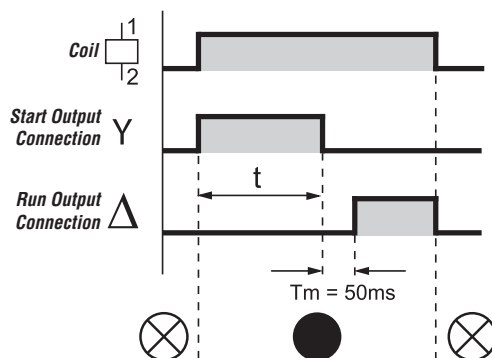

**IEC Wiring Diagram**

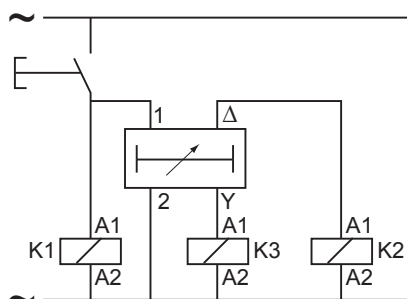

**IEC Schematic Symbols**

	Timing Relay Coil
	Contactor/Control Relay Coil
	Push Button N.O. Contacts

⊗ LED Off

● LED On

Tm = Change over time





# CWC Series Miniature Contactors Accessories


## Wiring Kits (Jumper Assemblies)

- Quick and easy assembly for wye-delta and reversing starters
- Allows assembly of WEG overload relay RW17D


Reversing Wiring Kit for Mini Contactors CWC07 to CWC016										
Part Number	Price	Max Rated Operational Power of Three-Phase Motors 50/60 Hz kW [hp]						Rated Operational Current I <sub>e</sub> AC-3 (U <sub>e</sub> ≤ 440V)	Mini Contactors	
		220V 230V	380V	400V 415V	440V	500V	660V 690V		K1 = K2	
ECC0-R	\$10.00	1.5 [2]	3 [4]	3 [4]	3.7 [5]	3.7 [5]	3 [4]	7	CWC07	
		2.2 [3]	4 [5.4]	4 [5.4]	4.5 [6]	4.5 [6]	4 [5.4]	9	CWC09	
		3 [4]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	5.5 [7.5]	12	CWC012	
		4 [5.4]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	7.5 [10]	16	CWC016	
Star-Delta Wiring Kit for Mini Contactors CWC07 to CWC016										
Part Number	Price	Max Rated Operational Power of Three-Phase Motors 50/60 Hz kW [hp]					Rated Operational Current I <sub>e</sub> AC-3 (U <sub>e</sub> ≤ 440V)	Mini Contactors		
		220–230 V		400–415 V		660–690 V		K1 = K2	K3	
ECC0-SD	\$11.50	3.7 [5]		5.5 [7.5]		5.5 [7.5]	12	CWC07	CWC07	
		3.7 [5]		7.5 [10]		9.2 [12.5]	18	CWC012		
		5.5 [7.5]		11 [15]		15 [20]	25	CWC016	CWC09	

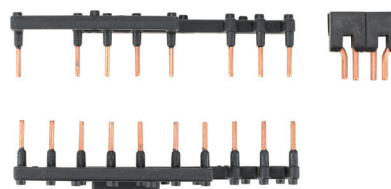

ECC0-R Wiring Diagram

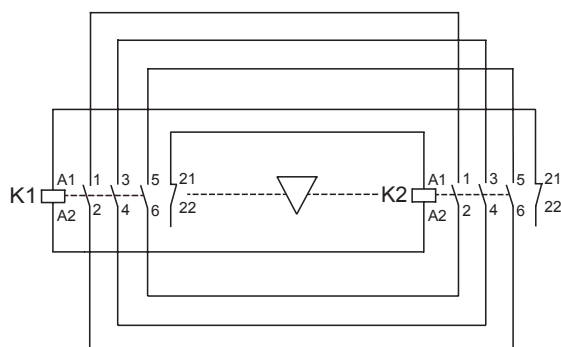

ECC0-SD Wiring Diagram

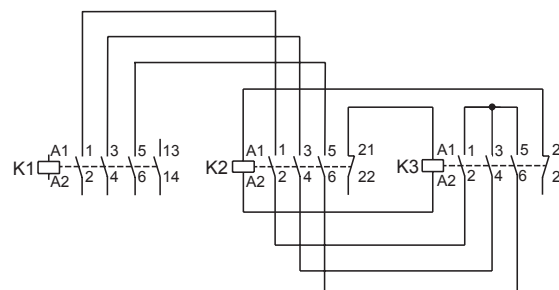



# CWC Series Miniature Contactors Accessories



## Mechanical Interlock Block and Latch Block

Mechanical Interlock Block and Latch Block			
Part Number	Price	Description	For Use With
<b>BICO</b>	\$2.50	Mechanical interlock, front mounted, use with any CWC07 through CWC016 series miniature contactor. Mechanically connects two CWC series mini contactors and prevents both contactors from being pulled in at the same time. For reversing contactors.	CWC07 CWC09 CWC012 CWC016
<b>RMCO</b>	\$3.00	Latch block, front mounted, use with any CWC07 through CWC016 series miniature contactor. Mechanically connects two CWC series mini contactors and enables one contactor to operate with a pulse input signal. Retention block for contactor.	

**Note:** Do not use BICO or RMCO accessory with mini contactors with low consumption DC coils.




## Operation Description of Latched Block RMCO

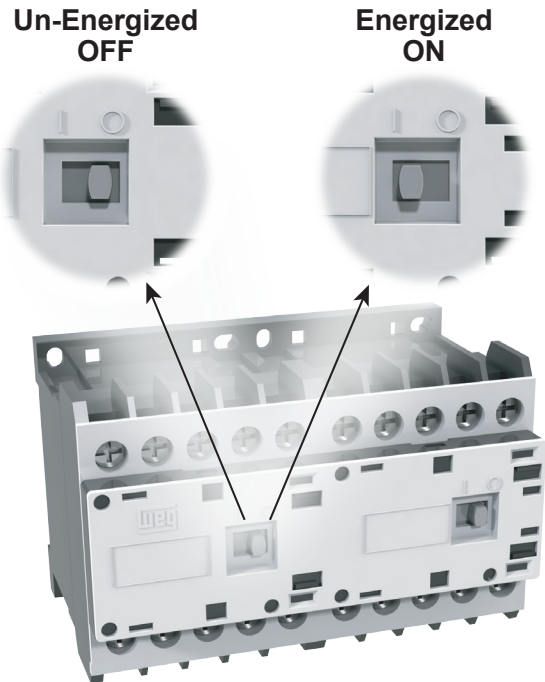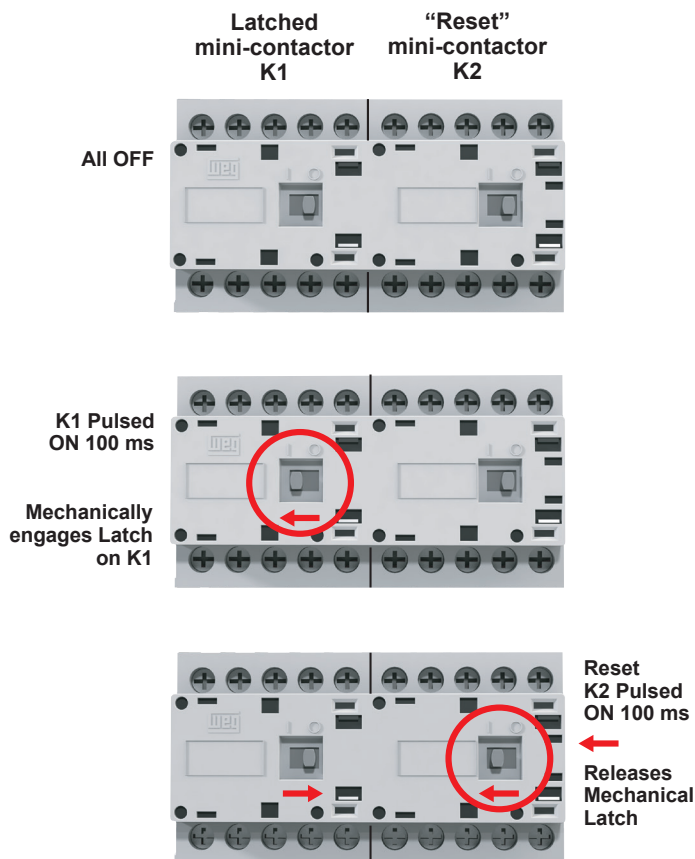

- After a minimum pulse of 100ms on mini contactor's coil (K1), the RMCO will keep K1 contactor switched on;
- The mini contactor K1 will only return to rest position after miniature contactor's coil (K2) has been energized by a releasing pulse of 100ms;
- The mechanical latch only occurs when mini contactor (K1) is energized (ON).

**Note:** If RESET miniature contactor's coil (K2) remains energized, the latching of mini contactor (K1) is not enabled.

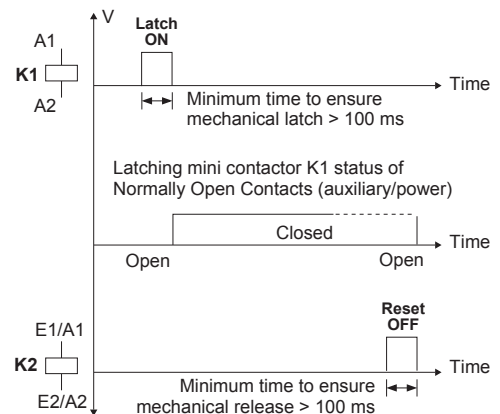







# CWC Series Miniature Contactors

## Accessories - Dimensions



### Dimensions mm [in]

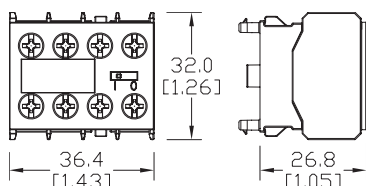


**BFC0-xx, BFC4-xx, BFC025-xx**

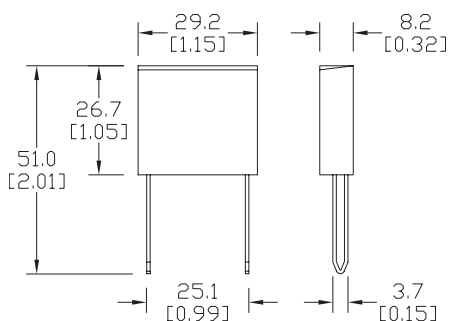

**RCC0-xxxx, VRC0-xxxx, DIC0-xxxx**

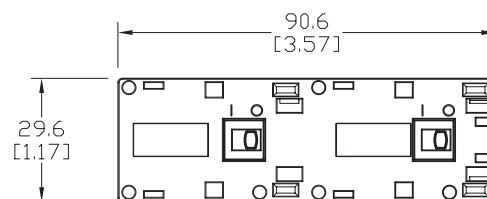


**BICO, RMC0**

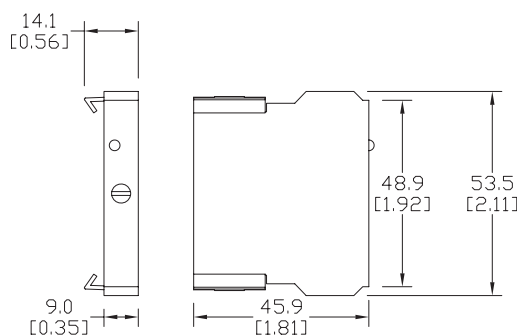

**TETCO-U030S-Dxx**

# WEG RW Series Overload Relays for CWC Miniature Contactors

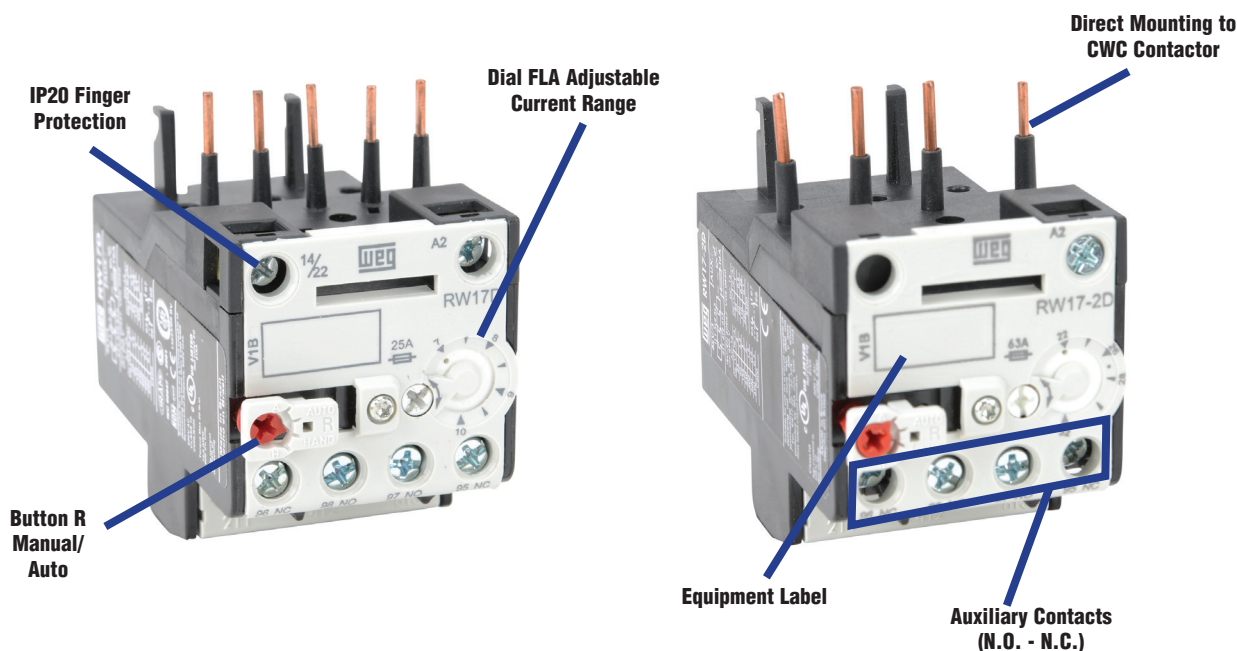

## Overload Relays Features

RW overload relays are an important part of WEG controls' range of products. As usual in WEG products, an extended operational service life is one of the main features you can find in RW overload relays.

WEG's RW class 10 thermal overload relays are designed for use with, and as perfect complement to, the CWC miniature contactors.

RW relays are available in compact frame sizes from 0.28 A to 32A. Mounting an RW series overload relay directly to a WEG CWC miniature contactor creates an across-the-line starter capable of controlling motors from fractional to 15hp @ 460V.

### Standards and Approvals

- IEC 60947 and VDE 0660.
- cULus listed file no. E189202
- CE marked low voltage directive 2006/95/EC
- Marine

### Modern Architecture



Previous models of open overloads with "heaters" encounter problems in the field, including:

- Inaccurate trip point, because of uneven screw tightness when installed on individual phases
- Ambient problems, such as dust and other contaminants, because of their open design
- Inability to protect in case of single phase failure
- Nuisance tripping, because no temperature compensation is possible.

The modern design of WEG overload relays solves all of these problems. RW overload relays are fitted with fixed bimetallic elements, which eliminate any need for heater elements for field installation or future upgrading to a more efficient motor. All sizes provide complete motor protection by offering:

- Ambient temperature compensation (-4°F to +140°F)
- Phase loss sensitivity protection
- Current unbalance sensitivity

### Dial FLA Setting

The trip-current is set via an adjustable dial designed with the motor's full load current (FLA) in mind.

### Temperature Compensation

Because RW overload relays include a fourth bimetallic strip in addition to the three that are directly heated by the motor current, ambient temperature variations in the range of -4°F to +140°F are no obstacle for accurate protection of your motors even in the toughest conditions.

### Phase Loss Sensitivity

WEG overload relays include standard phase failure sensitivity protection. This feature ensures fast tripping in case of phase loss, protecting your motor and avoiding expensive repairs.

### Multi Function Button "R"

The programmable RESET button can be selected to operate in a Manual or Automatic mode, with or without TEST capabilities of the isolated "trip" N.C. and "alarm" N.O. auxiliary contacts. The "R" multifunction RESET / TEST button can be set in four different positions:

- H (manual RESET only)
- HAND (manual RESET/TEST)
- AUTO (automatic RESET/TEST)
- A (automatic RESET only)

In HAND and AUTO positions, when gray R button is pushed, both N.O. 97-98 and N.C. 95-96 contacts change state.


# **RW Series Thermal Overload Relays for CWC Miniature Contactors**

## Thermal Overload Relays Features


- Adjustable tripping current
- Phase-loss sensitivity (All phases must be connected. See motor wiring diagrams.)
- Tripping class 10
- Auxiliary contacts 1 N.O. + 1 N.C.
- Temperature compensation from -20° to +60°C [-4°F to +140°F]
- Hand/Auto/Reset button
- Equipment Label

Thermal Overload Relay Selection Guide						
Part Number	Price	For use with	Setting range of overload release (A)	*Short-Circuit Protective Device		
				IEC Max Fuse	UL Max Fuse	UL Max Breaker
<b>RW17-1D3-D004</b>	\$14.00	CWC07 CWC09 CWC012 CWC016	0.28–0.4	2	15	15
<b>RW17-1D3-C063</b>	\$14.00		0.4–0.63	2	15	15
<b>RW17-1D3-D008</b>	\$14.00		0.56–0.8	2	15	15
<b>RW17-1D3-D012</b>	\$14.00		0.8–1.2	4	15	15
<b>RW17-1D3-D018</b>	\$14.00		1.2–1.8	6	15	15
<b>RW17-1D3-D028</b>	\$14.00		1.8–2.8	6	15	15
<b>RW17-1D3-U004</b>	\$14.00		2.8–4.0	10	15	15
<b>RW17-1D3-D063</b>	\$15.50		4.0–6.3	16	25	25
<b>RW17-1D3-U008</b>	\$15.50		5.6–8.0	20	30	30
<b>RW17-1D3-U010</b>	\$15.50		7.0–10	25	40	40
<b>RW17-1D3-D125</b>	\$15.50		8.0–12.5	25	50	50
<b>RW17-1D3-U015</b>	\$15.50		10.0–15.0	35	60	60
<b>RW17-1D3-U017</b>	\$15.50		11.0–17.0	35	60	60
<b>RW17-2D3-U010</b>	\$15.50	CWC025	7–10	25	40	40
<b>RW17-2D3-D125</b>	\$15.50		8–12.5	25	50	50
<b>RW17-2D3-U015</b>	\$15.50		10–15	35	60	60
<b>RW17-2D3-U017</b>	\$15.50		11–17	35	60	60
<b>RW17-2D3-U023</b>	\$15.50		15–23	50	90	90
<b>RW17-2D3-U032</b>	\$15.50		22–32	63	90	125

\* Note: Type 2 short-circuit coordination per IEC 60947-4-1. UL fuse type class CC.

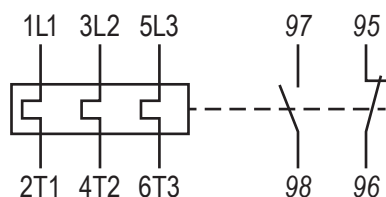

**Circuit Diagram**



**Hand/Auto/Reset Button**



# RW Series Thermal Overload Relays for CWC Miniature Contactors

## Thermal Overload Relays Technical Characteristics

RW Series Thermal Overload Relays General Ratings		
<b>Standards</b>		IEC 60947-1 / 60947-4-1, EN 60947-1 / 60947-4-1, UL 508; CSA C.22.2/14; VDE 0660/102
<b>Number of poles</b>		3
<b>Tripping class</b>		10
<b>Phase loss sensitive</b>		Yes
<b>Temperature compensation</b>		Yes
<b>Rated insulation voltage IEC 60947-4-1</b>		690V
<b>Rated insulation voltage UL/CSA</b>		600V
<b>Rated operation voltage <math>U_e</math> IEC 60947-4-1</b>		690V
<b>Rated operation voltage <math>U_e</math> UL/CSA</b>		600V
<b>Rated impulse voltage <math>U_{imp}</math></b>		6kV
<b>Current</b>	<b>Direct</b>	Yes
	<b>Alternating</b>	up to 400Hz
<b>Degree of protection - protection against contact acc. VDE 0160 - Part 100</b>		IP20
<b>Ambient Temperature</b>	<b>Storage</b>	-50 to +80°C [-58 to 176°F]
	<b>Operating</b>	-20 to +70°C [-4 to 158°F]
	<b>Ambient temperature compensation</b>	-20 to +60°C [-4 to 140°F]
<b>Pollution degree per IEC 60947-4-1</b>		3
<b>Mounting</b>		Direct on contactor
<b>Current heat loss</b>	<b>Lower value of setting range</b>	0.9 W
	<b>Higher value of setting range</b>	1.4 W
<b>Weight</b>		0.15kg [0.33lb]
<b>Shock resistance IEC 60068-2-27</b>		8g [10ms]
<b>Main terminals capacity</b> (Cross / Slotted Combination)	<b>Fine - stranded with sleeve (ferrule)</b>	1.5–10 mm <sup>2</sup>
	<b>Coarse - stranded / solid</b>	1.5–6.0 mm <sup>2</sup>
	<b>Stranded / solid (UL / CSA)</b>	14–6 AWG
<b>Tightening torque</b>		1.4–2.3 N·m [12.4–20.4 lb·in]
<b>Short circuit rating 600V</b>		5kA

# RW Series Thermal Overload Relays for CWC Miniature Contactors


## Thermal Overload Relays Technical Characteristics

Auxiliary Contacts General Ratings RW17D			
Front auxiliary contact		1 NO + 1 NC	
Rated auxiliary contacts IEC/EN 60947			
AC-14/15	24V	(A)	4.0
	60V	(A)	3.5
	125V	(A)	3.0
	230V	(A)	2.0
	400V	(A)	1.5
	500V	(A)	0.5
	690V	(A)	0.3
DC-13/14	24V	(A)	1.0
	60V	(A)	0.5
	110V	(A)	0.25
	220V	(A)	0.1
Rated thermal current		(A)	6
Short circuit protection			
Fuses type gL/gG		(A)	6
Auxiliary terminals capacity			
Fine - stranded with ferrule		(mm²)	1.0 – 2.5
Coarse - stranded/solid		(mm²)	1.0 – 2.5
Stranded/solid (UL/CSA)		(AWG)	16 – 12
Tightening torque		(N·m)	1.0 – 1.5
		(lb·in)	8.9 – 13.3



### RW Overload Relays Tripping Characteristics

These tripping characteristics show the tripping of RW overload relays in relation to the current. They show the mean values of the tolerance ranges at an ambient temperature of 20°C (68°F), starting from cold state. The tripping time of the overload releases at operational temperature is reduced to approximately 25% of the values shown. Under normal operational conditions, all three phases of the RW relays should be loaded.

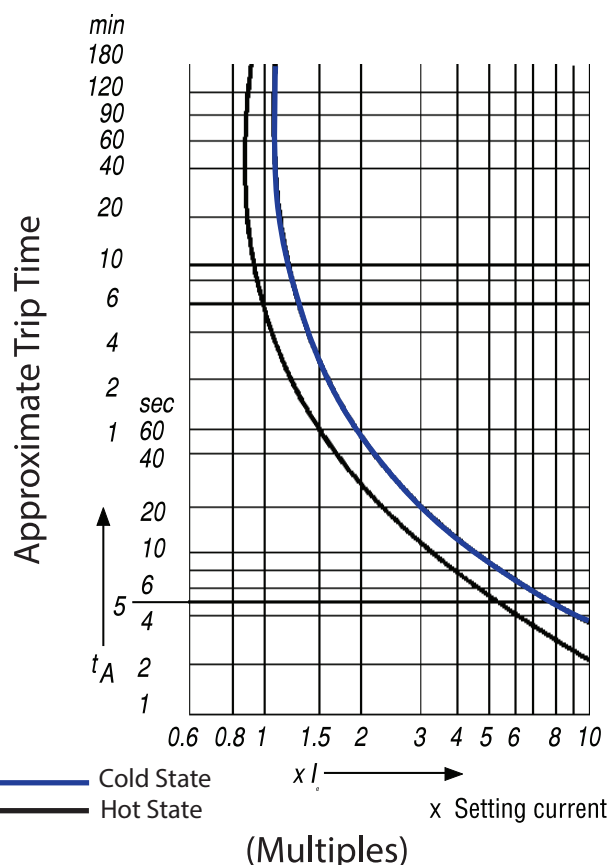







# RW Series Overload Relays for CWC Miniature Contactors

## Overload Relays Dimensions




Dimensions mm [inches]

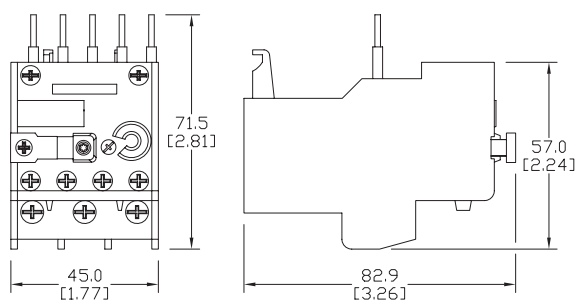




**RW17-1D**

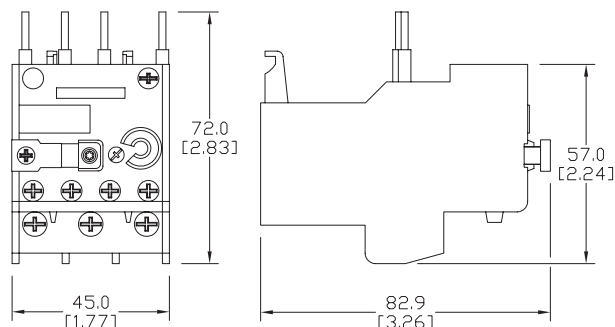

**RW17-2D**

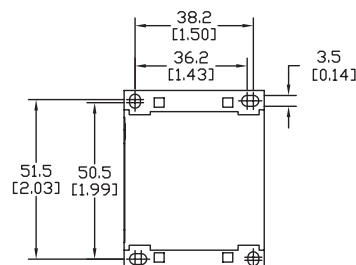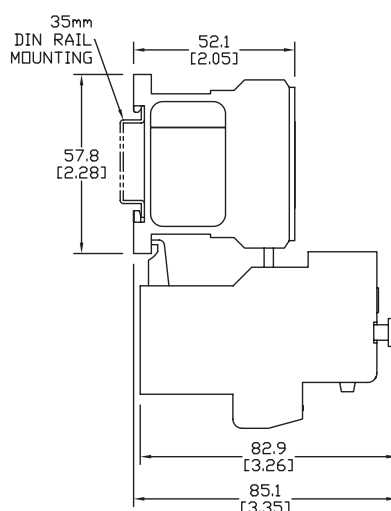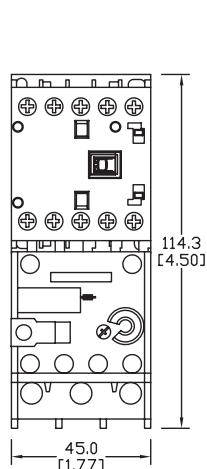



**CWC07...16 + RW17-1D**

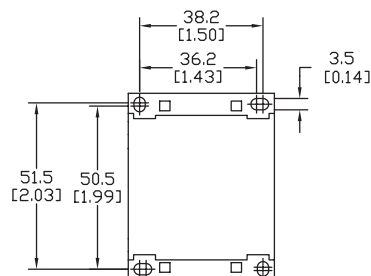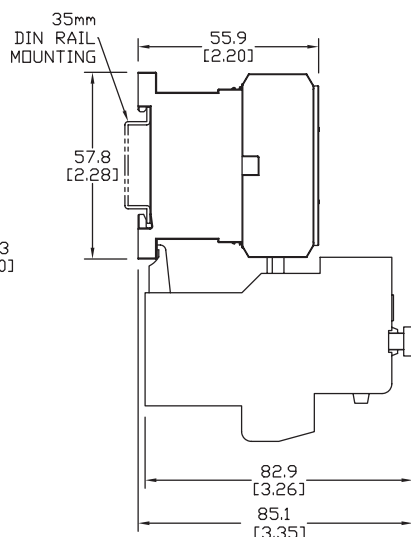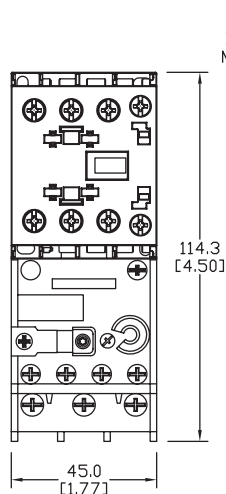

**CWC025 + RW17-2D**

# WEG Wiring Diagrams

## Reduced Voltage Starters – Wye Delta

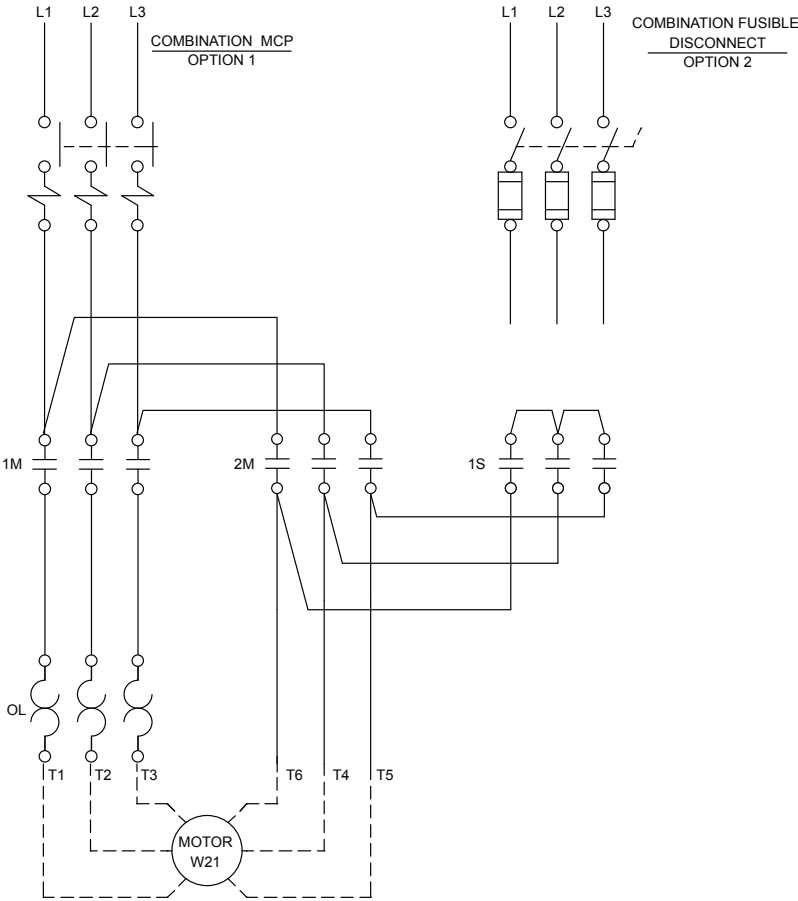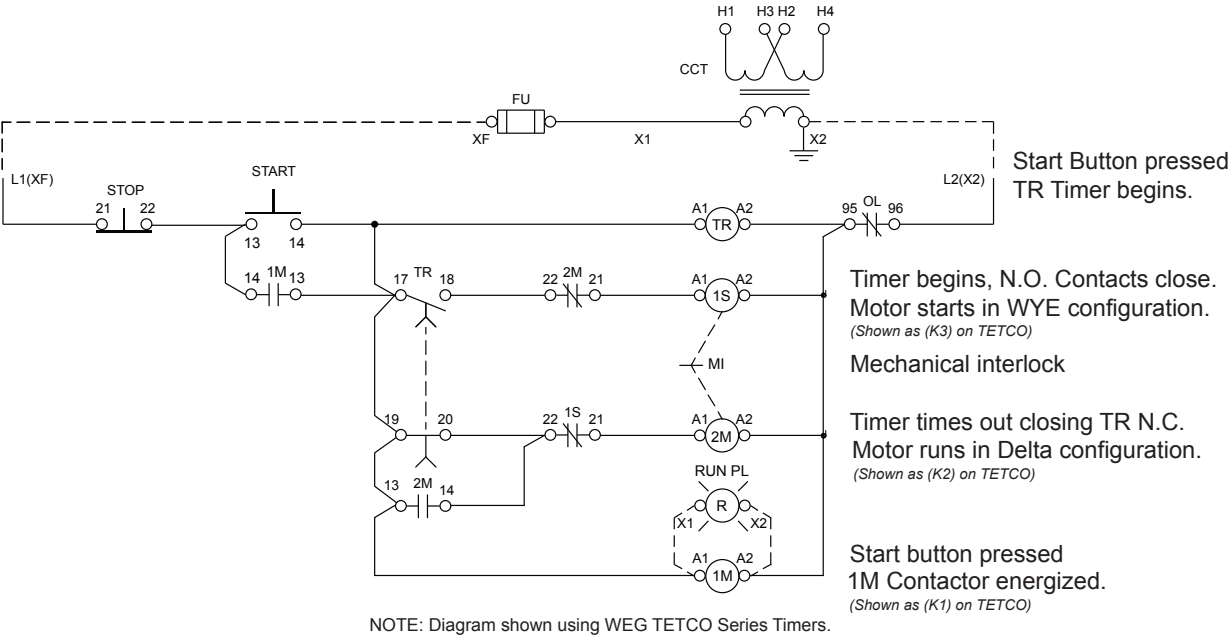



# Fuji Electric IEC Motor Controls

AUTOMATIONDIRECT has cooperated with Fuji Electric to offer a complete line of IEC electric motor controls.

The DUO line (SC-E contactors and TK-E overloads) is fully integrated so multiple motor speed controller solutions are possible with a minimum number of components. The conventional motor starters in the DUO line can accommodate electric motors up to 100 horsepower at 480VAC. The larger motor contactors feature the SUPERMAGNET™ coil for greater reliability and positive pick-up and drop-out.

The Odyssey Series of contactors and overload relays also features the SUPERMAGNET™ coil and come in sizes up to 361 A, AC-3 operation (300 horsepower at 480 VAC). Odyssey Series contactors are available in four sizes with overload relays to match any motor to 300 horsepower.

Both the DUO and Odyssey lines are available in 24 VAC, 24 VDC, 120 VAC, 240 VAC, 380-575 VAC. The motor contactors are rated up to 690 VAC, 3-phase.

Conformance to IEC standards:

- Short-circuit protective coordination between protective devices and the equipment to be protected

Response to the international market:

- Conformance to CE, IEC, UL, CSA and other international standards

Safety and environmental consideration:

- Application of international standards in safety features such as terminals with finger protection
- Use of recycled materials

## Use contactors for:

- Electronic switching
- Lighting
- Resistive loads
- Non-motor related inductive loads
- Disconnect switches
- VFD bypass/isolation

## Use starters for:

- Inductive motor starting and control
- Fulfillment of NEC 430 and 409
- NEMA starter replacement/retrofit

## DUO Series: SC-E series contactors and TK-E series overload relays


**1/2 to 100 hp  
9 - 150A (AC3) rated current**



**Fuji Electric**


### SC-E Series Contactor Features

- 5 to 100 hp at 480 VAC
- cULus and CSA approval, CE mark, meets JIS and IEC standards.
- Models SC-E02-xxx to SC-E4-xxx have 3-pole main circuits and come in three sizes with widths of 43 mm, 54 mm, and 67 mm.
- Models SC-E1-xxx to SC-E7-xxx employ a box terminal structure; allowing wires to be connected directly to the main circuit.
- Has a finger-protection terminal structure that prevents the exposure of live parts.
- Models SC-E5-xxx to SC-E7-xxx use a SUPERMAGNET™ (AC-input/DC-output operation) for high operating reliability




### TK-E Series Overload Features

- Isolated NO and NC contacts can be used with different potentials
- A high-precision scale for the current adjustment dial enables easy and exact current setting
- The operating status can be visually checked with ease
- The relays can be manually tripped. A trip-free mechanism is also provided
- Base unit can be added to enable separate mounting of the TK-E02, E2, and E3-xxx models
- IEC-947, UL, CSA, CE



### Build a reversing starter with DUO line components



### Traditional starters

Fuji's DUO line offers a complete range of components for building a traditional starter utilizing overload relays, auxiliary and alarm contacts, and mechanical interlocks to create a reversing unit.

# Fuji Electric IEC Motor Controls

## Odyssey 3N series contactors and matching overload relays

The Odyssey series, from 60 to 300 hp at 480 V, uses Fuji's unique SUPERMAGNET technology for greater reliability. The SUPERMAGNET holds without chattering even if the line voltage drops to 65% of its rated value, preventing contact and coil damage.


**60 to 300 hp at 480 V  
180 - 361A (AC3) rated current**

### 3N Series Contactor Features

- Provides higher current and horsepower capabilities than SC-E series. Designed for reliable use in applications requiring constant switching, reduced coil energy consumption, and increased horsepower capabilities.
- Available in 154 mm and 169 mm frame widths
- SUPERMAGNET™ for high operating reliability.
- Use with Odyssey 3N series overload relays.
- IEC-947, UL, CSA, CE

### 3N Series Overload Features

- Overload, phase loss protection
- Isolated NO and NC contacts
- Ambient temperature compensation
- Trip indicator
- Finger protection terminals
- IEC-947, UL, CSA, CE



**Use Odyssey components to build a traditional starter**

**Fuji Electric**



## Manual Motor Starters (MMS)

Circuit breakers for motor use that provide optimal protection by integrating the functions of a molded case circuit breaker and thermal overload relay into a compact unit.

### BM3 Series

- Rated Current: 0.16 to 32A, 10 to 63A
- Short Circuit Current Rating: 100 kA at 240V, 50 kA at 480V, 10 kA at 600V
- Widths: 45 mm and 55 mm



## Combination Starters

The ability to configure combination starters for compact, reliable motor protection by combining a manual motor starter and a magnetic contactor.

### Auxiliary contact blocks



### Mechanical interlocks




### Reversing kits




### Terminal Covers



### Replacement Coils



### Surge suppressors



**and more!**

Motor Controls Contactors/Starters	AutomationDirect Fuji	VS.	Allen-Bradley	ABB
<b>9 Amp Contactor</b>	<b>\$15.00</b> SC-E02-110VAC		<b>\$111.00 *</b> 100-C09D10	<b>\$42.44 *</b> A9-30-10-84
<b>40 Amp Contactor</b>	<b>\$52.50</b> SC-E2-110VAC		<b>\$248.00</b> 100-C37D00	<b>\$161.76 *</b> A40-30-10-84
<b>10 Amp Motor Starter</b>	<b>\$52.50</b> BM3RHB-010			<b>\$133.51</b> MS325-125
<b>* This product includes 1 N.O. Aux contact</b>				
<small>All prices are U.S. published prices. AutomationDirect prices as of 4/27/2016. Allen-Bradley prices taken from <a href="http://www.warmerelectric.com">www.warmerelectric.com</a> 4/18/2016. ABB prices taken from <a href="http://www.galco.com">www.galco.com</a> 4/18/2016. Prices and specifications may vary by dealer and configuration. Prices subject to change without notice.</small>				



# What Fuji Motor Control Do I Need?

There are four basic motor control options available: Basic contactors, traditional starters, manual motor starters, or combination starters. Follow these 3 steps to choose the best fit.

## 1

### What does the application require?

#### Basic Contactors Only



##### Contactor

Typical applications:

- Electronic switching
- Lighting
- Resistive loads
- Non-motor-related inductive loads
- Disconnect switches
- VFD bypass/isolation



#### Traditional Starters



##### Contactor and overload relay

Typical applications:

- Inductive motor starting and control
- NEC 430 and 409 fulfillment
- Nm starter replacement/retrofit



#### Manual Motor Starters



##### Manual motor starter (MMS)

Typical applications:

- Inductive motor starting and manual control
- NEC 430 fulfillment
- Lockout/tagout
- UL 508, type E
- Not AC-4 rated



#### Combination Starters



##### Manual motor starter, contactor, link module, and base plate

Typical applications:

- Inductive motor starting and control
- NEC 430 and 409 fulfillment
- Lockout/tagout
- UL 508, type F



## 2

### Consider these factors when selecting components:

- Load type: Resistive (AC-1) or inductive (AC-3)
- Duty cycle: One direction, reversing, plugging (AC-4); Refer to IEC Utilization Chart on page 17-114
- Horsepower (HP) and full load amperage (FLA); Refer to motor data plate information.

## 3

### Select your components.



Duo Series

SC-E Contactor **See page 17-31**

- 1/2 to 100 hp @ 480 V
- 9-150 A (AC3)

Odyssey Series

3N Contactor **See page 17-77**

- 60 to 300 hp
- 180-361 A (AC3)



Duo Series

SC-E Contactor **See page 17-31**

TK-E Overload relay **See page 17-46**

- 1/2 to 100 hp @ 480 V

Odyssey Series

3N Contactor **See page 17-77**

3N Overload relay **See page 17-80**

- 60 to 300 hp



Duo Series

BM3 Manual motor starter

- 1/2 to 40 hp @ 480 V **See page 17-53**



Duo Series

BM3 Manual motor starter **See page 17-53**

SC-E Contactor **See page 17-31**

BZ0L link module **See page 17-68**

BZ0BP base plate

- 1/2 to 40 hp @ 480 V

# Fuji Duo Series SC-E Contactors

## Features

- 5 to 100 hp at 480 VAC
- cULus and CSA approval, CE mark, meets JIS and IEC standards.
- Models SC-E02-xxx to SC-E4-xxx have 3-pole main circuits and come in three sizes with widths of 43 mm, 54 mm, and 67 mm.
- Models SC-E1-xxx to SC-E7-xxx employ a box terminal structure; allowing wires to be connected directly to the main circuit.
- Has a finger-protection terminal structure that prevents the exposure of live parts.
- Models SC-E5-xxx to SC-E7-xxx use a SUPERMAGNET™ (AC-input/DC-output operation) for high operating reliability and requires no surge suppressor.

## Small Size

- SC-E02-xxx to E05-xxx: 43mm wide
- SC-E1-xxx to E25-xxx: 54mm wide
- SC-E3-xxx, E4-xxx: 67mm wide
- SC-E5-xxx: 88mm wide



SC-E2S

**FE** Fuji Electric



SC-E7

## Safety

- Terminals with finger-touch protection (DIN 57106/VDE 0106 Teil100)

## Utility

- Box lug terminal construction
- Long electrical life
- Easy to wire

## Environmental

- Low power consumption
- Recycled thermoplastic resin used for plastic parts.
- The names of materials are indicated on all major parts to facilitate recycling

## Standards & Approvals

- UL listed, file E42419, Standard UL 508
- cUL listed, file E42419, Standard CSA C 22.2 No.14
- VDE 0660
- JIS C 8201-4-1
- IEC 60947-4-1 / EN 60947-4-1
- CE compliant

## Optional accessories

- Auxiliary contact blocks
- Coil surge suppression units
- Replacement coils for contactor sizes SC-E5 and larger

SC-E Series Contactors Specifications - UL and CSA													
Model	Price	Nominal Coil Voltage	Rated Capacity (HP)						Rated AC-3 Current (A) [note 1]	Rated AC-1 Thermal Current (A) [note 2]	SCCR Ratings (KA)	Rated Insulation Voltage (V)	Frame Width (mm)
			3-Phase Motor				1-Phase Motor						
			200V	220–240V	440–480V	550–600V	100–120V	220–240V					
SC-E02-24VAC	\$15.00	24VAC	2	2	5	5	1/3	1	9	20	5	690	43
SC-E02-110VAC	\$15.00	110VAC											
SC-E02-220VAC	\$15.00	220VAC											
SC-E02-440VAC	\$15.00	440-480VAC											
SC-E02-500VAC	\$15.00	500-550VAC											
SC-E02G-24VDC	\$17.00	24VDC											
SC-E03-24VAC	\$19.50	24VAC	3	3	7.5	7.5	1/2	2	12	20			
SC-E03-110VAC	\$19.50	110VAC											
SC-E03-220VAC	\$19.50	220VAC											
SC-E03-440VAC	\$19.50	440-480VAC											
SC-E03-500VAC	\$19.50	500-550VAC											
SC-E03G-24VDC	\$27.50	24VDC											
SC-E04-24VAC	\$24.00	24VAC	5	5	10	10	1	3	18	25			
SC-E04-110VAC	\$24.00	110VAC											
SC-E04-220VAC	\$24.00	220VAC											
SC-E04-440VAC	\$24.00	440-480VAC											
SC-E04-500VAC	\$24.00	500-550VAC											
SC-E04G-24VDC	\$33.00	24VDC											
SC-E05-24VAC	\$30.50	24VAC	5	7.5	15	15	2	3	25	32			
SC-E05-110VAC	\$30.50	110VAC											
SC-E05-220VAC	\$30.50	220VAC											
SC-E05-440VAC	\$30.50	440-480VAC											
SC-E05-500VAC	\$30.50	500-550VAC											
SC-E05G-24VDC	\$40.00	24VDC											
TABLE CONTINUED NEXT PAGE													
Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty.													
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)													

TABLE CONTINUED NEXT PAGE

Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty.  
 2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)

# Fuji Duo Series SC-E Contactors



SC-E Series Contactors Specifications - UL and CSA													
Model	Price	Nominal Coil Voltage	Rated Capacity (HP)						Rated AC-3 Current (A) [note 1]	Rated AC-1 Thermal Current (A) [note 2]	SCCR Ratings (kA)	Rated Insulation Voltage (V)	Frame Width (mm)
			3-Phase Motor				1-Phase Motor						
			200V	220–240V	440–480V	550–600V	100–120V	220–240V					
SC-E1-24VAC	\$37.50	24VAC	7.5	10	25	25	2	3	32	50	5	690	54
SC-E1-110VAC	\$37.50	110VAC											
SC-E1-220VAC	\$37.50	220VAC											
SC-E1-440VAC	\$37.50	440-480VAC											
SC-E1-500VAC	\$37.50	500-550VAC											
SC-E1G-24VDC	\$44.50	24VDC											
SC-E2-24VAC	\$52.50	24VAC	10	15	30	30	3	5	40	60			
SC-E2-110VAC	\$52.50	110VAC											
SC-E2-220VAC	\$52.50	220VAC											
SC-E2-440VAC	\$52.50	440-480VAC											
SC-E2-500VAC	\$52.50	500-550VAC											
SC-E2G-24VDC	\$63.50	24VDC											
SC-E2S-24VAC	\$63.50	24VAC	15	20	30	30	3	10	50	65			
SC-E2S-110VAC	\$63.50	110VAC											
SC-E2S-220VAC	\$63.50	220VAC											
SC-E2S-440VAC	\$63.50	440-480VAC											
SC-E2S-500VAC	\$63.50	500-550VAC											
SC-E2SG-24VDC	\$75.50	24VDC											
SC-E3-24VAC	\$72.00	24VAC	20	25	50	50	5	15	65	100			
SC-E3-110VAC	\$72.00	110VAC											
SC-E3-220VAC	\$72.00	220VAC											
SC-E3-440VAC	\$72.00	440-480VAC											
SC-E3-500VAC	\$72.00	500-550VAC											
SC-E3G-24VDC	\$89.00	24VDC											
SC-E4-24VAC	\$74.00	24VAC	25	30	50	50	5	15	80	105			
SC-E4-110VAC	\$74.00	110VAC											
SC-E4-220VAC	\$74.00	220VAC											
SC-E4-440VAC	\$74.00	440-480VAC											
SC-E4-500VAC	\$74.00	500-550VAC											
SC-E4G-24VDC	\$92.00	24VDC											
SC-E5-24V	\$184.00	24VAC/VDC	30	30	60	75	7.5	15	105	150	10		88
SC-E5-100V	\$184.00	110VAC/VDC											
SC-E5-200V	\$184.00	220VAC/VDC											
SC-E5-400V	\$184.00	380-450VAC											
SC-E5-500V	\$184.00	460-575VAC											
SC-E6-24V	\$234.50	24VAC/VDC	40	40	75	100	10	20	125	150			
SC-E6-100V	\$234.50	110VAC/VDC											
SC-E6-200V	\$234.50	220VAC/VDC											
SC-E6-400V	\$234.50	380-450VAC											
SC-E6-500V	\$234.50	460-575VAC											
SC-E7-24V	\$273.00	24VAC/VDC	50	50	100	125	15	25	150	200			115
SC-E7-100V	\$273.00	110VAC/VDC											
SC-E7-200V	\$273.00	220VAC/VDC											
SC-E7-400V	\$273.00	380-450VAC											
SC-E7-500V	\$273.00	460-575VAC											
Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty. 2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)													

Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty.

2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)

# Fuji Duo Series SC-E Contactors



SC-E Series Contactors Specifications - IEC												
Contactor Type	Rated Capacity (kW)				Rated Operating Current (A)						Rated Thermal Current (A)	Internal Auxilliary Contact Arrangement
	3-Phase Motor AC-3 / AC-4				3-Phase Motor AC-3 / AC-4				Resistive Load AC-1			
	200-240V	380-440V	500-550V	600-690V	200-240V	380-440V	500-550V	600-690V	200-240V	380-440V		
SC-E02(G)-xxx	2.2 / 2.2	4 / 4	4 / NA	4 / NA	9 / 9	9 / 9	7 / NA	5 / NA	20	20	20	-
SC-E03(G)-xxx	3 / 3	5.5 / 5.5	5.5 / NA	5.5 / NA	12 / 12	12 / 12	9 / NA	7 / NA	20	20	20	-
SC-E04(G)-xxx	4 / 4	7.5 / 7.5	7.5 / NA	7.5 / NA	18 / 18	18 / 18	13 / NA	9 / NA	25	25	25	-
SC-E05(G)-xxx	5.5 / 4	11 / 7.5	11 / NA	7.5 / NA	25 / 18	25 / 18	17 / NA	9 / NA	32	32	32	-
SC-E1(G)-xxx	7.5 / 7.5	15 / 15	15 / NA	11 / NA	32 / 32	32 / 32	24 / NA	15 / NA	50	50	50	-
SC-E2(G)-xxx	11 / 11	18.5 / 18.5	18.5 / NA	15 / NA	40 / 40	40 / 40	29 / NA	19 / NA	60	60	60	-
SC-E2S(G)-xxx	15 / 11	22 / 18.5	25 / NA	22 / NA	50 / 40	50 / 40	38 / NA	26 / NA	65	65	65	-
SC-E3(G)-xxx	18.5 / 18.5	30 / 30	37 / NA	30 / NA	68 / 68	65 / 65	60 / NA	38 / NA	100	100	100	-
SC-E4(G)-xxx	22 / 18.5	40 / 30	37 / NA	37 / NA	80 / 68	80 / 65	60 / NA	44 / NA	105	105	105	-
SC-E5-xxx	30 / 30	55 / 55	55 / NA	55 / NA	105 / 105	105 / 105	85 / NA	64 / NA	150	150	150	2NO+2NC
SC-E6-xxx	37 / 37	60 / 60	60 / NA	60 / NA	125 / 125	125 / 125	90 / NA	72 / NA	150	150	150	2NO+2NC
SC-E7-xxx	45 / 45	75 / 75	75 / NA	90 / NA	150 / 150	150 / 150	120 / NA	103 / NA	200	200	200	2NO+2NC

## Internal Auxiliary Contact Ratings

Internal Auxiliary Contact Ratings - UL and CSA						
Frame Size (note 1)	Rated Insulation Voltage (V)	NEMA ICS 5-2000 Ratings (note 2)				
		AC Ratings			DC Ratings	
		Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
E5 to E7-xxx	690	A600	7200	720	Q300	69
<b>Notes:</b> 1. E02(G) to E4(G) do not have internal auxiliary contact. 2. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, see page 113.						

Internal Auxiliary Contact Ratings - IEC, JIS									
Based on IEC 60974-4-1, EN 60947-4-1, JIS C 8201-4-1									
Frame Size <small>(note 1)</small>	Rated Insulation Voltage (V)	Rated Thermal Current (A)	Making and Breaking Capacity (A)		Rated Operational Current (A)				Minimum Operating Voltage and Current
			AC Voltage	Amps	AC Voltage	AC-15 (Ind. load)	DC Voltage	DC-13 (Ind. load)	
E5 to E7-xxx	690	10	120V	60	120V	6	24V	3	5VDC, 3mA
			220V	30	220V	3	48V	1.5	
			440V	15	440V	1.5	110V	0.55	
			600V	12	600V	1.2	220V	0.27	
Note 1: E02(G) to E4(G) do not have internal auxiliary contact.									

# Fuji Duo Series SC-E Contactors

## Coil Characteristics

AC Coil Characteristics								
Frame Size	Power Consumption (VA)		Power Loss (W)		Pick-Up Voltage (V)	Drop-Out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed	50Hz	60Hz			Coil ON to Contact ON	Coil OFF to Contact OFF
	50/60Hz	50/60Hz						
E02 to E05-xxx	90/95	9/9	2.7	2.8	0.85 - 1.1 x U.S. rated coil voltage	0.2 - 0.75 x U.S. rated coil voltage	9-20	5-16
E1 to E2S-xxx	120/135	12.7/12.4	3.6	3.8	0.85 - 1.1 x U.S. rated coil voltage	0.2 - 0.75 x U.S. rated coil voltage	10-17	6-13
E3, E4-xxx	180/190	13.3/13.4	4.5	5	0.85 - 1.1 x U.S. rated coil voltage	0.2 - 0.75 x U.S. rated coil voltage	10-18	8-18
E5-xxx	80/95	4/4.6	3.2	3.6	0.85 - 1.1 x U.S. rated coil voltage	0.2 - 0.75 x U.S. rated coil voltage	39-45	27-33
E6, E7-xxx	190/230	4.9/5.8	3.4	3.7	0.8 - 1.1 x U.S. rated coil voltage	0.1 - 0.65 x U.S. rated coil voltage	31-37	30-36

DC Coil Characteristics						
Frame Size	Power Consumption (W)		Pick-Up Voltage (V)	Drop-Out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
<b>E02G to E05G-xxx</b>	7	7	0.85 - 1.1 x U.S. rated coil voltage	0.1 - 0.75 x U.S. rated coil voltage	45-49	10-26
<b>E1G to E2SG-xxx</b>	9	9	0.85 - 1.1 x U.S. rated coil voltage	0.1 - 0.75 x U.S. rated coil voltage	40-50	8-17
<b>E3G, E4G-xxx</b>	12	12	0.85 - 1.1 x U.S. rated coil voltage	0.1 - 0.75 x U.S. rated coil voltage	60-70	14-21
<b>E5-xxx</b>	90	2.8	0.85 - 1.1 x U.S. rated coil voltage	0.1 - 0.75 x U.S. rated coil voltage	35-41	26-32
<b>E6, E7-xxx</b>	225	3.2	0.8 - 1.1 x U.S. rated coil voltage	0.1 - 0.65 x U.S. rated coil voltage	28-34	27-33

Operating Coil	
AC Coil, SC-E02-xxx to SC-E4-xxx	
Voltage Code	Coil Operating Voltage / Frequency
24VAC	24VAC 50Hz / 24-26VAC 60Hz
110VAC	100-110VAC 50Hz / 110-120VAC 60Hz
220VAC	200-220VAC 50Hz / 220-240VAC 60Hz
440VAC	415-440VAC 50Hz / 440-480VAC 60Hz
500VAC	480-500VAC 50Hz / 500-550VAC 60Hz

Operating Coil	
AC/DC Coil (SUPERMAGNET), SC-E5-xxx to SC-E7-xxx	
Voltage Code	Coil Operating Voltage / Frequency
24V	24-25VAC 50/60Hz; 24VDC
100V	100-127VAC 50/60Hz; 100-120VDC
200V	200-250VAC 50/60Hz; 200-240VDC
400V	380-450VAC 50/60Hz
500V	460-575VAC 50/60Hz

Operating Coil	
DC Coil, SC-E02G-xxx to SC-E4G-xxx	
Voltage Code	Coil Operating Voltage
24VDC	24VDC

## Performance Data

Frame size	Making current (A)		Breaking current (A)		Operating cycles per hour	Durability (operations)	
	220V	440V	220V	440V		Electrical	Mechanical
SC-E02	108	108	90	90	1800	2 million	10 million
SC-E03	144	144	120	120	1800	1.5 million	10 million
SC-E04	216	216	180	180	1800	1.5 million	10 million
SC-E05	250	250	200	200	1200	1.5 million	10 million
SC-E1	384	384	320	320	1200	1.5 million	10 million
SC-E2	480	480	400	400	1200	1.5 million	10 million
SC-E2S	500	500	400	400	1200	1.5 million	10 million
SC-E3	816	780	680	650	1200	1.5 million	5 million
SC-E4	816	800	680	650	1200	1 million	5 million
SC-E5	1260	1260	1050	1050	1200	1 million	5 million
SC-E6	1500	1500	1250	1250	1200	1 million	5 million
SC-E7	1800	1800	1500	1500	1200	1 million	5 million





# Fuji Duo Series SC-E Contactors



## Standard operating conditions

The magnetic contactors are manufactured for use in the standard operating conditions given in the table.



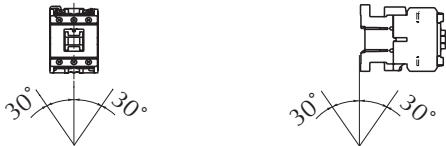
Standard Operating Conditions	
<b>Ambient Temperature</b>	Operating: -5 to 55°C No sudden temperature changes resulting in condensation or icing (The average temperature over a 24-hour period must not exceed 35°C) Storage: -40 to 65°C
<b>Humidity</b>	45 to 85%RH
<b>Altitude</b>	2000m or lower
<b>Atmosphere</b>	No excessive dust, smoke, corrosive gases, flammable gases, steam, or salt
<b>Vibration</b>	10 to 55Hz 15m/s <sup>2</sup>
<b>Shock</b>	50m/s <sup>2</sup>
<b>Mounting</b>	35mm IEC DIN rail mounting (SC-E02 to SC-E4), screw mounting
<b>Mounting Angle</b>	
<b>Standard</b>	IEC 947-4-1, EN 60947-4-1, VDE 0660 JIS C 8201-4-1, JEM 1038 UL 508, file E42419; CSA C22.2, file 20479


## Wiring

Be sure to perform wiring correctly with reference to the wiring diagrams. Main terminals for models SC-E02 to SC-E7 are wired using solid wires or stranded wires. Stranded wires or flexible stranded wires can be connected by twisting them together and crimping a sleeve (ferrule) onto them before connecting.

## Tightening torque

If wires are not tightened sufficiently, they may become hot or loosen, resulting in a fire, short-circuit, electric shock, or other potentially dangerous situation. Tighten wires to the torques specified in these tables.

Wire Sizes, Tightening Torques - Control Circuit		
<b>Solid or Stranded Wire (mm<sup>2</sup>)</b>	<b>One</b>	0.75 to 2.5 (1 to 1.6 mm diameter)
	<b>Two</b>	0.75 to 2.5 (1 to 1.6 mm diameter)
<b>AWG</b>	<b>One</b>	18 to 14
	<b>Two</b>	18 to 14
<b>Insulation Stripping Length</b>		
<b>Fork Terminal</b>		Max. 7.7mm wide
<b>Terminal Screw Size</b>		M3.5
<b>Tool</b>		Phillips screwdriver, H-type, No. 2 (ISO 8764); ADC part number DN-SP1 or DN-SP2 Flat-blade screwdriver, 1 x 5.5 x L-type, B (ISO 2830); ADC part number DN-SS5
<b>Tightening Torque (N·m)</b>		0.8 to 1

Wire Sizes, Tightening Torques - Main Circuit					
Contactor Type		SC-E02-xxx	SC-E03-xxx	SC-E04-xxx	SC-E05-xxx
Solid Wire (mm <sup>2</sup> )	One	0.75 to 4		0.75 to 6	
	Two	1 to 4		1.5 to 6	
Stranded Wire (mm <sup>2</sup> )	One	0.75 to 4		0.75 to 6	
	Two	1 to 4		1.5 to 6	
AWG	One	12 max.		10 max.	
	Two	12 max.		10 max.	
Insulation Stripping Length					
Terminal Screw Size		M4			
Tool		Phillips screwdriver, H-type, No. 2 (ISO 8764); ADC part number DN-SP1 or DN-SP2 Flat-blade screwdriver, 1 x 5.5 x L-type, B (ISO 2830); ADC part number DN-SS5			
Tightening Torque (N·m)		1.2 to 1.5			


# Fuji Duo Series SC-E Contactors

Wire Sizes, Tightening Torques - Main Circuit						
Contactor Type			SC-E1, E2, E2S-xxx	SC-E3, E4-xxx	SC-E5, E6-xxx	SC-E7-xxx
Top-Only Connection	Solid or stranded wire (mm <sup>2</sup> ) <sup>1</sup>		0.75 to 35	1.5 to 70	4 to 70	4 to 120
	Flexible stranded wire with sleeve (mm <sup>2</sup> ) <sup>1</sup>		0.75 to 25	1.5 to 50	2.5 to 50	2.5 to 95
	Flexible stranded wire without sleeve (mm <sup>2</sup> )		0.75 to 25	1.5 to 50	4 to 50	4 to 95
	AWG		18 to 2	16 to 2/0	12 to 2/0	12 to 250MCM
	Solid or stripping length (mm)		15	19.5	26.5	28.5
Bottom-Only Connection	Single stranded wire (mm <sup>2</sup> ) <sup>1</sup>		0.75 to 25	1.5 to 50	4 to 70	4 to 120
	Flexible stranded wire with sleeve (mm <sup>2</sup> ) <sup>1</sup>		0.75 to 16	1.5 to 35	2.5 to 50	2.5 to 95
	Flexible stranded wire without sleeve (mm <sup>2</sup> )		0.75 to 16	1.5 to 35	4 to 50	4 to 95
	AWG		18 to 3	16 to 1/0	12 to 2/0	12 to 250MCM
	Sheath stripping length (mm)		12.5	16	26.5	28.5
Top/Bottom Connection	Solid or stranded wire (mm <sup>2</sup> ) <sup>1</sup>	Top/ bottom	0.75 to 25	1.5 to 50	4 to 70	4 to 120
	Flexible stranded wire with sleeve (mm <sup>2</sup> ) <sup>1</sup>	Top/ bottom	0.75 to 16	1.5 to 35	2.5 to 50	2.5 to 95
	Flexible stranded wire without sleeve (mm <sup>2</sup> )	Top/ bottom	0.75 to 16	1.5 to 35	4 to 50	4 to 95
	AWG	Top/ bottom	18 to 3	16 to 1/0	12 to 2/0	12 to 250MCM
Tool			Phillips screwdriver, H-type, No.2 (ISO 8764); ADC part number DN-SP1 or DN-SP2	Hex. wrench 4 (ISO 2936)		
			Flat-blade screwdriver, 1 x 5, 5xL-type, B (ISO 2830); ADC part number DN-SS5			
Tightening Torque (Nm)			2.5	8		10
Self-locking Torque (Nm) <sup>2</sup>			1	2		
Note 1: Stranded wire (0 to 25mm <sup>2</sup> ) consists of 7 wires or less. Stranded wire (35 to 120mm <sup>2</sup> ) consists of 19 wires or less. Flexible stranded wire consists of more number wires than the above.			Note 2: The tightening bolt must be loosened in order to insert the wire. However, stop loosening the bolt when the anti-drop attachment on the bottom of the bolt reaches the top edge of the terminal. If a torque exceeding that given in the table is applied in this state, the retaining bracket may loosen.			


# Fuji Duo Series SC-E Contactors

## Electrical durability


### AC-3 duty / SC-E02 to SC-E05-xxx

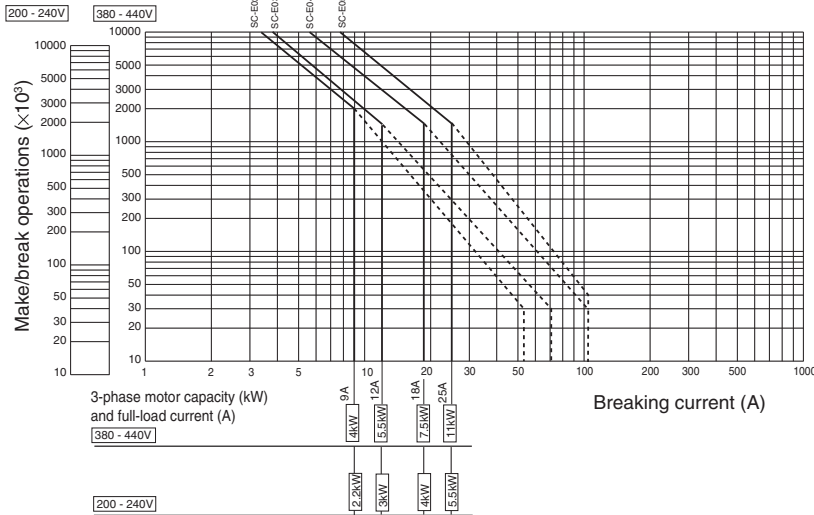

### AC-3 duty / SC-E1 to SC-E7-xxx

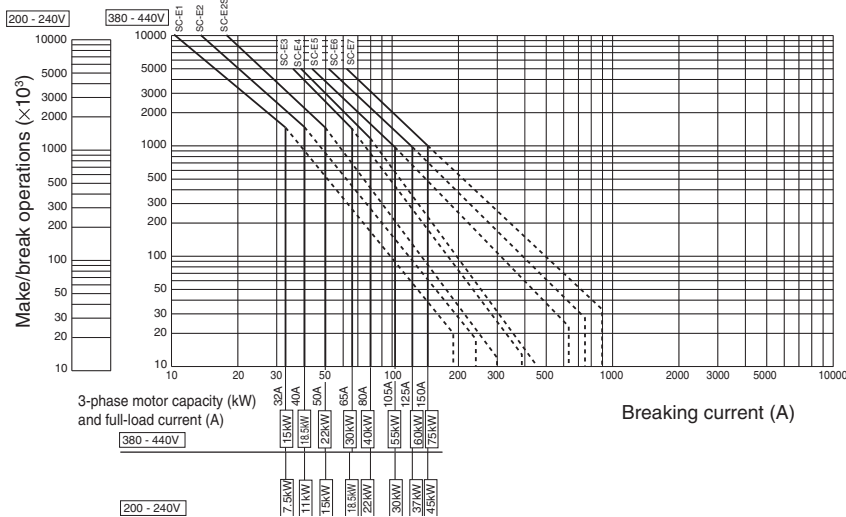


### AC-1 duty / SC-E02 to SC-E7-xxx

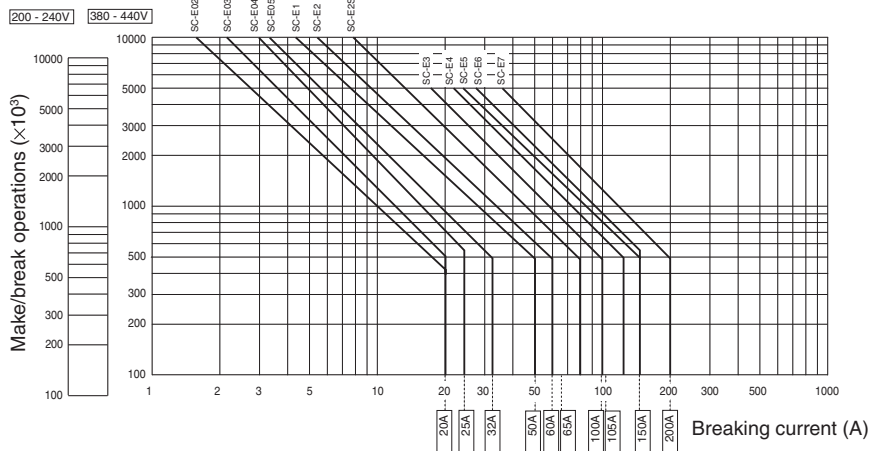

# Fuji Duo Series SC-E Contactors

## Accessories

### Optional accessories

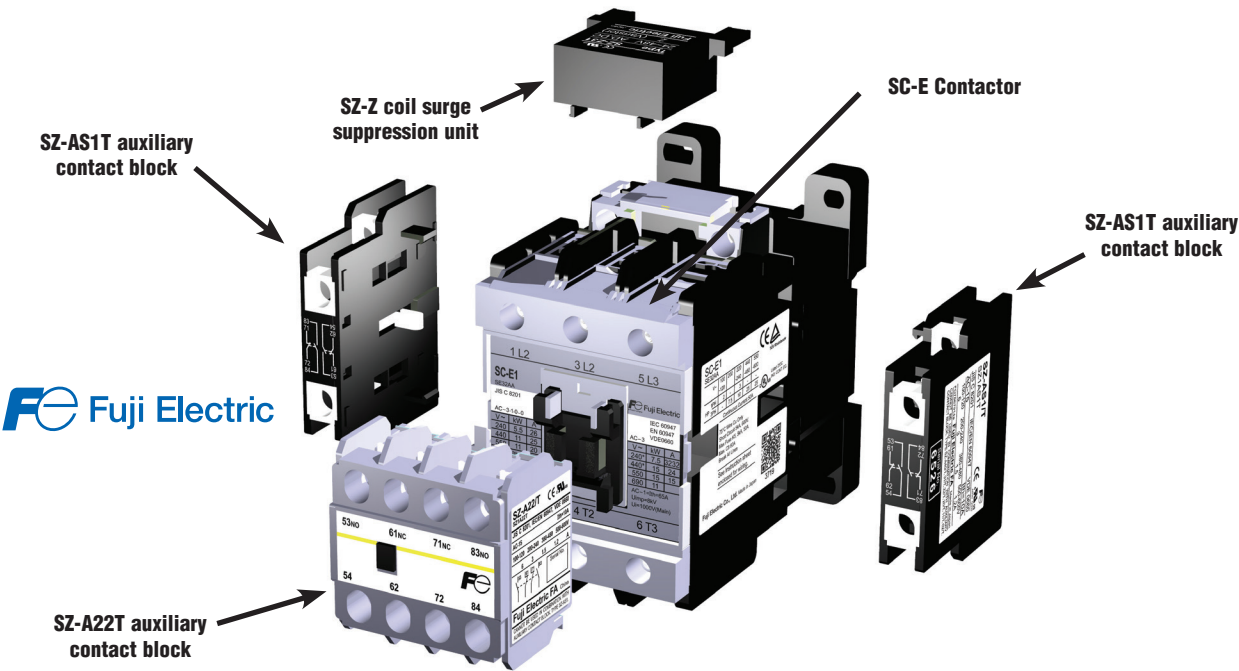

### Auxiliary contact blocks with terminal covers

Maximum auxiliary contact blocks: 2 side mounted (1 per side) **OR** 1 front mounted. The front and side blocks cannot be mounted together on the same contactor.



SZ-A22T



SZ-A11T



SZ-AS1T



SZ-AS2T

### Caution on use:

1. Front mounting auxiliary contact block and side mounting block cannot be attached to one contactor at the same time.
2. Only one front mounting block can be attached to one contactor.
3. Where interlock unit is already attached, side mounting auxiliary contact block can be attached on one side only.

### Auxiliary Contact Blocks with Terminal Covers

Part Number	Price	Applicable Contactor	Mounting	Number of Contacts	Contact Arrangement
SZ-A22T	\$12.50	SC-E02(G)-xxx to E4(G)-xxx	Front mounting	4	2NO + 2NC
SZ-A20T	\$8.00			2	2NO
SZ-A11T	\$8.00				1NO + 1NC
SZ-AS1T	\$12.50	SC-E02(G)-xxx to E4(G)-xxx	Side mounting	2	1NO + 1NC
SZ-AS2T	\$12.50			2	1NO + 1NC

### Accessory Auxiliary Contact Ratings - UL and CSA

NEMA ICS 5-2000 Ratings (note 1)				
AC Ratings			DC Ratings	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
A600	7200	720	Q300	69

For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113

Accessory Auxiliary Contact Ratings - IEC and JIS continued on next page.

# Fuji Duo Series SC-E Contactors

## Accessories

Accessory Auxiliary Contact Ratings - IEC and JIS							
Rated Thermal Current (A)	Making and Breaking Capacity at AC (A)		Rated operational current (A)				Minimum Operating Voltage and Current
			AC		DC		
			Voltage	AC-15 (Ind. load)	Voltage	DC-13 (Ind. load)	
10	120V	60	120V	6	24V	3	5VDC, 3mA
	220V	30	220V	3	48V	1.5	
	440V	15	440V	1.5	110V	0.55	
	600V	12	600V	1.2	220V	0.27	

### Coil surge suppression units



SZ-Z1




SZ-Z37

Suppress surge voltage due to contactor ON-OFF operations; easily connect to contactor coil terminals.

**Important:** When driving 24VDC Fuji contactors with a PLC solid-state output, we recommend using diode terminal block part number DN-D10DR-A or ZL-TSD8-24. Please see application note AN-MISC-032 for additional information located on [Automationdirect.com/technotes](http://Automationdirect.com/technotes).

Coil Surge Suppression Units					
Part Number	Price	Applicable Contactor		Operating Coil Voltage	Device
		AC Operated	DC Operated		
SZ-Z1	\$10.00	SC-E02-xxx to E05-xxx	SC-E02G-xxx to E05G-xxx	24-48V AC/DC	varistor
SZ-Z2	\$10.00			100-250V AC/DC	
SZ-Z31	\$13.50	SC-E1-xxx to -E4xxx	SC-E1G-xxx to E4G-xxx	24-48V AC/DC	
SZ-Z32	\$13.50			100-250V AC/DC	
SZ-Z4	\$11.50	SC-E02-xxx to E05-xxx	SC-E02G-xxx to E05G-xxx	24-48V AC/DC	capacitor / resistor
SZ-Z5	\$11.50			100-250V AC/DC	
SZ-Z34	\$13.50	SC-E1-xxx to E4-xxx	-	24-48V AC/DC	
SZ-Z35	\$13.50			100-250V AC/DC	
SZ-Z36	\$13.50	-	SC-E1G-xxx to E4G-xxx	24-48V AC/DC	
SZ-Z37	\$13.50			100-250V AC/DC	
SC-E02 to E05				380-440V AC/DC	
SC-E1 to E4				380-440V AC/DC	

**Note:** Super Magnet Coils on SC-E5, SC-E6, and SC-E7 contactors have internal surge suppression. See diagram below.

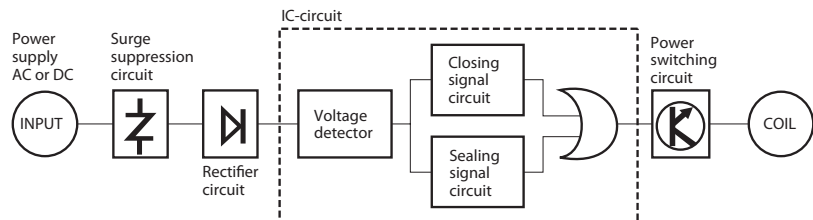

### Replacement contactor coils



SZ-GSN5-100

SC-E Series Replacement Contactor Coils			
Part Number	Price	Applicable Contactor	Coil Voltage
SZ-GSN5-100	\$120.50	SC-E5-xxx	100-127VAC 50/60Hz / 100-120VDC
SZ-GSN6-100	\$132.50	SC-E6-xxx, SC-E7-xxx	100-127VAC 50/60Hz / 100-120VDC
SZ-GSN5-200	\$120.50	SC-E5-xxx	200-250VAC 50/60Hz / 200-240VDC
SZ-GSN6-200	\$132.50	SC-E6-xxx, SC-E7-xxx	200-250VAC 50/60Hz / 200-240VDC
SZ-GSN5-24	\$120.50	SC-E5-xxx	24-25VAC/ 50/60Hz / 24VDC
SZ-GSN6-24	\$132.50	SC-E6-xxx, SC-E7-xxx	24-25VAC/ 50/60Hz / 24VDC

Replacement coils are available for contactor sizes SC-E5 and larger only.  
Replacement coils are not available for coil codes 440VAC, 500VAC, 400V, 500V.



# Fuji Duo Series SC-E Accessories

## Connection kits for reversing SC-E contactors



SZ-ERW1A



SZ-ERW1B




SZ-ERW1D



SZ-ERW2A



SZ-ERW2B



SZ-ERW2D




SZ-ERW3A



SZ-ERW3B



SZ-ERW3D



Connection Kits			
Part Number	Price	Description	Use with Contactors
<b>SZ-ERW1A</b>	\$4.50	Line side reversing connection kit.	SC-E02-xxx to SC-E05-xxx
<b>SZ-ERW1B*</b>	\$4.50	Load side reversing connection kit. For wiring load side when using contactors only or with a MMS device.	
<b>SZ-ERW1D</b>	\$4.50	Load side reversing connection kit. For wiring load side when using two contactors with a thermal overload relay.	
<b>SZ-ERW2A</b>	\$10.00	Line side reversing connection kit.	SC-E1-xxx to SC-E2S-xxx
<b>SZ-ERW2B*</b>	\$10.00	Load side reversing connection kit. For wiring load side when using contactors only or with a MMS device.	
<b>SZ-ERW2D</b>	\$10.00	Load side reversing connection kit. For wiring load side when using two contactors with a thermal overload relay.	
<b>SZ-ERW3A</b>	\$18.50	Line side reversing connection kit.	SC-E3-xxx to SC-E4-xxx
<b>SZ-ERW3B*</b>	\$18.50	Load side reversing connection kit. For wiring load side when using contactors only or with a MMS device.	
<b>SZ-ERW3D</b>	\$18.50	Load side reversing connection kit. For wiring load side when using two contactors with a thermal overload relay.	

\* When using the SZ-ERWxB, a TK-E thermal overload relay must be separately mounted and wired using an SZ-HxE base. To assemble a TK-E overload directly to the contactor use a SZ-ERWxD load side connection kit.

## Mechanical interlock unit



SZ-RM

Mechanical Interlock Unit			
Part Number	Price	Description	Use with Contactors
<b>SZ-RM</b>	\$12.50	Used when building a reversing starter. Prevents both contactors from being pulled in at once.	SC-E02-xxx to SC-E4-xxx

NOTE: Mechanical interlock unit cannot be used with SC-E5-xxx through E7-xxx contactors.

## Parts for reversing Fuji SC-E contactors

- SC-E (Contactors - qty. 2)
- SZ-ERWxA (Line side connection kit - qty. 1)
- SZ-ERWxB\* (Load side connection kit - qty. 1)
- SZ-RM (Mechanical interlock - qty. 1)
- SZ-AxxT (Auxiliary contact blocks - qty. 1)




# Fuji Duo Series SC-E Contactors


## Dimensions (mm)

### Contactors


#### SC-E02, E03, E04, E05-xxx

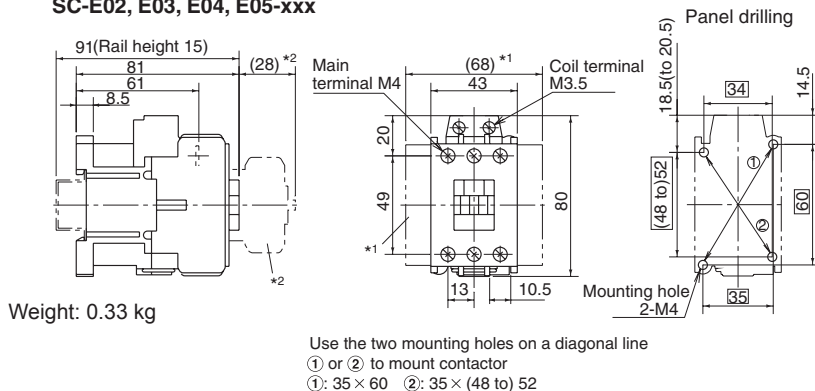

#### SC-E1, E2, E2S-xxx

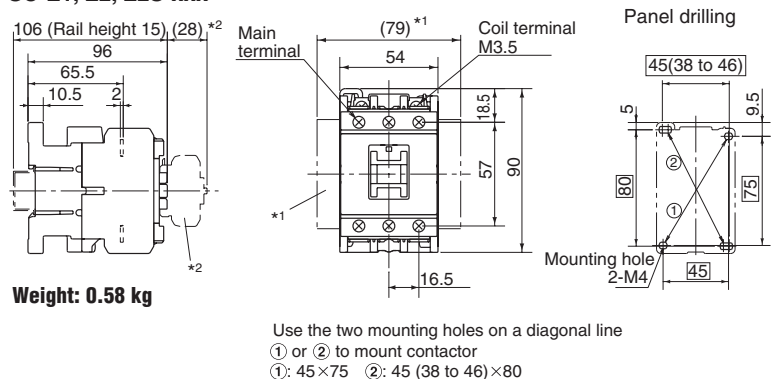


#### SC-E3, E4-xxx

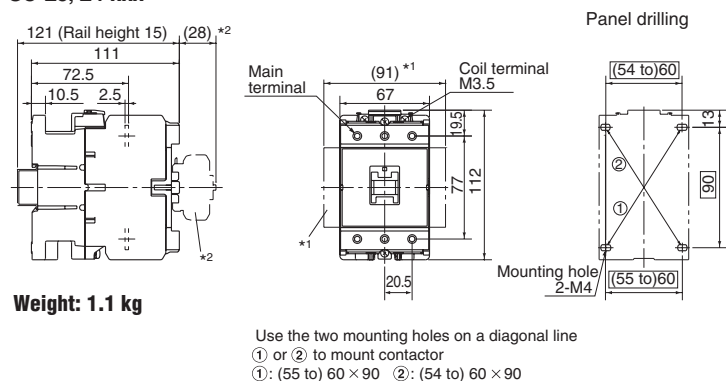


## Wiring diagrams

### Contactors

SC-E02 to E05-xxx  
 SC-E1 to E4-xxx  
 SC-E02G to E05G-xxx  
 SC-E1G to E4G-xxx  
 SC-E2S, E2SG-xxx

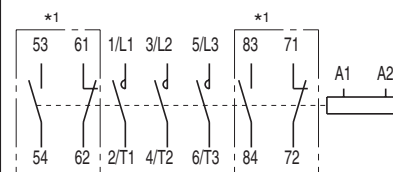

#### SC-E5, E6, E7-xxx

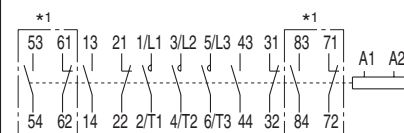


\*1 In case of aux. contact 4NO+4NC

# Fuji Duo Series SC-E Contactors


## Dimensions (mm)

### Contactors


#### SC-E5-xxx



**Weight: 2.0 kg**




#### Panel drilling




\*1 Side mounting aux. contact block  
\*2 Front mounting aux. contact block


#### SC-E6-xxx




**Weight: 2.6 kg**




#### Panel drilling




#### SC-E7-xxx




**Weight: 2.9 kg**




#### Panel drilling




#### SC-E02G, E03G, E04G, E05G-xxx



**Weight: 0.59 kg**



#### Panel drilling




Use the two mounting holes on a diagonal line  
① or ② to mount contactor  
① 35 × 60 ②: 35 × (48 to 52)

# Fuji Duo Series SC-E Contactors

## Dimensions (mm)

### Contactors

#### SC-E1G, E2G, E2SG-xxx

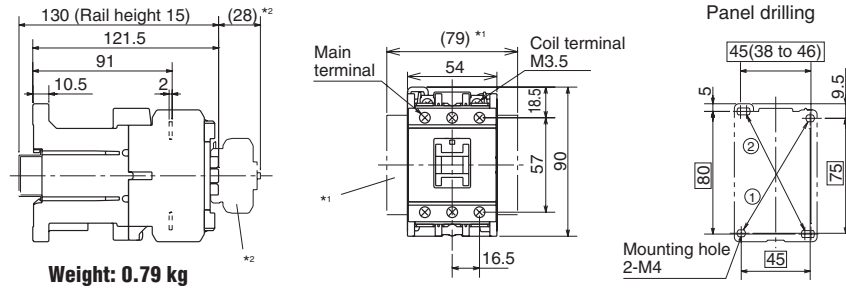


\*1 Side mounting aux. contact block  
\*2 Front mounting aux. contact block

Use the two mounting holes on a diagonal line  
① or ② to mount contactor  
①: 45×75 ②: 45 (38 to 46)×80



#### SC-E3G, E4G-xxx

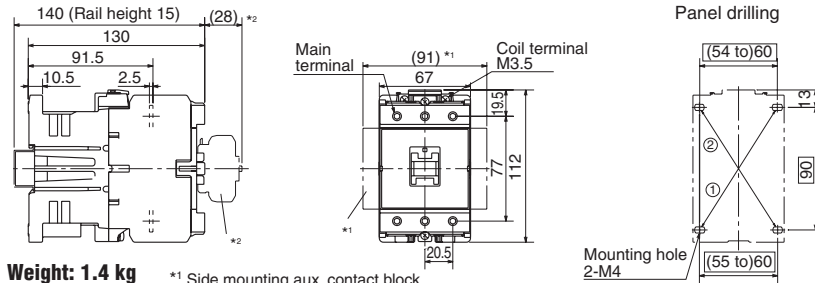


\*1 Side mounting aux. contact block  
\*2 Front mounting aux. contact block

Use the two mounting holes on a diagonal line  
① or ② to mount contactor  
①: (55 to 60)×90 ②: (54 to 60)×90

## Dimensions-mm

### Auxiliary contact blocks - front mounting


#### SZ-A22T, A20T, A11T for SC-E02 (G)-xxx to E4 (G)-xxx

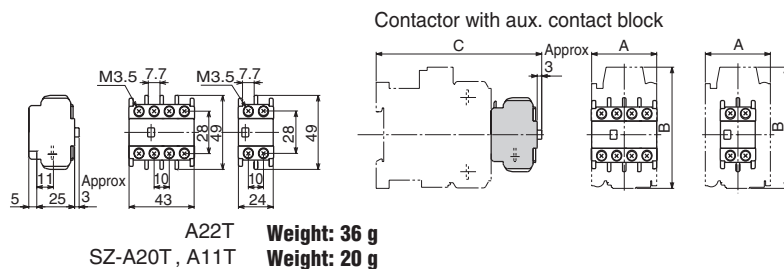

Type	A	B	C
SC-E02, E03, E04, E05-xxx	43	80	109
SC-E1, E2, E2S-xxx	54	90	124
SC-E3, E4-xxx	67	112	139
SC-E02G, E03G, E04G, E05(G)-xxx	43	80	136
SC-E1G, E2G, E2SG-xxx	54	90	149.5
SC-E3G, E4G-xxx	67	112	158

## Wiring diagrams

#### SZ-A22T, A20T, A11T




# Fuji Duo Series SC-E Contactors

## Dimensions (mm)


### Auxiliary contact blocks - side mounting

#### SZ-AS1T for SC-E02(G)-xxx to E4(G)-xxx

Contactor with aux. contact block



Weight: 28 g

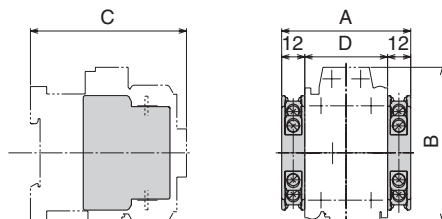

Type	A	B	C	D
SC-E02, E03, E04, E05-xxx	67	80	81	43
SC-E1, E2, E2S-xxx	78	90	54	54
SC-E3, E4-xxx	91	112	67	67
SC-E02G, E03G, E04G, E05(G)-xxx	67	80	108	43
SC-E1G, E2G, E2SG-xxx	78	90	121.5	54
SC-E3G, E4G-xxx	91	112	130	67


## Wiring diagrams

### 1 N.O. + 1 N.C.

Mounted on right side




Mounted on left side




#### SZ-AS2T for SC-E5 to E7-xxx

Contactor with aux. contact block



Weight: 40 g

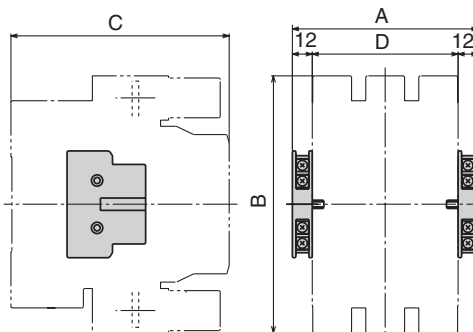

Type	A	B	C	D
SC-E5-xxx	112	155	132	88
SC-E6-xxx	124	169	138	100
SC-E7-xxx	139	175	140	115

### 1 N.O. + 1 N.C.

Mounted on right side



Mounted on left side




# Fuji Duo Series SC-E Contactors

## Dimensions (mm)


### Coil surge suppression units

#### SZ-Z1, Z2, Z4, Z5

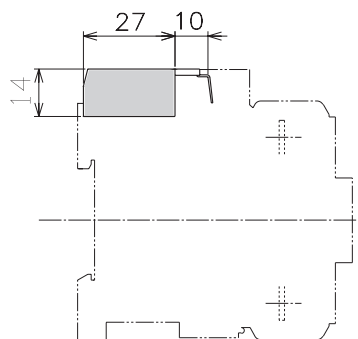


Weight: 14 g


#### SZ-Z31, Z32, Z34, Z35, Z36, Z36, Z37

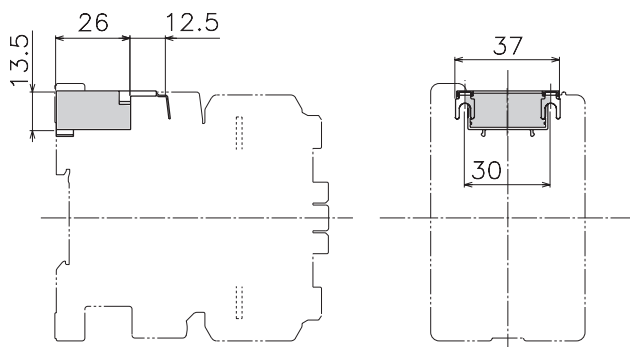

Weight: 15 g

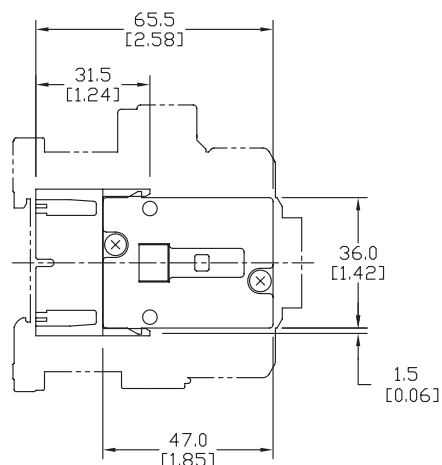

#### SZ-RM

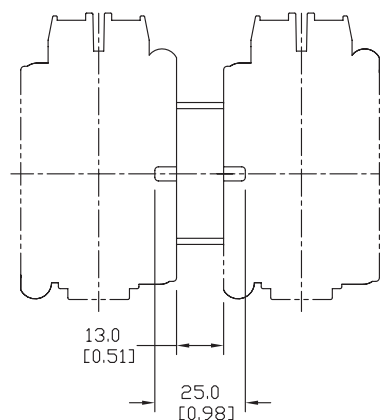


## Wiring diagrams


#### SC-E02 to E05-xxx + SZ-Z1, Z2 (Built-in varistor)



#### SC-E02 to E05-xxx + SZ-Z4, Z5 (Built-in capacitor/resistor)




#### SC-E1 to E4-xxx + SZ-Z31, Z32 (Built-in varistor)



#### SC-E1 to E4-xxx + SZ-Z34, Z35 (Built-in capacitor/resistor)

#### SC-E1G to E4G-xxx + SZ-Z36, Z37 (Built-in capacitor/resistor)






# Fuji Duo Series TK-E Overload Relays

## TK-E series thermal overload relays with open-phase protective device

### Features

- This relay protects motor windings from burning due to overloads, locked rotor current, or open-phases
- Maintenance and inspection safety has been improved by employing a finger protection mechanism to cover exposed terminals (conforms to DIN 57106, VDE 0106 Teil 100)
- Isolated NO and NC contacts can be used with different potentials
- A high-precision scale for the current adjustment dial enables easy and exact current setting
- The operating status can be visually checked with ease
- The relays can be manually tripped. A trip-free mechanism is also provided
- Base unit can be added to enable separate mounting of the TK-E02, E2, and E3-xxx models



TK-E02-900



TK-E3-5000



TK-E2-800



TK-E5-3600

### Standards

UL listed, file E44592, Standard UL 508  
 cUL listed, file E44592, CSA C22.2 No. 14  
 IEC 60947-4-1, EN60947-4-1  
 VDE 0660, JIS C 8201-4-1  
 CE Compliant



TK-E6-6500

TK-E Series Overloads			
Part Number	Price	Amperage Adjustment Range (A)	Frame Width/ Contactor
TK-E02-15	\$25.00	0.1 - 0.15	53mm SC-E02(G) through SC-E05(G) For separate mounting, use with optional base unit SZ-HCE on page 17-51
TK-E02-20	\$25.00	0.13 - 0.2	
TK-E02-24	\$25.00	0.15 - 0.24	
TK-E02-30	\$25.00	0.2 - 0.3	
TK-E02-36	\$25.00	0.24 - 0.36	
TK-E02-54	\$25.00	0.36 - 0.54	
TK-E02-72	\$25.00	0.48 - 0.72	
TK-E02-96	\$25.00	0.64 - 0.96	
TK-E02-120	\$25.00	0.8 - 1.2	
TK-E02-145	\$25.00	0.95 - 1.45	
TK-E02-220	\$25.00	1.4 - 2.2	
TK-E02-260	\$25.00	1.7 - 2.6	
TK-E02-340	\$25.00	2.2 - 3.4	
TK-E02-420	\$25.00	2.8 - 4.2	
TK-E02-600	\$25.00	4.0 - 6.0	
TK-E02-800	\$25.00	5.0 - 8.0	
TK-E02-900	\$25.00	6.0 - 9.0	
TK-E02-1100	\$25.00	7.0 - 11.0	
TK-E02-1300	\$25.00	9.0 - 13.0	
TK-E02-1800	\$25.00	12 - 18	
TK-E02-2200	\$25.00	16 - 22	
TK-E02-2500	\$25.00	20 - 25	


TK-E Series Overloads (continued)			
Part Number	Price	Amperage Adjustment Range (A)	Frame Width/ Contactor
TK-E2-600	\$40.00	4 - 6	54mm SC-E1(G) through SC-E2S(G) For separate mounting, use with optional base unit SZ-HDE on page 17-51
TK-E2-800	\$40.00	5 - 8	
TK-E2-900	\$40.00	6 - 9	
TK-E2-1100	\$40.00	7 - 11	
TK-E2-1300	\$40.00	9 - 13	
TK-E2-1800	\$40.00	12 - 18	
TK-E2-2600	\$40.00	18 - 26	
TK-E2-3600	\$40.00	24 - 36	
TK-E2-4200	\$40.00	32 - 42	
TK-E2-5000	\$40.00	40 - 50	
TK-E2-5400	\$40.00	44 - 54	
TK-E3-1100	\$49.00	7 - 11	68mm SC-E3(G) through SC-E4(G) For separate mounting, use with optional base unit SZ-HEE on page 17-51
TK-E3-1300	\$49.00	9 - 13	
TK-E3-1800	\$49.00	12 - 18	
TK-E3-2600	\$49.00	18 - 26	
TK-E3-3600	\$49.00	24 - 36	
TK-E3-4000	\$49.00	28 - 40	
TK-E3-5000	\$49.00	34 - 50	
TK-E3-6500	\$49.00	45 - 65	
TK-E3-6800	\$49.00	48 - 68	
TK-E3-8000	\$49.00	64 - 80	

TK-E Series Overloads (continued)			
Part Number	Price	Amperage Adjustment Range (A)	Frame Width/ Contactor
TK-E5-2600	\$55.00	18 - 26	76.5mm SC-E5
TK-E5-3600	\$55.00	24 - 36	
TK-E5-4000	\$55.00	28 - 40	
TK-E5-5000	\$26.75	34 - 50	
TK-E5-6500	\$55.00	45 - 65	
TK-E5-9500	\$55.00	65 - 95	
TK-E5-10500	\$55.00	85 - 105	
TK-E6-6500	\$94.50	45 - 65	100mm SC-E6 SC-E7
TK-E6-8000	\$94.50	53 - 80	
TK-E6-9500	\$94.50	65 - 95	
TK-E6-12500	\$94.50	85 - 125	
TK-E6-16000	\$94.50	110 - 160	


# Fuji Duo Series Contactor and Overload Relay Selection Tables



SC-E Contactor



TK-E Overload Relay




**FE** Fuji Electric

## 100-240V Single Phase Motor (1/3 to 25 hp)

Step 1. Select a contactor from page 17-31 based on motor voltage and horsepower.

Step 2. Select an overload relay from page 17-46 based on motor full load current.

Check the data plate on the motor for the hp, volts and full-rated amps.



Motor			
HP	5	Volts	460
RPM	1725	Amps	7.6
Design	B	AMB	40°C
Duty	Cont	Encl	TEFC
Phase	3	Hz	60
Type	P	SF	1.15
Insul Class		F	
Code		K	

Motor horsepower → HP  
Motor voltage → Volts  
Motor full-load rated amperage (FLA) → Amps

## Three Phase Motors - Refer to tables on following page

Step 1. Select a SC-E contactor from Column A based on motor voltage, and horsepower.

Step 2. Select a TK-E overload relay from Column B to work with the SC-E contactor selected in Step 1. The motor full load current (FLA) should be within the adjustable current range of the overload relay.

# Fuji Duo Series Overload Relay Selection Tables

## 220-240V 3-Phase Motor (0.5 to 50 hp)<sup>1</sup>

Overload Relay Selection for 220–240V 3-phase motors				
Motor Rating		A	B	
Motor HP	Motor Full Load Amperage (FLA) <sup>2</sup>	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
1/2	2.2	SC-E02-xxxx	TK-E02-260	1.7 to 2.6 Amps
3/4	3.5		TK-E02-420	2.8 to 4.2 Amps
1	4.2		TK-E02-600	4 to 6 Amps
1-1/2	6		TK-E02-800	5 to 8 Amps
2	6.8		TK-E02-900	6 to 9 Amps
3	9.6	SC-E03-xxxx	TK-E02-1300	9 to 13 Amps
5	15.2	SC-E04-xxxx	TK-E02-1800	12 to 18 Amps
7-1/2	22	SC-E05-xxxx	TK-E02-2500	20 to 25 Amps
10	28	SC-E1-xxxx	TK-E2-3600	24 to 36 Amps
15	42	SC-E2-xxxx	TK-E2-4200	32 to 42 Amps
20	54	SC-E3-xxxx	TK-E3-6500	45 to 65 Amps
25	68	SC-E4-xxxx	TK-E3-6800	48 to 68 Amps
30	80	SC-E5-xxxx	TK-E5-9500	65 to 95 Amps
40	104	SC-E6-xxxx	TK-E6-12500	85 to 125 Amps
50	130	SC-E7-xxxx	TK-E6-16000	110 to 160 Amps


**Note 1:** For 220-240 V three-phase motors up to 150 hp refer to the Fuji Odyssey series.  
**Note 2:** Per NEC 2005 table 430.250

## 440-480V 3-Phase Motor (0.5 to 100 hp)<sup>1</sup>

Overload Relay Selection for 440–480V 3-phase motors				
Motor Rating		A	B	
Motor HP	Motor Full Load Amperage (FLA) <sup>2</sup>	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
1/2	1.1	SC-E02-xxxx	TK-E02-145	0.95 to 1.45 Amps
3/4	1.6	SC-E02-xxxx	TK-E02-220	1.4 to 2.2 Amps
1	2.1	SC-E02-xxxx	TK-E02-260	1.7 to 2.6 Amps
1-1/2	3.0	SC-E02-xxxx	TK-E02-420	2.8 to 4.2 Amps
2	3.4	SC-E02-xxxx	TK-E02-420	2.8 to 4.2 Amps
3	4.8	SC-E02-xxxx	TK-E02-600	4 to 6 Amps
5	7.6	SC-E02-xxxx	TK-E02-900	6 to 9 Amps
7 1/2	11	SC-E03-xxxx	TK-E02-1300	9 to 13 Amps
10	14	SC-E04-xxxx	TK-E02-1800	12 to 18 Amps
15	21	SC-E05-xxxx	TK-E02-2500	20 to 25 Amps
20	27	SC-E1-xxxx	TK-E2-3600	24 to 36 Amps
25	34	SC-E1-xxxx	TK-E2-4200	32 to 42 Amps
30	40	SC-E2-xxxx	TK-E2-4200	32 to 42 Amps
40	52	SC-E3-xxxx	TK-E3-6500	45 to 65 Amps
50	65	SC-E4-xxxx	TK-E3-6800	48 to 68 Amps
60	77	SC-E5-xxxx	TK-E5-9500	65 to 95 Amps
75	96	SC-E6-xxxx	TK-E6-12500	85 to 125 Amps
100	124	SC-E7-xxxx	TK-E6-16000	110 to 160 Amps

**Note 1:** For 440-480 V three-phase motors up to 300 hp refer to the Fuji Odyssey series.  
**Note 2:** Per NEC 2005 table 430.250

# Fuji Duo Series TK-E Overload Relays



Standard Operating Conditions	
<b>Ambient Temperature</b>	Operating: -5 to 55°C No sudden temperature changes resulting in condensation or icing (The average temperature over a 24-hour period must not exceed 35°C) Storage: -40 to 65°C
<b>Humidity</b>	45 to 85%RH
<b>Atmosphere</b>	No excessive dust, smoke, corrosive gases, flammable gases, steam, or salt
<b>Vibration</b>	10 to 55Hz, 15m/s <sup>2</sup>
<b>Shock</b>	50m/s <sup>2</sup>

Specifications						
Model	Applicable Contactor Non-reversing	Auxiliary Contact	Trip Class IEC 60947-4-1	No. of Heater Elements	Power Consumption per Pole (VA)	Features
TK-E02-xxx	SC-E02, E03, E04, E05-xxx	1NO+1NC	10A	3	2.2	Overload, open-phase protection, Ambient temperature compensation, Manual/auto reset selectable, Manual trip mechanism, Trip indicator
TK-E2-xxx	SC-E1, E2, E2S-xxx				3.8	
TK-E3-xxx	SC-E3, E4-xxx				6.6	
TK-E5-xxx	SC-E5-xxx				6.6	
TK-E6-xxx	SC-E6, E7-xxx				8.0	

Auxiliary Contact Ratings - UL and CSA						
Model	Rated Insulation Voltage (V)	NEMA ICS 5-2000 Ratings (note 1)				
		AC Ratings			DC Ratings	
		Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
TK-E02-xxx to TK-E6-xxx	690	B600	3600	360	R300	28


Notes:  
1. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

Auxiliary contact ratings - JIS and IEC							
Model	Rated Insulation Voltage (A)	Rated Thermal Current (A)	Rated Operational Current (A)				Minimum Voltage and Current
			AC Voltage (V)	AC15 (Ind. load)	DC Voltage (V)	DC13 (Ind. load)	
TK-E02-xxx	690	5	24	3 (0.3) *	24	1.1 (0.3)	3VDC, 5mA
			100-120	2.5 (0.3) *	100-120	0.28	
			200-240	2 (0.3) *	200-240	0.14	
			380-440	1 (0.3) *			
			500-600	0.6 (0.3) *			
TK-E2-xxx	690	5	24	3 (0.5) *	24	1.1 (0.3)	3VDC, 5mA
TK-E3-xxx			100-120	2.5 (0.5) *	100-120	0.28	
TK-E5-xxx			200-240	2 (0.5) *	200-240	0.14	
TK-E6-xxx			380-440	1 (0.5) *			
			500-600	0.6 (0.5) *			
Note: * In case of auto-reset type NO contact.							

# Fuji Duo Series TK-E Overload Relays

## Wiring



Be sure to wire the relays correctly using the wiring diagrams on the supplied installation sheets. Main terminals for models TK-E02-xxx to TK-E6-xxx are wired using solid wires or stranded wires. Stranded wires or flexible stranded wires can be connected by twisting them together and crimping a sleeve (ferrule) onto them before connecting.





## Tightening torque

If wires are not tightened sufficiently, they may become hot or loosen and result in a fire, short-circuit, electric shock, or some other potentially dangerous situation. Be sure to tighten the wires to the torques specified in these tables.



Wire Sizes, Tightening Torques - Main Circuit				
Thermal Overload Relay Model	TK-E2-xxx	TK-E3-xxx	TK-E5-xxx	TK-E6-xxx
Single Stranded Wire (mm <sup>2</sup> )	0.75 to 16	1.5 to 35		16 to 70
Flexible Stranded Wire with Sleeve (mm <sup>2</sup> )	0.75 to 16	1.5 to 35		16 to 70
Flexible Stranded Wire without Sleeve (mm <sup>2</sup> )	0.75 to 16	1.5 to 35		16 to 70
AWG	6 max.	2 max.		00 max.
Insulation Stripping Length				
Tool	Phillips screwdriver, H-type, No. 2 (ISO 8764); ADC part number DN-SP1 or DN-SP2  Flat-blade screwdriver, 1 x 5.5 x L-type, B (ISO 2830); ADC part number DN-SS5		Hex. wrench 4 (ISO 2936)	
Tightening Torque (N·m)	2.5	6		10
Note: Stranded wire (0 to 25mm <sup>2</sup> ) consists of 7 wires or less. Stranded wire (35 to 120mm <sup>2</sup> ) consists of 19 wires or less. Flexible stranded wire consists of more wires than the above.				

Wire Sizes, Tightening Torques - Main Circuit		
Thermal Overload Relay Type	TK-E02-xxx	
Solid Wire (mm <sup>2</sup> )	One	0.75 to 4
	Two	1 to 4
Stranded Wire (mm <sup>2</sup> )	One	0.75 to 4
	Two	1 to 4
AWG	One	12 max.
	Two	12 max.
Insulation Stripping Length (mm)		
Terminal Screw Size	M4	
Tool	Phillips screwdriver, H-type, No. 2 (ISO 8764); ADC part number DN-SP1 or DN-SP2 Flat-blade screwdriver, 1 x 5.5 x L-type, B (ISO 2830); ADC part number DN-SS5	
Tightening Torque [N·m (lb·in)]	1.2 to 1.5 (11 to 13)	


Wire Sizes, Tightening Torques - Control Circuit		
Single Stranded Wire (mm <sup>2</sup> )	One	0.75 to 2.5 (ø 1 to ø 1.6)
	Two	0.75 to 2.5
AWG	One	18 to 14
	Two	18 to 14
Insulation Stripping Length (mm)		
Fork Terminal	Max. 7.7mm wide (R2-3.5)	
Terminal Screw Size	M3.5	
Tool	Phillips screwdriver, H-type, No. 2 (ISO 8764); ADC part number DN-SP1 or DN-SP2 Flat-blade screwdriver, 1 x 5.5 x L-type, B (ISO 2830); ADC part number DN-SS5	
Tightening Torque [N·m (lb·in)]	0.8 to 1 (7 to 9)	

# Fuji Duo Series TK-E Overload Relays

## Operating characteristics


TK-E02-xxx

Reference temperature: 20°C

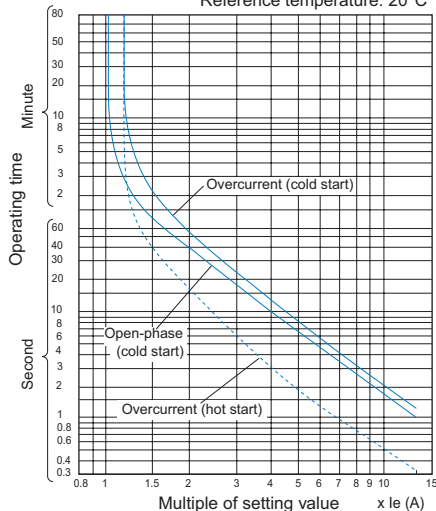

TK-E2 to E6-xxx

Reference temperature: 20°C

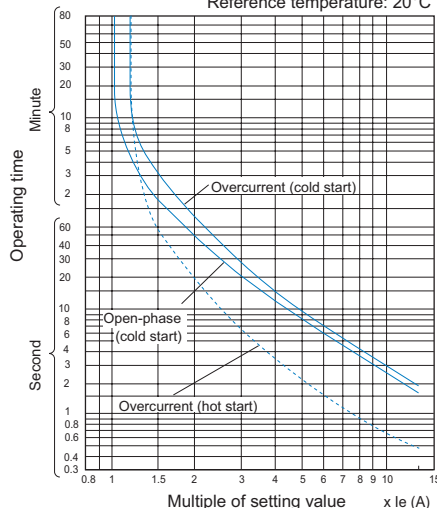

## Optional accessories

### Base units for separate mounting



Allows TK-E02, E2, and E3 series thermal overload relays to be separately mounted to 35mm wide DIN rail, or screw mounted to panel.

#### Mounting Base Unit

Part Number	Applicable Overload Relays	Price
<b>SZ-HCE</b>	TK-E02-xxx	\$6.00
<b>SZ-HDE</b>	TK-E2-xxx	\$12.00
<b>SZ-HEE</b>	TK-E3-xxx	\$14.00



SZ-HCE

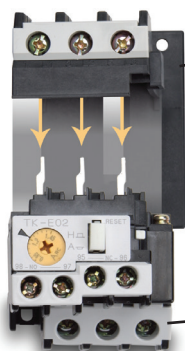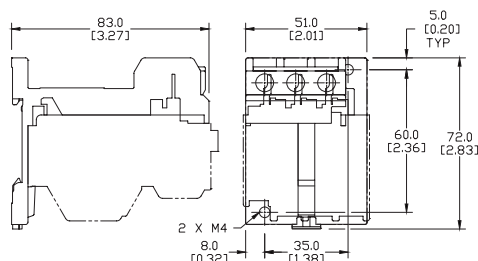

SZ-HCE Base Unit


Install thermal overload relay onto base unit as shown. Relay can now be installed onto DIN rail or panel.




TK-E02-145 Thermal Overload Relay



SZ-HDE

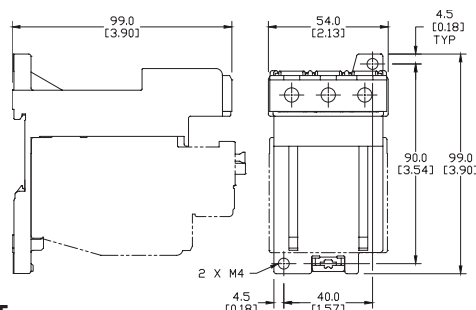

SZ-HEE

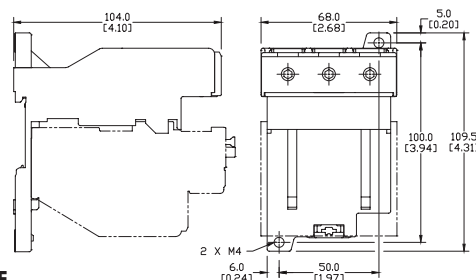






# Fuji Duo Series Manual Motor Starters

The manual motor starter is a protective device for motor use that provides optimal protection by integrating the functions of a molded case circuit breaker and thermal overload relay into a compact unit. Since Fuji's MMS is UL listed for Category E self-protected motor control, it can be used for motor branch circuit protection without the need for additional protection such as fuses or molded case circuit breakers. The MMS is avail-


able in a 32A version with a 45 mm frame width, and a 63A version with a 55 mm frame width. Both MMS versions have high breaking capacities, up to 100,000A in some ranges. A wide range of accessories is available, including shunt trips and undervoltage releases.

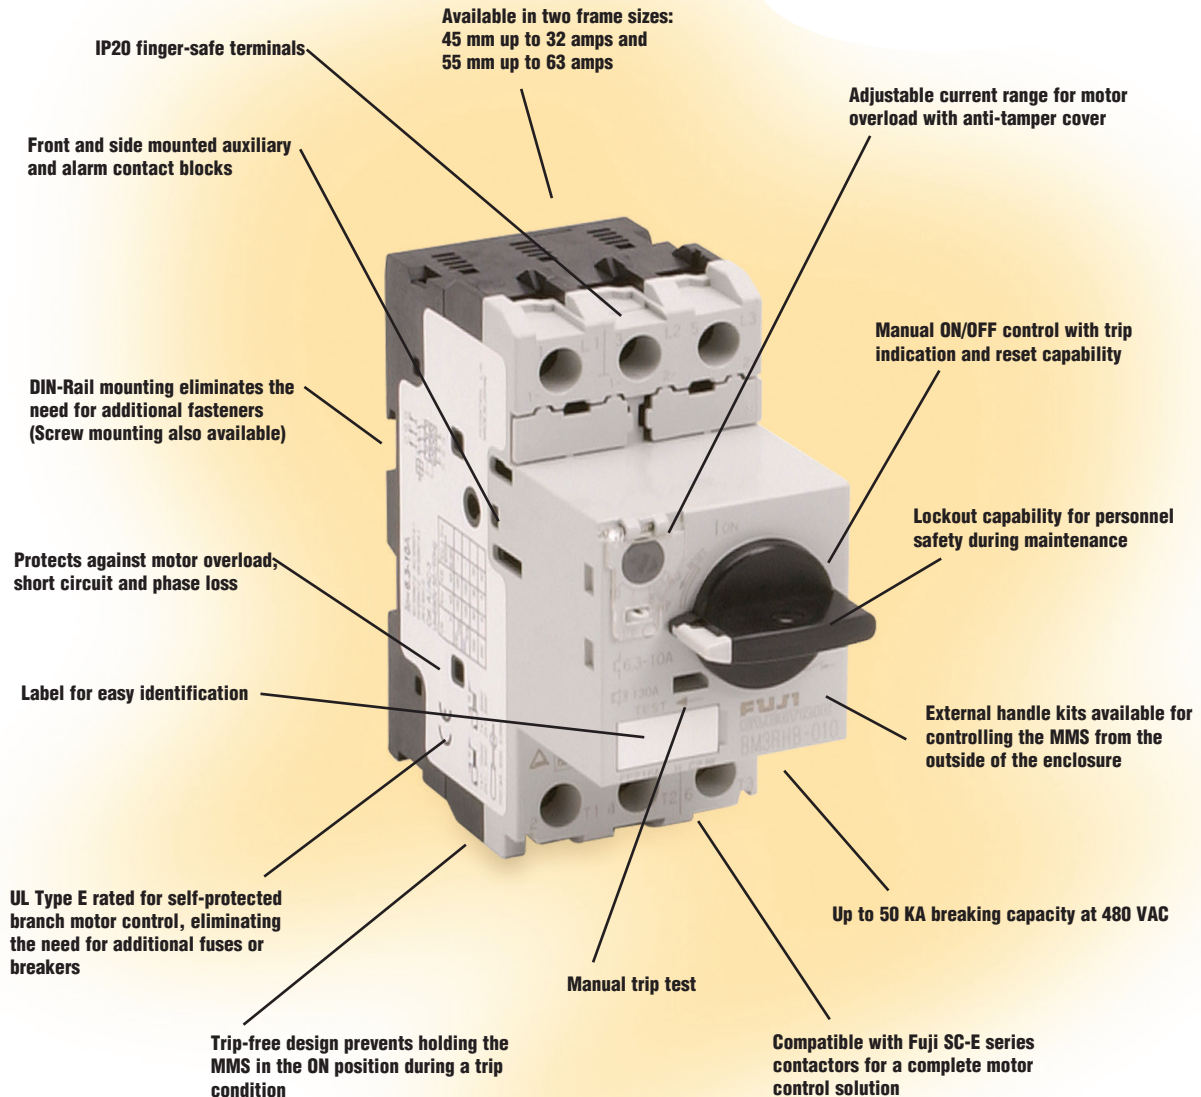

**Auxiliary and alarm contact blocks**



**Shunt trips and undervoltage releases**



**MMS external handles**



**MMS Busbars**

# Accessories

Book 2 (14.3)

# Fuji Duo Series Manual Motor Starters


## General Information

### Features

- Adjustable thermal-magnetic trip
- Available in two frame sizes, 45 mm width and 55 mm width
- A wide motor capacity range up to 40 hp, 3-phase (440/480 VAC, 63A); 60 hp @ 600 V
- Rotary handle operators
- On/Off and trip state indicators for all frames
- Max. breaking capacity of 100 kA (240 VAC)
- Common accessories to reduce inventory
- A wide rated operational current range of up to 32A for the 45 mm wide and 63A for the 55 mm wide starters
- ON/OFF and trip indicators for instant status recognition
- Accessories such as auxiliary contact blocks, shunt trip devices, and undervoltage trip devices are compatible with the 45 mm and 55 mm wide frame sizes
- External operating handles are available as optional accessories
- Lockout/tagout feature

### Standards

- UL listed, file E163944, Standard UL 508
- cUL listed, file E163944, CSA C22.2 No.14
- TÜV, CE
- cULus listed for group installation per NEC 430-53(c)



### BM3RHB-xxx Models (45mm wide)

Rated current: 0.16 to 32A

Rated insulation voltage: 690V

Operation handle: Rotary

Short circuit current rating:

- 100 kA at 240 VAC
- 50 kA at 480 VAC

NOTE: When using BM3RHB-xxx MMS in a UL Type E application, you must also use part numbers BZOT-KUAB (short-circuit contact block) and BZOTCRE (line side terminal cover).



### BM3VHB-xxx Models (55mm wide)

Rated current: 10 to 63A

Rated insulation voltage: 1000V



Operation handle: Rotary

Short circuit current rating:

- 100 kA at 240 VAC
- 50 kA at 480 VAC

NOTE: When using BM3VHB-xxx MMS in a UL Type E application, you must also use part number BZOT-KUAB (short-circuit contact block).

## Characteristic curves

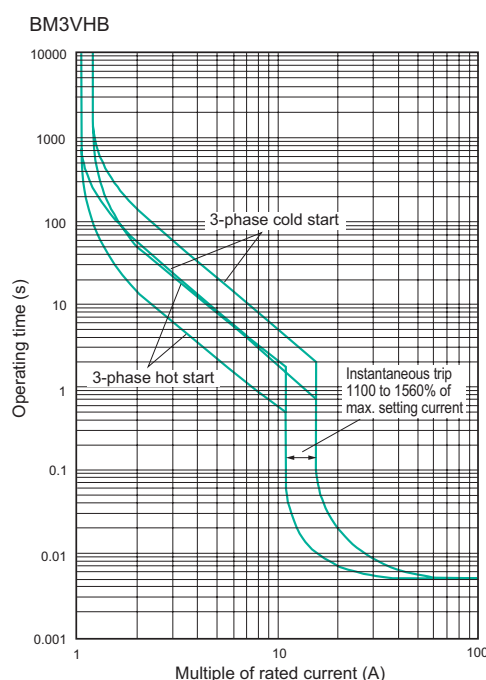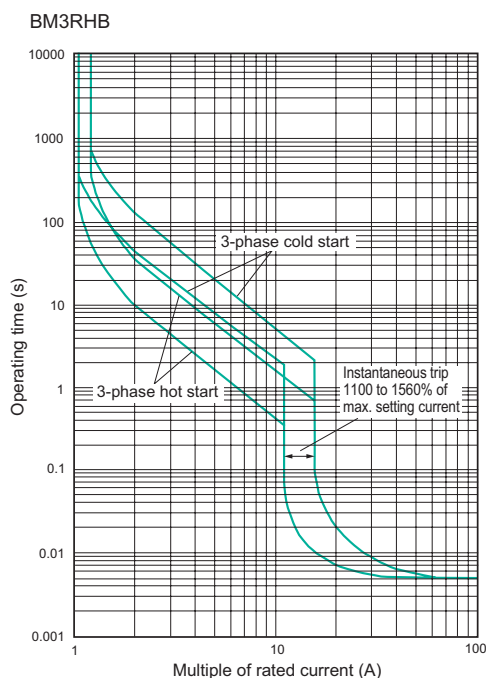

# Fuji Duo Series Manual Motor Starters

## BM3RHB-xxx Specifications



General Specifications: 45 mm Frame Width - BM3RHB-XXX Series											
Part Number	Price	Adjustable Current Range	UL/CSA 3-Phase HP Rating <sup>1</sup>				Instantaneous Trip Current (A)	UL/CSA Short Circuit Current Rating (kA) <sup>2</sup>			Max. Listed Branch Circuit Protection - Fuse or MCCB (A) <sup>2</sup>
		Ie: Min.-Max. (A)	200-208VAC	220-240VAC	440-480VAC	550-600VAC		240VAC	480VAC	600VAC	
BM3RHB-P16	\$49.50	0.1-0.16	Rated to motor full-load amperage		In accordance with motor full-load current		2.1	100	50	10	500
BM3RHB-P25	\$49.50	0.16-0.25					3.3	100	50	10	500
BM3RHB-P40	\$49.50	0.25-0.4					5.2	100	50	10	500
BM3RHB-P63	\$49.50	0.4-0.63					8.2	100	50	10	500
BM3RHB-001	\$49.50	0.63-1				1/2	13	100	50	10	500
BM3RHB-1P6	\$49.50	1-1.6				3/4	3/4	20.8	100	50	10
BM3RHB-2P5	\$49.50	1.6-2.5	1/2	1/2	1	1-1/2	32.5	100	50	10	500
BM3RHB-004	\$49.50	2.5-4	3/4	3/4	2	3	52	100	50	10	500
BM3RHB-6P3	\$49.50	4-6.3	1	1-1/2	3	5	81.9	100	50	10	500
BM3RHB-010	\$52.50	6.3-10	2	3	5	7-1/2	130	100	50	10	500
BM3RHB-013	\$52.50	9-13	3	3	7-1/2	10	169	100	50	10	500
BM3RHB-016	\$52.50	11-16	3	5	10	10	208	100	50	10	500
BM3RHB-020	\$52.50	14-20	5	5	10	15	260	100	50	10	500
BM3RHB-025	\$62.50	19-25	7-1/2	7-1/2	15	20	325	100	50	10	500
BM3RHB-032	\$79.50	24-32	10	10	20	30	416	100	50	10	500
Note 1: BM3RHB-xxx are cUL listed as HP rated motor controllers.      Note 2: BM3RHB-xxx are cUL listed for group installation per NEC430-53(C).											

Note 1: BM3RHB-xxx are cUL listed as HP rated motor controllers.

Note 2: BM3RHB-xxx are cUL listed for group installation per NEC430-53(C).

General Specifications: 45 mm Frame Width - BM3RHB-XXX Series - continued										
<b>Features</b>		Adjustable thermal-magnetic trip type								
<b>Number of Poles</b>		3								
<b>Handle Type</b>		Rotary								
<b>Rated Current Ie (A)</b>		0.16 to 32								
<b>Rated Operational Voltage Ue (V)</b>		200 to 690								
<b>Rated Frequency (Hz)</b>		50/60								
<b>Rated insulation Voltage Ui (V)</b>		690								
<b>Rated Impulse Withstand Voltage Uimp (kV)</b>		6								
<b>Utilization Category</b>	<b>IEC 60947-2 Circuit Breaker</b>	Cat. A								
	<b>IEC 60947-4-1 Motor Starter</b>	AC-3								
<b>Trip Class IEC 60947-4-1</b>		10								
<b>Instantaneous Trip Characteristic</b>		13 x Ie max.								
<b>Power Loss (total of 3-pole)</b>		7W: In=0.16 to 25A    8.5W: In=32A								
<b>Mechanical Durability (operations)</b>		100,000: In=0.16 to 25A    70,000: In=32A								
<b>Electrical Durability (operations)</b>		100,000: In=0.16 to 25A    70,000: In=32A								
<b>Max. Operations per Hour (motor start-up)</b>		25								
<b>Phase-loss Protection</b>		Provided								
<b>Trip Indicator</b>		Provided								
<b>Test Trip Function</b>		Provided								
<b>Dimensions (mm) WxHxD</b>		45x90x79								
<b>Weight (oz/g)</b>		13.05 / 370								
<b>Optional Accessories</b>	<b>Auxiliary Contact Block</b>	Yes								
	<b>Alarm Contact Block</b>	Yes								
	<b>Auxiliary and Alarm Contact Block</b>	Yes								
	<b>Short-Circuit Alarm Contact Block</b>	Yes								
	<b>Shunt Trip Device</b>	Yes								
	<b>Undervoltage Trip Device</b>	Yes								
	<b>External Operating Handle</b>	Yes								
<b>Standards &amp; Agency Approvals</b>		IEC 60947-1, 60947-2, 60947-4-1, UL 508 file E163944, CSA C22.2 No.14 file 20479								

# Fuji Duo Series Manual Motor Starters

## BM3VHB-xxx Specifications

General Specifications: 55 mm Frame Width - BM3VHB-XXX Series											
Part Number	Price	Adjustable Current Range	UL/CSA 3-Phase hp Rating <sup>1</sup>				Instantaneous Trip Current (A)	UL/CSA Short Circuit Current Rating (kA) <sup>2</sup>			Max. Listed Branch Circuit Protection - Fuse or MCCB (A) <sup>3</sup>
		I <sub>e</sub> : Min.-Max. (A)	200-208VAC	220-240VAC	440-480VAC	550-600VAC		240VAC	480VAC	600VAC	
<b>BM3VHB-010</b>	\$122.50	6.3-10	2	3	5	7-1/2	130	100	50	10	600
<b>BM3VHB-013</b>	\$122.50	9-13	3	3	7-1/2	10	169	100	50	10	600
<b>BM3VHB-016</b>	\$122.50	11-16	3	5	10	10	208	100	50	10	600
<b>BM3VHB-020</b>	\$122.50	14-20	5	5	10	15	260	100	50	10	600
<b>BM3VHB-025</b>	\$142.00	19-25	7-1/2	7-1/2	15	20	325	100	50	10	600
<b>BM3VHB-032</b>	\$150.50	24-32	10	10	20	30	416	100	50	10	600
<b>BM3VHB-040</b>	\$150.50	28-40	10	10	30	30	520	100	50	10	600
<b>BM3VHB-050</b>	\$157.00	35-50	15	15	30	40	650	100	50	10	600
<b>BM3VHB-063</b>	\$157.00	45-63	20	20	40	60	819	100	50	10	600
<p><b>Note 1:</b> BM3VHB-xxx are cUL listed as HP rated motor controllers.      <b>Note 2:</b> BM3VHB-xxx are cUL listed for group installation per NEC430-53(C).</p>											

General Specifications: 55 mm Frame Width - BM3VHB-XXX Series - continued											
<b>Features</b>		Adjustable thermal-magnetic trip type									
<b>Number of Poles</b>		3									
<b>Handle Type</b>		Rotary									
<b>Rated Current I<sub>e</sub> (A)</b>		10 to 63									
<b>Rated Operational Voltage U<sub>e</sub> (V)</b>		200 to 690									
<b>Rated Frequency (Hz)</b>		50/60									
<b>Rated Insulation Voltage U<sub>i</sub> (V)</b>		1,000									
<b>Rated Impulse Withstand Voltage U<sub>imp</sub> (kV)</b>		8									
<b>Utilization Category</b>	<b>IEC 60947-2 Circuit Breaker</b>	Cat. A									
	<b>IEC 60947-4-1 Motor Starter</b>	AC-3									
<b>Trip Class IEC 60947-4-1</b>		10									
<b>Instantaneous Trip Characteristic</b>		13 x I <sub>e</sub> max.									
<b>Power Loss (total of 3-pole)</b>		11W: I <sub>n</sub> = 10 to 32A    15W: I <sub>n</sub> = 40 to 50A    17W: I <sub>n</sub> = 63A									
<b>Mechanical Durability (operations)</b>		50,000									
<b>Electrical Durability (operations)</b>		25,000									
<b>Max. Operations per Hour (motor start-up)</b>		25									
<b>Phase-Loss Protection</b>		Provided									
<b>Trip Indicator</b>		Provided									
<b>Test Trip Function</b>		Provided									
<b>Dimensions (mm) WxHxD</b>		55x110x96									
<b>Weight (oz/g)</b>		27.51 / 780									
<b>Optional Accessories</b>	<b>Auxiliary Contact Block</b>	Yes									
	<b>Alarm Contact Block</b>	Yes									
	<b>Auxiliary and Alarm Contact Block</b>	Yes									
	<b>Short-Circuit Alarm Contact Block</b>	Yes									
	<b>Shunt Trip Device</b>	Yes									
	<b>Undervoltage Trip Device</b>	Yes									
<b>Standards &amp; Agency Approvals</b>		IEC 60947-1, 60947-2, 60947-4-1, UL 508 file E163944, CSA C22.2 No.14 file 20479									



# Fuji Duo Series Manual Motor Starters

## DIN-rail mounting

The MMS can be mounted to a 35 mm DIN rail. Secure the rail with screws at mounting pitch of less than 400 mm for the BM3R type and less than 300 mm for the BM3V type.


Applicable rail:

Use a 15 mm-high DIN rail, such as our DN-R35HS1, which conforms to EN-50022 and IEC715.


The standard DIN rail mounting direction is horizontal. When using the MMS on vertically mounted DIN rail, use end clamps.

## Screw mounting




The separately sold push-in lug (BZOSET) is required for screw mounting the BM3R frame. The BM3V frame can be screw mounted directly to the panel.

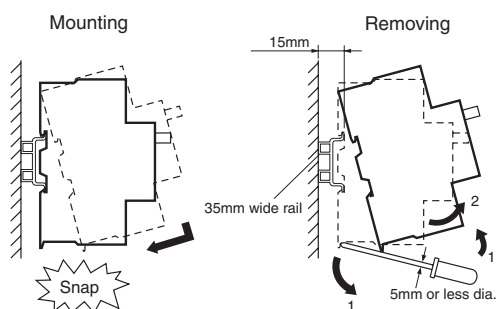

BM3RHB-xxx



BM3VHB-xxx



## Wiring

While pressing the wire with a screw-driver, tighten the screw to the specified tightening torque.

## Environmental Specifications

<b>Ambient Temperature</b>	Operating: -5 to +55°C Storage: -40 to +65°C	No sudden temperature changes resulting in condensation or icing.
<b>Humidity</b>	45 to 85%RH	
<b>Altitude</b>	2000m or lower	
<b>Atmosphere</b>	No excessive dust, smoke, corrosive gases, flammable gases, steam or salt.	
<b>Vibration</b>	10 to 55Hz 15m/s2	No abnormal shock or vibration.
<b>Shock</b>	50m/s2	

## Wiring Specifications

### Wire Size and Tightening Torque


Type	BM3RHB-XXX	BM3VHB-XXX	BZO Accessories
<b>Solid Wire (mm)</b>	1.6 to 2.6 dia.	1.6 to 2.6 dia.	1 to 1.6 dia.
<b>Stranded Wire (mm<sup>2</sup>)</b>	<b>Single-wire</b> 1 to 10 1 to 6	<b>Single-wire</b> 1 to 25 1 to 16	0.5 to 2.5 0.5 to 2.5
<b>AWG</b>	<b>Single-wire</b> 18 to 8 18 to 10	<b>Single-wire</b> 18 to 4 18 to 4	18 to 14 18 to 14
<b>Sheath Stripping Length (mm)</b>	Approx.10	Approx.13	Approx.10
<b>Terminal Screw</b>	Pan head screw (PZ2) M4	Pan head screw (PZ2) M6	Pan head screw (PZ2) M3.5
<b>Tightening Torque (N·m)</b>	2	4	0.8

**Note:** There is no need for a crimp terminal or any other terminal on the end of the connection wire.

## Arc Space Requirements

### Arc Space Requirements

Part Number	Rated operational voltage U <sub>e</sub> (V)	Minimum distance to grounded metal (mm)	
		A,B	C,D
BM3RHB-XXX	Up to 500	15	30
	Up to 690	40	50
BM3VHB-XXX	Up to 500	15	40
	Up to 690	40	50



When the motor starters are mounted side by side, operating conditions such as ambient temperature or using the maximum rated current for continuous carrying current may cause changes in operating characteristics and temperature rises. Under such conditions, it is recommended that the frames be separated by at least 5mm.




# Fuji Duo Series Manual Motor Starters

## Accessories


### Optional accessories

- All accessories can be used with BM3R (45 mm wide) and BM3V (55 mm wide) frames
- Accessories are easily mounted
- Internally-mountable auxiliary contact blocks and alarm contact blocks can be front mounted
- Side-mountable auxiliary contact blocks can be mounted on the left side
- Shunt trip and undervoltage trip devices are available in a wide operating coil voltage range and mount on the right side
- Standard and emergency external handles are available
- IP20 terminal cover helps prevent accidental contact with electrically charged parts
- Optional front mounted contact and alarm blocks eliminate horizontal space needed with the DIN rail

### Installation of optional contact blocks and trip devices

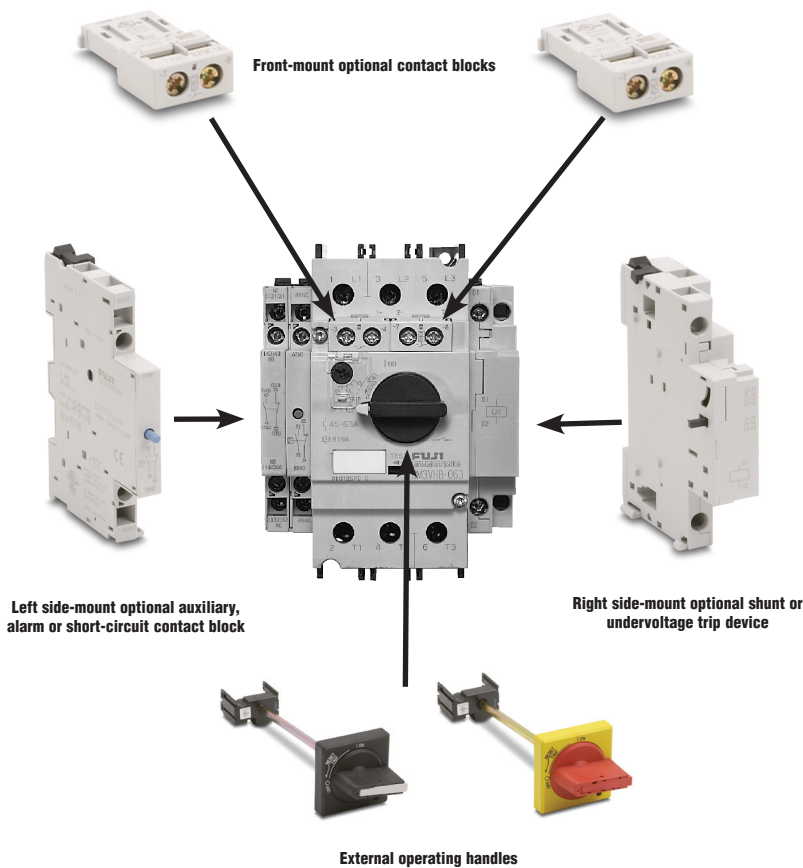

### Auxiliary contact blocks

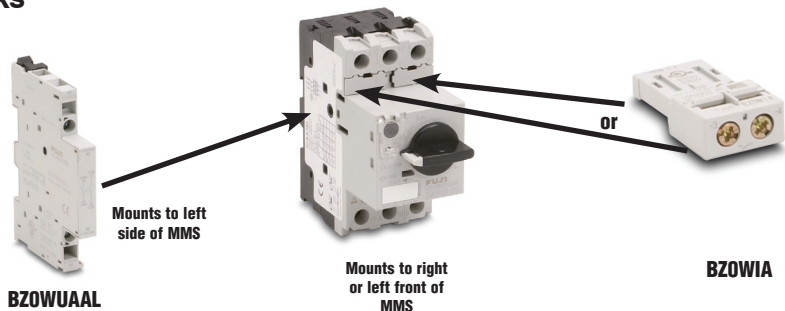


Auxiliary Contact Blocks						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
BZOWIA	\$5.50	These contact blocks do not discriminate between OFF, overload, phase-loss, or short circuit. The blocks are linked to the ON/OFF operation of the MMS, and also operate in the event of an overload, phase-loss, or short circuit. Up to two contact blocks can be mounted to the right/left front, and up to two contact blocks can be mounted to the left sides.	BM3RHB-XXX BM3VHB-XXX	Front	1NO	9/0.02
BZOWIB	\$5.50				1NC	
BZOWUAAAL	\$8.00			Left side	2NO	45/0.1
BZOWUABL	\$8.00				1NO + 1NC	
BZOWUBBL	\$8.00				2NC	

# Fuji Duo Series Manual Motor Starters Accessories




## Accessories (continued)

### Alarm contact blocks

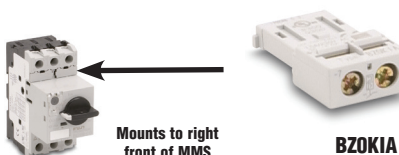

Alarm Contact Blocks						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
<b>BZ0K1A</b>	\$5.50	<ul style="list-style-type: none"> <li>This block operates when the MMS trips due to overload, phase-loss, or short-circuit. It is not linked to the ON/OFF operation of the MMS.</li> </ul>	BM3RHB-XXX BM3VHB-XXX	Front (Right side only)	1NO	9/0.02
<b>BZ0K1B</b>	\$5.50				1NC	


**Note: Operation can be checked with the test trip function.**



### Auxiliary and alarm contact blocks

Combination Auxiliary/Alarm Contact Blocks						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
<b>BZ0WKUAA</b>	\$10.00	<ul style="list-style-type: none"> <li>This contact block combines an auxiliary contact and an alarm contact that operates in the event of an overload, phase loss, or short-circuit. Alarm contact is not linked to the ON/OFF operation of the MMS.</li> <li>An alarm is displayed in the contact block's indicator when the alarm contact operates.</li> </ul>	BM3RHB-XXX BM3VHB-XXX	Left	1NO (Aux.) + 1NO (Alarm)	45/0.1

**Note: Operation can be checked with the test trip function.**



**Note 1: Required when using MMS in a UL Type E application.**

**Note 2: Do not configure this with an auxiliary contact block; the contact will only close when a short circuit occurs.**

### Short-circuit alarm contact blocks

Short-Circuit Alarm Contact Block						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
<b>BZ0TKUAB</b>	\$12.50	<ul style="list-style-type: none"> <li>The contacts operate only when the MMS has tripped due to a short-circuit (cannot be checked with trip test function).</li> <li>When these contacts operate, the blue reset button extends out, and a trip indication is displayed.</li> <li>The power to the MMS can be turned ON after pressing the reset button.</li> </ul>	BM3RHB-XXX BM3VHB-XXX	Left	1NO + 1NC	45/0.1


**Note: Be sure to press the reset button before mounting to the MMS.**

Contact Status					
Contact Type		Device Condition			
		OFF	ON	Tripped	
				Overload or Phase-loss	Short Circuit
AUX. CONTACT <b>BZ0W1A, BZ0W1B, BZ0WUAA, BZ0WUBB, BZ0WUAB</b>	NO	Open	Closed	Opens	
	NC	Closed	Open	Closes	
ALARM CONTACT <b>BZ0K1A, BZ0K1B</b>	NO	Open (no change)	Open (no change)	Closes	
	NC	Closed (no change)	Closed (no change)	Opens	
AUX & ALARM CONTACT <b>BZ0WKUAA</b>	NO (AUX)	Open	Closed	Opens	
	NO (ALM)	Open (no change)	Open (no change)	Closes	
SHORT-CIRCUIT CONTACT <b>BZ0TKUAB</b>	NO	Open (no change)	Open (no change)	Open (no change)	Closes
	NC	Closed (no change)	Closed (no change)	Closed (no change)	Opens

# Fuji Duo Series Manual Motor Starters


## Accessories

### Accessories (continued)



#### Shunt trip devices

Shunt Trip Devices						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
<b>BZ0FAZU</b>	\$17.00	This device is used to remotely trip the MMS.	BM3RHB-XXX BM3VHB-XXX	Right	24V 50/60Hz	115/0.25
<b>BZ0FDZU</b>	\$17.00	<b>Notes:</b> <ul style="list-style-type: none"> <li>This device cannot be used together with an undervoltage trip device.</li> <li>When the MMS has been tripped with the shunt trip device, press the reset button before turning ON the power.</li> </ul>			110-127V 50Hz/120V 60Hz	
<b>BZ0FKZUD</b>	\$17.00				24-60VDC (time rating of coil is 5s)	



#### Undervoltage trip devices

Undervoltage Trip Devices						
Part Number	Price	Description	Starter Type	Mounting	Contact Arrangement	Weight (g/lb)
<b>BZ0RAZ2U</b>	\$17.00	This device automatically trips the MMS when the control circuit voltage drops below the specified value.	BM3RHB-XXX BM3VHB-XXX	Right	24V 60Hz	115/0.25
<b>BZ0RDZU</b>	\$17.00	<b>Notes:</b> This device cannot be used together with a shunt trip device.           When the MMS has been tripped with the undervoltage trip device, press the reset button before turning ON the power.			110-127V 50Hz/120V 60Hz	
<b>BZ0R4ZU</b>	\$17.00				415-440V 50Hz/460-480V 60Hz	



#### Push-in lug

Push-in Lug				
Part Number	Price	Description	Starter type	Weight (g/lb)
<b>BZ0SET</b>	\$5.50	Push-in mounting lug. Required for screw mounting of MMS; qty: 10/pkg	BM3RHB-XXX	2.0/.004
<b>Note:</b> See page 17-57 for installation instructions				



#### Terminal Cover


Terminal Cover			
Part Number	Price	Description	Starter Type
<b>BZ0TCRE</b>	\$8.00	Line side terminal cover.	BM3RHB-XXX
<b>Notes:</b> BZ0TCRE required only when using BM3RHB-xxx MMS in a UL Type E application (along with short circuit alarm contact block BZ0TKUAB). If using BZ0TCRE terminal cover with BM3R series MMS, the busbar system can not be used.			

# Fuji Duo Series Manual Motor Starters


## Accessories

### Accessories (continued)

#### External operating handles



**BZ0VBBL**



**BZ0VYRL**



External Operating Handles					
Part Number	Price	Description	Starter Type	Handle Type	Weight (g/lb)
<b>BZ0VBBL</b>	\$25.00	<ul style="list-style-type: none"> <li>Used to operate an MMS installed inside a panel, from the outside of the panel.</li> <li>Equipped with an interlock mechanism that prevents someone from mistakenly opening the panel door when the MMS is in the ON state.</li> <li>The shaft can be cut to match the distance between the MMS and the panel door.</li> <li>Door interlock function</li> <li>OFF lock function</li> <li>Can be locked OFF with up to three padlocks.</li> <li>Note: Padlocks are to be provided by the customer.</li> <li>Release screw allows the door to be opened with the handle in the ON position.</li> <li>IP54 enclosure</li> </ul>	BM3RHB-XXX	Standard (black)	160/0.35
<b>BZ0VYRL</b>	\$26.50			Emergency (red/yellow)	160/0.35
<b>BZ0VBBM</b>	\$25.00		BM3VHB-XXX	Standard (black)	160/0.35
<b>BZ0VYRM</b>	\$26.50			Emergency (red/yellow)	160/0.35

**NOTE:** Premade MMS enclosures are currently not available.

### Accessory specifications

Trip Device Specifications			
Accessory Type and Part Number		Shunt trip device	Undervoltage device
		BZ0Fxxx	BZ0Rxxx
<b>Standard</b>		IEC 60947-1, UL 508	
<b>Rated Insulation Voltage (VAC)</b>	<b>IEC 60947</b>	690	
	<b>UL 508</b>	600	
<b>No. of ON-OFF Operations</b>		5000	
<b>Operating Time (ms)</b>		20	
<b>Power Consumption</b>	<b>Inrush (VA/W)</b>	21/12	
	<b>Sealed (VA/W)</b>	8/1.2	
<b>Voltage Range</b>	<b>Tripping Voltage (V)</b>	0.7 to 1.1 Ue	0.35 to 0.7 Ue
	<b>Closing Voltage (V)</b>	-	0.85 to 1.1 Ue
<b>Time Rating of Coil (s)</b>		AC: Continuous	AC: Continuous
		DC: 5	

Contact Block Specifications						
Accessory Type and Part Number		Auxiliary contact block/front	Auxiliary contact block/side	Alarm contact block	Aux. and alarm contact block	Short-circuit alarm contact block
		<b>BZOWIA, BZOWIB</b> <i>(note 3)</i>	<b>BZOWUAAL, BZOWUABL, BZOWUBBL</b>	<b>BZOKIA, BZOKIB</b> <i>(note 3)</i>	<b>BZOWKUAA</b>	<b>BZOTKUAB</b>
<b>Standard</b>		IEC 60947-5-1, UL 508				
<b>Rated Operational Current (A)</b>	<b>48VAC AC-15</b> <i>(note 2)</i>	5	6	5	6	6
	<b>125VAC</b>	3	4	3	4	4
	<b>230VAC</b>	1.5	4	1.5	4	4
	<b>400VAC</b>	<i>(note 3)</i>	2.2	<i>(note 3)</i>	2.2	2.2
	<b>500VAC</b>		1.5		1.5	1.5
	<b>690VAC</b>		0.6		0.6	0.6
	<b>48VDC DC-13</b> <i>(note 2)</i>	1.38	5	1.38	5	5
	<b>110VDC</b>	0.55	1.3	0.55	1.3	1.3
	<b>220VDC</b>	0.27	0.5	0.27	0.5	0.5
<b>Contact Rating Code UL 508</b> <i>(note 1)</i>	<b>AC</b>	B300	A600	B300	A600	A600
	<b>DC</b>	Q300	P300	Q300	P300	P300
<b>Min. Voltage and Current</b>		17V / 5mA				

**Note 1:** NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

**Note 2:** IEC utilization category. For more information, refer to page 17-114.

**Note 3:** The indicated contacts should not be used in control circuits higher than 300V.

## Manual motor starters

Technical drawings of the 100mm x 100mm x 10mm mounting plate. The left drawing is a top view showing a square plate with a central circular hole (Dia. 5), four corner mounting holes (M4), and a central rectangular slot. Dimensions include overall width and height of 105mm, a central slot width of 45mm, and various hole spacings. The right drawing is a side view showing the plate's profile with a total height of 91mm, a base thickness of 3.7mm, and a central raised section of 45mm width and 27mm height.

[illegible]

# Fuji Duo Series Manual Motor Starters


## Accessories

Dimensions  
(continued - mm)




### Accessories


**Auxiliary contact blocks, front mounting**  
BZ0WIA, BZ0WIB




**Auxiliary contact blocks, side mounting**  
BZ0WUAAL, BZ0WUABL, BZ0WUBBL




**Alarm contact blocks, front mounting**  
BZ0KIA, BZ0KIB




**Auxiliary and alarm contact blocks**  
BZ0WKUAA

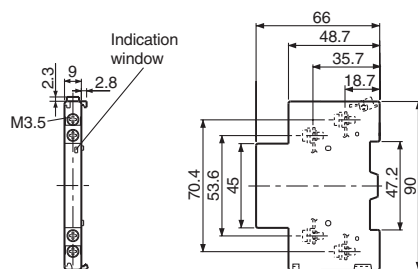

**Short-circuit alarm contact block**  
BZ0TKUAB


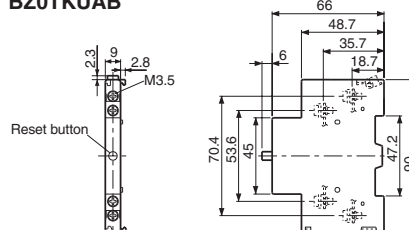


**Shunt trip devices BZ0Fxxxx**  
**Undervoltage trip devices BZ0Rxxxx**


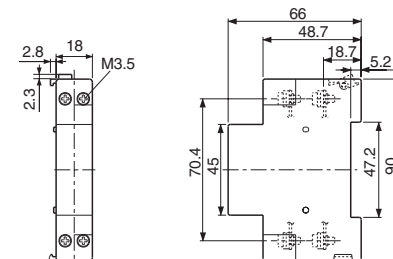


### MMS with accessories

**BM3RHB-xxx + BZ0xxxxx**



**BM3VHB-xxx + BZ0xxxxx**





# Fuji Duo Series Manual Motor Starters


## Accessories

### Dimensions (continued - mm)





### Accessories


#### External operation handle BZ0Vxxx

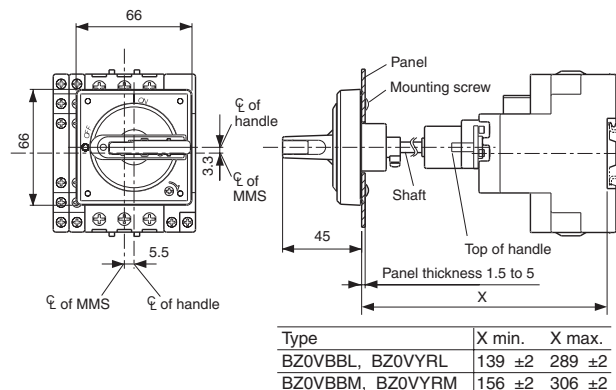


#### Panel drilling



#### MMS




#### Auxiliary and alarm contact blocks BZ0WKUAA




#### Alarm contact blocks

##### Front mounting

##### BZ0KIA



##### BZ0KIB




# Fuji Duo Series Manual Motor Starters Accessories

## Wiring diagrams (continued)


### Auxiliary contact blocks

#### Front mounting

##### BZ0WIA




##### BZ0WIB




#### Side mounting


##### BZ0WUAAL



##### BZ0WUABL




##### BZ0WUBBL




### Short-circuit alarm contact blocks

##### BZ0TKUAB




### Shunt trip devices

##### BZ0Fxxxx



### Undervoltage trip devices

##### BZ0Rxxxx




# Fuji Duo Series Manual Motor Starters

## Accessories

### Busbar system

#### Features

- The busbar system reduces wiring time and saves floor space.
- The busbar makes it easy to power from 2 to 5 manual motor starters, with no wiring needed.
- The 3-phase feed-in terminals are used to connect the wire for the power supply circuit.
- The busbar cover guards against accidental touching of nonconnected busbar terminals (charged parts).
- If using BZ0TCRE terminal cover with BM3R series MMS, the busbar system can not be used.

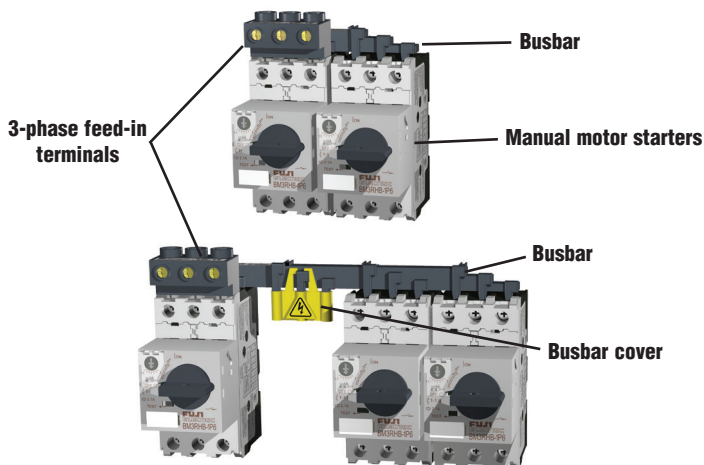

BZ0BR02A



BZ0BR03A



BZ0BR04A



BZ0BR05A



BZ0BR12A



BZ0BR13A



BZ0BR14A



BZ0BR15A



BZ0BV02A



BZ0BV03A

*Note: Busbar photos continued on next page.*



BZ0BFRA



BZ0BFVA



BZ0BCRA



BZ0BCVA

#### Busbar System Components and Ratings

Part Number	Price	Description	Used with	Specifications		Weight (g)
BZ0BR02A	\$15.00	Busbar	BM3R	Continuous current: 64A max. pin connection	2-BM3R, modular space: 45mm	30
BZ0BR03A	\$13.50				3-BM3R, modular space: 45mm	50
BZ0BR04A	\$16.00				4-BM3R, modular space: 45mm	70
BZ0BR05A	\$17.00				5-BM3R, modular space: 45mm	90
BZ0BR12A	\$12.50				2-BM3R, modular space: 54mm	30
BZ0BR13A	\$15.00		BM3R+ 1 external accessory, 9mm wide		3-BM3R, modular space: 54mm	55
BZ0BR14A	\$17.00				4-BM3R, modular space: 54mm	80
BZ0BR15A	\$18.50				5-BM3R, modular space: 54mm	105
BZ0BV02A	\$24.00				BM3V	2-BM3V, modular space: 55mm
BZ0BV03A	\$30.50		3-BM3V, modular space: 55mm			240
BZ0BV04A	\$36.50		4-BM3V, modular space: 55mm			340
BZ0BV12A	\$26.50		BM3V + 1 external accessory, 9mm wide	2-BM3V, modular space: 64mm		150
BZ0BV13A	\$33.00			3-BM3V, modular space: 64mm		270
BZ0BV14A	\$38.50			4-BM3V, modular space: 64mm	380	
BZ0BFRA	\$13.50	3-phase feed-in terminal	BM3R	Continuous current: 64A max. Applicable cable size: 25mm <sup>2</sup> max.	40	
BZ0BFVA	\$27.50		BM3V	Continuous current: 126A max. Applicable cable size: 50mm <sup>2</sup> max.	170	
BZ0BCRA	\$3.50	Busbar cover	BZ0BR	For pin connection	10	
BZ0BCVA	\$4.50		BZ0BV	NOTE: Some fine tuning and fitting adjustments may be needed.	5	

### Dimensions (mm)



BZ0BR02A: 80 mm  
BZ0BR03A: 125 mm  
BZ0BR04A: 170 mm  
BZ0BR05A: 215 mm

BZ0BR12A: 89 mm  
BZ0BR13A: 143mm  
BZ0BR14A: 197 mm  
BZ0BR15A: 251 mm

Technical drawing of the 3-core cable assembly showing three views: front, side, and detail.

**Front View:** Shows three circular conductors with a diameter of 6-25mm<sup>2</sup> (10-4 AWG). The overall width is 44.5 mm.

**Side View:** Shows the cable profile with a total height of 24 mm. The conductors are positioned 38.5 mm apart, and the insulation thickness is 1.5 mm. The overall height including the insulation is 27 mm.

**Detail View:** Shows the M4 terminal block with dimensions: 14.5 mm between terminals, 14.5 mm between terminals, 5 mm terminal width, 13.5 mm terminal height, 25 mm total height, 6.5 mm terminal width, 3 mm terminal width, 14.5 mm between terminals, 14.5 mm between terminals, 1.9 mm terminal width, and 3.8 mm terminal width.

BZ0BV02A: 97 mm  
BZ0BV03A: 151 mm  
BZ0BV04A: 205 mm

BZ0BV12A: 106 mm  
BZ0BV13A: 169 mm  
BZ0BV14A: 232 mm

# Building a Fuji Duo Series Combination Starter

The Fuji SC-E series contactors work with the MMS to create starters for particular applications. The MMS combination starters can accommodate motors up to 40 horsepower at 480 VAC or 60 horsepower at 600 VAC.

**1/2 to 40 hp at 480 V  
when used with SC-E contactor**

## Combination starters used for:


- Induction motor starting and control
- Fulfillment of NEC 430
- UL508E, type 2 coordination for group motor rating installation (See parts list for details)

## SC-E Series Contactor Features


- 1/2 to 40 hp at 480 V
- AC and DC coils with a wide range of voltages
- Finger protection terminals
- Compact frame sizes (45 mm and 55 mm)
- IEC-947, UL, CSA, CE

## Manual Motor Starter Features

- Circuit breaker functions plus overload relay functions in a highly compact unit
- Two frame sizes up to 63A
- Multiple coil voltages
- IEC-947
- UL listed, file E211710, Standard 508
- cUL listed, file E211710, Standard CSA C22.2 No. 14

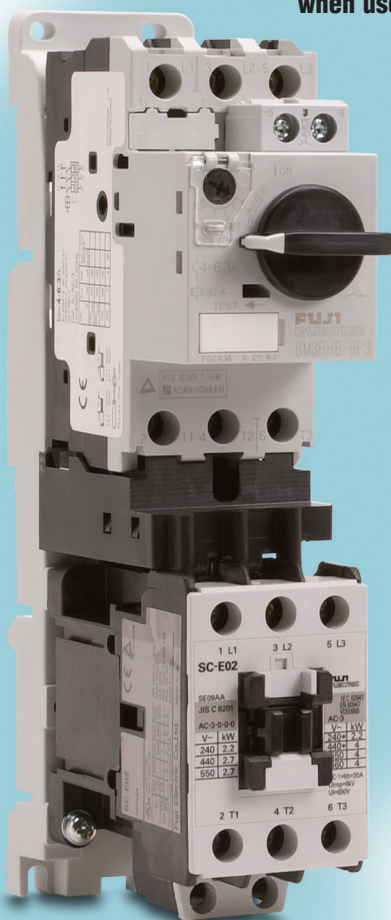

**Fuji Electric**

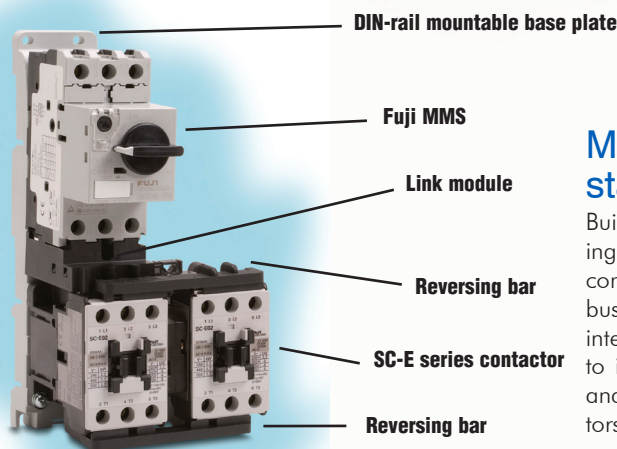

## MMS reversing starter

Build your MMS reversing starter from these Fuji components. Reversing busbars and mechanical interlocks are designed to integrate with the MMS and SC-E series contactors.

# Fuji Duo Series Combination Starters

## General information

### Description

The user can assemble a combination starter by combining a BM3 series manual motor starter and an SC-E series magnetic contactor to achieve a compact motor control that minimizes enclosure space requirements.

The manual motor starter provides overload, phase-loss, and short-circuit protection for the motor circuit, and incorporates a dial for flexible adjustment to match the full load current of the motor.

The magnetic contactor allows remote ON/OFF operation of the motor circuit with high frequency, and features an electrical durability of one million operations.

The manual motor starter and magnetic contactor are connected with a link module and mounted to a base plate.

### Features

- Consists of a manual motor starter and magnetic contactor that can be assembled by the user to achieve a compact motor control circuit.
- Protects the motor from short-circuit and overcurrent accidents in the three-phase motor circuit within a range between 20 hp at 240 VAC and 30 hp at 415 VAC, up to a current level of 50A.
- Conforms to IEC 60947 requirements for magnetic motor starters and circuit breakers of protective coordination types 1 and 2, greatly reducing the possibility of an accident causing damage to other equipment.
- Can be mounted to IEC top hat rail using the base plate.
- Modular wiring system requires less wiring, shortens required mounting time, and decreases the mounting area.



**UL Type E Self-Protected Manual Motor Starter and Contactor**

### IEC 60947-4-1

#### Type 1:

Coordination requires that, under short-circuit conditions, the contactor or starter shall cause no danger to persons or installation and may not be suitable for further service without repair and replacement of parts.

#### Type 2:

Coordination requires that, under short-circuit conditions, the contactor or starter shall cause no danger to persons or installation and shall be suitable for further use. The risk of contact welding is recognized, in which case the manufacturer shall indicate the measures to be taken regarding the maintenance of the equipment.

NOTE: Refer to UL 508E and UL 508F for more information.






## Choosing 45 mm or 55 mm frame width

The Fuji MMS is available in 45 mm and 55 mm frame widths. The 45 mm frame size is capable of controlling motors up to 20 horsepower while the 55 mm frame size can handle motors up to 40 horsepower at 480 volts AC. The frame sizes overlap in motor sizing though the breaking capacity remains the same.

For controlling a group of motors up to 20 horsepower, the 45 mm frame size is the perfect answer. For motor sizes 20 to 40 horsepower @480 VAC, the 55 mm frame is specified.

If your motors range from below 20 horsepower to 40 horsepower, consider using the 55 mm frame. Though the individual costs per unit is more expensive for the 55 mm frame width in sizes below 20 horsepower, construction cost's are reduced by standardizing on the same frame size.

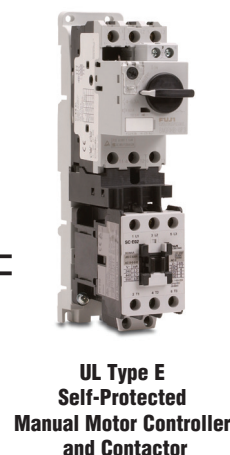



# Fuji Duo Series Combination Starter Selection Table - 45 mm

Use this selection table to select 45 mm frame width (A) Manual Motor Starter, (B) Contactor, (C) Link Module, and (D) Base Plate for a Combination Starter

Combination Starter Selection Table - 45 mm									
Three Phase Motor					A	B	C	D	
220-240 Volt		440-480 Volt							
Motor Horsepower (hp) See Note 1 below	Motor Full-Load Amperage (FLA) See Note 4 below	Motor Horsepower (hp) See Note 1 below	Motor Full-Load Amperage (FLA) See Note 4 below	Manual Motor Starter Adjustable Current Range (A)	Manual Motor Starter See Note 2 below for UL Type E applications.	Contactor The contactor part number needs the coil voltage suffix. See Note 3 below.	Link Module	Base Plate	SCCR at 480Y/277 VAC (kA) type F coordination
-	-	-	-	0.1 to 0.16	BM3RHB-P16	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA	BZ0BP22A	65
-	-	-	-	0.16 to 0.25	BM3RHB-P25	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
-	-	-	-	0.25 to 0.4	BM3RHB-P40	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
-	-	-	-	0.4 to 0.63	BM3RHB-P63	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
-	-	-	-	0.63 to 1.0	BM3RHB-001	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
-	-	0.75	1.6	1.0 to 1.6	BM3RHB-1P6	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
0.5	2.2	1	2.1	1.6 to 2.5	BM3RHB-2P5	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
0.75	3.2	2	3.4	2.5 to 4.0	BM3RHB-004	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
1.5	6	3	4.8	4.0 to 6.3	BM3RHB-6P3	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
-	-	5	7.6	6.3 to 10	BM3RHB-010	SC-E02-110VAC SC-E02G-24VDC	BZOLRE22AA BZOLRE22GA		65
3	9.6	7.5	11	9 to 13	BM3RHB-013	SC-E03-110VAC SC-E03G-24VDC	BZOLRE22AA BZOLRE22GA		65
5	15.2	10	14	11 to 16	BM3RHB-016	SC-E04-110VAC SC-E04G-24VDC	BZOLRE22AA BZOLRE22GA		65
5	15.2	10	14	14 to 20	BM3RHB-020	SC-E04-110VAC SC-E04G-24VDC	BZOLRE22AA BZOLRE22GA		65
7.5	22	15	21	19 to 25	BM3RHB-025	SC-E05-110VAC SC-E05G-24VDC	BZOLRE22AA BZOLRE22GA		50
10	28	20	27	24 to 32	BM3RHB-032	SC-E1-110VAC SC-E1G-24VDC	BZOLRE32AA BZOLRE32GA	BZ0BP32A	50
<p><b>Note 1:</b> When a horsepower rating is listed on two rows, the motor full-load amperage must be known so you can select the MMS with the best adjustable current range for your application. For example, if you have a 230V, 5 hp, 15.2A motor, you can select a MMS with either a 11-16A range or a 14-20A range. Consult the motor data plate or motor manufacturer.</p> <p><b>Note 2:</b> When using BM3RHB-xxx MMS in a UL Type E application, you must also use part numbers BZ0TKUAB (short-circuit contact block) and BZ0TCRE (line side terminal cover).</p> <p><b>Note 3:</b> For AC coil voltages other than 110VAC, substitute the "110VAC" in the part number with "220VAC" for 220/240VAC coils or "24VAC" for 24VAC coils. For example, if the table lists a SC-E02-110VAC contactor for your application and you need a contactor with a 220VAC coil, use contactor SC-E02-220VAC.</p> <p><b>Note 4:</b> Per NEC 2005 Table 430.250</p>									

# Fuji Duo Series Combination Starter Selection Table - 55 mm



Use this selection table to select 55 mm frame width (A) Manual Motor Starter, (B) Contactor, (C) Link Module, and (D) Base Plate for a Combination Starter

Combination Starter Selection Table - 55 mm									
Three Phase Motor					A	B	C	D	
220-240 Volt		440-480 Volt							
Motor horsepower (hp) See Note 1 below	Motor Full-Load Amperage (FLA) See Note 4 below	Motor Horsepower (hp) See Note 1 below	Motor Full-Load Amperage (FLA) See Note 4 below	Manual Motor Starter Adjustable Current Range (A)	Manual Motor Starter See Note 2 below for UL Type E applications.	Contactor The contactor part number needs the coil voltage suffix. See Note 3 below.	Link Module	Base Plate	SCCR at 480Y/277 VAC (kA) type F coordination
3	9.6	5	7.6	6.3 to 10	BM3VHB-010	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA	BZ0BPVE51A	65
3	9.6	7.5	11	9 to 13	BM3VHB-013	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
5	15.2	10	14	11 to 16	BM3VHB-016	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
5	15.2	10	14	14 to 20	BM3VHB-020	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
7.5	22	15	21	19 to 25	BM3VHB-025	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
10	28	20	27	24 to 32	BM3VHB-032	SC-E1-110VAC SC-E1G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
10	28	30	40	28 to 40	BM3VHB-040	SC-E2-110VAC SC-E2G-24VDC	BZ0LVE51AA BZ0LVE51GA		65
15	42	30	40	35 to 50	BM3VHB-050	SC-E2S-110VAC SC-E2SG-24VDC	BZ0LVE51AA BZ0LVE51GA		65
20	54	40	52	45 to 63	BM3VHB-063	SC-E3-110VAC SC-E3G-24VDC	BZ0LVE65AA BZ0LVE65GA	BZ0BPVE65A	65
<p><b>Note 1:</b> When a horsepower rating is listed on two rows, the motor full-load amperage must be known so you can select the MMS with the best adjustable current range for your application. For example, if you have a 230V, 10 hp, 28A motor, you can select a MMS with either a 24-32A range or a 28-40A range. Consult the motor data plate or motor manufacturer.</p> <p><b>Note 2:</b> When using BM3VHB-xxx MMS in a UL Type E application, you must also use part number BZ0TKUAB (short-circuit contact block).</p> <p><b>Note 3:</b> For AC coil voltages other than 110VAC, substitute the "110VAC" in the part number with "220VAC" for 220/240VAC coils or "24VAC" for 24VAC coils. For example, if the table lists a SC-E1-110VAC contactor for your application and you need a contactor with a 220VAC coil, use contactor SC-E1-220VAC.</p> <p><b>Note 4:</b> Per NEC 2005 Table 430.250</p>									

# Fuji Duo Series Combination Starter

**BM3RHB-xxx Manual Motor Starter Prices**

Part Number	Price	Part Number	Price
<b>BM3RHB-P16</b>	\$49.50	<b>BM3RHB-6P3</b>	\$49.50
<b>BM3RHB-P25</b>	\$49.50	<b>BM3RHB-010</b>	\$52.50
<b>BM3RHB-P40</b>	\$49.50	<b>BM3RHB-013</b>	\$52.50
<b>BM3RHB-P63</b>	\$49.50	<b>BM3RHB-016</b>	\$52.50
<b>BM3RHB-001</b>	\$49.50	<b>BM3RHB-020</b>	\$52.50
<b>BM3RHB-1P6</b>	\$49.50	<b>BM3RHB-025</b>	\$62.50
<b>BM3RHB-2P5</b>	\$49.50	<b>BM3RHB-032</b>	\$79.50
<b>BM3RHB-004</b>	\$49.50		


**BM3VHB-xxx Manual Motor Starter Prices**

Part Number	Price	Part Number	Price
<b>BM3VHB-010</b>	\$122.50	<b>BM3VHB-032</b>	\$150.50
<b>BM3VHB-013</b>	\$122.50	<b>BM3VHB-040</b>	\$150.50
<b>BM3VHB-016</b>	\$122.50	<b>BM3VHB-050</b>	\$157.00
<b>BM3VHB-020</b>	\$122.50	<b>BM3VHB-063</b>	\$157.00
<b>BM3VHB-025</b>	\$142.00		




*Note: When using BM3VHB-xxx MMS in a UL type E application you must also use part number BZ0TKUAB (short circuit contact block).*

*Note: When using BM3RHB-xxx MMS in a UL type E application, you must also use part number BZ0TKUAB (short circuit contact block) and BZ0TCRE (line side terminal cover).*

**Contactor Prices**

Part Number	Price	Part Number	Price	Part Number	Price	Part Number	Price
<b>SC-E02-24VAC</b>	\$15.00	<b>SC-E05-24VAC</b>	\$30.50	<b>SC-E2S-24VAC</b>	\$63.50	<b>SC-E5-24V</b>	\$184.00
<b>SC-E02-110VAC</b>	\$15.00	<b>SC-E05-110VAC</b>	\$30.50	<b>SC-E2S-110VAC</b>	\$63.50	<b>SC-E5-100V</b>	\$184.00
<b>SC-E02-220VAC</b>	\$15.00	<b>SC-E05-220VAC</b>	\$30.50	<b>SC-E2S-220VAC</b>	\$63.50	<b>SC-E5-200V</b>	\$184.00
<b>SC-E02G-24VDC</b>	\$17.00	<b>SC-E05G-24VDC</b>	\$40.00	<b>SC-E2SG-24VDC</b>	\$75.50	<b>SC-E6-24V</b>	\$234.50
<b>SC-E03-24VAC</b>	\$19.50	<b>SC-E1-24VAC</b>	\$37.50	<b>SC-E3-24VAC</b>	\$72.00	<b>SC-E6-100V</b>	\$234.50
<b>SC-E03-110VAC</b>	\$19.50	<b>SC-E1-110VAC</b>	\$37.50	<b>SC-E3-110VAC</b>	\$72.00	<b>SC-E6-200V</b>	\$234.50
<b>SC-E03-220VAC</b>	\$19.50	<b>SC-E1-220VAC</b>	\$37.50	<b>SC-E3-220VAC</b>	\$72.00	<b>SC-E7-24V</b>	\$273.00
<b>SC-E03G-24VDC</b>	\$27.50	<b>SC-E1G-24VDC</b>	\$44.50	<b>SC-E3G-24VDC</b>	\$89.00	<b>SC-E7-100V</b>	\$273.00
<b>SC-E04-24VAC</b>	\$24.00	<b>SC-E2-24VAC</b>	\$52.50	<b>SC-E4-24VAC</b>	\$74.00	<b>SC-E7-200V</b>	\$273.00
<b>SC-E04-110VAC</b>	\$24.00	<b>SC-E2-110VAC</b>	\$52.50	<b>SC-E4-110VAC</b>	\$74.00		
<b>SC-E04-220VAC</b>	\$24.00	<b>SC-E2-220VAC</b>	\$52.50	<b>SC-E4-220VAC</b>	\$74.00		
<b>SC-E04G-24VDC</b>	\$33.00	<b>SC-E2G-24VDC</b>	\$63.50	<b>SC-E4G-24VDC</b>	\$92.00		



## Link modules and base plates

### Link modules


**BZ0LRE22A**

**BZ0LRE22GA**

**BZ0LRE32AA**

**BZ0LRE32GA**

**BZ0LVE51AA**

**BZ0LVE51GA**

**BZ0LVE65AA**

**BZ0LVE65GA**
**Link modules**

Part Number	Price	Description	Applicable MMS	Applicable Magnetic Contactor	Operating Coil (V)	Weight (g/lb)
<b>BZ0LRE22AA</b>	\$9.00	The link module connects the manual motor starter and magnetic contactor electrically and mechanically.	BM3RHB-xxx	SC-E02, E03, E04, E05-xxxVAC	AC	25/0.055
<b>BZ0LRE22GA</b>	\$11.50			SC-E02G, E03G, E04G, E05G-xxxVDC	DC	35/0.077
<b>BZ0LRE32AA</b>	\$10.00			SC-E1-xxxVAC	AC	45/0.1
<b>BZ0LRE32GA</b>	\$12.50			SC-E1G-xxxVDC	DC	60/0.13
<b>BZ0LVE51AA</b>	\$11.50		BM3VHB-xxx	SC-E1, E2, E2S-xxxVAC	AC	45/0.1
<b>BZ0LVE51GA</b>	\$13.50			SC-E1G, E2G, E2SG-xxxVDC	DC	60/0.13
<b>BZ0LVE65AA</b>	\$13.50			SC-E3-xxxVAC	AC	65/0.14
<b>BZ0LVE65GA</b>	\$16.00			SC-E3G-xxxVDC	DC	80/0.176

# Fuji Duo Series Combination Starters

## Base plates



BZOBPRE22A



BZOBPRE32A



BZOBPVE51A



BZOBPVE65A



Base Plates						
Part Number	Price	Description	Applicable MMS	Applicable Magnetic Contactor	Operating Coil (V)	Weight (g/lb)
<b>BZOBPRE22A</b>	\$12.50	The base plate is a plastic plate to which the combination starter is mounted. The base plate can then be mounted to a panel with screws or to a DIN rail.	BM3RHB-xxx	SC-E02, E03, E04, E05, SC-E02G, E03G, E04G, E05G-xxx	AC/DC	100/0.22
<b>BZOBPRE32A</b>	\$13.50			SC-E1, SC-E1G-xxx	AC/DC	160/0.35
<b>BZOBPVE51A</b>	\$15.00		BM3VHB-xxx	SC-E1, E2, E2S, SC-E1G, E2G, E2SG-xxx	AC/DC	160/0.35
<b>BZOBPVE65A</b>	\$17.00			SC-E3, SC-E3G-xxx	AC/DC	195/0.43

## How to reverse the contactor nameplate

When the manual motor starter and magnetic contactor are configured as a combination starter, the contactor nameplate ends up facing the wrong direction because the coil terminal of the magnetic contactor faces downward. Use the following procedure to turn the nameplate upside down.




SC-E2S

Contactor nameplate must be reversed when used in a combination starter configuration.


### For SC-E02 to SC-E05-xxx contactors

- Insert a flat-blade screwdriver between the arc-chamber of the S phase or V phase and the terminal screw, and lift the arc-chamber to remove it.
- After removing the cover, turn the cover 180 degrees (top to bottom), then re-mount it onto the magnetic contactor.
- Align the cover with the top and bottom terminals and press it on firmly by hand.

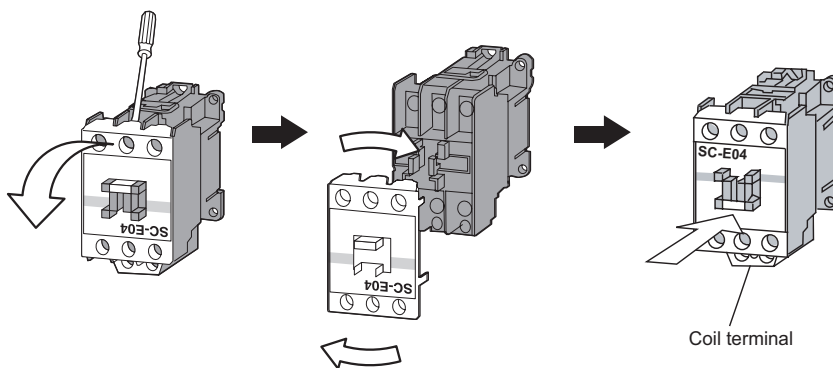

### For SC-E1 to SC-E3-xxx contactors

- Use a Phillips screwdriver to remove the two screws securing the front and back bodies.
- Remove the front body and turn it 180 degrees (top to bottom), then re-mount it with the screws.
- Make sure that no foreign matter enters the interior of the magnetic contactor during this removal/re-mounting procedure.

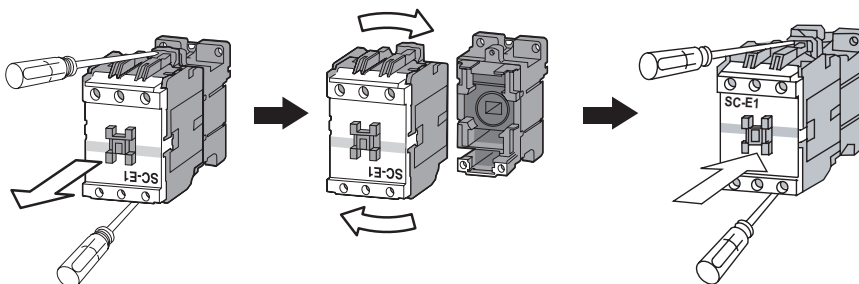


# Fuji Duo Series Combination Starters



## Dimensions (mm)


### BZ0BPVE22A

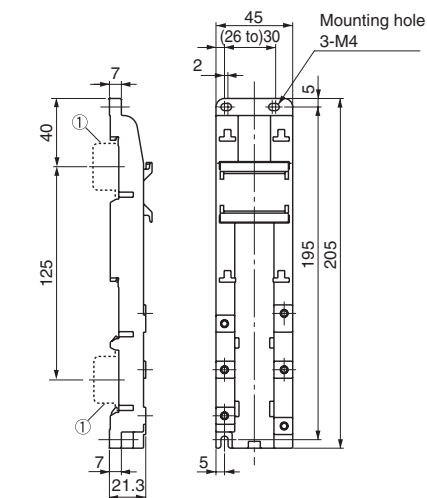

①35mm wide rail (height 15mm) x 2

Base plate	MMS	Contactor
BZ0BPVE22A	BM3RHB-xxx	SC-E02, E03, E04, E05-xxx E02G, E03G, E04G, E05G-xxx


### BZ0BPVE32A

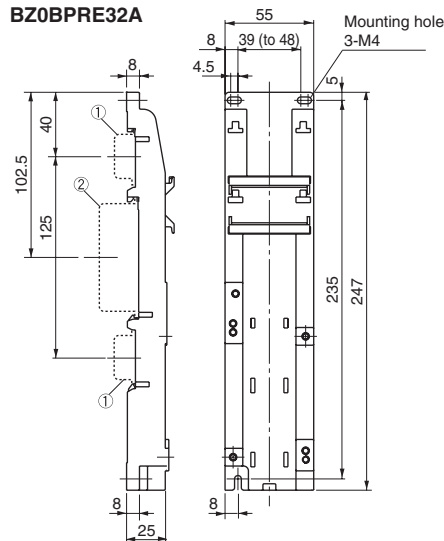

①35mm wide rail (height 15mm) x 2  
②75mm wide rail (height 25mm) x 1

Base plate	MMS	Contactor
BZ0BPVE32A	BM3RHB-xxx	SC-E1, E1G-xxx


### BZ0BPVE51A

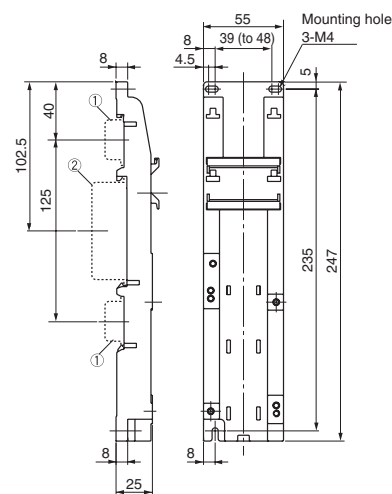

①35mm wide rail (height 15mm) x 2  
②75mm wide rail (height 25mm) x 1

Base plate	MMS	Contactor
BZ0BPVE51A	BM3VHB-xxx	SC-E1, E2, E2S-xxx E1G, E2G, E2SG-xxx

### BZ0BPVE65A

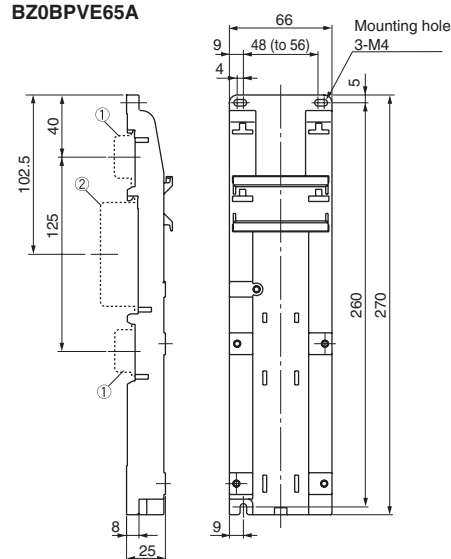


①35mm wide rail (height 15mm) x 2  
②75mm wide rail (height 25mm) x 1

Base plate	MMS	Contactor
BZ0BPVE65A	BM3VHB-xxx	SC-E3, E3G-xxx


# Fuji Duo Series Combination Starters




## Dimensions (mm)

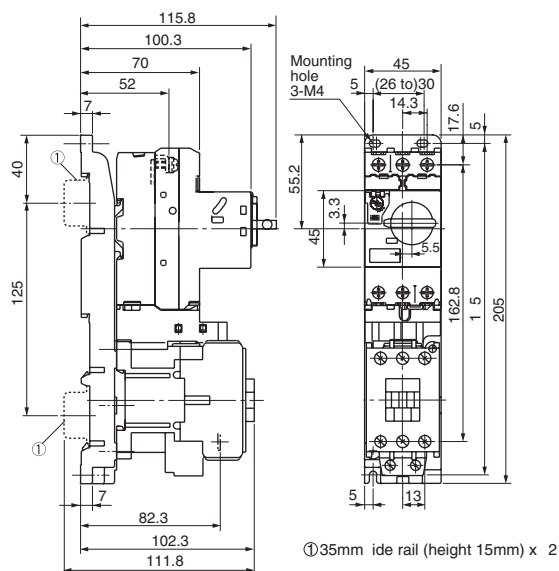**BM3RHB-xxx + SC-E02 to E05-xxx**


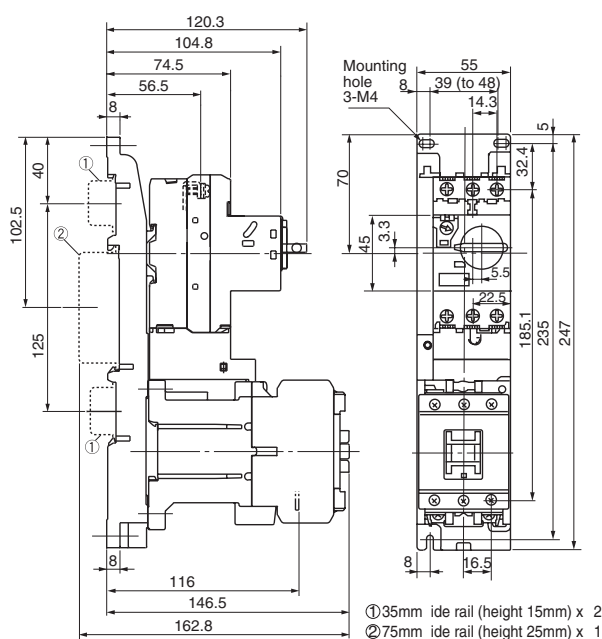
MMS	Contactors	Link module	Base plate
BM3RHB-xxx	SC-E02, E03, E04, E05-xxx	BZ0LRE22AA	BZ0BPRE22A

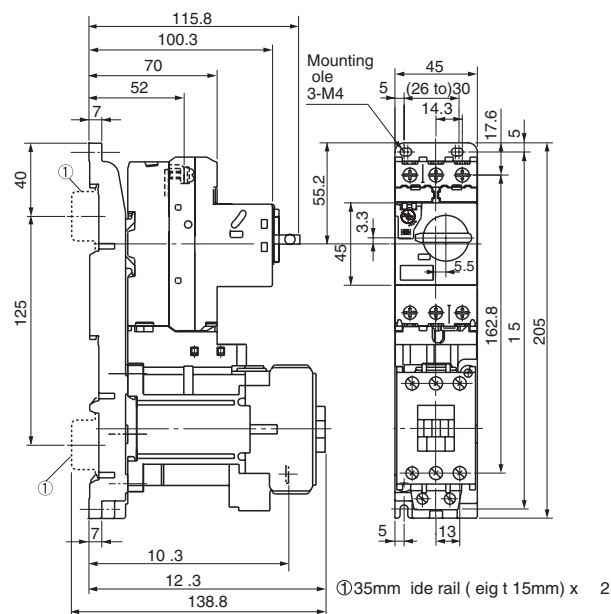**BM3RHB-xxx + SC-E02G to E05G-xxx**


MMS	Contactors	Link module	Base plate
BM3RHB-xxx	SC-E02G, E03G, E04G, E05G-xxx	BZ0LRE22GA	BZ0BPRE22A

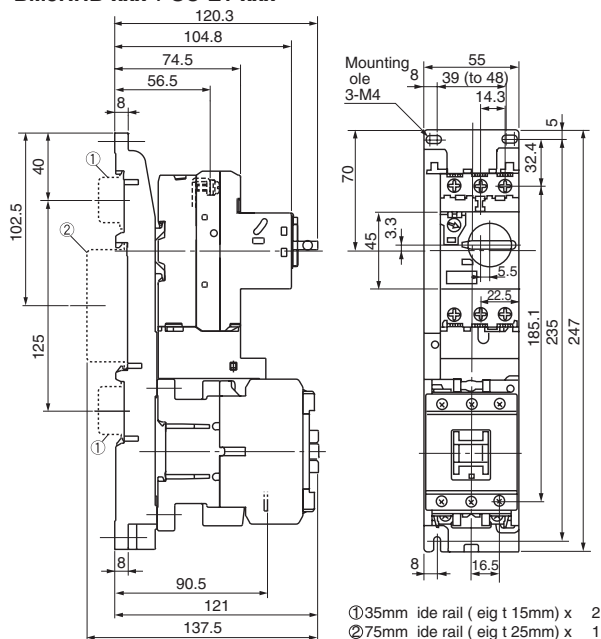**BM3RHB-xxx + SC-E1-xxx**


MMS	Contactors	Link module	Base plate
BM3RHB-xxx	SC-E1-xxx	BZ0LRE32AA	BZ0BPRE32A

**BM3RHB-xxx + SC-E1G-xxx**


MMS	Contactors	Link module	Base plate
BM3RHB-xxx	SC-E1G-xxx	BZ0LRE32GA	BZ0BPRE32A



MMS	Contactors	Link module	Base plate
BM3VHB-xxx	SC-E1, E2, E2S-xxx	BZ0LVE51AA	BZ0BPVE51A

MMS	Contactors	Link module	Base plate
BM3VHB-xxx	SC-E1G, E2G, E2SG-xxx	BZ0LVE51GA	BZ0BPVE51A

MMS	Contactors	Link module	Base plate
BM3VHB-xxx	SC-E3-xxx	BZ0LVE65AA	BZ0BPVE65A

MMS	Contactors	Link module	Base plate
BM3VHB-xxx	SC-E3G-xxx	BZ0LVE65GA	BZ0BPVE65A

# Fuji Odyssey Series 3N Contactors



## Description

- 180 - 361A rating (AC3)
- Provides higher current and horsepower capabilities than SC-E series. Designed for reliable use in applications requiring constant switching, reduced coil energy consumption, and increased horsepower capabilities.
- Available in 154 mm and 169 mm frame widths
- SUPERMAGNET™ for high operating reliability.
- Use with Odyssey 3N series overload relays.

## Features

- Equipped with 2 N.O. and 2 N.C. auxiliary contacts
- Chatter-free operation eliminates contact welding and coil burning
- SUPERMAGNET™ coil operates on either AC or DC voltage
- Wire Terminal Connection Type: Crimp ring Terminal

## Agency approvals

- UL listed file E42419, Standard UL508
- cUL listed file E42419, Standard CSA C22.2 No. 14
- CE: Meets LVD EN60947-4-1
- SEMI F47-0200

## Optional accessories

- Replacement coils
- Terminal covers
- Auxiliary contacts



3NC4H0122

## Ecology

- Low power consumption
- Recycled thermoplastic resin used for plastic parts.
- The names of materials are indicated on all major parts to facilitate recycling.

Odyssey 3N Series Contactors 180–361 Amps

Part Number	Fuji Type	Price	Coil Voltage	Rated Motor Capacity (HP)				Rated AC-3 Current (A) [note 1]	Rated AC-1 Thermal Current (A) [note 2]	Quantity of Auxiliary Contacts		SCCR Ratings (KA)	Frame Width (mm)		
				3-Phase						1-Phase				NO	NC
				200–208V	220–240V	440–480V	550–600V			100–120V	220–240V				
3NC4Q0E22	SC-N8	\$361.50	24–25VAC / 24VDC	60	60	150	150	180	260	2	2	10	138		
3NC4Q0122		\$361.50	100–127VAC / 100–120VDC												
3NC4Q0222		\$361.50	200–250VAC / 200–240VDC												
3NC4Q0Q22		\$361.50	380–450VAC												
3NC4Q0422		\$361.50	460–575VAC												
3NC4H0E22	SC-N10	\$428.00	24–25VAC / 24VDC	75	75	150	200	221	260	2	2	18	148		
3NC4H0122		\$428.00	100–127VAC / 100–120VDC												
3NC4H0222		\$428.00	200–250VAC / 200–240VDC												
3NC4H0Q22		\$428.00	380–450VAC												
3NC4H0422		\$428.00	460–575VAC												
3NC5F0E22	SC-N11	\$558.00	24–25VAC / 24VDC	100	100	200	250	285	350	2	2	18	148		
3NC5F0122		\$558.00	100–127VAC / 100–120VDC												
3NC5F0222		\$558.00	200–250VAC / 200–240VDC												
3NC5F0Q22		\$558.00	380–450VAC												
3NC5F0422		\$558.00	460–575VAC												
3NC5H0E22	SC-N12	\$612.00	24–25VAC / 24VDC	125	150	300	350	361	450	2	2	18	148		
3NC5H0122		\$612.00	100–127VAC / 100–120VDC												
3NC5H0222		\$612.00	200–250VAC / 200–240VDC												
3NC5H0Q22		\$612.00	380–450VAC												
3NC5H0422		\$612.00	460–575VAC												

Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty.  
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)

Contactor Coil Characteristics - AC Input

Part Number	Power Consumption (VA)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
3NC4Qxxxx, 3NC4Hxxxx	277	5.4	70-80	35-50	35-41	37-45
3NC5Fxxxx, 3NC5Hxxxx	265	5.9	70-80	35-50	40-47	36-43

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 120VAC, 60Hz.

# Fuji Odyssey Series 3N Contactors

## Contactor Coil Characteristics - DC Input - 110VDC

Part Number	Power Consumption (watts)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
<b>3NC4Qxxxx, 3NC4Hxxxx</b>	324	4.1	77-88	28-44	35-41	37-45
<b>3NC5Fxxxx, 3NC5Hxxxx</b>	340	4.5	77-88	28-44	40-47	36-43

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 110VDC.

## Contactor Coil Characteristics - DC Input - 24VDC

Part Number	Power Consumption (watts)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
<b>3NC4Qxxxx, 3NC4Hxxxx</b>	250	5.9	17-19.2	6-12	35-41	37-45

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 110VDC.

## Contactor Auxiliary Contact Ratings

NEMA ICS 5-2000 Ratings (note 1)

### AC Ratings

Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
A600	7200	720	Q300	69

### DC Ratings

Note 1: NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

## Contactor Terminal Tightening Torque Chart

Part Number	Terminal Size	Cable Size Maximum	Applicable Max. Width for Ring Terminal	Tightening Torque
<b>3NC4Q0XXX</b>	M10	300MCM (152mm²)	36.5mm	133-177 in.-lbs. 15-20 Nm
<b>3NC4H0XXX</b>	M10	300MCM (152mm²)	36.5mm	133-177 in.-lbs. 15-20 Nm
<b>3NC5F0XXX 3NC5H0XXX</b>	M12	400MCM (203mm²)	44.5mm	310-399 in.-lbs. 35-45 Nm

## Contactor Life Expectancy Performance Data

Model	Current Capacity Make/Break	Operating Cycles per Hour	Life Expectancy (million operations)	
			Electrical	Mechanical
<b>3NC4Qxxxx through 3NC5Fxxxx</b>	12xle/10xle	1200	1	5
<b>3NC5Hxxxx</b>	12xle/10xle	1200	0.5	5


Note: Rated operational current. Electrical life test: Conforming to IEC947-4-1, AC3. The endurance test complies with the requirements of international standard IEC, JIS and JEM.

Note: Super Magnet Coils on 3NC4 and 3NC5 series contactors have internal surge suppression. See diagram below.

## Optional accessories

### Terminal covers

Prevent contact with electrified terminals.



SZ-N8T




SZ-N11T

### Replacement contactor coils



SZ-GSN11-100

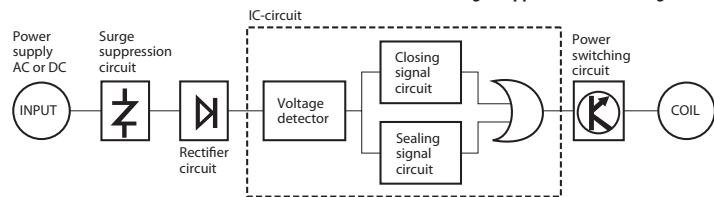

## Odyssey Series Contactor Terminal Covers

Part Number	Price	Description	Applicable Contactors
<b>SZ-N8T</b>	\$45.00	Terminal cover for line or load side. Prevents contact with electrified contactor terminals.	3NC4Qxxxx, 3NC4Hxxxx contactors
<b>SZ-N11T</b>	\$55.00		3NC5Fxxxx, 3NC5Hxxxx contactors

## Odyssey Series Replacement Contactor Coils



Part Number	Price	Applicable Contactors	Coil Voltage
<b>SZ-GSN8-100</b>	\$148.50	3NC4Q0122, 3NC4H0122	100-127VAC/100-120VDC
<b>SZ-GSN11-100</b>	\$163.50	3NC5F0122, 3NC5H0122	100-127VAC/100-120VDC
<b>SZ-GSN8-24</b>	\$148.50	3NC4Q0E22, 3NC4H0E22	24-25VAC/24VDC
<b>SZ-GSN11-24</b>	\$163.50	3NC5F0E22, 3NC5H0E22	24-25VAC/24VDC

Replacement coils are not available for coil codes Q and 4 (380-450VAC and 460-575VAC).

# Fuji Odyssey Series 3N Contactors

## Dimensions (mm)



**3NC4Q0#22**  
**3NC4H0#22**



\* 1 Aux. contact block (Side mounted)

Weight: 4.9kg


**3NC5F0#22**  
**3NC5H0#22**



\* 1 Aux. contact block (Side mounted)

Weight: 7.8kg

## Mounting dimensions

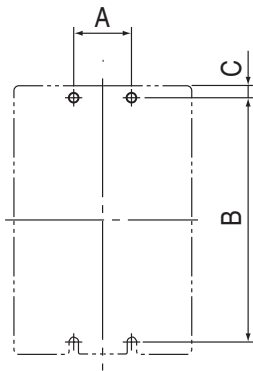


Frame Size	A	B	C	Screw Size
3NC4Qxxxx	45	190	9.5	4-M6
3NC4Hxxxx	45	190	9.5	4-M6
3NC5Fxxxx	60	220	10	4-M8
3NC5Hxxxx	60	220	10	4-M8



## Wiring diagrams

### Non-reversing Contactors




# Fuji Odyssey Series 3N Overload Relays

## General information


- Use with Odyssey 3N series contactors.
- Protects motor windings from burning due to overloads, locked rotor currents, or open phases.

### Agency approvals:


- UL listed file E42419, Standard UL 508
- cUL listed file E42419, Standard CSA C22.2 No. 14
- CE: LVD EN60947-4-1



3NK4QK



3NK4HN



3NK5HQ

Odyssey Series Overload Relays							
Part Number	Fuji Type	Price	Adjustable Current Range (A)	Frame Width	Compatible Contactor	Trip Class IEC 60947-4-1	
3NK4QK	TK-N8	\$134.50	65 - 95	119mm	3NC4Qxxxx	10A	
3NK4QL	TK-N8	\$134.50	85 - 125				
3NK4QN	TK-N8	\$134.50	110 - 160				
3NK4QP	TK-N8	\$134.50	125 - 185				
3NK4HL	TK-N10	\$160.00	85 - 125	138mm	3NC4Hxxxx	20A	
3NK4HN	TK-N10	\$160.00	110 - 160				
3NK4HP	TK-N10	\$160.00	125 - 185				
3NK4HQ	TK-N10	\$160.00	160 - 240				
3NK5HN	TK-N12	\$262.50	110 - 160	142mm	3NC5Fxxxx 3NC5Hxxxx	20A	
3NK5HP	TK-N12	\$262.50	125 - 185				
3NK5HQ	TK-N12	\$262.50	160 - 240				
3NK5HR	TK-N12	\$262.50	200 - 300		3NC5Hxxxx		
3NK5HS	TK-N12	\$262.50	240 - 360				
3NK5HT	TK-N12	\$262.50	300 - 450				


## Specifications

Overload Relay Alarm Contact Ratings				
AC Ratings (note 1)			DC Ratings (note 1)	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
C600	1800	180	---	---

Notes:  
1. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

Wire Terminal Tightening Torque Chart					
Part Number	Contactor or Starter	Terminal Size	Cable Size Maximum	Applicable Max. Width for Ring Terminal	Tightening Torque
3NK4Qx	3NC4Q0	M10	300MCM (152mm <sup>2</sup> )	36.5mm	133-177 in.lbs., 15-20 Nm
3NK4Hx	3NC4H0	M10	300MCM (152mm <sup>2</sup> )	36.5mm	133-177 in.lbs., 15-20 Nm
3NK5Hx	3NC5F0	M12	400MCM (203mm <sup>2</sup> )	44.5mm	310-399 in.lbs., 35-45 Nm
	3NC5H0				

# Fuji Odyssey Series 3N Overload Relays Selection Tables

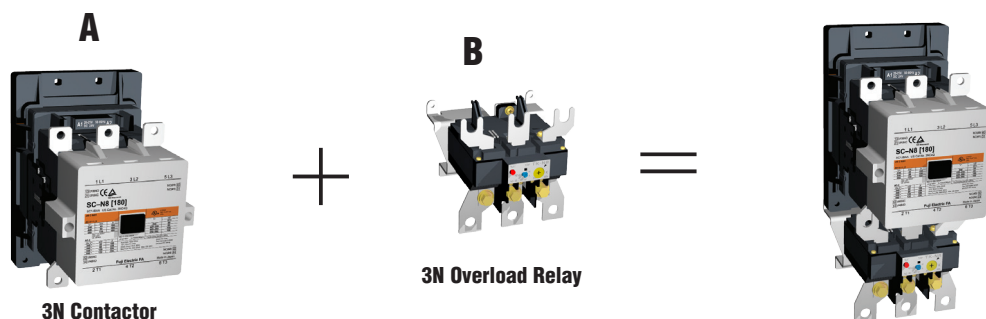

Step 1. Select an Odyssey 3N contactor from Column A based on motor voltage and horsepower.

Step 2. Select an Odyssey 3N overload relay from Column B to work with the contactor selected in Step 1. The motor full load current (FLA) should be within the adjustable current range of the overload relay.

## 220-240V 3-Phase Motor (60 to 150 hp)

Motor Rating		A	B	
HP	Motor Full Load Amperage (FLA) (See Note 1)	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
60	154	3NC4Q0x22	3NK4QN	110 to 160 Amps
75	192	3NC4H0x22	3NK4HQ	160 to 240 Amps
100	248	3NC5F0x22	3NK5HR	200 to 300 Amps
125	312	3NC5H0x22	3NK5HS	240 to 360 Amps
150	360	3NC5H0x22	3NK5HT	300 to 450 Amps

**Note 1:** Per NEC 2005 Table 430.250

## 440-480V 3-Phase Motor (125 to 300 hp)

Motor Rating		A	B	
HP	Motor Full Load Amperage (FLA) (See Note 1)	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
125	156	3NC4Q0x22	3NK4QP	125 to 185 Amps
150	180	3NC4H0x22	3NK4HQ	160 to 240 Amps
200	240	3NC5F0x22	3NK5HR	200 to 300 Amps
250	302	3NC5H0x22	3NK5HS	240 to 360 Amps
300	361	3NC5H0x22	3NK5HT	300 to 450 Amps

**Note 1:** Per NEC 2005 Table 430.250




# Fuji Odyssey Series 3N Overload Relays

## Specifications

### Ambient temperature compensator

Overload relays are provided with an ambient temperature compensator. Their characteristics limit current value changes to approximately 10% as the ambient temperature changes between  $-5^{\circ}\text{C}$  and  $40^{\circ}\text{C}$ .


Compensation characteristics  
(Average value)

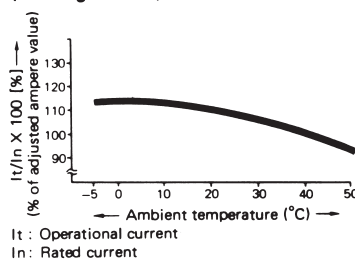


## Open-phase protection

### 3NK4Qx

#### Cold start

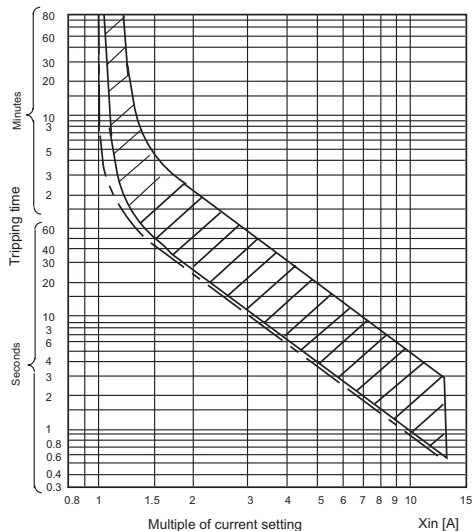


#### Hot start

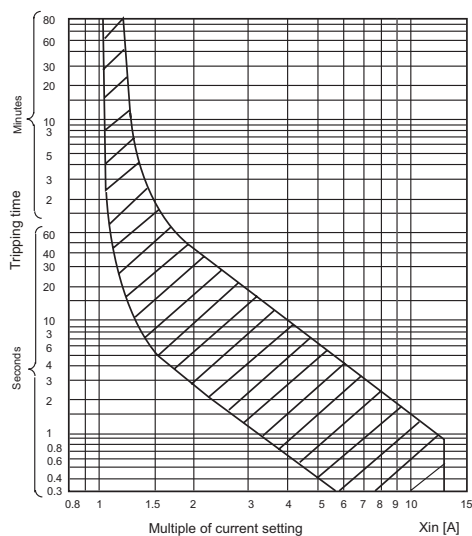


### 3NK4Hx, 3NK5Hx

#### Cold start

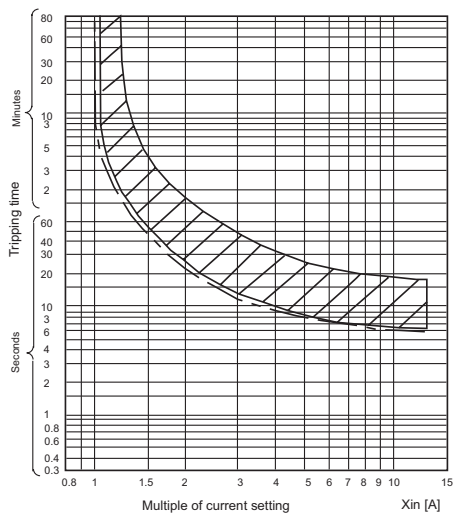

#### Hot start

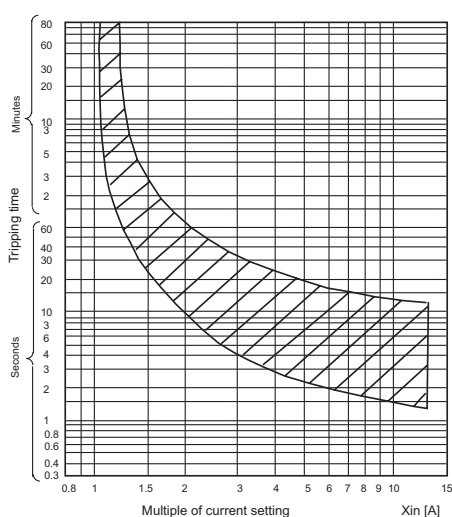

# Fuji Odyssey Series 3N Overload Relays

## Optional accessories

### Terminal covers

NOTE: Larger terminal covers may require some adjustment for proper fit.



SZ-WN8T



SZ-WN10T




SZ-WN11T


Odyssey Series Overload Relay Terminal Covers			
Part number	Price	Description	Applicable Contactors, Overload Relays
SZ-WN8T	\$66.50	Terminal cover for load side. Prevents contact with electrified contactor terminals.	3NK4Qx overload relays
SZ-WN10T	\$66.50		3NK4Hx overload relays
SZ-WN11T	\$76.50		3NK5Hx overload relays

### Dimensions (mm)


3NK4Qx

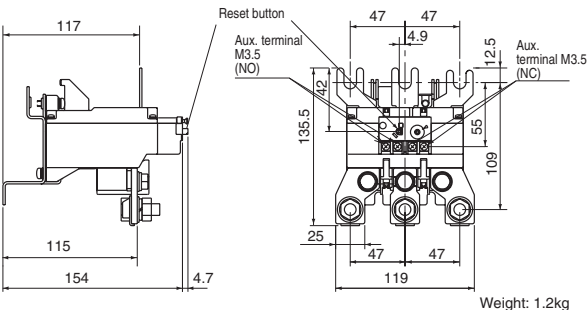

3NK4Hx

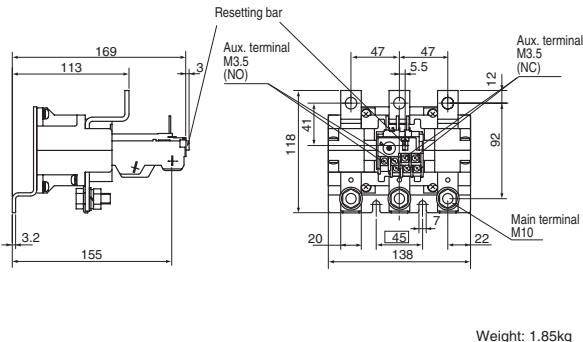


3NK5Hx

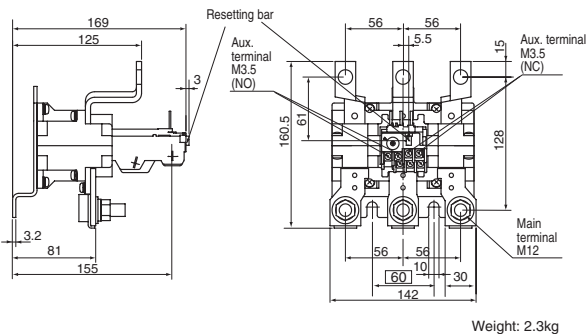


### Wiring diagrams

3NK4Qx



3NK4Hx, 3NK5Hx



# GH15 Series IEC Motor Controls

The GH15 series of IEC contactors and thermal overload relays are manufactured by Europe's leading maritime contactor company. Contactors for ocean-going vessels are built to the most rigid specifications. This same design technology carries over to this line of industrial motor controls.

We offer individual components that allow you to use the contactor alone or to assemble your motor starter using our thermal overload relays. You can also combine a manual motor starter/protector for all-in-one protection.

Use contactors wherever you need a heavy-duty switching device with up to three poles. Add up to 2 side-mounted auxiliary blocks (1 per side) plus 1 top-mounted auxiliary contact block per contactor max. This will equal up to 8 possible auxiliary contact configurations. Or use the optional mechanical interlock to create an inexpensive reversing contactor.

**Self-lifting pressure plate terminals** make for quick wiring terminations.

**Actuator coils, available in 110/120 V and 220/240 V, 60Hz models,** accommodate most applications.

**IEC sizes B through TT** accommodate up to 250 hp motors @460 VAC.

**Terminals are IP20 rated** to protect fingers from electrical shock.

**35 mm DIN-rail mounting and panel mounting (larger size)** provides fast and easy installation. Panel mounting holes are provided.

**Top and side mounted auxiliary contacts** offer versatility for space requirements.

## Approvals

- cULus listed #E191059
- UL 60947-4-1A



See next page for detailed specifications.

# GH15 Series Contactor Configurations

Contactor Configurations							
IEC FRAME SIZE	Contactor Model*	Part Number	Price	Number of Contacts			Coil Voltage and Frequency
				Main	Auxiliary Contacts Included		
					N.O	N.C.	
45 mm	GH15BN	GH15BN-3-10A	\$45.50	3	1	—	110-120 VAC 50-60 Hz
		GH15BN-3-01A	\$44.50	3	—	1	110-120 VAC 50-60 Hz
		GH15BN-3-10B	\$45.50	3	1	—	220-240 VAC 50-60 Hz
		GH15BN-3-01B	\$44.50	3	—	1	220-240 VAC 50-60 Hz
	GH15CN	GH15CN-3-10A	\$52.00	3	1	—	110-120 VAC 50-60 Hz
		GH15CN-3-01A	\$52.00	3	—	1	110-120 VAC 50-60 Hz
		GH15CN-3-10B	\$52.00	3	1	—	220-240 VAC 50-60 Hz
		GH15CN-3-01B	\$52.00	3	—	1	220-240 VAC 50-60 Hz
	GH15DN	GH15DN-3-10A	\$57.00	3	1	—	110-120 VAC 50-60 Hz
		GH15DN-3-01A	\$57.00	3	—	1	110-120 VAC 50-60 Hz
		GH15DN-3-10B	\$57.00	3	1	—	220-240 VAC 50-60 Hz
		GH15DN-3-01B	\$57.00	3	—	1	220-240 VAC 50-60 Hz
	GH15ET	GH15ET-3-00A	\$84.75	3	—	—	110-120 VAC 50-60 Hz
		GH15ET-3-00B	\$84.75	3	—	—	220-240 VAC 50-60 Hz
	GH15FT	GH15FT-3-00A	\$92.75	3	—	—	110-120 VAC 50-60 Hz
		GH15FT-3-00B	\$92.75	3	—	—	220-240 VAC 50-60 Hz
60 mm	GH15GT	GH15GT-3-00A	\$168.25	3	—	—	120 VAC 60 Hz only
		GH15GT-3-00B	\$75.25	3	—	—	240 VAC 60 Hz / 212 VAC 50 Hz
	GH15HT	GH15HT-3-00A	\$186.75	3	—	—	120 VAC 60 Hz only
		GH15HT-3-00B	\$186.75	3	—	—	240 VAC 60 Hz / 212 VAC 50 Hz
	GH15JT	GH15JT-3-00A	\$194.75	3	—	—	120 VAC 60 Hz only
		GH15JT-3-00B	\$194.75	3	—	—	240 VAC 60 Hz / 212 VAC 50 Hz
79 mm	GH15KT	GH15KT-3-00A	\$240.75	3	—	—	120 VAC 60 Hz only
		GH15KT-3-00B	\$240.75	3	—	—	240 VAC 60 Hz / 212 VAC 50 Hz
	GH15LT	GH15LT-3-00A	\$284.50	3	—	—	120 VAC 60 Hz only
		GH15LT-3-00B	\$284.50	3	—	—	240 VAC 60 Hz / 212 VAC 50 Hz
	GH15MT	GH15MT-3-00A	\$317.25	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15MT-3-00B	\$317.25	3	—	—	220-240 VAC 50-60 Hz
110 mm	GH15NT	GH15NT-3-00A	\$419.25	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15NT-3-00B	\$419.25	3	—	—	220-240 VAC 50-60 Hz / 220 VDC
	GH15PT	GH15PT-3-00A	\$507.00	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15PT-3-00B	\$507.00	3	—	—	220-240 VAC 50-60 Hz / 220 VDC
145 mm	GH15RT	GH15RT-3-00A	\$633.50	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15RT-3-00B	\$633.50	3	—	—	220-240 VAC 50-60 Hz / 220 VDC
	GH15ST	GH15ST-3-00A	\$674.25	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15ST-3-00B	\$674.25	3	—	—	220-240 VAC 50-60 Hz / 220 VDC
	GH15TT	GH15TT-3-00A	\$869.00	3	—	—	110-120 VAC 50-60 Hz / 110 VDC
		GH15TT-3-00B	\$869.00	3	—	—	220-240 VAC 50-60 Hz / 220 VDC

\* Up to 2 auxiliary contact blocks may be added to the contactor by utilizing the side mount and top mount contact block assemblies. Though referred to as a top mount assembly, the GH15T mounts to the front of the contactor.

Note: If using the BM0H or BM3H-AD mechanical interlock, the use of auxiliary contacts is prohibited on the side of each contactor where the interlock is mounted. This does not pertain to the auxiliary contact built into the GH15BN, GH15CN and GH15DN contactors.




# GH15 Series 45 mm Contactor Specifications

45 mm Contactor Specifications							
Contactor Model			GH15BN	GH15CN	GH15DN	GH15ET	GH15FT
Insulation Voltage	AC	(V)	600 Volts AC				
Ampere Rating UL 508	Max. UL Continuous Current	(A)	11	14	19	32	32
	Max. UL General Use Current <small>note 2</small>	(A)	20	20	25	40	45
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	2	3	3	7.5	7.5
	230/240V	(hp)	3	3	5	7.5	10
	460/480V	(hp)	5	7.5	10	15	20
	575V	(hp)	7.5	10	15	20	25
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	0.5	0.5	1	2	2
	230/240V	(hp)	1	2	3	3	5
Insulation Voltage	AC	(V)	690 Volts AC				
Ampere Rating EN/IEC 60947	AC-3 Ie (ambient Temp = 55°C @ 440V)	(A)	9	12	16	25	32
	AC-1 Ie (ambient Temp = 40°C @ 690V)	(A)	30	30	30	45	50
Maximum Power (kW) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	2.2	3	4	6.5	7.5
	400V	(kW)	4	5.5	7.5	11	15
	440/480V	(kW)	4.7	6.4	9	12.5	16.5
	500V	(kW)	5.5	7.5	10	11	15
	690V	(kW)	5.5	7.5	7.5	11	15
Max Short Circuit Protection Fuses Class RK5 UL Rated Fuses	Type 2 Coordination <small>note 3</small>	(A)	25	30	50	60	70
SCCR Rating (kA)		kA	5	5	5	5	5
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>				
Coil Voltage Operating Limits			AC Pick-up 85-110% rated control voltage / AC Drop-out 20-75% rated control voltage				
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			AC Pick-Up (VA) 80-100 / AC Sealed (VA) 9-12				
Power Factor			Pick-up 0.65 / Sealed 0.35				
Coil Operating Time at Rated Coil Voltage			Pick-up (ms) 10-25 / Drop-out (ms) 6-18				
Maximum Operating Frequency (No-Load Operation)			3000 operations / hour				
Mechanical Durability			10,000,000 operations				
Operating Ambient Temperature			-25 to +70C (-13 to +158F)				
Electrical Protection Degree			IP20 (IP10 for power entry cables)				
Mounting			Screw (panel mount) or 35mm DIN rail				
Main Circuit Connections	Wire Size		14-10 AWG Stranded			14-8 AWG Stranded	
	Tightening Torque		1.4 N-m (12 lb-in)			2.3 N-m (20 lb-in)	
Auxilliary Circuit Connections	Wire Size		16-12 AWG Stranded / 14-12 AWG Solid				
	Tightening Torque		0.8 N-m (7 lb-in)				

## Notes

- AC3 type loads consist of squirrel cage three phase motors.
- AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)
- Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations, and shall be suitable for further use. The risk of minor contact welding is possible.
- NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

## Contactor Diagram

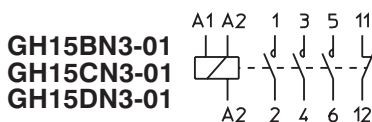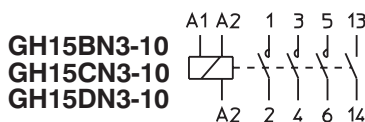




# GH15 Series 60 mm Contactor Specifications

60 mm Contactor Specifications					
Contactor Model			GH15GT	GH15HT	GH15JT
Insulation Voltage	AC	(V)	600 Volts AC		
Ampere Rating UL 508	Max. UL Continuous Current	(A)	42	52	65
	Max. UL General Use Current <small>note 2</small>	(A)	60	70	80
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	10	15	15
	230/240V	(hp)	10	15	20
	460/480V	(hp)	25	30	40
	575V	(hp)	30	40	50
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	3	3	5
	230/240V	(hp)	5	7.5	10
Insulation Voltage	AC	(V)	690 Volts AC		
Ampere Rating EN/IEC 60947	AC-3 Ie (ambient Temp = 55°C @440V)	(A)	40	50	63
	AC-1 Ie (ambient Temp = 40°C @690V)	(A)	63	80	100
Maximum Power (kW) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	11	12.5	18.5
	400V	(kW)	18.5	22	30
	440/480V	(kW)	21	25	33
	500V	(kW)	18.5	22	30
	690V	(kW)	18.5	22	30
Max Short Circuit Protection Circuit Breaker UL Rated MCCB	Type 2 Coordination <small>note 3</small>	(A)	150	175	200
SCCR Rating (kA)		(kA)	5	5	5
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>		
Coil Voltage Operating Limits			AC Pick-up 85-110% rated control voltage AC Drop-Out 20-75% rated control voltage		
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			AC Pick-up (VA) 250 / AC Sealed (VA) 18		
Power Factor			Pick-up 0.54 / Sealed 0.35		
Coil Operating Time at Rated Coil Voltage			Pick-up (ms) 12-30 / Drop-out (ms) 6-15		
Maximum Operating Frequency (No-Load Operation)			3000 operations / hour		
Mechanical Durability			10,000,000 operations		
Operating Ambient Temperature			-25 to +70C (-13 to +158F)		
Electrical Protection Degree			IP20 (IP10 for power entry cables)		
Mounting			Screw (panel mount) or 35mm DIN rail		
Main Circuit Connections	Wire Size		12-3 AWG stranded		
	Tightening Torque		5.0 N·m (45 lb·in)		
Auxiliary Circuit Connections	Wire Size		16-12 AWG (stranded recommended)		
	Tightening Torque		0.8 N·m (7 lb·in)		

## Notes

1. AC3 type loads consist of squirrel cage three phase motors.
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)
3. Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations, and shall be suitable for further use. The risk of minor contact welding is possible.
4. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

## Contactor Diagram






# GH15 Series 79 mm Contactor Specifications

79 mm Contactor Specifications					
Contactor Model			GH15KT	GH15LT	GH15MT
Insulation Voltage	AC	(V)	600 Volts AC		
Ampere Rating UL 508	Max. UL Continuous Current	(A)	90	90	120
	Max. UL General Use Current <sup>note 2</sup>	(A)	90	100	120
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	20	25	30
	230/240V	(hp)	25	30	40
	460/480V	(hp)	50	60	75
	575V	(hp)	60	75	100
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	5	7.5	10
	230/240V	(hp)	15	15	20
Insulation Voltage	AC	(V)	1000 Volts AC		
Ampere Rating EN/IEC 60947	AC-3 Ie (ambient Temp = 55°C @440V)	(A)	80	95	110
	AC-1 Ie (ambient Temp = 40°C @690V)	(A)	125	125	135
Maximum Power (kW) of Three-Phase Motors AC3 Category <sup>note 1</sup>	230/240V	(kW)	22	25	30
	400V	(kW)	37	45	55
	440/480V	(kW)	45	51	63
	500V	(kW)	45	51	55
	690V	(kW)	45	51	55
Max Short Circuit Protection Fuses Class RK5 UL Rated Fuses	Type 2 Coordination <sup>note 3</sup>	(A)	250	250	225
SCCR Rating (kA)		(kA)	10	10	10
Auxiliary Contacts Electrical Capacity			A600 <sup>note 4</sup>		
Coil Voltage Operating Limits			AC Pick-up 85-110% rated control voltage AC Drop-Out 20-75% rated control voltage		
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			AC Pick-up (VA) 250 / AC Sealed (VA) 18 AC Pick-up (VA) 250 AC Sealed 24-125V (VA) 4 AC Sealed 220-600V (VA) 19		
Power Factor			Pick-up 0.54 / Sealed 0.35 Pick-up 0.98 Sealed 24-125V 0.98 Sealed 220-600V 0.2		
Coil Operating Time at Rated Coil Voltage			Pick-up (ms) 12-30 / Drop-out (ms) 6-15 Pick-up (ms) 15-50 Drop-out (ms) 30-80		
Maximum Operating Frequency (No-Load Operation)			3000 operations / hour		
Mechanical Durability			10,000,000 operations		
Operating Ambient Temperature			-25 to +70C (-13 to +158F)		
Electrical Protection Degree			IP20 (Front)		
Mounting			Screw (panel mount)		
Main Circuit Connections	Wire Size		10-2 AWG Stranded (1 or 2 wires)		
	Tightening Torque		8.0 N-m (70 lb-in)		
Auxiliary Circuit Connections	Wire Size		2 x 16-12 AWG Stranded / 2 x 14-12 AWG Solid		
	Tightening Torque		0.8 N-m (7 lb-in)		

## Notes

1. AC3 type loads consist of squirrel cage three phase motors.
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)
3. Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations, and shall be suitable for further use. The risk of minor contact welding is possible.
4. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

## Contactor Diagram




# GH15 Series 110 mm Contactor Specifications

110 mm Contactor Specifications				
Contactor Model			GH15NT	GH15PT
Insulation Voltage	AC	(V)	600 Volts AC	
Ampere Rating UL 508	Max. UL Continuous Current	(A)	180	180
	Max. UL General Use Current <small>note 2</small>	(A)	180	220
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	40	50
	230/240V	(hp)	50	60
	460/480V	(hp)	100	125
	575V	(hp)	125	150
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	15	15
	230/240V	(hp)	25	30
Insulation Voltage	AC	(V)	1000 Volts AC	
Ampere Rating EN/IEC 60947	AC-3 Ie (ambient Temp = 55°C @440V)	(A)	150	175
	AC-1 Ie (ambient Temp = 40°C @690V)	(A)	230	250
Maximum Power (kW) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	40	50
	400V	(kW)	75	90
	440/480V	(kW)	85	100
	500V	(kW)	90	110
	690V	(kW)	110	132
Max Short Circuit Protection Fuses Class RK5 UL Rated Fuses	Type 2 Coordination <small>note 3</small>	(A)	300	350
SCCR Rating (kA)		(kA)	10	10
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>	
Coil Voltage Operating Limits			AC Pick-up 85-110% rated control voltage AC Drop-Out 20-75% rated control voltage	
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			AC Pick-up (VA) 350 / AC Sealed (VA) 5	
Power Factor			Pick-up 0.98 / Sealed 0.98	
Coil Operating Time at Rated Coil Voltage			Pick-up (ms) 30-60 / Drop-out (ms) 30-80	
Maximum Operating Frequency (No-Load Operation)			1200 operations / hour	
Mechanical Durability			10,000,000 operations	
Operating Ambient Temperature			-25 to +70C (-13 to +158F)	
Electrical Protection Degree			IP00 - IP20	
Mounting			Screw (panel mount)	
Main Circuit Connections with Terminal Kit MR3-AD	Wire Size		2 x 4/0 AWG Stranded / 1 x 4/0 AWG Solid	
	Tightening Torque		17 N·m (150 lb·in)	
Auxiliary Circuit Connections	Wire Size		2 X 5-4/0 AWG Stranded	
	Tightening Torque		0.8 N·m (7 lb·in)	

## Notes

1. AC3 type loads consist of squirrel cage three phase motors.
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. turnaces, ovens, etc.)
3. Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations, and shall be suitable for further use. The risk of minor contact welding is possible.
4. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

## Contactor Diagram



# GH15 Series 145 mm Contactor Specifications


145 mm Contactor Specifications					
Contactor Model			GH15RT	GH15ST	GH15TT
Insulation Voltage	AC	(V)	600 Volts AC		
Ampere Rating UL 508	Max. UL Continuous Current	(A)	250	300	360
	Max. UL General Use Current <small>note 2</small>	(A)	250	300	360
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	60	75	100
	230/240V	(hp)	75	100	125
	460/480V	(hp)	150	200	250
	575V	(hp)	200	250	300
Maximum Power (hp) of Single-Phase Motors	230/240V	(hp)	40	50	50
Insulation Voltage	AC	(V)	1000 Volts AC		
Ampere Rating EN/IEC 60947	AC-3 Ie (ambient Temp = 55°C @440V)	(A)	210	260	315
	AC-1 Ie (ambient Temp = 40°C @690V)	(A)	350	450	500
Maximum Power (kW) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	60	75	90
	400V	(kW)	110	132	160
	440/480V	(kW)	125	150	190
	500V	(kW)	132	160	210
	690V	(kW)	132	160	210
Max Short Circuit Protection Fuses Class RK5 UL Rated Fuses	Type 2 Coordination <small>note 3</small>	(A)	400	450	500
SCCR Rating (kA)		(kA)	18	18	18
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>		
Coil Voltage Operating Limits			AC Pick-up 85-110% rated control voltage AC Drop-Out 20-75% rated control voltage		
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			AC Pick-up (VA) 360 / AC Sealed (VA) 5		
Power Factor			Pick-up 0.98 / Sealed 0.98		
Coil Operating Time at Rated Coil Voltage			Pick-up (ms) 40-60 / Drop-out (ms) 40-60		
Maximum Operating Frequency (No-Load Operation)			1200 operations / hour		
Mechanical Durability			8,000,000 operations		
Operating Ambient Temperature			-25 to +70C (- 13 to +158F)		
Electrical Protection Degree			IP20 (Front)		
Mounting			Screw (panel mount)		
Main Circuit Connections with Terminal Kit KAL-4	Wire size		2 x 6-300 MCM (75° copper wire only)		
	Tightening Torque		31 N·m (275 lb·in)		
Auxiliary Circuit Connections	Wire Size		16-12 AWG Stranded / 14-12 AWG Solid		
	Tightening Torque		0.8 N·m (7 lb·in)		

## Notes

1. AC3 type loads consist of squirrel cage three phase motors.
2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)
3. Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations, and shall be suitable for further use. The risk of minor contact welding is possible.
4. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

## Contactor Diagram

GH15RT-3-00  
GH15ST-3-00  
GH15TT-3-00





# GH15 Series Contactor Electrical Durability of Main Contacts

Main contacts have a conductor material support, on which a silver alloy tip is welded. This tip makes, carries and breaks the load currents. The contact durability is represented by the average number of operations which the contact can carry out without maintenance and before the contact requires replacement. Every operation involves mechanical

stresses when the contactor closes and thermal stress during load current conduction. However, the main stress that affects contact durability is due to the electric arc between contacts during making and breaking operations. The electric arc causes the erosion of the contact active material; such erosion will increase according to the intensity of

the current and the arcing time. Therefore the contact durability is strictly dependent on the type of load, i.e. on the utilization category, rated operational current and rated voltage. The following diagrams give curves of contact durability for each contactor for use in category AC-1, AC-3 and AC-4.

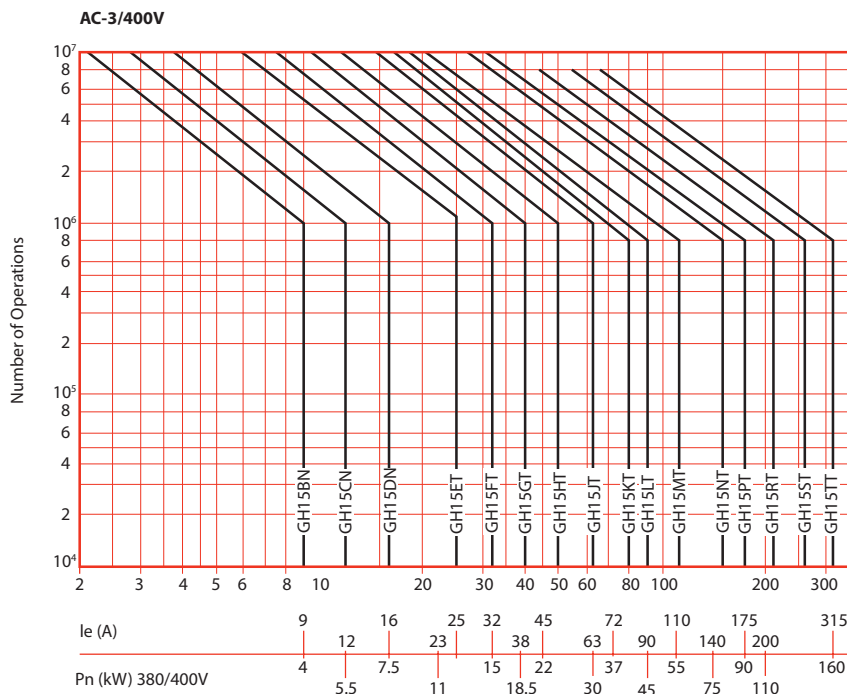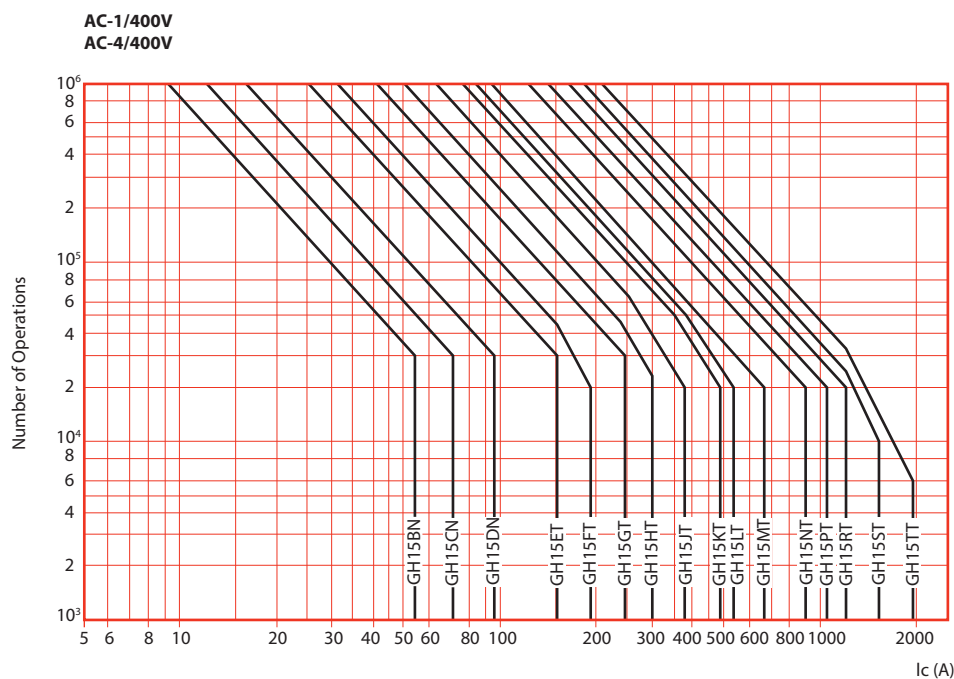


*Note: Average durability curves are at 400V.  
For higher operational voltages, reduce the durability according following table.*

Electrical Durability Curve Adjustment for Voltages Over 400V		
	AC-1 / AC-4	AC-3
400V	0%	0%
440V	10%	5%
500V	20%	10%
690V	40%	20%


# GH15 Series Contactor Dimensions

Dimensions mm [inches]									
Contactor Model	Wide	High	Deep	Mounting					Product Weight kg [lb.]
	A	B	C	D	E	E1	F	G	
GH15BN	45.0 [1.77]	80.0 [3.15]	85.0 [3.35]	35.0 [1.38]	60.0 [2.36]	7.5 [0.30]	116.0 [4.57]	12.0 [0.47]	0.41 [0.90]
GH15CN									
GH15DN									
GH15ET	45.0 [1.77]	80.0 [3.15]	91.0 [3.58]	35.0 [1.38]	60.0 [2.36]	7.5 [0.30]	122.0 [4.80]	12.0 [0.47]	0.47 [1.04]
GH15FT									
GH15GT	60.0 [2.36]	114.0 [4.49]	109.0 [4.29]	50.0 [1.97]	100.0 [3.94]	—	140.0 [5.51]	12.0 [0.47]	1.12 [2.47]
GH15HT									
GH15JT									
GH15KT	79.0 [3.11]	137.0 [5.39]	130.0 [5.12]	70.0 [2.76]	100.0 [3.94]	—	161.0 [6.34]	12.0 [0.47]	1.80 [3.97]
GH15LT									
GH15MT	79.0 [3.11]	162.0 [6.38]	130.0 [5.12]	70.0 [2.76]	100.0 [3.94]	—	161.0 [6.34]	12.0 [0.47]	2.20 [4.85]
GH15NT	110.0 [4.33]	170.0 [6.69]	162.0 [6.38]	100.0 [3.94]	130.0 [5.12]	—	193.0 [7.59]	12.0 [0.47]	4.00 [8.82]
GH15PT									
GH15RT	145.0 [5.71]	200.0 [7.87]	208.0 [8.19]	120.0 [4.72]	160.0 [6.30]	—	239.0 [9.41]	12.0 [0.47]	7.50 [16.53]
GH15ST									
GH15TT									

## GH15BN, GH15CN, GH15DN, GH15ET, GH15FT

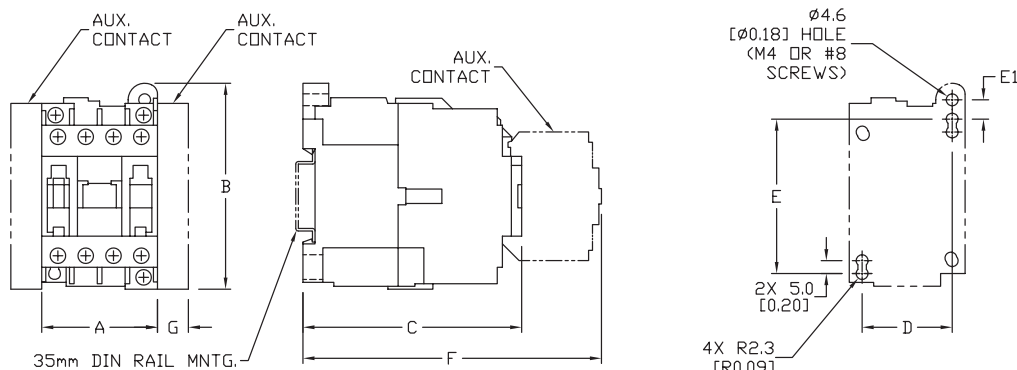


## GH15GT, GH15HT, GH15JT

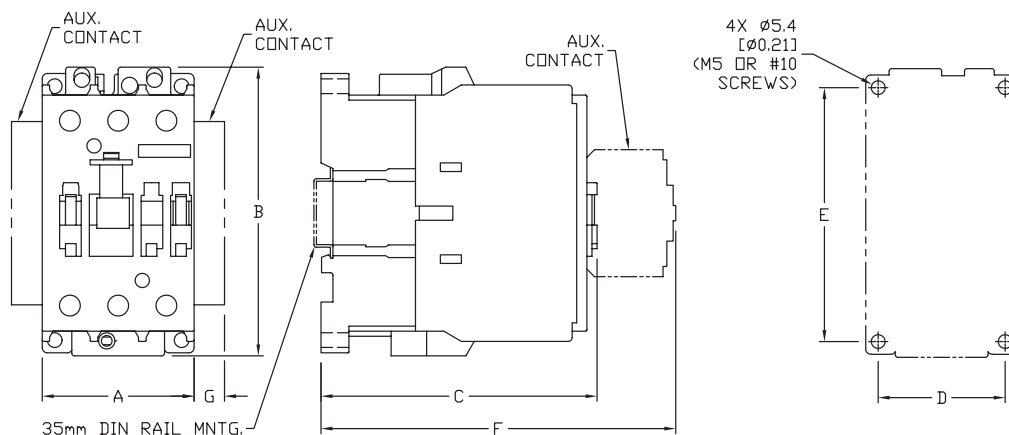


# GH15 Series Contactor Dimensions

Dimensions mm [inches]


## GH15KT, GH15LT, GH15MT

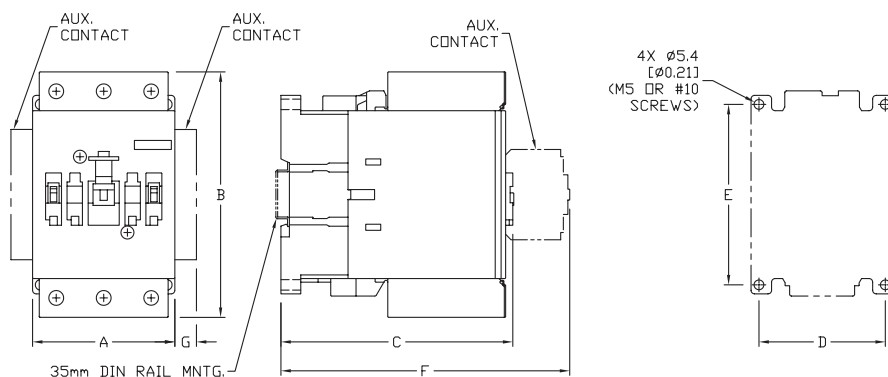

## GH15NT and GH15PT

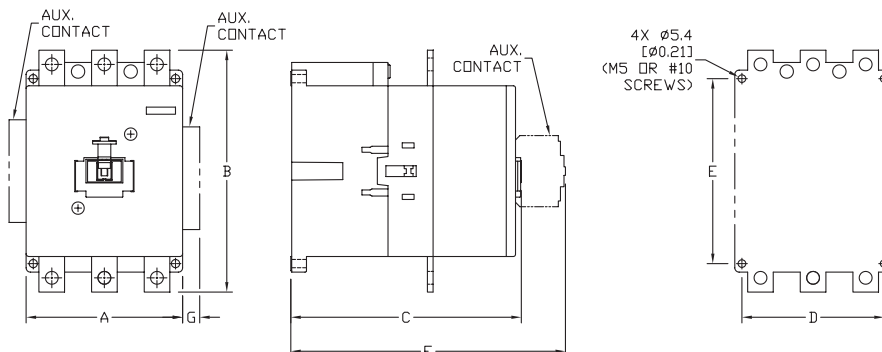


## GH15RT, GH15ST, GH15TT

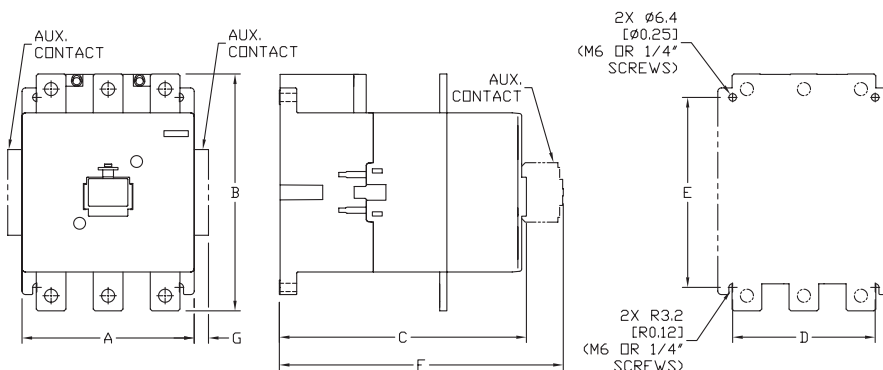

## GH15 Series Mounting Positions

The correct mounting position is with the base plate in the vertical plane. The device can be mounted up to 25° from the vertical position.

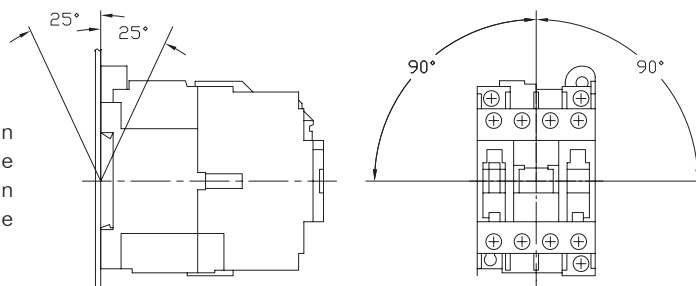



# GH15 Series Contactor Accessories

## Auxiliary contacts

Auxiliary contacts are designed for installation on all the GH15 series contactors. The snap-on design makes them quick and easy to install. The bifurcated contact blocks feature silver nickel alloy contacts.


Add up to 2 side-mounted auxiliary blocks (1 per side) plus 1 top-mounted auxiliary contact block per contactor max. This will equal up to 8 possible auxiliary contact configurations.

Auxiliary Contacts			
Part Number	Price	Description	Mounting
GH15T11	\$17.75	1 NO 1 NC	Top
GH15T22	\$26.00	2 NO 2 NC	Top
GH15T31	\$26.00	3 NO 1 NC	Top
GH15T40	\$30.00	4 NO	Top
GH15S11	\$22.50	1 NO 1 NC	Side
Contacts rated A600 per NEMA ICS 5-2000. For more info, refer to Control Circuit Contact Electrical Ratings.			

Note: See contactor drawings page for dimensions



## Auxiliary Contact Blocks

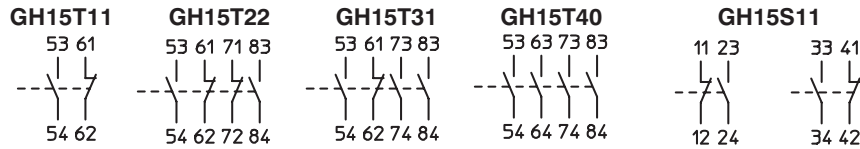

## Replacement coils

Replacement Coils			
Part Number	Price	Description	Use With
B01-A-120	\$21.50	110-120VAC 50-60Hz	GH15BN, GH15CN, GH15DN, GH15ET, GH15FT
B01-B-240	\$21.50	220-240VAC 50-60Hz	
B02-A-120	\$21.50	120VAC 60Hz	GH15GT, GH15HT, GH15JT, GH15KT, GH15LT
B02-B-240	\$15.25	240VAC 60Hz / 212VAC 50Hz	
B022-A-120	\$67.25	110-120VAC 50-60Hz, 110VDC	GH15MT
B022-B-240	\$67.25	220-240VAC 50-60Hz	
B031-A-120	\$94.75	110-120VAC 50-60Hz, 110VDC	GH15NT, GH15PT
B031-B-240	\$94.75	220-240VAC 50-60Hz, 220VDC	
B041-A-120	\$270.25	110-120VAC 50-60Hz, 110VDC	GH15RT, GH15ST, GH15TT
B041-B-240	\$270.25	220-240VAC 50-60Hz, 220VDC	


# GH15 Series Contactor Accessories

## Mechanical Interlock


Mechanical interlocks connect two contactors horizontally. When one contactor is energized, the other contactor is mechanically prohibited from making, even though it may be energized. The mechanical interlocks work with 45, 60, 79, 110 and 145 mm contactors.

Mechanical Interlock			
Part Number	Price	Description	Mounting
<b>BM0H</b>	\$16.25	Mechanical interlock, for use with GH15BN, GH15CN, GH15DN, GH15ET, GH15FT, GH15GT, GH15HT, GH15JT, GH15KT, GH15LT, or GH15MT series contactors.	Side
<b>BM3H-AD</b>	\$25.50	Mechanical interlock, for use with GH15NT, GH15PT, GH15RT, GH15ST or GH15TT series contactors.	Side


### BM0H / BM3H-AD



#### BM0H

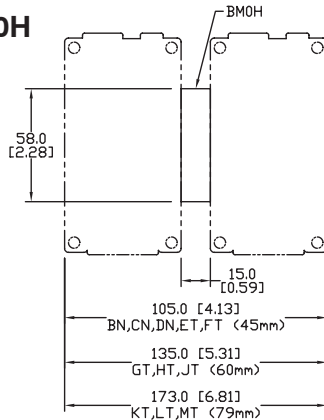

#### BM3H-AD

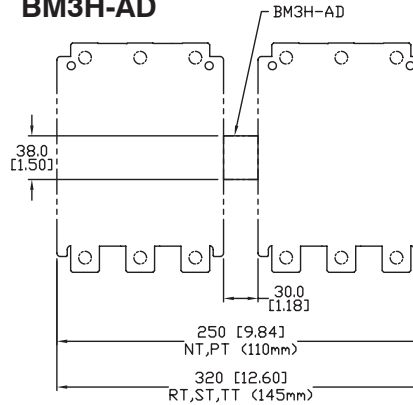

## Terminal Screens

Terminal screens are for use with contactors and thermal overload relays to protect against accidental contact with live components.

Terminal Screens*				
Part Number	Price	Quantity	Description	Use With
<b>PR37-AD</b>	\$25.50	1 screen	Terminal screen, top or bottom, covers 3 poles. Use on line or load side. Mounting hardware included.	GH15NT GH15PT
<b>PRT3-AD</b>	\$25.00	1 screen	Terminal screen, top or bottom, covers 3 poles. Use on line or load side. Mounting hardware included.	GH15RT GH15ST GH15TT

\* No additional protecting device is required for contactors up to IEC Size 79mm since the equipment by itself ensures IP20 frontal protection.

### PRT3-AD



### PR37-AD



Terminal Lug				
Part Number	Price	Quantity	Description	Use With
<b>MR3-AD</b>	\$13.00	1	Terminal lug, 1-pole, can hold (2) wires 6 AWG - 4/0 AWG.	GH15NT GH15PT RTD180
<b>KAL-4</b>	\$30.00	1	Terminal lug, 1-pole, can hold (1) wire 6 AWG - 300 MCM. Mounting hardware included.	GH15RT GH15ST GH15TT RTD320

### MR3-AD



### KAL-4



# Adjustable Overloads for GH15 Series Contactors

The RTD series adjustable motor overload relays are designed for use with the GH15 Series 45 mm, 60 mm, 79 mm, 110 mm, and 145 mm contactors.

By combining the contactor with an overload relay, you have a reliable motor starter solution.



## RTD32 overload relays for 45 mm contactors

- 16 sizes for motor currents from 0.4 to 32 amps
- Units come with (1) N.O. and (1) N.C. auxiliary contacts
- Mount directly to 45 mm contactors
- Class 10A trip class
- cULus listed, CE

## RTD65 overload relays for 60 mm contactors

- Four sizes for motor currents from 20 to 65 amps
- Units come with (1) N.O. and (1) N.C. auxiliary contacts
- Mount directly to 60 mm contactors
- Class 10A trip class
- cULus listed, CE

## RTD180 overload relays for 79 mm and 110 mm contactors

- 3 sizes for motor currents from 60 to 180 amps
- Units come with (1) N.O. and (1) N.C. auxiliary contacts
- Mount directly to 110 mm contactors with connection links (included)
- Hard-wire connection to 79 mm contactors (No connection links available)
- Class 10A trip class
- cULus listed, CE


## RTD320 overload relays for 145 mm contactors

- 2 sizes for motor currents from 144 to 320 amps
- Units come with (1) N.O. and (1) N.C. auxiliary contacts
- Mount directly to 145 mm contactors with connection links (included)
- Class 10A trip class
- cULus listed, CE




# GH15 Series Adjustable Overload Relay Features

## RTD32 for 45 mm Contactors

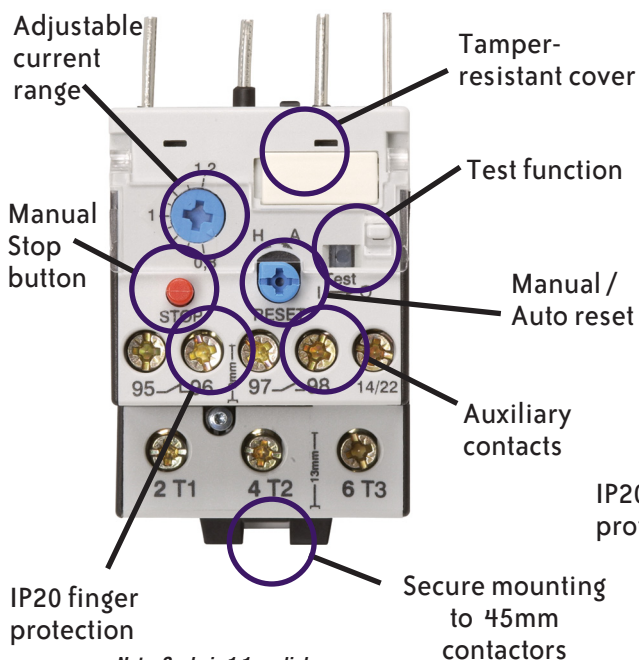


## RTD180 for 79 mm and 110 mm Contactors

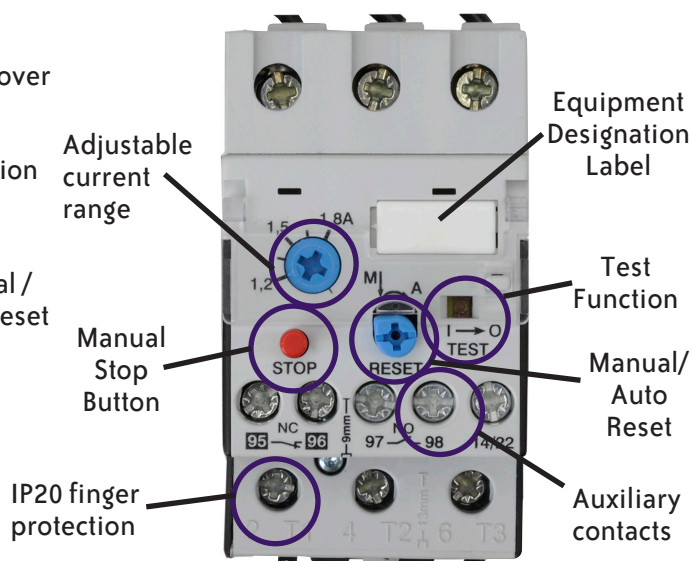

Note: The secondary current for the dial adjustment of the relay is 100x the dial current. For example, for a rated load current of 120A, the relay setting should be 1.2A.


## RTD65 for 60 mm Contactors

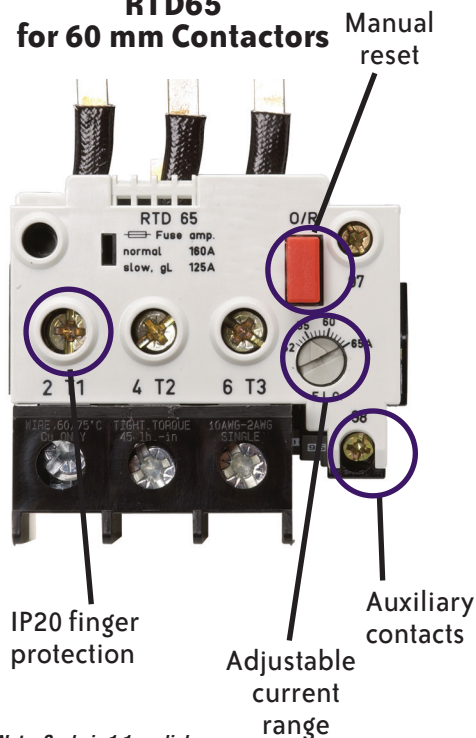

Note: Scale is 1:1 on dial.

Note: Additional Black Loadside Terminal Block is available on RTD65-5200 and RTD65-6500 only.

## RTD320 for 145 mm Contactors

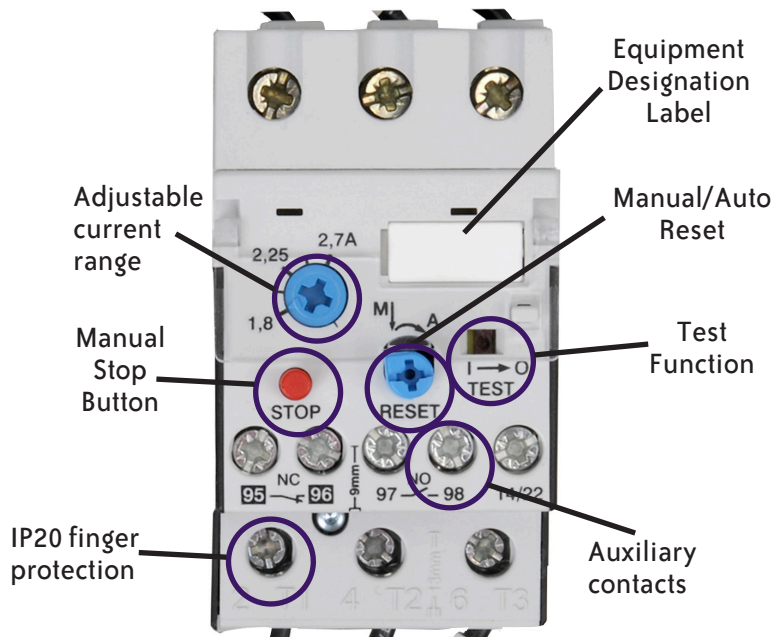

Note: The secondary current for the dial adjustment of the relay is 80x the dial current. For example, for a rated load current of 216A, the relay setting should be 2.7A.

# GH15 Series Overload Relay Selection Guide


- Step 1** Determine the motor FLA and service factor listed on the motor name plate. Next, calculate the size overload protection required based on 2005 NEC 430.32. Select your motor's FLA (Full Load Amperage) from Column A. Tripping current occurs at 125% of FLA in column A.
- Step 2** Follow across to Column B to find your contactor size. Check the maximum amperage rating for that contactor. Ranges overlap and you may have to go to the next larger size.
- Step 3** After selecting your contactor, follow across to Column C to find your overload relay model number.
- Step 4** Order the contactor and overload relay, any desired auxiliary contacts, then assemble and install your motor starter.

Motor Contactor and Overload Relay Selection Guide (When Motor FLA is Known)				
<b>A</b>	<b>B</b>	<b>C</b>	<b>Price</b>	<b>IEC Contactor Frame Size</b>
<b>Current Range Motor FLA</b>	<b>Contactor Model</b>	<b>Overload Relay</b>		
0.4 to 0.6A	GH15BN up to maximum FLA of 9A	<b>RTD32-60</b>	\$62.25	45 mm
0.6 to 0.9A		<b>RTD32-90</b>	\$62.25	
0.8 to 1.2A		<b>RTD32-120</b>	\$62.25	
1.2 to 1.8A		<b>RTD32-180</b>	\$62.25	
1.8 to 2.7A		<b>RTD32-270</b>	\$62.25	
2.7 to 4.0A		<b>RTD32-400</b>	\$62.25	
4.0 to 6.0A		<b>RTD32-600</b>	\$62.25	
6.0 to 9.0A		<b>RTD32-900</b>	\$62.25	
8.0 to 11.0A	GH15CN up to 12A FLA	<b>RTD32-1100</b>	\$62.25	
10.0 to 14.0A		<b>RTD32-1400</b>	\$67.25	
10.0 to 14.0A	GH15DN up to 16A FLA	<b>RTD32-1400</b>	\$67.25	
13.0 to 18.0A		<b>RTD32-1800</b>	\$67.25	
13.0 to 18.0A	GH15ET up to 25A FLA	<b>RTD32-1800</b>	\$67.25	
17.0 to 24.0A		<b>RTD32-2400</b>	\$67.25	
22.0 to 32.0A		<b>RTD32-3200</b>	\$79.50	
22.0 to 32.0A	GH15FT up to 32A FLA	<b>RTD32-3200</b>	\$79.50	
20.0 to 28.0A	GH15GT up to 40A FLA	<b>RTD65-2800</b>	\$116.25	60 mm
28.0 to 42.0A		<b>RTD65-4200</b>	\$116.25	
28.0 to 42.0A	GH15HT up to 50A FLA	<b>RTD65-4200</b>	\$116.25	
40.0 to 52.0A		<b>RTD65-5200</b>	\$144.75	
40.0 to 52.0A	GH15JT up to 63A FLA	<b>RTD65-5200</b>	\$144.75	
52.0 to 65.0A		<b>RTD65-6500</b>	\$144.75	
60.0 to 90.0A	GH15KT up to 80A FLA	<b>RTD180-9000</b>	\$203.00	79 mm
60.0 to 90.0A	GH15LT up to 95A FLA	<b>RTD180-9000</b>	\$203.00	
80.0 to 120.0A	GH15MT up to 110A FLA	<b>RTD180-12000</b>	\$257.25	110 mm
120.0 to 180.0A	GH15NT up to 150A FLA	<b>RTD180-18000</b>	\$277.50	
120.0 to 180.0A	GH15PT up to 175A FLA	<b>RTD180-18000</b>	\$277.50	
144.0 to 216.0A	GH15RT up to 210A FLA	<b>RTD320-21600</b>	\$321.25	145 mm
144.0 to 216.0A	GH15ST up to 260A FLA	<b>RTD320-21600</b>	\$321.25	
216.0 to 320.0A		<b>RTD320-32000</b>	\$321.25	
144.0 to 216.0A		<b>RTD320-21600</b>	\$321.25	
216.0 to 320.0A	GH15TT up to 315A FLA	<b>RTD320-32000</b>	\$321.25	

# GH15 Series Contactors Overload Technical Characteristics

## Typical Trip Curves


### 45 and 60 mm Overloads

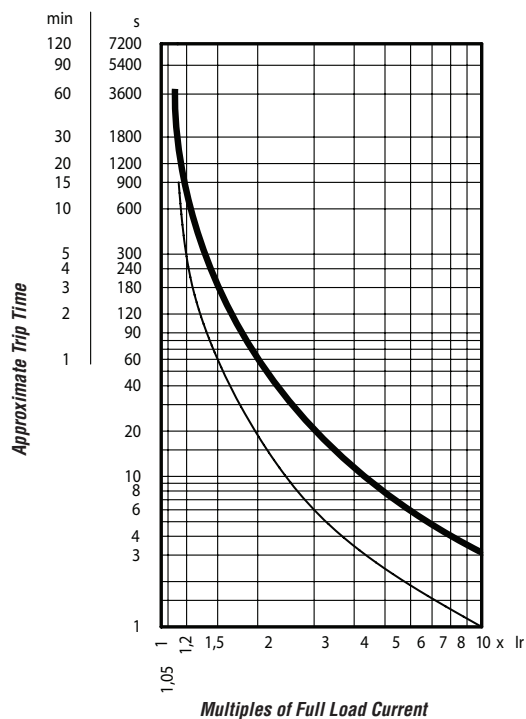

Note: Curves show tripping time (average value) versus multiples of setting current  $I_r$ .

— Tripping starting from cold  
— Tripping starting from hot

### 79 mm, 110 mm, and 145 mm Overloads

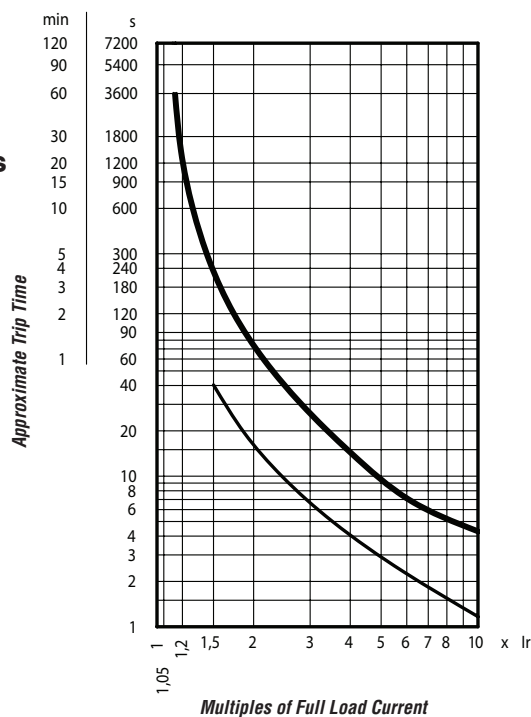





# GH15 Series Contactors Overload

## Technical Characteristics

Thermal Overload Relays Specifications					
	RTD32	RTD65	RTD180	RTD180-18000	RTD320
Storage temperature	-40 to +70°C (-40°F to 158°F)				
Operating temperature	-25 to +55°C (-13°F to 131°F)				
Tripping class IEC 60947-4-1	10A				
Phase loss sensitive	Yes				
Connection to contactor	Built-in links		Pass through wire	Links for direct	Links for direct
Frequency limits	0-400 Hz		50-60 Hz		
Power dissipation per phase	2.3 Watts	3.7 Watts (52-65 A) setting range: 4.5 W	3 Watts		5 Watts
Short circuit current rating 600V	5kA rms				
Aux contacts wire range	14-10 AWG				
Aux contacts tightening torque	8.1 lb-in				


Overload Aux Contact Ratings					
Contact Rating Code Designation	Thermal Continuous Current (Amps)	Maximum Current (Amps)			
		120 Volt	240 Volt	480 Volt	600 Volt
		Make / Break	Make / Break	Make / Break	Make / Break
95-96 (NC) B600	5	30 / 3	15 / 1.5	7.5 / 0.75	6 / 0.6
97-98 (NO) C600	2.5	15 / 1.5	7.5 / 0.75	3.75 / 0.375	3 / 0.3

### IEC terminal designations

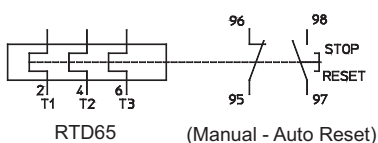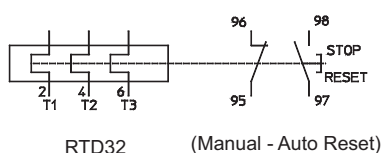


### Wiring Diagrams

#### RTD32 / RTD65




#### RTD180 / RTD320

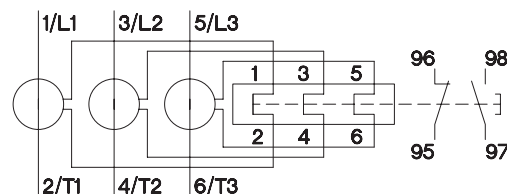

# GH15 Series Overload Relay Dimensions


## 45 mm contactor and overload dimensions

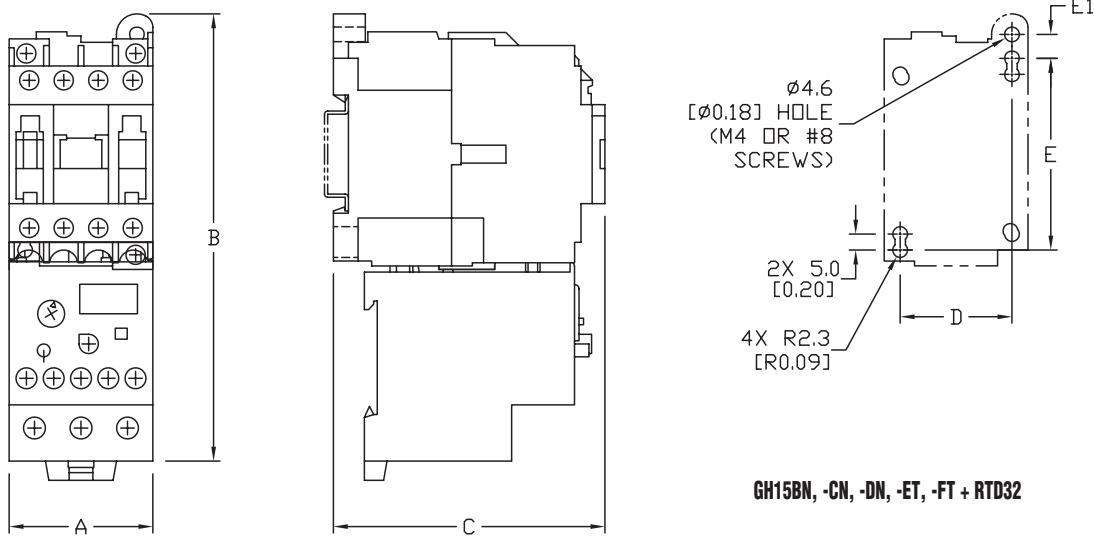


Overload Dimensions mm [inches]														
Contactor Model	Overload Model	Width	Height		Depth	D	E	E1	F	G	H	I		
		A	B	B1									B2	C
GH15BN	RTD32	45.0 [1.77]	146.0 [5.75]	—	—	85.0 [3.35]	35.0 [1.38]	60.0 [2.36]	7.5 [0.30]	—	—	—	—	
GH15CN														
GH15DN														
GH15ET														
GH15FT														
GH15GT	RTD65	68.5 [2.70]	169.0 [6.65]	—	—	109.0 [4.29]	50.0 [1.97]	100.0 [3.94]	—	—	—	—	—	
GH15HT														
GH15JT														
GH15KT														
GH15LT	RTD180	128.0 [5.04]	contactor and overloads do not have a link connector	137.0 [5.39]	81.0 [3.19]	130.0 [5.12]	70.0 [2.76]	100.0 [3.94]	—	—	68.0 [2.68]	40.0 [1.57]	—	
GH15MT				162.0 [6.38]	81.0 [3.19]									
GH15NT														
GH15PT	RTD180-18000			290.0 [11.42]	—	—	145.0 [5.71]	100.0 [3.94]	130.0 [5.12]	—	42.5 [1.67]	68.0 [2.68]	40.0 [1.57]	—
GH15RT	RTD320			145.0 [5.71]	361.0 [14.21]	—	—	208.0 [8.19]	120.0 [4.72]	160.0 [6.30]	—	80.0 [3.15]	68.0 [2.68]	40.0 [1.57]
GH15ST														
GH15TT														

# GH15 Series Overload Relay Dimensions

## 60 mm contactor and overload dimensions

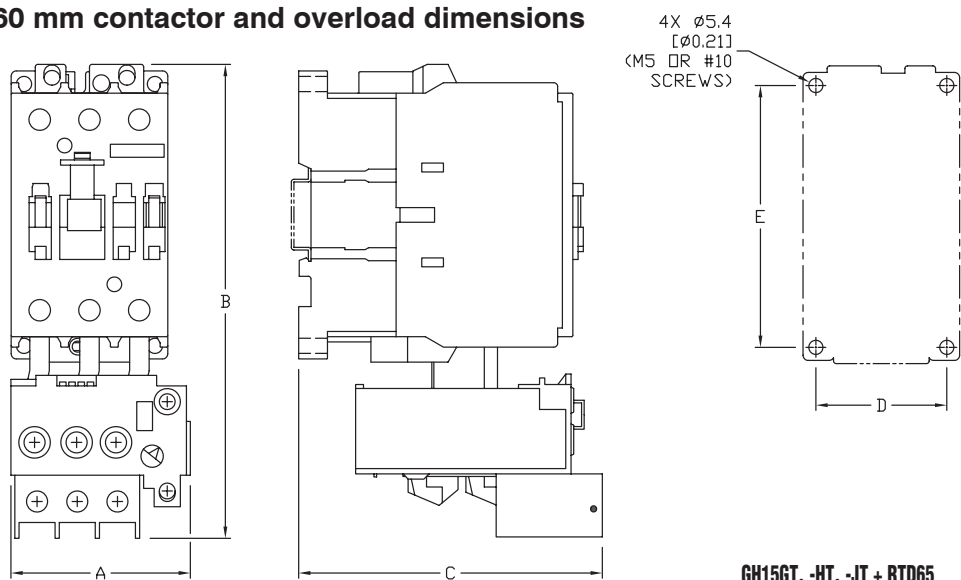


## 79 mm contactor and overload dimensions

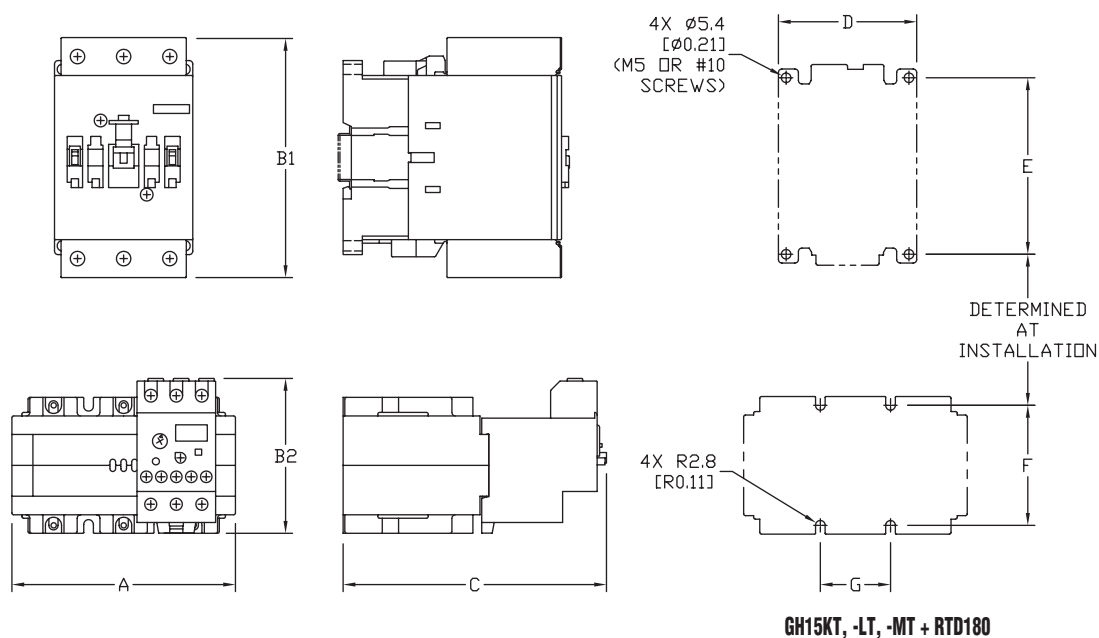


Note: See our website [www.automationdirect.com](http://www.automationdirect.com) for complete engineering drawings

# GH15 Series Overload Relay Dimensions

## 110 mm contactor and overload dimensions

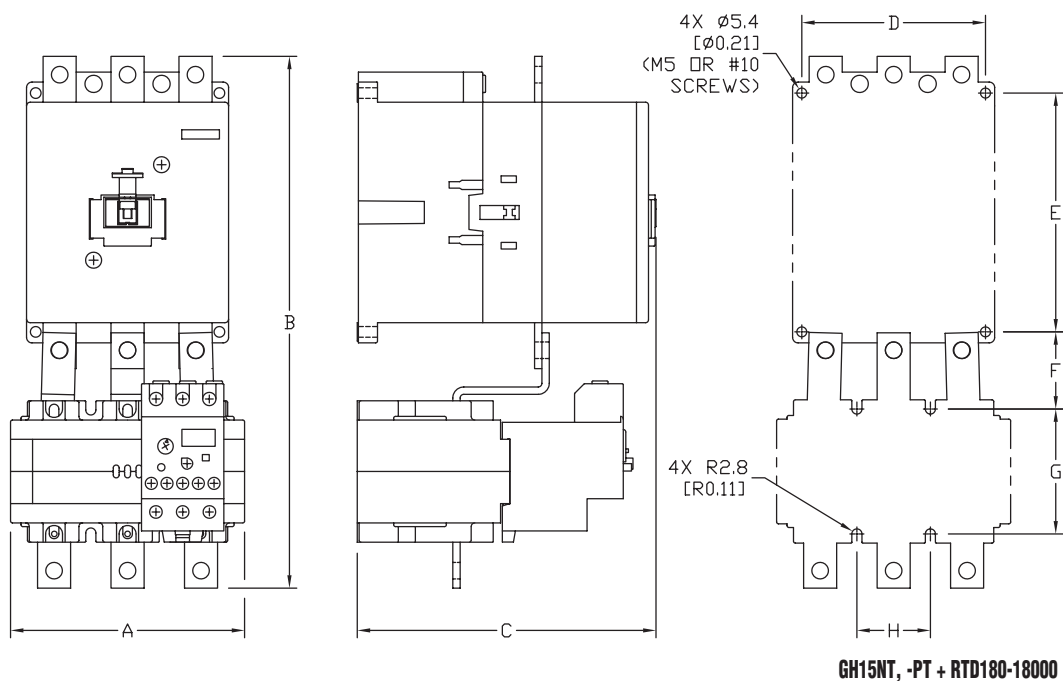

## 145 mm contactor and overload dimensions

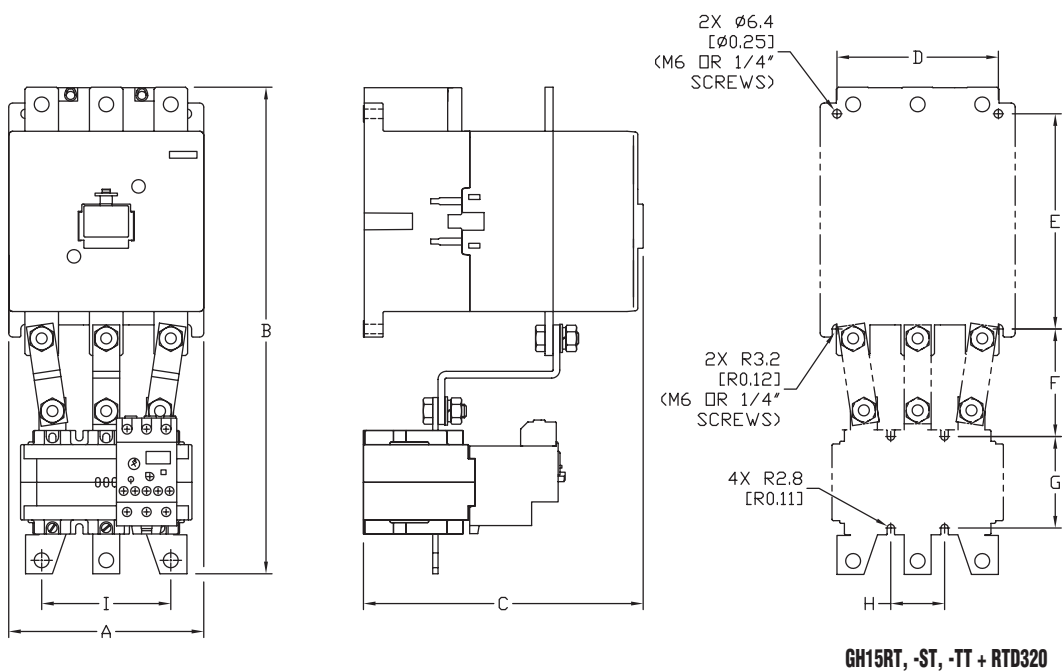

Note: See our website [www.automationdirect.com](http://www.automationdirect.com) for complete engineering drawings

# MS Series Motor Starter/Protector Specifications



## Shunt release


Shunt releases are used for electrically tripping the MSP. These units are easily installed inside the MSP and are offered in 120 and 220/240 volt AC versions.

## Undervoltage release

Undervoltage releases are also installed inside the MSP and trip the device when the monitored voltage drops below a specified level. This is to protect the motor from damage when a low voltage situation occurs. Undervoltage releases may be wired to monitor voltage at point, but are typically wired to two of the incoming lines to the motor circuit. Undervoltage releases are not to be confused with the MSP's internal phase loss protection.

Note: A shunt release and undervoltage release cannot be installed in the same MSP.

## Dimensions (mm)

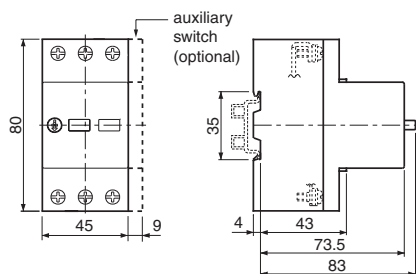


Specifications	
General	
<b>Standards</b>	IEC 947, EN 60947, VDE 0660, EN 60204, VDE 0113
<b>Approvals</b>	UL
<b>Impact Resistance at 20 ms Duration</b>	20g
<b>Ambient Temperature</b>	-25 to 50 °C (open) -25 to 40 °C (enclosed)
<b>Climactic Class</b>	IEC 68-2-3, IEC 68-2-30
<b>Weight</b>	0.55 lb (250g)
<b>Protection Degree</b>	IP 20
Main Circuits	
<b>Insulation Voltage</b>	690V
<b>Insulation Impulse Voltage</b>	6kV
<b>Thermal Current</b>	25A
<b>Utilization Category</b>	AC3
<b>Wire Size Maximum</b>	14-10 AWG
<b>Terminal Torque Specification</b>	2 N·m
Auxiliary Contact	
<b>Insulation Voltage</b>	500V
<b>Thermal Current</b>	6A
<b>Operational Current:</b>	
230V	3.5A
400V	2A
500V	1.5A
<b>Maximum Fuse Size</b>	6A
<b>Wire Size Maximum</b>	18-14 AWG
<b>Note:</b> Phase loss protection only works under load. The phase loss protection is a product of the thermal overload protection circuitry.	

Dimensions and installation data for these products are available on our website, listed under Tech Support/technical and application notes/motor controls/contactors and starters/Application Data for MS25 manual starter.

## Phase loss protection

Phase loss protection is integral to the MSP overload protection system. Phase loss protection works by detecting unequal current in each of the phases. A mechanical device senses the difference in the position of the bi-metallic overload strips and trips the MSP when this occurs. For proper phase loss detection, the MSP must be sized and adjusted to the motor it is protecting. The phase loss protection works only when the motor is running, and is a product of the thermal overload protection circuitry.

Note: The MSP provides magnetic short circuit protection as well as thermal overload protection under IEC 60947 requirements. NEC 430 may require a short circuit protection device upstream from the MSP. It is the responsibility of the user to comply with applicable codes and requirements.

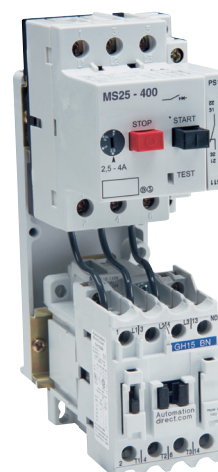

Motor starter/protector combination consisting of a contactor, MSP with optional MS25-PS11 auxiliary contact and a UMP45 adapter plate. Components are sold separately.

# MS Series MSP Selection Guide

Choose your motor starter/protector according to the FLA rating on your motor data plate. Refer to the charts on the following page.

## Accessories

To complete your motor starter/ protector, there are several accessories that may be used. The Auxiliary Switch (contact) has one normally open contact and one normally closed contact. The Shunt Release trips when voltage is applied (120V or 220V). With the Undervoltage Release, your motor is protected from a low voltage situation.

Motor Starter/Protector and Accessories		
Part Number	Price	Description
<b>MS25-16</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 0.1 to 0.16A
<b>MS25-25</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 0.16 to 0.25A
<b>MS25-40</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 0.25 to 0.4A
<b>MS25-63</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 0.4 to 0.63A
<b>MS25-100</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 0.63 to 1A
<b>MS25-160</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 1 to 1.6A
<b>MS25-250</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 1.6 to 2.5A
<b>MS25-400</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 2.5 to 4A
<b>MS25-630</b>	\$43.50	Motor starter protector with thermal overload release, setting range from 4 to 6.3A
<b>MS25-1000</b>	\$50.00	Motor starter protector with thermal overload release, setting range from 6.3 to 10A
<b>MS25-1600</b>	\$50.00	Motor starter protector with thermal overload release, setting range from 10 to 16A
<b>MS25-2000</b>	\$52.00	Motor starter protector with thermal overload release, setting range from 16 to 20A
<b>MS25-2500</b>	\$65.00	Motor starter protector with thermal overload release, setting range from 20 to 25A
<b>MS25-PS11</b>	\$11.50	Auxiliary Switch, 1 N.O. contact, 1 N.C. contact
<b>MS25-A120</b>	\$21.50	120V/60Hz Shunt Release
<b>MS25-U220</b>	\$21.00	220V/60Hz UnderVoltage Release
<b>MS25-U440</b>	\$21.00	440V/60Hz UnderVoltage Release
<b>UMP45</b>	\$13.00	Din Rail Adapter Plate

## MS25 Series Motor Starter/Protector Short Circuit Instantaneous Trip Current and Backup Fuse Recommendations

Manual Starter/ Protector Part Number	Short Circuit Trip Current <sup>1</sup>	Short Circuit Breaking Capacity (kA)				Max Back-Up Fuses Class CC or Class J <sup>2</sup>			
		220/240VAC	460/480VAC	500 VAC	690 VAC	230 VAC	400 VAC	500 VAC	690 VAC
<b>MS25-16</b>	2	50	50	50	50	*	*	*	*
<b>MS25-25</b>	3	50	50	50	50	*	*	*	*
<b>MS25-40</b>	5	50	50	50	50	*	*	*	*
<b>MS25-63</b>	8	50	50	50	50	*	*	*	*
<b>MS25-100</b>	12	50	50	50	50	*	*	*	*
<b>MS25-160</b>	20	50	50	50	50	*	*	*	*
<b>MS25-250</b>	33	50	50	3	2.5	*	*	25	20
<b>MS25-400</b>	44	50	50	3	2.5	*	*	35	25
<b>MS25-630</b>	75	50	50	3	2.5	*	*	50	35
<b>MS25-1000</b>	120	50	6	3	2.5	*	80	50	35
<b>MS25-1600</b>	160	6	4	2.5	2	63	80	63	35
<b>MS25-2000</b>	230	6	4	2.5	2	63	80	63	50
<b>MS25-2500</b>	270	6	4	2.5	2	63	80	63	50

**Note 1:** The short-circuit trip is the current at which the device will instantly trip via the electromagnetic trip circuitry within the MSP. The short circuit breaking capacity is the total branch circuit supply current that the device can safely protect. Fields marked with an asterisk indicate that the device can safely handle any supply current with output fusing.

**Note 2:** The trip currents and back-up fuses are per IEC 60947. Local codes and regulations may require additional short circuit protection. Consult codes applicable to your application.



# GH Series Contactor/MSP Selection Guide

**Step 1:** Select your motor FLA (full load amperage) from column A.

**Step 2:** Go to column B to find your contactor model. Check the maximum amperage rating for that contactor. Ranges overlap and you may have to go to the next larger size.

**Step 3:** After selecting your contactor, go to column C to find your motor starter/protector.

**Step 4:** Order the motor starter/protector, contactor or any other accessories.

Motor Contactor and Motor Starter/Protector (MSP) Selection Guide (when motor FLA is known)				
<b>A</b>	<b>B</b>	<b>C</b>	<b>IEC Frame Size</b>	<b>Special Assembly Note</b>
<b>Current Range Motor FLA</b>	<b>Contactor Model</b>	<b>Motor Starter/Protector Part Number</b>		
0.1 to 0.16 A	GH15BN Up to 9A FLA	<b>MS25-16</b>	45 mm frame size	Note: A DIN rail adapter plate is needed for assembly of the contactor and motor starter/protector. This plate allows two DIN rail devices to be mounted together as an assembly to one piece of DIN rail. The part number is UMP45.
0.16 to 0.25 A		<b>MS25-25</b>		
0.25 to 0.4 A		<b>MS25-40</b>		
0.4 to 0.63 A		<b>MS25-63</b>		
0.63 to 1 A		<b>MS25-100</b>		
0.1 to 1.6 A		<b>MS25-160</b>		
1.6 to 2.5 A		<b>MS25-250</b>		
2.5 to 4 A		<b>MS25-400</b>		
4 to 6.3 A		<b>MS25-630</b>		
6.3 to 10 A		<b>MS25-1000</b>		
10.0 to 16 A	GH15CN Up to 12 A FLA	<b>MS25-1600</b>		
10.0 to 16.0 A	GH15DN Up to 16A FLA	<b>MS25-1600</b>		
16.0 to 20.0 A	GH15ET Up to 25A FLA	<b>MS25-2000</b>		
20.0 to 25.0 A		<b>MS25-2500</b>		

The following charts are to be used as a guideline only. Motor control devices should be sized using the motor FLA (full load amperage) rating. It is the user's responsibility to size the motor starter/protector properly.

**Step 1:** Select your motor horsepower rating in column A based on the rating from the motor data plate or spec. sheet.

**Step 2:** Go to column B to find your contactor model. Check the maximum amperage rating for that contactor. Ranges overlap and you may need to go to the next larger size.

**Step 3:** After selecting your contactor, go to column C to find your motor starter/protector.

Motor Contactor and MSP Selection Guide for 440-480 Volt Three-Phase Motor Control				
<b>A</b>	<b>B</b>	<b>C</b>	<b>IEC Frame Size</b>	<b>Special Assembly Note</b>
<b>Motor Horsepower</b>	<b>Contactor Model</b>	<b>Motor Starter/Protector Part Number</b>		
1/2	GH15BN Up to 9A FLA	<b>MS25-160</b>	45 mm frame size	Note: A DIN rail adapter plate is needed for assembly of the contactor and motor starter/protector. This plate allows two DIN rail devices to be mounted together as an assembly to one piece of DIN rail. The part number is UMP45.
3/4		<b>MS25-160</b>		
1		<b>MS25-250</b>		
1 1/2		<b>MS25-400</b>		
2		<b>MS25-400</b>		
3		<b>MS25-630</b>		
5		<b>MS25-1000</b>		
7 1/2	GH15CN Up to 12A FLA	<b>MS25-1600</b>		
10	GH15DN Up to 16A FLA	<b>MS25-1600</b>		
15	GH15ET Up to 25A FLA	<b>MS25-2500</b>		

Motor Contactor and MSP Selection Guide for 230-240 Volt Three-Phase Motor Control				
<b>A</b>	<b>B</b>	<b>C</b>	<b>IEC Frame Size</b>	<b>Special Assembly Note</b>
<b>Motor Horsepower</b>	<b>Contactor Model</b>	<b>Motor Starter/Protector art Number</b>		
1/2	GH15BN Up to 9A FLA	<b>MS25-250</b>	45 mm frame size	Note: A DIN rail adapter plate is needed for assembly of the contactor and motor starter/protector. This plate allows two DIN rail devices to be mounted together as an assembly to one piece of DIN rail. The part number is UMP45
3/4		<b>MS25-400</b>		
1		<b>MS25-400</b>		
1 1/2		<b>MS25-630</b>		
2		<b>MS25-1000</b>		
3	GH15CN Up to 12A FLA	<b>MS25-1000</b>		
5	GH15DN Up to 16A FLA	<b>MS25-1600</b>		
7 1/2	GH15ET Up to 25A FLA	<b>MS25-2500</b>		

# EAT•N Starters and Contactors Overview



Cutler-Hammer's Freedom series of IEC contactors feature a compact space saving design. Components that meet IEC 60947 are more reliable, of higher quality, and are better matched to their intended application.

## Contactor overview

The Cutler-Hammer CE15 Freedom Series IEC contactors offer big contactor ratings in a compact frame. The 45 mm frame contactors can handle up to 20 hp at 460V. They are easily DIN-rail mountable in either the vertical or horizontal upright position. Note: There is not enough space to assemble two contactors into a reversing contactor.



## Starter overview

The Cutler-Hammer AE16 Series IEC starters are full voltage magnetic starters used for starting polyphase induction motors. These starters also provide protection to the motor against running or stalled overcurrents.

The 45 mm frame starters can handle up to 20 hp at 460V. They are easily DIN-rail mountable in either the vertical or horizontal upright position.

Starter are comprised of a contactor, overload relay and heater packs (sold separately). The overload relays have FLA adjustable dials.

## Starter/contactor features and specifications

- EN60947-4-1 IEC 947-4-1 compliance (international standard for low voltage switchgear and control devices)
- UL-listed and CSA-certified
- 45 mm frame rated maximum 20 hp at 460V; highest horsepower rating in a compact, space-saving design
- Long-life twin break, silver cadmium oxide contacts for excellent conductivity and superior resistance to welding and arc erosion
- 45 mm open contactors, sizes A-F, with DIN-rail or universal base mounting
- DIN rail release mechanism: conveniently located on line side of contactor
- Designed to 2,000,000 electrical and 20,000,000 mechanical operations at maximum hp ratings through 20 hp at 460V. Adequate for most general duty control applications.
- Contactor and terminal markings conform to CENELEC EN50011.
- Holding circuit contact(s) supplied standard
- Lugs supplied standard on sizes A-F
- Tape wound coil
- Straight-through wiring

# EAT•N Thermal Overload Relays Overview

Overload relays are provided to protect motors, motor control apparatus and motor-branch circuit conductors against excessive heating due to motor overloads and failure to start.

The C306 overload relay is designed for use with the Cutler-Hammer series non-reversing contactors.

## Time-current characteristics

The time-current characteristics of an overload relay define its operating time at various multiples of its current setting. Underwriters Laboratory (UL) performs tests in accordance with NEMA Standards and the NEC as follows:

- When tested at 100 percent of its current rating, the overload relay shall trip ultimately.
- When tested at 200 percent of its current rating, the overload relay shall trip in not more than eight minutes.
- When tested at 600 percent of its current rating, the overload relay shall trip in not more than 10 or 20 seconds, depending on the class of the relay.

## Definitions

**Current rating:** the minimum current at which the relay will trip. Per NEC, an overload must ultimately trip at 125% of FLA current (heater) setting for a 1.15 service factor motor, and 115% FLA for a 1.0 service factor motor. **Current setting:** the FLA (Full Load Amperage) of the motor and thus the overload heater pack setting.

**Example:** 600% of current rating is defined as 750% (600 X 1.25) of FLA current (heater) setting for a 1.15 service factor motor. A 10A heater setting must trip in 20 seconds or less at 75A motor current for a Class 20 relay.

## Thermal overload relays feature:

- Selectable manual or automatic reset operations
- Interchangeable Class 20 heater packs  $\pm 24\%$  to match motor FLA and calibrated for 1.0 and 1.15 service factors (ordered separately)
- Integral load lugs which allow field wiring prior to heater pack installation
- Single-phase protection
- Bimetallic, ambient compensated operation
- Trip-free mechanism
- Electrically-isolated N.O. or N.C. contacts
- Overload trip indication
- Fingerproof terminals to reduce possibility of shock
- UL-listed, CSA-certified, NEMA-compliant

## Overload relay setting

### FLA dial adjustment

For motors having a 1.15 service factor, rotate the FLA adjustment dial to correspond to the motor's FLA rating. Estimate the dial position when the motor FLA falls between two letter values, as shown in the example.

For motors having a 1.0 service factor, or to meet IEC 947 requirements, rotate the FLA dial one-half of a position counterclockwise (CCW).

### Manual/automatic reset


The overload relay is factory set at M for manual reset operation. For automatic reset operation, turn the reset adjustment dial to the A position, as shown in the illustration. Automatic reset is not intended for two-wire control devices.

### Test for trip indication

To test overload relay for trip indication when in manual reset, pull out the blue RESET button. An orange flag will appear indicating that the device has tripped. Push RESET button in to reset.


Thermal Overload Relays			
IEC	Max. Amps	No. of Poles	Open Type
A-F	32	3	C306DN3B

**Price: \$161.25**

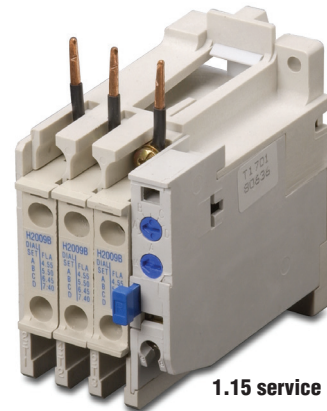


**1.15 service factor**

Heater packs sold separately




**Example of 12.0 FLA setting for heater pack number H2011B showing position for 1.0 or 1.15 service factor motors.**




**Example of setting of manual reset.**

## Class 20 overload relay 25°C open rating

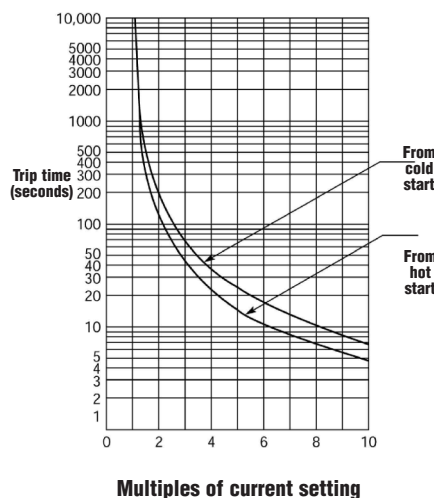


## Overload terminals 95/96 and 98/97

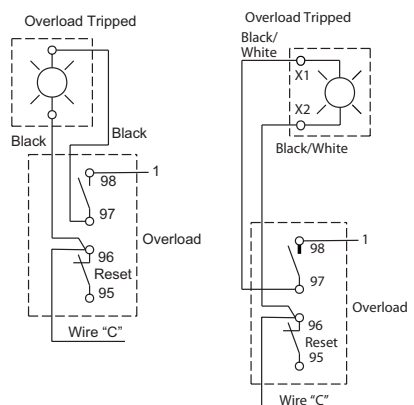


**Warning:** To provide continued protection against fire or shock hazard, the complete relay must be replaced if burnout of the heater element occurs.

# EAT•N Motor Control Accessories

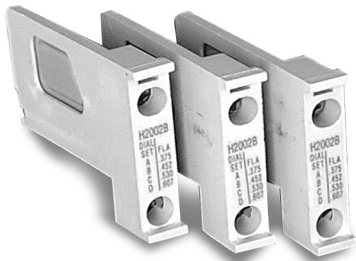

## Heater packs


Heater packs are used with the C306D-N3B overload relay. The load lugs are built into the overload base to allow load wiring prior to heater pack installation. Heater packs come in packs of three.

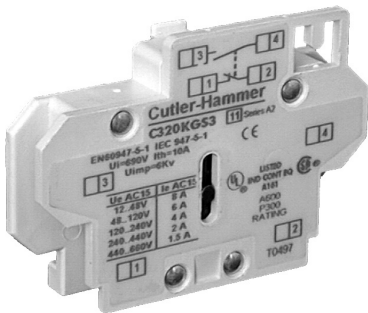

## Auxiliary contacts

Auxiliary contacts are designed for installation on the Cutler-Hammer Freedom series contactors and starters. The snap-on design makes them quick and easy to install.

The bifurcated (i.e. contact is split into two fingers for redundant contact) design of the contact blocks features silver cadmium alloy contacts.

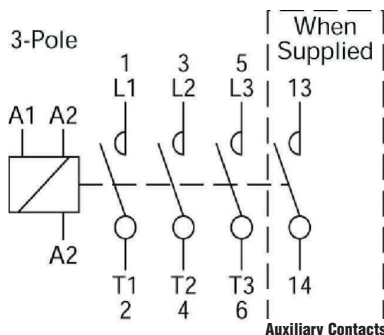


## Contactors

Standard Trip-Class 20 Heater Packs

Part Number (Three heater packs)	Price	Max. Amps	Motor Full Load Ampere Rating Dial Position			
			A	B	C	D
H2001B-3	\$86.00	32	.254	.306	.359	.411
H2002B-3	\$86.25	32	.375	.452	.530	.607
H2003B-3	\$86.25	32	.560	.676	.791	.907
H2004B-3	\$86.25	32	.814	.983	1.15	1.32
H2005B-3	\$86.25	32	1.20	1.45	1.71	1.96
H2006B-3	\$86.25	32	1.79	2.16	2.53	2.90
H2007B-3	\$86.25	32	2.15	2.60	3.04	3.49
H2008B-3	\$86.25	32	3.23	3.90	4.56	5.23
H2009B-3	\$86.25	32	4.55	5.50	6.45	7.40
H2010B-3	\$86.25	32	6.75	8.17	9.58	11.0
H2011B-3	\$86.25	32	9.14	10.8	12.4	14.0
H2012B-3	\$86.25	32	14.0	16.9	19.9	22.8
H2013B-3	\$86.25	32	18.7	22.7	26.7	30.7
H2014B-3	\$86.25	32	23.5	28.5	33.5	38.5

## terminal markings

Contactors terminals are identified by a two-digit number in accordance with international standards approved by CENELEC (European Committee for Electrotechnical Standardization). This distinctive number is marked on the top nameplate and designates the type and quantity of built-in auxiliary contacts. The first digit indicates the quantity of N.O. contacts and the second digit indicates the quantity of N.C. contacts. Example: 10E indicates a contactor with one N.O. and no N.C. auxiliary contacts (factory supplied). In addition, all terminals conform to both CENELEC and NEMA requirements. Auxiliary contact terminals use the first digit to indicate location and the second digit to indicate status (1-2 means N.C. and 3-4 means N.O.) Example: 13-14 indicates the first auxiliary contact and it is a N.O. See the diagram to the left for the contact label.



DIN-rail and panel mounting adapters are required when overload relays need to be separately mounted due to space requirements. The terminal base adapter includes line terminals and connects with the overload relays.

Mounting Adapters

Part Number	Price	Description
C306TB1	\$27.50	Mounting Adapter for 32A Overload Relay

## Mounting adapters

Auxiliary Contacts

Part Number	Price	Description
C320KGS3	\$60.50	1 N.O. and 1 N.C.
C320KGS1	\$43.75	1 N.O.



# CE15 Contactor Specifications

45 mm Cutler-Hammer CE15 Contactor Specifications								
Contactor Model			CE15AN	CE15BN	CE15CN	CE15DN	CE15EN	CE15FN
Insulation Voltage	AC	(V)	690 Volts AC					
Ampere Rating	Max. UL Current (AC3) <small>note 1</small>	(A)	7	10	12	18	25	32
	AC1 Thermal Current (600V) <small>note 2</small>	(A)	20	20	20	32	32	32
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	1.5	2	3	5	5	7.5
	230/240V	(hp)	1.5	2	3	5	7.5	10
	460/480V	(hp)	3	5	7.5	10	15	20
	575V	(hp)	5	7.5	10	15	20	25
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	0.25	0.5	0.5	1	2	2
	230/240V	(hp)	0.5	1	2	3	3	5
Maximum Power (kw) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	1.1	1.5	2.2	4	5.5	7.5
	415/440V	(kW)	2.2	4	5.5	7.5	11	15
	500/550V	(kW)	2.2	4	5.5	7.5	11	15
	500V	(kW)	4	5.5	7.5	11	15	18.5
	600V	(kW)	1.5	2.2	4	5.5	7.5	10
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>					
SCCR			5kA					
Coil Voltage Operating Limits			A.C.Pick-Up 85-110% Rated Control Voltage / A.C. Drop-Out 20-75% Rated Control Voltage					
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			A.C. Pick-Up (VA) 80-100 / A.C. Sealed (VA) 9-12					
Power Factor			Pick-Up .65 / Sealed .35					
Coil Operating Time at Rated Coil Voltage			Pick-Up (ms) 10-25 / Drop-Out (ms) 6-18					
Maximum Operating Frequency (No-Load Operation)			3000 Operations / Hour					
Mechanical Durability			10,000,000 Operations					
Electrical Durability			1,000,000 Operations					
Operating Ambient Temperature			-25° to +55°C					
Electrical Protection Degree			IP20 (IP10 for GH15ET and GH15FT)					
Mounting			Screw or 35mm DIN Rail					
Wire Sizes	Line / Load		#10 - #14 AWG stranded recommended			#14 - #8 stranded recommended		
	Control & Auxiliary Contacts		#12 - #14 AWG (stranded recommended)					
Line/Load Tighting Torque	Nm (Inch Pounds)		7	7	7	15	15	15

## Notes

1. AC3 type loads consist of squirrel cage three phase motors.

2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)

3. Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that Type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations and shall be suitable for further use. The risk of minor contact welding is possible.

4. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

Cutler-Hammer CE15 Series Contactor Part Numbers									
IEC FRAME SIZE	Cutler-Hammer Contactor Model	Part Number	Price	Number of Contacts			Coil Voltage and Frequency	Additional Contacts	
				Main	Auxiliary Contacts Included			Maximum Contact Block Arrangement	Type of Additional Contact Block
					N.O.	N.C.			
45 mm	CE15AN	CE15AN4AB	\$176.50	4			110-120VAC 50-60Hz	Up to two auxiliary contact blocks may be added to CE15 contactors (one per side).	Side mount C320KGS3: 1 N.O. / 1 N.C. C320KGS1: 1 N.O. / 1 N.C.
		CE15AN4BB	\$176.50	4			220-240VAC 50-60Hz		
	CE15BN	CE15BN4AB	\$181.00	4			110-120VAC 50-60Hz		
		CE15BN4BB	\$181.00	4			220-240VAC 50-60Hz		
	CE15CN	CE15CN4AB	\$224.50	4			110-120VAC 50-60Hz		
		CE15CN4BB	\$224.50	4			220-240VAC 50-60Hz		
	CE15DN	CE15DNS3AB	\$266.50	3	1		110-120VAC 50-60Hz		
		CE15DNS3BB	\$266.50	3	1		220-240VAC 50-60Hz		
	CE15EN	CE15ENS3AB	\$295.00	3	1		110-120VAC 50-60Hz		
		CE15ENS3BB	\$295.00	3	1		220-240VAC 50-60Hz		
	CE15FN	CE15FNS3AB	\$336.00	3	1		110-120VAC 50-60Hz		
		CE15FNS3BB	\$336.00	3	1		220-240VAC 50-60Hz		

Note: Holding circuit contact(s) supplied standard: a N.O. auxiliary contact block is mounted on the right-hand side. (On Sizes A-C, contact occupies fourth power pole position - no increase in width.)

# AE16 Starter Specifications

45 mm Cutler-Hammer AE16 Starter Specifications								
Starter Model			AE16AN	AE16BN	AE16CN	AE16DN	AE16EN	AE16FN
Insulation Voltage	AC	(V)	690 Volts AC					
Ampere Rating	Max. UL Current (AC3) <small>note 1</small>	(A)	7	10	12	18	25	32
	AC1 Thermal Current (600V) <small>note 2</small>	(A)	20	20	20	32	32	32
Maximum Power (hp) of Three-Phase Motors	200V	(hp)	1.5	2	3	5	5	7.5
	230/240V	(hp)	1.5	2	3	5	7.5	10
	460/480V	(hp)	3	5	7.5	10	15	20
	575V	(hp)	5	7.5	10	15	20	25
Maximum Power (hp) of Single-Phase Motors	115V	(hp)	0.25	0.5	0.5	1	2	2
	230/240V	(hp)	0.5	1	2	3	3	5
Maximum Power (kw) of Three-Phase Motors AC3 Category <small>note 1</small>	230/240V	(kW)	1.1	1.5	2.2	4	5.5	7.5
	415/440V	(kW)	2.2	4	5.5	7.5	11	15
	500/550V	(kW)	2.2	4	5.5	7.5	11	15
	500V	(kW)	4	5.5	7.5	11	15	18.5
	600V	(kW)	1.5	2.2	4	5.5	7.5	10
Auxiliary Contacts Electrical Capacity			A600 <small>note 4</small>					
SCCR			5kA					
Coil Voltage Operating Limits			A.C.Pick-Up 85-110% Rated Control Voltage / A.C. Drop-Out 45% Rated Control Voltage					
Average Coil Power Requirements / Coil current (A) = VA/Coil Voltage			A.C. Pick-Up (VA) 80-100 / A.C. Sealed (VA) 7.5-10					
Power Factor			Pick-Up .65 / Sealed .35					
Coil Operating Time at Rated Coil Voltage			Pick-Up (ms) 12 / Drop-Out (ms) 12					
Maximum Operating Frequency (No-Load Operation)			Pick-Up (ms) 12 / Drop-Out (ms) 12					
Mechanical Durability			10,000,000 Operations					
Electrical Durability in Operations (AC3) <small>note 1</small>			2,000,000	2,000,000	2,220,222	1,300,000	1,600,000	1,500,000
Operating Ambient Temperature			-25° to +55°C					
Electrical Protection Degree			IP20 (IP10 for AE16DN,AE16EN, AE15FN)					
Mounting			Screw or 35mm DIN Rail					
Wire Sizes	Line / Load		#12 - 16 AWG stranded recommended			#16 - #8 stranded recommended		
	Control & Auxiliary Contacts		#12 - #14 AWG (stranded recommended)					
Line/Load Tighting Torque	Nm (Inch Pounds)		7			15		

## Notes

- AC3 type loads consist of squirrel cage three phase motors.
- AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)
- Type 2 coordination is a protection category for IEC 60947-4-1. Section 8.2.5.1 specifies that type 2 coordination requires that, under short circuit conditions, the contactor or starter shall cause no danger to persons or installations and shall be suitable for further use. The risk of minor contact welding is possible.
- NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page 17-113.

Cutler-Hammer AE16 Series Starter Part Numbers									
IEC FRAME SIZE	Cutler- Hammer Contactor Model	Part Number	Price	Number of Contacts			Coil Voltage and Frequency	Additional Contacts	
				Main	Auxiliary Contacts Included			Maximum Contact Block Arrangement	Type of Additional Contact Block
					N.O	N.C.			
45 mm	AE16AN	AE16ANSOAC	\$265.00	3	1		110-120VAC 50-60Hz	Up to two auxiliary contact blocks may be added to AE16 contactors (one per side).	Side mount C320KGS3 (1 NO and 1 NC) C320KGS1 (1 NO and 1 NC)
		AE16ANSOBC	\$289.50	3	1		220-240VAC 50-60Hz		
	AE16BN	AE16BNSOAC	\$295.25	3	1		110-120VAC 50-60Hz		
		AE16BNSOBC	\$295.25	3	1		220-240VAC 50-60Hz		
	AE16CN	AE16CNSOAC	\$337.25	3	1		110-120VAC 50-60Hz		
		AE16CNSOBC	\$337.25	3	1		220-240VAC 50-60Hz		
	AE16DN	AE16DNSOAC	\$365.75	3	1		110-120VAC 50-60Hz		
		AE16DNSOBC	\$365.75	3	1		220-240VAC 50-60Hz		
	AE16EN	AE16ENSOAC	\$393.75	3	1		110-120VAC 50-60Hz		
		AE16ENSOBC	\$393.75	3	1		220-240VAC 50-60Hz		
	AE16FN	AE16FNSOAC	\$436.25	3	1		110-120VAC 50-60Hz		
		AE16FNSOBC	\$436.25	3	1		220-240VAC 50-60Hz		


Note: Holding circuit contact(s) supplied standard: a N.O. auxiliary contact block is mounted on the right-hand side. (On Sizes A-C, contact occupies fourth power pole position-no increase in width.)




# EAT•N Motor Control Dimensions

Size and Dimensions (Inches)										
Product	IEC Size	Contactor Type								Ship Weight in Pounds
		Wide	High	Deep	Mounting					
		A	B	C	D	E	E1	F	G	
Starters	A-F	1.80	5.86	3.28	1.36	5.19	5.39	-	54	1.75
Contactors	A-C	1.80	2.96	3.26	1.36	1.96	-	-	54	1.3
Contactors	D-F	1.80	2.96	3.26	1.36	1.96	-	-	54	1.4
Overload Relays	32 Amp	1.77	4.13	3.69	1.36	3.74	-	-	-	0.8

## IEC contactor sizes A-F, CE15

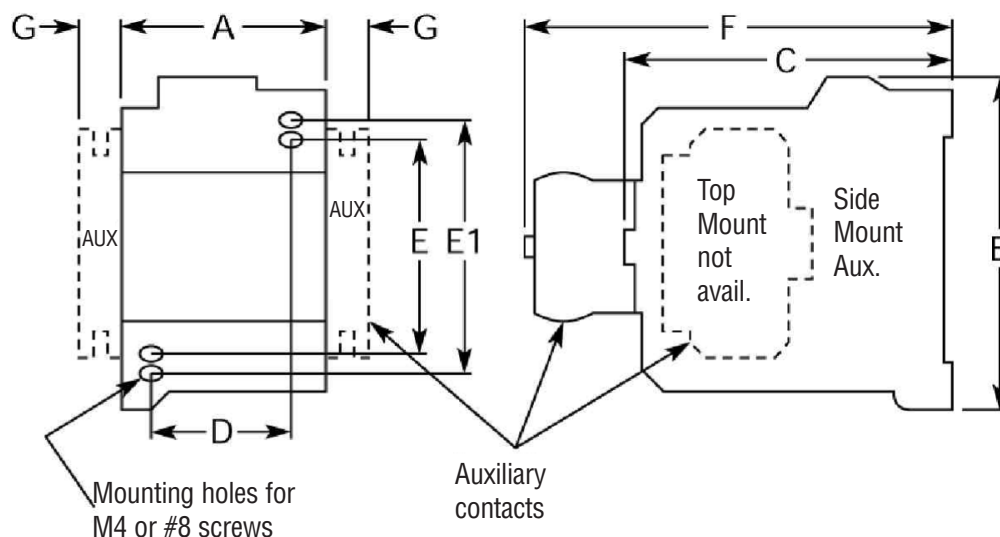

## IEC starter sizes A-F, AE16

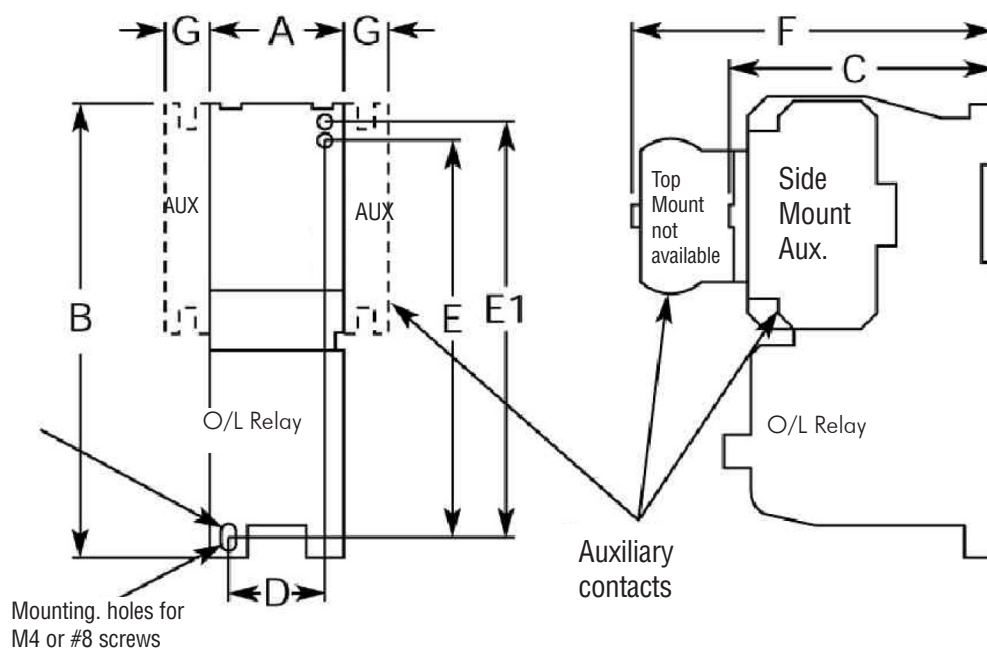

# Electrical Ratings Charts

## Motor Current Ratings

Full Load Ampere (FLA) Rating for AC Induction Motors							
Motor HP	115 VAC		200 VAC		230 VAC		460 VAC
	1-Phase (A)	3-Phase (A)	1-Phase (A)	3-Phase (A)	1-Phase (A)	3-Phase (A)	3-Phase (A)
1/10	3.0	---	---	---	1.5	---	---
1/8	3.8	---	---	---	1.9	---	---
1/6	4.4	---	2.5	---	2.2	---	---
1/4	5.8	---	3.3	---	2.9	---	---
1/3	7.2	---	4.1	---	3.6	---	---
1/2	9.8	4.4	5.6	2.5	4.9	2.2	1.1
3/4	13.8	6.4	7.9	3.7	6.9	3.2	1.6
1	16.0	8.4	9.2	4.8	8.0	4.2	2.1
1 1/2	20.0	12.0	11.5	6.9	10	6.0	3.0
2	24.0	13.6	13.8	7.8	12	6.8	3.4
3	34.0	19.2	19.6	11.0	17	9.6	4.8
5	56.0	30.4	32.2	17.5	28	15.2	7.6
7 1/2	80.0	44.0	46.0	25.3	40	22	11
10	100.0	56.0	57.5	32.2	50	28	14
15	---	84.0	---	48.3	---	42	21
20	---	108.0	---	62.1	---	54	27
25	---	136.0	---	78.2	---	68	34
30	---	160.0	---	92	---	80	40
40	---	208.0	---	120	---	104	52
50	---	260.0	---	150	---	130	65
60	---	---	---	177	---	154	77
75	---	---	---	221	---	192	96
100	---	---	---	285	---	248	124

*The motor currents are approximate and not guaranteed to be accurate. This chart is provided as a guideline only. Values were extrapolated from NEC Tables 430-148 and 430-150. Motor currents should be taken from the motor's nameplate. It is the user's responsibility to properly size their motor control devices.*

## Control Circuit Contact Electrical Ratings

NEMA Mechanical Switching Ratings and Test Values for DC Control Circuit Contacts					
Contact Rating Designation	Thermal Continuous Test Current (A)	Maximum Make or Break DC Current (A)			Voltamperes
		125 Volts	250 Volts	301 to 600 Volts	
P300	5.0	1.1	0.55	---	138
P600	5.0	1.1	0.55	0.20	138
Q300	2.5	0.55	0.27	---	69
Q600	2.5	0.55	0.27	0.10	69
R300	1.0	0.22	0.11	---	28

*This chart is provided as a guideline only, and the ratings and values are not guaranteed to be accurate. It is the users' responsibility to properly size their control circuit devices. The chart values are from NEMA Standard ICS 5-2000, Table 1-4-2.*

NEMA Mechanical Switching Ratings and Test Values for AC Control Circuit Contacts											
Contact Rating Designation	Thermal Continuous Test Current (A)	Maximum AC Current, 50/60Hz (A)								Voltamperes	
		120 Volts		240 Volts		480 Volts		600 Volts			
		Make	Break	Make	Break	Make	Break	Make	Break	Make	Break
A300	10	60	6.00	30	3.00	---	---	---	---	7200	720
A600	10	60	6.00	30	3.00	15	1.50	12	1.20	7200	720
B300	5	30	3.00	15	1.50	---	---	---	---	3600	360
B600	5	30	3.00	15	1.50	7.5	0.75	6	0.60	3600	360
C600	2.5	15	1.5	7.5	0.75	3.75	0.375	3.00	0.30	1800	180
This chart is provided as a guideline only, and the ratings and values are not guaranteed to be accurate. It is the users' responsibility to properly size their control circuit devices. The chart values are from NEMA Standard ICS 5-2000, Table 1-4-1.											

# IEC Utilization Categories

IEC Utilization Categories for Low Voltage Switchgear and Control Gear			
Current	Category	Typical Applications	Relevant IEC Product Standard (3)
AC	AC-1	Non inductive or slightly inductive loads, resistance furnaces, heaters	60947-4
	AC-2	Slip-ring motors: switching off	
	AC-3	Squirrel-cage motors: starting, switching off motors during running most typical industrial application	
	AC-4	Squirrel-cage motors: starting, plugging (1), inching (2)	
	AC-5a	Switching of electric discharge lamps	
	AC-5b	Switching of incandescent lamps	
	AC-6a	Switching of transformers	
	AC-6b	Switching of capacitor banks	
	AC-7a	Slightly inductive load in household appliances: mixers, blenders	
	AC-7b	Motor-loads for household applications: fans, central vacuum	
	AC-8a	Hermetic refrigerant compressor motor control with manual resetting overloads	60947-5
	AC-8b	Hermetic refrigerant compressor motor control with automatic resetting overloads	
	AC-12	Control of resistive loads and solid state loads with opto-coupler isolation	
	AC-13	Control of solid state loads with transformer isolation	60947-3
	AC-14	Control of small electromagnetic loads	
	AC-15	Control of AC electromagnetic loads	60947-3
	AC-20	Connecting and disconnecting under no-load conditions	
	AC-21	Switching of resistive loads, including moderate loads	
	AC-22	Switching of mixed resistive and inductive loads, including moderate overloads	
	AC-23	Switching of motor loads or other highly inductive loads	
AC and DC	A	Protection of circuits, with no rated short-time withstand current	60947-2
	B	Protection of circuits, with a rated short-time withstand current	
DC	DC-1	Non-Inductive or slightly inductive loads, resistance furnaces, heaters	60947-4
	DC-3	Shunt-motors, starting, plugging (1), inching (2), dynamic breaking of motors	
	DC-5	Series-motors, starting, plugging (1), inching (2), dynamic breaking of motors	
	DC-6	Switching of incandescent lamps	
	DC-12	Control of resistive loads and solid state loads with opto-coupler isolation	60947-5
	DC-13	Control of DC electromagnetics	
	DC-14	Control of D.C. electromagnetic loads having economy resistors in the circuit	
	DC-20	Connecting and disconnecting under no-load conditions	60947-3
	DC-21	Switching of resistive loads, including moderate overloads	
	DC-22	Switching of mixed resistive and inductive loads, including moderate overloads (i.e. shunt motors)	
	DC-23	Switching of highly inductive loads (i.e. series motors)	

(1) *Plugging - Stopping a motor rapidly by reversing the primary power connections.*

(2) *Inching - Energizing a motor repeatedly for short periods to obtain small incremental movements.*

(3) *IEC Standards must be purchased from the International Electrotechnical Commission*

# BRYANT®

# Manual Motor Controllers / Disconnects

## Overview

Bryant motor controllers are “suitable as motor disconnects,” which means that a motor controller marked as such can also be used as a motor disconnect. From a safety perspective, this means a motor load can now be isolated and locked-out in one convenient location. By utilizing Bryant’s compact motor controllers and disconnects, you benefit through the convenience of one device fulfilling two needs. A motor controller is simply used to activate a motor load “ON” or “OFF” and perform this function thousands of times. A motor disconnect, however, is designed and tested to withstand motor overloads and high short-circuit fault currents while maintaining the ability to disconnect the motor for service or maintenance.

According to the 2008 National Electric Code (NEC®) article 430.102, all motor controllers must have a disconnecting means located within the line of sight of the controller. Because the NEC® recognizes that a controller and disconnect can be the same unit (article 430.109), Bryant has designed a compact controller that will also meet the rigorous demands of a motor disconnect. Bryant’s controllers are listed as “Suitable as Motor Disconnect” under UL Standard 508 – Industrial Control Equipment – qualifying them to perform both operations in one compact package.



## TECH-SPEC®

## Features and Benefits

- Thermoset body provides high resistance to electrical arc tracking.
- Silver alloy contacts for excellent conductivity and extended life
- Available NEMA 1, 3/3R and 4X enclosures
- Undrilled enclosures available for custom placement of entry positions
- Lockout / Tagout capability
- Switch sizes in 30, 40 and 60 Amps up to 600 VAC
- 2-pole and 3-pole switch configurations
- Use in indoor and outdoor environments
- Quick make, slow break design
- UL Listed as “Suitable as Motor Disconnect” under UL 508
- Wiring conduit knockouts on NEMA 1 and 3R controllers / disconnects
- Compact design

## Applications

- Can be used locally at the motor
- “Suitable as a motor disconnect”
- Across-the-line motor starting
- Industrial machines
- Automation
- Switch contacts AC rated only (not DC rated).

## Listings

- UL Listed and Recognized Category NLRV, UL file #E70402
- CSA Certified File #6186
- Flammability - UL94HB/V
- Standards
  - UL508
  - UL60947-1
  - CSA C22.2 No 14



# BRYANT®

## Quick Selection Guide

# Manual Motor Controllers / Disconnects


## TECH·SPEC®



Toggle Switch AC Motor Controllers / Disconnects						
Part Number	Description	Amperage	Phase	Poles	Wired	Price
30002D	Switch only, 30A, 2-pole, 15 HP @ 600 VAC - Standard Toggle	30	1	2	Back and Side	\$23.50
30003D	Switch only, 30A, 3-pole, 20 HP @ 600 VAC - Standard Toggle	30	3	3	Back and Side	\$50.00
4002*	Switch only, 40A, 2-pole, 5 HP @ 600 VAC - Standard Toggle	40	1	2	Side	\$27.00
40002D	Switch only, 40A, 2-pole, 15 HP @ 600 VAC - Standard Toggle	40	1	2	Side	\$41.00
40003D	Switch only, 40A, 3-pole, 20 HP @ 600 VAC - Standard Toggle	40	3	3	Side	\$66.00
60002D	Switch only, 60A, 2-pole, 20 HP @ 600 VAC - Standard Toggle	60	1	2	Back	\$71.00
60003D	Switch only, 60A, 3-pole, 30 HP @ 600 VAC - Standard Toggle	60	3	3	Back	\$87.00
*Motor controller only ("Not suitable as disconnect")						

Toggle Switch AC Motor Controller Accessories		
Part Number	Description	Price
30003FG	Finger Guards; red; for use with 30A and 40A Switches (Set of 2)	\$6.00
30100	NEMA 1 Enclosure without switch, use with 30002D and 30003D	\$16.50

**Example**  
Back and Side Wired



Enclosed Toggle Switch AC Motor Controllers / Disconnects							
Part Number	Description	Included Switch	Amperage	Phase	Poles	Enclosure	Price
30102D	Enclosed, 30A, 2-pole, NEMA 1	30002D Standard Toggle	30	1	2	NEMA 1 Metal	\$30.50
30103D	Enclosed, 30A, 3-pole,NEMA 1	30003D Standard Toggle	30	3	3		\$65.00
30302D	Enclosed, 30A, 2-pole, Aluminum	30002D Standard Toggle	30	1	2	NEMA 3R Metal	\$44.50
30303D	Enclosed, 30A, 3-pole, Aluminum	30003D Standard Toggle	30	3	3		\$81.00
30322D*	Enclosed, 30A, 2-pole, Plastic	30002DS Short Toggle	30	1	2	NEMA 3R Thermo-plastic	\$53.00
30323D*	Enclosed, 30A, 3-pole, Plastic	30003DS Short Toggle	30	3	3		\$56.00
60302D*	Enclosed, 60A, 2-pole, Aluminum	60002FWD Standard Toggle	60	1	2	NEMA 3R Metal	\$104.00
60303D*	Enclosed, 60A, 3-pole, Aluminum	60003FWD Standard Toggle	60	3	3		\$122.00
*Switch is not available as a separate item							

NEMA 4X Enclosed Rotary Switch AC Motor Controllers / Disconnects							
Part Number	Description	Included Switch	Amperage	Phase	Poles	Enclosure	Price
664X33D*	Enclosed, 30A, 3-pole, NEMA 4X	66033D Rotary	30	3	3	NEMA 4X Thermoplastic	\$110.00
664X63D*	Enclosed, 60A, 3-pole, NEMA 4X	66033D Rotary	60	3	3		\$137.00
*Switch is not available as a separate item							

NEMA 4X Enclosed Rotary Switch AC Motor Controller Accessories		
Part Number	Description	Price
30003FG	Finger Guards; red; for use with 30A and 40A Switches (Set of 2)	\$6.00
660AC*	SPDT Auxiliary contact NO / NC; includes one contact for use with push-on terminals; use with 664X33D and 664X63D	\$15.50
6610MK	Rotary handle replacement kit, use with 664X33D and 664X63D. (Nema 1 rating) Must use gasket replacement kit 664XWP for NEMA 4X rating.	\$12.00
664XWP	NEMA 4X enclosure gasket replacement kit; includes 4 seals, neoprene bushing and 3 o-rings; use with 664X33D and 664X63D	\$8.25
664XFT	NEMA 4X enclosure mounting feet	\$7.25
6603N	NEMA 4X enclosure neutral buss connector	\$37.00
*660AC Terminal is a quick connect terminal #250		



# BRYANT®

## Manual Motor Controllers / Disconnects

### Toggle Switch


Toggle AC manual motor controllers can be integrated into your equipment design as a manual motor controller or as a motor disconnect. Quick-make and slow break operation provides reliability and long life. Each toggle switch controller has a 10,000 amp high fault short circuit withstand rating.

### Toggle Switch Features

#### TECH-SPEC®

##### Thermoset Body

- Provides high resistance to electrical arc tracking
- Withstands high temperatures
- Excellent dimensional stability
- Superior dielectric strength

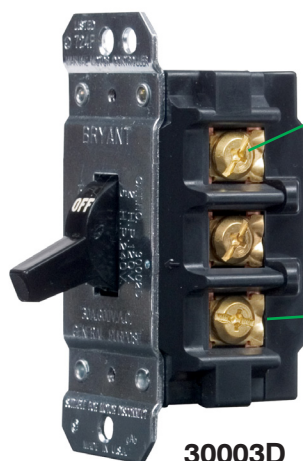

30003D



30003FG

#10 brass terminal screw;  
clamping plate for back or  
side wiring

Optional side guard for  
close wall applications and  
finger safe environment



Silver alloy contacts

- Four large contacts per pole
- Excellent conductivity
- Extended life



40002D



30003FG

High Temperature  
thermoset body

Optional side guard for  
close wall applications and  
finger safe environment



60003D

Steel screws and copper  
terminals

Recessed wiring wells for  
finger safe environments



# BRYANT® Manual Motor Controllers / Disconnects

## Toggle Switch

Toggle Switch AC Motor Controllers / Disconnects									
Part Number	Amperage	Phase	Poles	HP Ratings				Wired	Price
				120 VAC	240 VAC	480 VAC	600 VAC		
<b>30002D</b>	30	1	2	2	5	10	15	Back and Side	\$23.50
<b>30003D</b>	30	3	3	3	7.5	15	20	Back and Side	\$50.00
<b>4002*</b>	40	1	2	2	5	10	15	Side	\$27.00
<b>40002D</b>	40	1	2	2	5	10	15	Side	\$41.00
<b>40003D</b>	40	3	3	3	7.5	15	20	Side	\$66.00
<b>60002D</b>	60	1	2	—	10	15	20	Back	\$71.00
<b>60003D</b>	60	3	3	—	10	25	30	Back	\$87.00

\*Motor controller only ("Not suitable as disconnect")

Toggle Switch AC Motor Controller Accessories		
Part Number	Description	Price
<b>30003FG</b>	Finger Guards; red; for use with 30A and 40A Switches (Set of 2)	\$6.00
<b>30100</b>	NEMA 1 Enclosure without switch, use with 30002D and 30003D	\$16.50



**30002D**



**40003D**




**4002**



**60002D**

**TECH·SPEC®**




**30003FG**




**30100**

## Dimensions


Units: inches [mm]

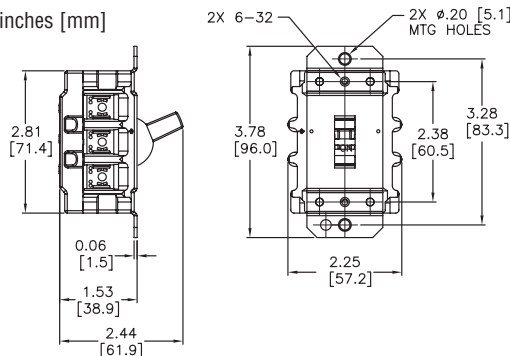

**30002D, 30003D, 40002D, 40003D**

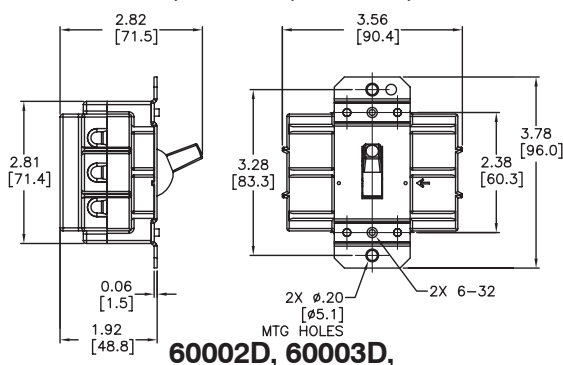

**60002D, 60003D,**



**4002**

Dimensions are approximate  
- Not for construction purposes

# BRYANT®

# Manual Motor Controllers / Disconnects

## Enclosed Toggle Switch

Enclosed toggle AC manual motor controllers feature NEMA 1 or NEMA 3R enclosures and can be used as motor controllers or disconnects. The NEMA 1 metal enclosed switches are ideal for use in indoor environments. The thermoplastic and metal NEMA 3R enclosed switches are raintight for use outdoors.

## Enclosed Toggle Switch Features

### NEMA 1 Motor Controllers / Disconnects

Wiring conduit knockouts

- 1/2 inch and 3/4 inch NPT
- Top, bottom or back wire entry points
- Surface mount control

*Lockout / Tagout capability*




*All aluminum cover and base; base is pre-drilled for rear surface mounting*

**30103D**

### NEMA 3 / 3R Motor Controllers / Disconnects

- Raintight enclosures
- Designed for surface mounting

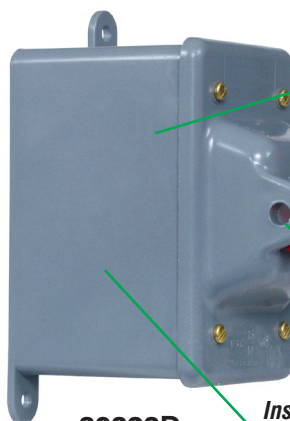

*Valox® enclosure; chemical and impact resistant*

*External activation lever switch*

*Lockout / Tagout capability*

**30323D**

*Installer determined wire entry; no pre-drilled openings or knockouts*

**TECH-SPEC®**



*Rain tight drip shield top; rolled seamless sides*

*All aluminum cover and base; base is pre-drilled for rear surface mounting*

**30303D**

*Wiring conduit knockouts; 1/2 inch NPT KO for 30 amp; bottom or back wire entry points*

*Lockout / Tagout capability*



*All aluminum cover and base; base is pre-drilled for rear surface mounting*

**60303D**

*Wiring conduit knockouts; 3/4 inch / 1 inch NPT KO for 60 amp; bottom or back wire entry points*

*Valox® is a registered trademark of SABIC Innovative Plastics.*

**BRYANT®**

Enclosed Toggle Switch

Manual Motor Controllers / Disconnects



30102D, 30103D



30302D, 30303D



30322D, 30323D




60302D, 60303D

Enclosed Toggle Switch AC Motor Controllers / Disconnects									
Part Number	Amperage	Phase	Poles	HP Ratings				Enclosure	Price
				120 VAC	240 VAC	480 VAC	600 VAC		
30102D	30	1	2	2	5	10	15	NEMA 1 Metal	\$30.50
30103D	30	3	3	3	7.5	15	20		\$65.00
30302D	30	1	2	2	5	10	15	NEMA 3R Metal	\$44.50
30303D	30	3	3	3	7.5	15	20		\$81.00
30322D *	30	1	2	2	5	10	15	NEMA 3R Thermoplastic	\$53.00
30323D *	30	3	3	—	7.5	15	20		\$56.00
60302D *	60	1	2	—	10	15	20	NEMA 3R Metal	\$104.00
60303D *	60	3	3	—	10	25	30		\$122.00
*Switch is not available as a separate item									

TECH·SPEC®

Dimensions

Units: inches [mm]

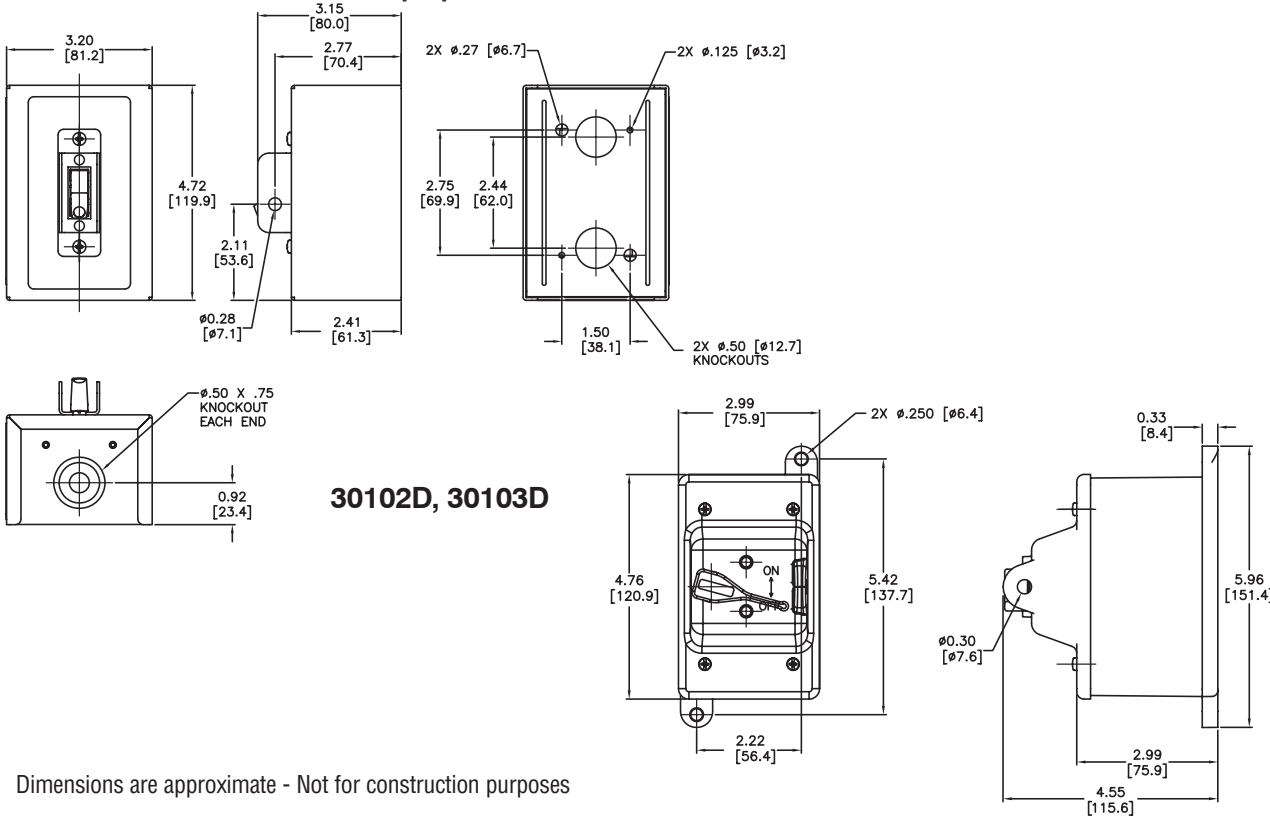

**BRYANT®**



# Manual Motor Controllers / Disconnects

## Enclosed Toggle Switch

**TECH·SPEC®**

### Dimensions

Units: inches [mm]

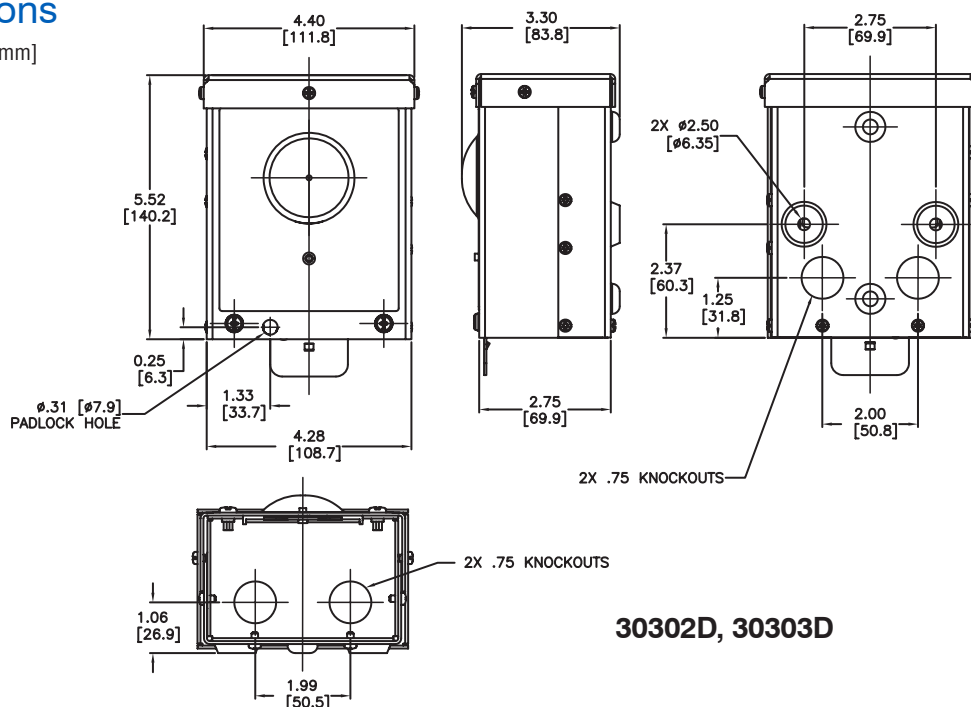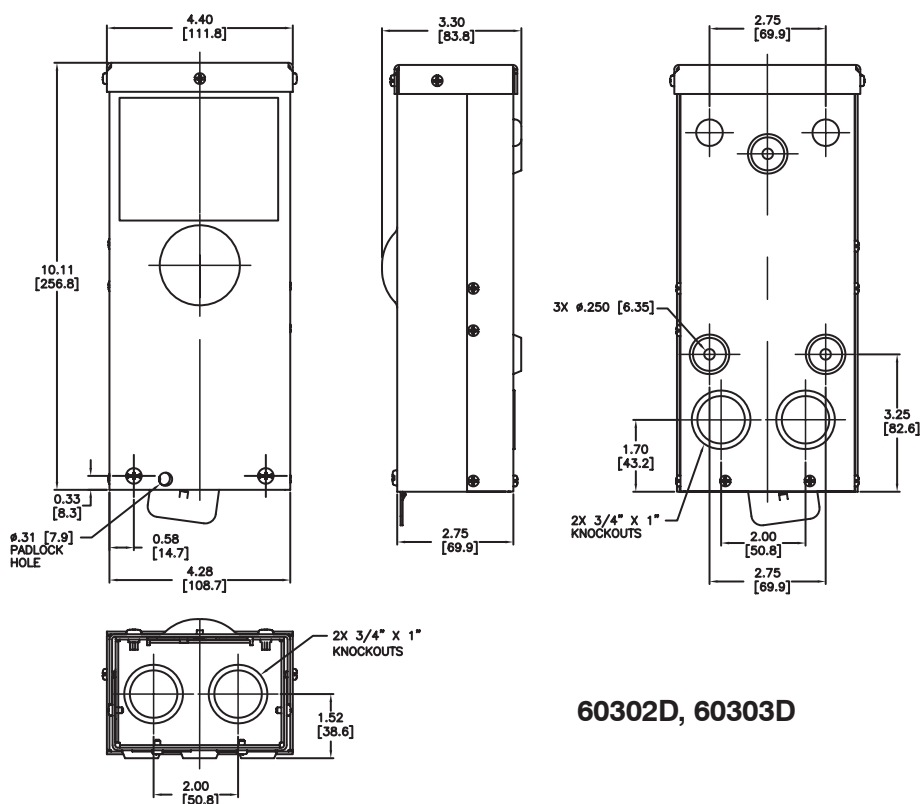**30302D, 30303D****60302D, 60303D**



# BRYANT®



## Manual Motor Controllers / Disconnects

### NEMA 4X Enclosed Rotary Switch

NEMA 4X enclosed toggle switch AC manual motor controllers are ideal for heavy wash down and corrosive environments. They feature thermoplastic bodies and can be used as a motor controller or disconnect.

**TECH·SPEC®**

### NEMA 4X Enclosed Rotary Switch Features

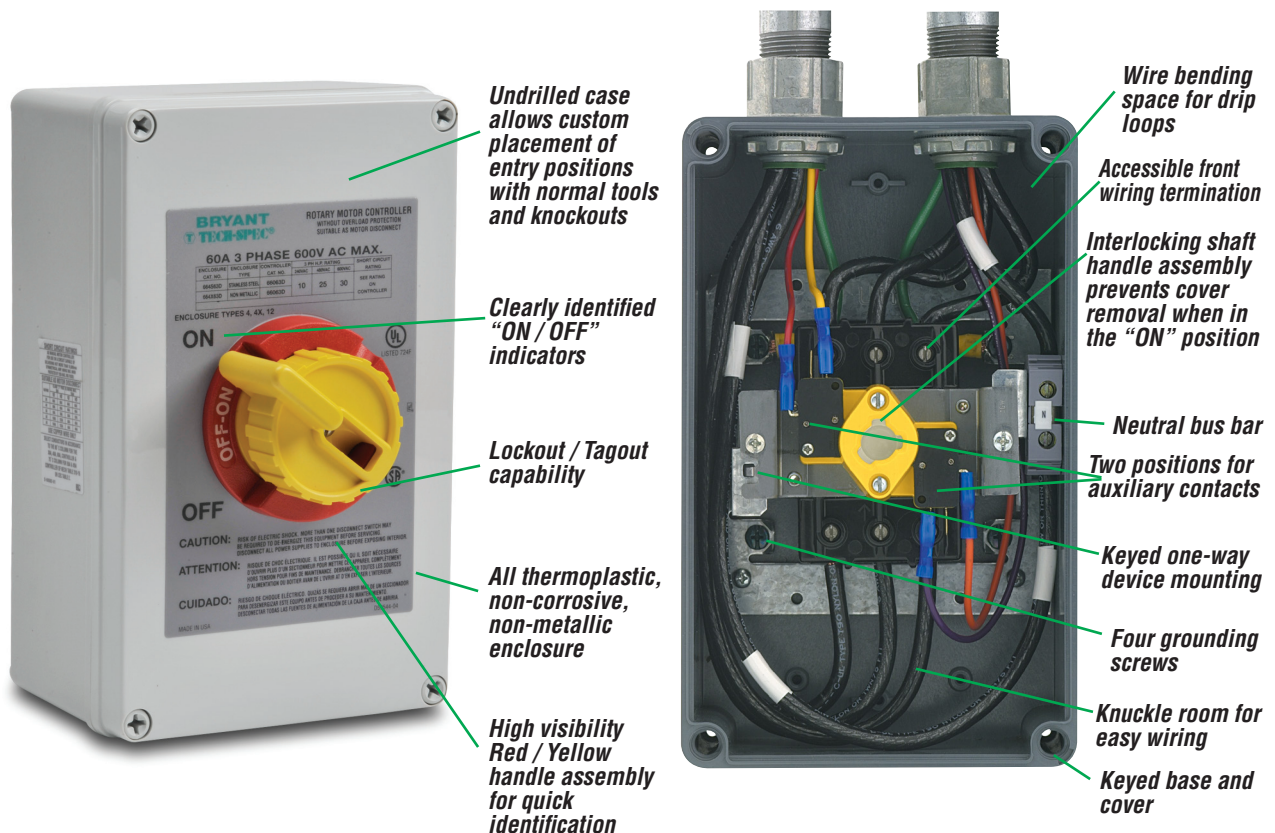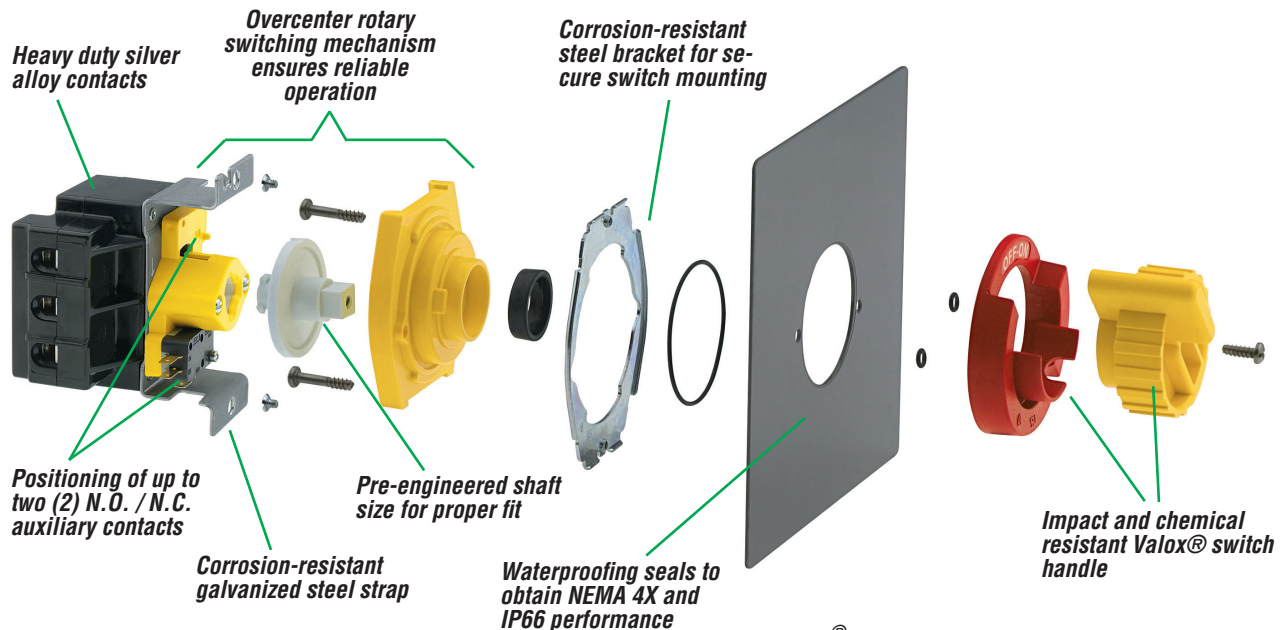

# BRYANT® Manual Motor Controllers / Disconnects

## NEMA 4X Enclosed Rotary Switch

NEMA 4X Enclosed Rotary Switch AC Motor Controllers								
Part Number	Amperage	Phase	Poles	HP Ratings				Enclosure
				120 VAC	240 VAC	480 VAC	600 VAC	
664X33D*	30	3	3	3	7.5	15	20	NEMA 4X Thermoplastic
664X63D*	60	3	3	—	10	25	30	

\*Sold as a complete unit only

NEMA 4X Enclosed Rotary Switch AC Motor Controller Accessories		
Part Number	Description	Price
30003FG	Finger Guards; red; for use with 30A and 40A Switches (Set of 2)	\$6.00
660AC*	SPDT Auxiliary contact NO / NC. includes one contact for use with push-on terminals, use with 664X33D and 664X63D	\$15.50
6610MK	Rotary handle replacement kit, use with 664X33D and 664X63D (Nema 1 rating) Must use gasket replacement kit 664XWP for NEMA 4X rating.	\$12.00
664XWP	NEMA 4X enclosure gasket replacement kit; includes 4 seals, neoprene bushing and 3 o-rings; use with 664X33D and 664X63D	\$8.25
664XFT	NEMA 4X enclosure mounting feet	\$7.25
6603N	NEMA 4X enclosure neutral bus connector	\$37.00

\*660AC Terminal is a quick connect terminal #250



30003FG



660AC



6610MK



664XWP



664XFT



6603N



664X33D




664X63D


### TECH·SPEC®

### Dimensions

Units: inches [mm]

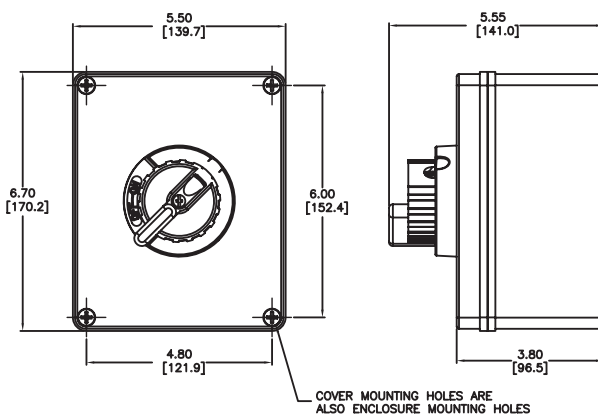

664X33D

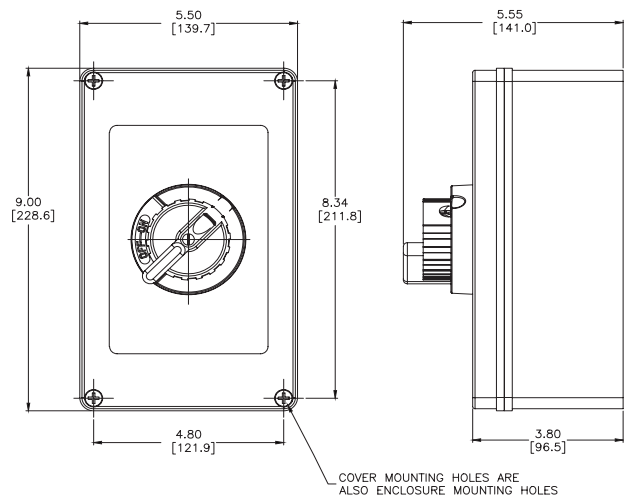

664X63D

Dimensions are approximate  
- Not for construction purposes



**BRYANT®**


# Manual Motor Controllers / Disconnects

**TECH·SPEC®**

## Specifications

General Specifications													
Type	Part Number	Weight	Short Circuit Withstand Rating	Dielectric Voltage	Electrical Life	Max Working Voltage	Mechanical Life	Operating Temperature					
Standard Toggle Switch	30002D	0.4 lb (181g)	10 kA 60A max J fuses or 125A max RK5 fuses	2,200V AC minimum for 1 minute	6,000 cycles at rated switch load	600 VAC RMS	10,000 minimum cycles	-40 °C (-40 °F) to 60 °C (140 °F)					
	30003D	0.5 lb (227g)											
	4002	0.1 lb (45g)											
	40002D	0.4 lb (181g)											
	40003D	0.5 lb (227g)											
	60002D	0.7 lb (318g)	10 kA 80A max J fuses or 125A max RK5 fuses										
	60003D												
Enclosed Toggle Switch	30102D	1.0 lb (454g)	10 kA 60A max J fuses or 125A max RK5 fuses										
	30103D	1.3 lb (590g)											
	30302D												
	30303D	2.2 lb (998g)											
	30322D												
	30323D	1.9 lb (861g)	10 kA 80A max J fuses or 125A max RK5 fuses										
	60302D												
Enclosed Rotary Switch	664X33D	2.5 lb (1,134g)	10 kA 80A max J fuses or 125A max RK5 fuses										
	664X63D	3.0 lb (1,361g)											

### NEMA 4X Enclosed Rotary Switch AC Motor Controller Accessory Specifications

Part Number	Switch Type	Load	Contact Material
660AC		15A @ 250 VAC Resistive, 10A @ 250 VAC Inductive 10A @ 30VDC Resistive and Inductive	Silver Alloy

### Wiring Specifications

Type	Part Number	Cable Size		Tightening Torque	
Toggle Switch	30002D	14 to 10 AWG	2.5 to 6 mm <sup>2</sup>	20 lb-in	2.3 N-m
	30003D				
	4002	14 to 8 AWG	2.5 to 10 mm <sup>2</sup>	25 lb-in	2.8 N-m
	40002D				
	40003D				
	60002D	14 to 6 AWG	2.5 to 16 mm <sup>2</sup>	25 lb-in	2.8 N-m
	60003D				
Enclosed Toggle Switch	30102D	14 to 10 AWG	2.5 to 6 mm <sup>2</sup>	20 lb-in	2.3 N-m
	30103D				
	30302D				
	30303D				
	30322D	14 to 6 AWG	2.5 to 16 mm <sup>2</sup>	25 lb-in	2.8 N-m
	30323D				
	60302D				
Enclose Rotary Switch	664X33D	14 to 6 AWG	2.5 to 16 mm <sup>2</sup>	25 lb-in	2.8 N-m
	664X63D				

**Note:** Bryant does not recommend the use of wire ferrules or crimping terminals. The wire gauges are specified above and in the installation instructions included with each manual motor controller.

# prosense® Phase Monitor Relays

## Phase Monitor Relays



**PMRRL**

Phase monitor relays provide protection against premature equipment failure caused by voltage faults on 3-Phase systems. All ProSense phase monitor relays are designed to be compatible with typical Wye or Delta systems. Phase monitor relays protect against single phasing regardless of any regenerative voltages.

The PMRRL Series phase monitor relays provide protection against phase loss, phase reversal and undervoltage. These relays are designed to be compatible with typical Wye or Delta systems. In Wye systems, a connection to a neutral is not required. Phase monitor relays protect against single phasing regardless of any regenerative voltages.

The relay is energized and the LED is on when all three phases are present in the correct sequence at a voltage level above the undervoltage setting. The undervoltage drop-out can be set at 75 to 95% of operating voltage. Any fault will instantaneously de-energize the relay and turn off the LED. Re-energization is automatic upon correction of the fault condition.

### Features

- Protects against phase loss, phase reversal and undervoltage
- Undervoltage setting is adjustable from 75-95% of nominal
- LED indicates both normal and fault conditions
- Compact plug-in case utilizing industry-standard 8-pin octal socket
- 10A SPDT output contacts


### Agency Approvals

- cURus, File number E191059
- UL Listed, File number E191059
- CE, EN60947-1
- RoHS



(with appropriate socket 70169-D)



ProSense Series Phase Monitor Relays					
Part Number	Description	Pcs/Pkg	Wt (lb)	Price	Use With
<b>PMRRL-1C-208A</b>	Phase monitor relay, provides protection against phase reversal, phase loss and undervoltage; 10A SPDT output contacts, 8-pin octal base. Works with 208V 3-phase systems.	1	0.3	\$46.50	70169-D or 750-2C-SKT
<b>70169-D</b>	Relay socket, 10A at 600V, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$3.50	-----
<b>750-2C-SKT</b>	Relay socket, 5A at 600V, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$4.25	-----



Technical Specifications	
<b>Input Voltage Range*</b>	208VAC 50/60 Hz (+10/-25%)
<b>Undervoltage Rating</b>	156-198V
<b>Phase Loss</b>	Unit trips on total loss of one or more of the three phases (A,B,C)
<b>Phase Reversal</b>	Unit trips if sequence of the three phases is anything other than A-B-C
<b>Undervoltage</b>	Unit trips when the average of all three line phases is less than the adjusted set point*
<b>Overvoltage</b>	N/A
<b>Power Consumption</b>	3VA
<b>Temperature</b>	-28° to 65°C [-18° to 149°F]
<b>Mounting</b>	8-pin octal socket requires a 600V rated socket when used on system voltages greater than 300V
<b>Approvals</b>	cURus, CE (PMRU series only), RoHS, (cULus when used with socket 70169-D)

\* Fusing is not required by code but if fusing is used we recommend 2A MCL2 fuse between the phase monitor relay and the three phases.

### Dimensions Inches [mm]

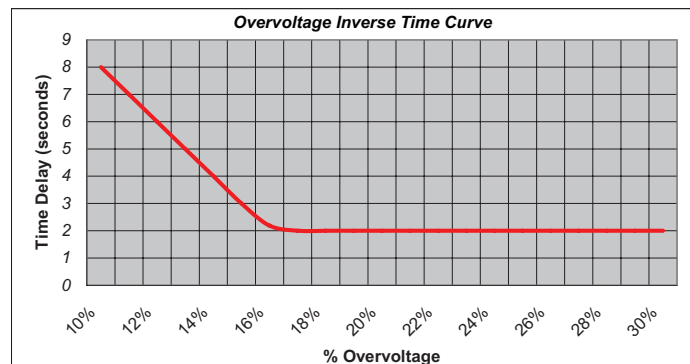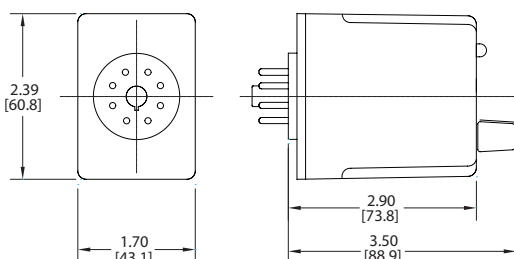

## Protection


Depending on the unit selected, it will protect 3-phase equipment against:

- **Phase loss** - total loss of one or more of the three phases. Also known as "single phasing." Typically caused by a blown fuse, broken wire, or worn contacts. This condition would result in a motor drawing locked rotor current during start-up. In addition, a 3-phase motor will continue to run after losing a phase, resulting in possible motor burn-out.
- **Phase reversal** - reversing any two of the three phases will cause a 3-phase motor to run in the opposite direction. This may cause damage to driven machinery or injury to personnel. The condition usually occurs as a result of mistakes made during routine maintenance or when modifications are made to the circuit.

- **Phase unbalance** - unbalance of a 3-phase system occurs when single phase loads are connected such that one or two of the lines (phases) carry more or less of the load. This could cause motors to run at temperatures above published ratings.
- **Undervoltage** - when voltage in all three lines of a 3-phase system drop simultaneously.
- **Overvoltage** - when voltage in all three lines of a 3-phase system increase simultaneously.

## Typical Connections


### Line Side Monitoring

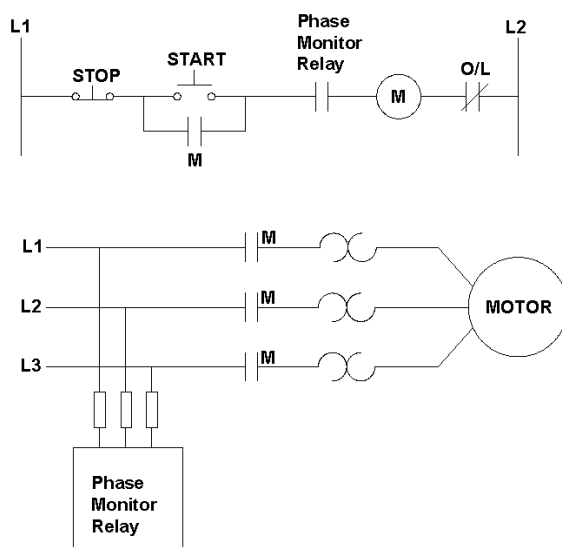

### Line Side Monitoring

With the relay connected before the motor starter, the motor can be started in the reverse direction. However, the motor is unprotected against phase failures between the relay and the motor.

### Load Side Monitoring

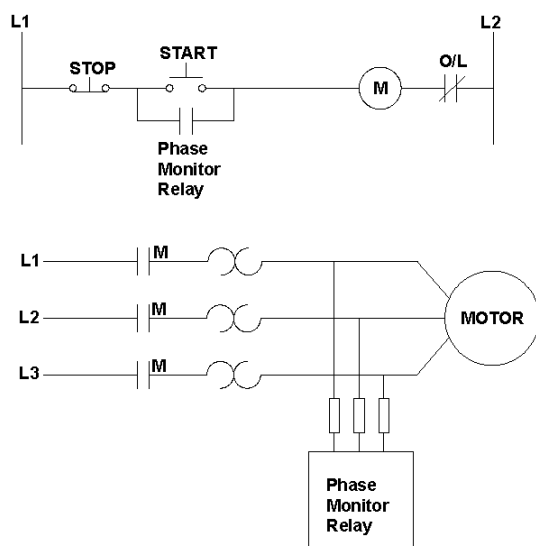

### Load Side Monitoring

With the relay connected directly to the motor, the total feed lines are monitored. This connection should not be used with reversing motors.

# Alternating Relays



AR



ARX

## Alternating Relays

### AR Series

Alternating relays are used in special applications where the optimization of load usage is required by equalizing the run time of two loads. The alternating action is initiated by a control switch, such as a float switch, manual switch, timing delay, pressure switch, or other isolated contact. Each time the initiating switch is opened, the output relay contacts will change state, thus alternating the two loads. Two LED indicators show which load to energize next.

The alternating relay can be used with one or two control switches and is available in the SPDT output configuration.

The AR Series Relays have a three-position selector switch. This allows the unit to alternate the two loads as normal, or lock the relay to one load or the other. By locking the alternating relay to one load, the other load can be removed for service without rewiring the first load for continuous operation. The selector switch has a low profile to prevent any accidental changes in status.

### ARX Series

Alternating relays with DPDT cross-wired outputs are used in applications requiring both (a) the optimization of load usage by equalizing the run time of two loads and (b) additional capacity in case of excess load requirements. The alternating action is initiated by a control switch, such as a float switch, manual switch, timing relay, pressure switch, or other isolated contact. Each time the initiating switch is opened, the output relay contacts will change state, thus alternating the two loads. Two LED indicators show the load to energize first.

Alternating relays with DPDT cross-wired output configurations can be used with two or three control switches.

The ARX series relays have a three-position selector switch. This allows a DPDT cross-wired unit to alternate the two loads as normal, or lock the relay to always operate the same load first each time. In this manner, a load that has fewer hours of operation than the other load could be used more often in an effort to eventually balance the run time of both loads.

## Features

### AR

- For duplex loads
- 10A SPDT output configuration
- Can be used with one or two control switches
- 120 VAC Control voltage
- Compact plug-in design utilizing industry-standard 8-pin octal socket
- Low profile selector switch to lock in one sequence
- 2 LEDs indicate load to energize next

### Agency Approvals

- cURus, File number E191059
- CSA, File number LR45565
- CE, EN60947-1, EN60947-5-1
- RoHS

### ARX

- For duplex loads
- 10A DPDT cross-wired output configuration
- Can be used with two or three control switches
- 120 VAC Control voltage
- Compact plug-in design utilizing industry-standard 8-pin octal socket
- Low profile selector switch to lock either load On first
- 2 LEDs indicate load to energize first



(with appropriate  
socket 70169-D)

# Alternating Relays


AR/ARX Series Alternating Relays					
Part Number	Description	Pcs/Pkg	Wt (lb)	Price	Use With
<b>AR-1C-120A</b>	Alternating relay, for use in applications requiring load usage optimization by equalizing the run time of two loads. 120 VAC coil voltage, SPDT, 10A contact rating, 8-pin octal base, selector switch to select between load A, load B, or alternate loads. Two LEDs indicate load to energize next.	1	0.3	\$23.00	70169-D or 750-2C-SKT
<b>ARX-2C-120A</b>	Alternating relay, for use in applications requiring load usage optimization by equalizing the run time of two loads, accommodates additional capacity in case of excess load requirements. 120 VAC coil voltage, DPDT Cross Wired, 10A contact rating, 8-pin octal base, selector switch to select between load A, load B, or alternate loads. Two LEDs indicate load to energize first.	1	0.3	\$24.50	70169-D or 750-2C-SKT
<b>70169-D</b>	Relay socket, 10A at 600V, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$3.50	-----
<b>750-2C-SKT</b>	Relay socket, 5A at 600V, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$4.25	-----

Technical Specifications		
	AR-1C-120A	ARX-2C-120A
<b>Voltage Tolerances</b>	120 VAC 50/60Hz (+10%/-15%)	
<b>Output Contacts</b>	10A at 240 VAC/30 VDC Max	
<b>Life *</b>	Mechanical 10,000,000 operations; Electrical - Resistive: 100,000 operations	
<b>Power Consumption</b>	Less than 3 VA	
<b>Temperature</b>	-28 to 65°C (-18 to 149°F)	
<b>Mounting</b>	8-pin octal socket	
<b>Indicator LED</b>	2 LEDs marked LOAD A and LOAD B	
<b>Selector Switch Settings</b>	LOCK LOAD A ALTERNATE LOCK LOAD B	LOCK LOAD A (Always energizes first based on switch position) ALTERNATE LOCK LOAD B (Always energizes first based on switch position)
<b>Approvals</b>	cURus, CE, CSA (LR45565), RoHS, (cULus when used with socket 70169-D)	


\* Resistive load

## Wiring

AR-1C-120A





ARX-2C-120A



## Dimensions

AR-1C-120A, ARX-2C-120A

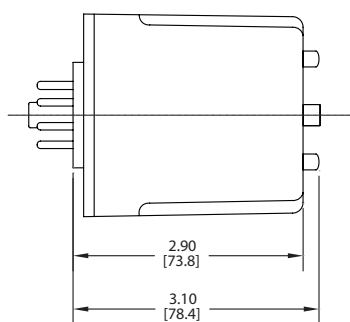All Dimensions in Inches  
(Millimeters)

# Alternating Relays

## Typical Installations

When using the AR series relay with the selector switch in the "Alternate" position in the initial off state (Figure A), the Control Switch is open, the Alternating Relay is in the "LOAD A" position, and both loads (M1 and M2) are off. The red LED marked "LOAD A" is ON. When the Control Switch closes, it energizes Load M1. As long as the Control Switch remains closed, Load M1 remains energized. When the Control Switch opens, Load M1 is turned off and the Alternating Relay toggles to the "LOAD B" position. The red LED marked "LOAD B" glows.

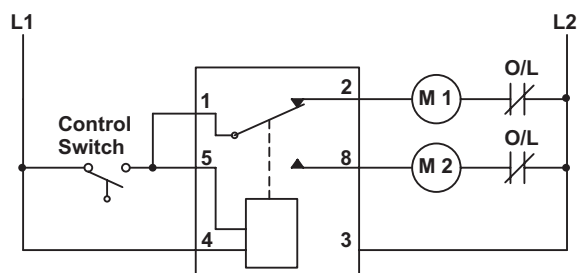


Figure A

When using the ARX series relay with the selector switch in the "Alternate" position in the initial off state (Figure C), both the LEAD Control Switch and the LAG Control Switch are open, the Alternating Relay is in the "LOAD A" position, and both loads are off. The red LED marked "LOAD A" is ON. When the LEAD Control Switch closes, it energizes Load M1. As long as the LEAD Control Switch remains closed, Load M1 remains energized. If the LAG Control Switch closes, it energizes Load M2. When the LAG Control Switch opens, Load M2 is turned off. When the LEAD Control Switch opens, Load M1 is turned off and the Alternating Relay toggles to the "LOAD B" position. The red LED marked "LOAD B" is ON. When the LEAD Control Switch closes, it turns on Load M2. If the LAG Control Switch closes, it will energize Load M1. When the LAG Control Switch opens, Load M1 is turned off. When the LEAD Control Switch opens, Load M2 is turned off, the Alternating Relay toggles back to the "LOAD A" position, and the process can be repeated again.

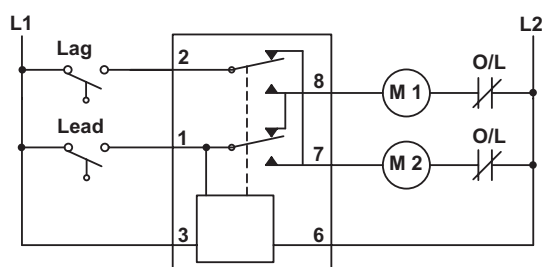


Figure C

Note: M1 and M2 reference in Figures A,B,C and D are coils.

When the Control Switch closes again, it energizes Load M2. When the Control Switch opens, Load M2 is turned off, the Alternating Relay toggles back to the "LOAD A" position, and the process can be repeated again. On relays with DPDT contacts, two pilot lights can be used for remote indication of "LOAD A" or "LOAD B" status.

To eliminate any bounce condition of the Control Switch, the addition of a second switch (OFF) along with two auxiliary contacts is recommended as shown (Figure B).

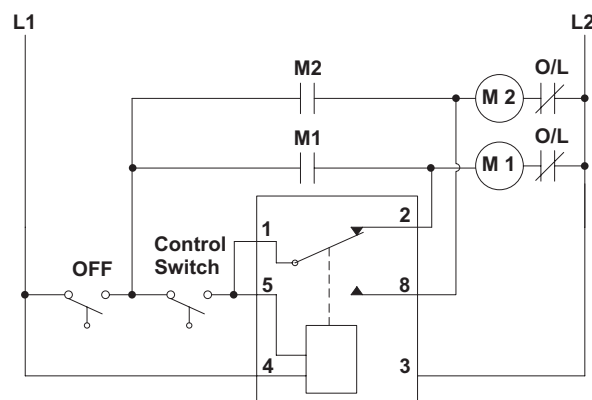


Figure B

A type of operation known as "Sequence On - Simultaneously Off (S.O.S.O.)" where the two loads are energized sequentially, but remain on together until the OFF switch is opened (Figure D). In the initial OFF state, all three switches are open, the Alternating Relay is in the "LOAD A" position, and both loads are off. No action happens with the Alternating Relay or either load when the OFF Switch closes. When the LEAD Switch closes, Load M1 turns on. When the LAG Switch closes, Load M2 turns on. Both loads remain on as long as all three switches are closed. When the LAG Switch opens, Load M2 remains on because the OFF Switch is still closed. When the LEAD Switch opens, Load M1 remains on because the STOP Switch is still closed. When the OFF Switch opens, both Load M1 and Load M2 are turned off simultaneously. The Alternating Relay toggles to the "LOAD B" position. The entire cycle is then repeated, but with Load M2 energized first followed by Load M1.

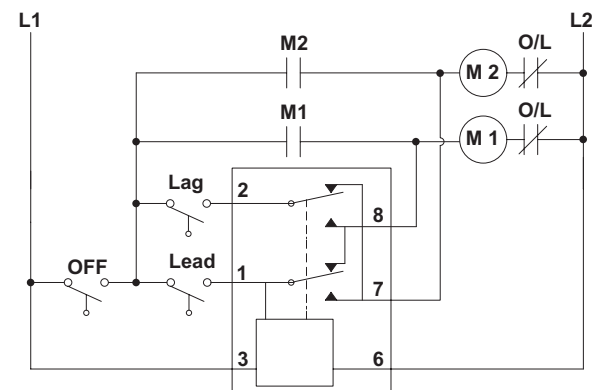


Figure D





# 8-pin Octal Socket



**70169-D**



**750-2C-SKT**

## Features

- 600V (Plug-in 3-phase monitor relays require a 600V-rated socket when used with system voltages greater than 300V)
- Mounts on 35mm DIN rail
- Screw pressure wire clamp termination

## Agency Approvals

- cURus, File number E191059, E225080, E169693
- CE
- RoHS




Octal Sockets for Motor Monitor Relays				
Part Number	Description	Pcs/Pkg	Wt (lb)	Price
<b>70169-D</b>	Relay socket, works with all phase monitor relays, 10A at 600V rated, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$3.50
<b>750-2C-SKT</b>	Relay socket, works with all phase monitor relays, 5A at 600V rated, 8-pin octal configuration. Can be mounted on 35mm DIN rail or directly mounted to the panel.	1	0.1	\$4.25

Technical Specifications						
Part Number	Voltage	Current	Screw Size	Screw wire size (capacity)	Screw wire torque	Screw chassis mounting torque
<b>70169-D</b>	600V	10A	6-32	1 or 2 #12-#22 AWB	6-7 lb-in (12 lb-in max)	7 lb-in
<b>750-2C-SKT</b>	600V	5A	M3.5	(1) #12/ (2) #14 AWG	9 lb-in	7 lb-in


To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Dimensions

**70169-D**

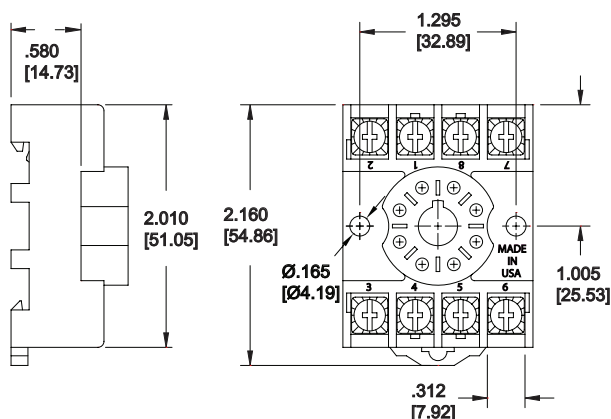


**750-2C-SKT**

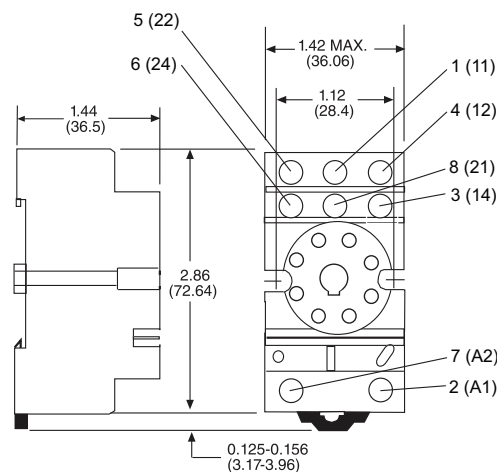


## Socket Pinouts

**70169-D**



**750-2C-SKT**



All Dimensions in Inches  
(Millimeters)