

The DL05 & DL06 Family of Products

The DL05 micro PLC family includes eight different models. Each has eight inputs and six outputs in the base unit. The DL05 has one option module slot, which can be used to expand the I/O count, provide additional communications capability or add a real-time clock and battery back-up.

The larger DL06 micro PLC family has 20 inputs and 16 outputs in the base unit. The DL06 has four option module slots which can be used to add I/O or provide additional communications options.

Instruction sets

The DL05 CPU offers PID capability, high-speed counting, and most of the same powerful instruction set as our popular D2-250-1 CPU, including the IBox instructions available in DirectSOFT version 6. All DL05 PLCs have two built-in RS-232 communications ports that can be used for programming, operator interface, networking, etc.

The DL06 CPU offers PID capability, floating point number handling, and an instruction set very similar to our D2-260 CPU, including the IBox instructions available in DirectSOFT. All DL06 PLCs have two built-in communications ports that can be used for programming, operator interface, networking, etc. One of the DL06 ports is a multi-function port capable of RS-232, RS-422, or RS-485 communications.

Power options


The DL05 and DL06 families have AC and DC power options. They are also offered with a variety of I/O options. You can explore the Quick Selection Guide on the next page to choose the right PLC for your application.

High-speed inputs and outputs

Units with DC inputs have selectable high-speed input features on three input points (DL05) or four input points (DL06). Units with DC outputs can use the first two outputs as a single bi-directional pulse output. An overview of the high-speed I/O features appear later in this section.


DL05
8 in/6 out

Communication ports

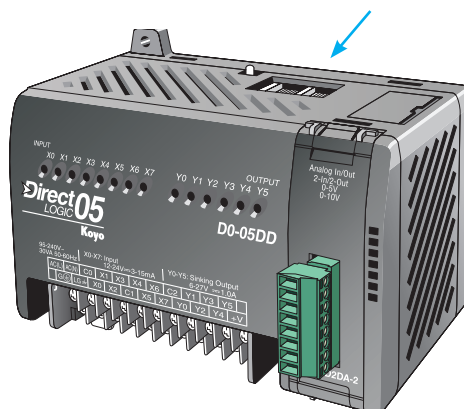

DL06
20 in/16 out

Option modules

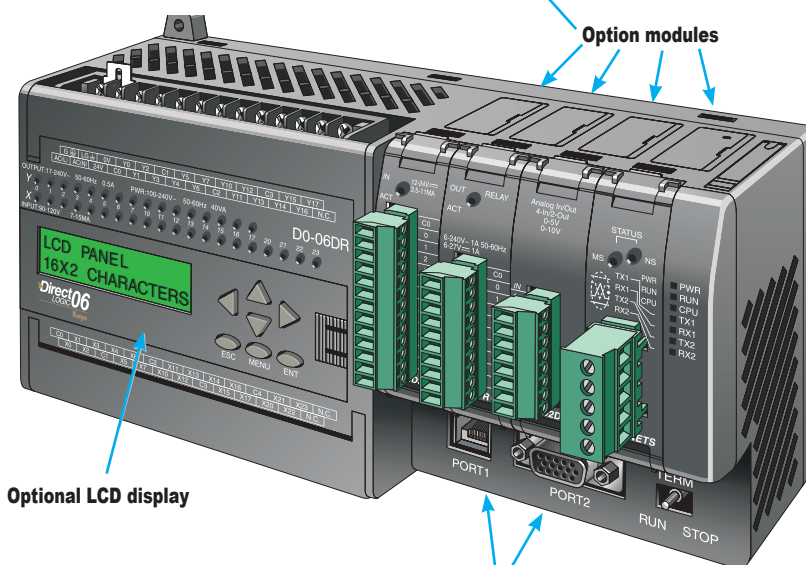

Optional LCD display

Communication ports

General Specifications	AC Powered	DC Powered
Power	100-240 VAC (+ 10%, -15%), 50-60 Hz	12/24 VDC
Input Voltage Range	95-240 VAC	12-24 VDC
Maximum Power	30VA (DL05) 40VA (DL06)	20W
Maximum Inrush Current	13A, 1ms (240VAC)	10A < 1ms
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	
Ambient Operating Temperature	32°F to 131°F (0°C to 55°C)	
Ambient Humidity	5% - 95% relative humidity (non-condensing)	
Vibration Resistance	MIL STD 810C, Method 514.2	
Shock Resistance	MIL STD 810C, Method 516.2	
Noise Immunity	NEMA (ICS3-304)	
Atmosphere	No corrosive gases	

Quick Selection Guide

110/220 (+10%, -15%) VAC Power Options

DL05

D0-05AA

- 8 AC inputs
- 6 AC outputs, 0.5 A/point

D0-05AD

- 8 AC inputs
- 6 DC outputs (sinking), 1.0 A/point
Two outputs can be used as a single bi-directional 7kHz pulse output

D0-05AR

- 8 AC inputs
- 6 relay outputs, 2A/point

D0-05DA

- 8 DC inputs
Three inputs are filtered, or configure as a single 5kHz high-speed counter, interrupt input, or pulse catch input
- 6 AC outputs, 0.5 A/point

D0-05DD

- 8 DC inputs
Four inputs are filtered, or configure as a single 5kHz high-speed counter, interrupt input, or pulse catch input
- 6 DC outputs (sinking), 1.0 A/point
Two outputs can be used as a single bi-directional 7kHz pulse output

D0-05DR

- 8 DC inputs
Four inputs are filtered inputs, can also be configured as a single 5kHz high-speed counter, interrupt input, or pulse catch input
- 6 relay outputs, 2A/point

DL06

D0-06AA

- 20 AC inputs
- 16 AC outputs, 0.5 A/point

D0-06AR

- 20 AC inputs
- 16 relay outputs, 2A/point

D0-06DA

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 AC outputs, 0.5 A/point

D0-06DD1

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 DC outputs (sinking), 1.0 A/point*
Two outputs can be used as a single bi-directional 10kHz pulse output

D0-06DD2

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 DC outputs (sourcing), 1.0 A/point
Two outputs can be used as a single bi-directional 10kHz pulse output

D0-06DR

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 relay outputs, 2A/point

12/24 VDC Power Options

DL05

D0-05DD-D

- 8 DC inputs
Three inputs are filtered inputs, can also be configured as a single 5kHz high-speed counter, interrupt input, or pulse catch input
- 6 DC outputs (sinking), 1.0 A/point
Two outputs can be used as a single bi-directional 7kHz pulse output

D0-05DR-D

- 8 DC inputs
Three inputs are filtered inputs, can also be configured as a single 5kHz high-speed counter, interrupt input, or pulse catch input
- 6 Relay outputs, 2A/point

DL06

D0-06DD1-D

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 DC outputs (sinking), 1.0 A/point*
Two outputs can be used as a single bi-directional 10kHz pulse output

D0-06DR-D

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 relay outputs, 2A/point

D0-06DD2-D

- 20 DC inputs
Four inputs are filtered inputs, can also be configured as a single 7kHz high-speed counter, interrupt input, or pulse catch input
- 16 DC outputs (sourcing), 1.0 A/point
Two outputs can be used as a single bi-directional 10kHz pulse output

Note: High speed outputs cannot be used if high-speed inputs are in use, and high-speed inputs cannot be used if high-speed outputs are in use. Analog inputs and outputs can be accommodated with option modules, which are available for both the DL05 and DL06.

** These outputs must be derated to 0.6 A for EN61131-2 compliance.*

Features at a Glance

The DL05 and DL06 micro PLCs are complete self-contained systems. The CPU, power supply, and I/O are all included inside the same housing. Option modules are available to expand the capability of each PLC family for more demanding applications. The standard features of these PLCs are extraordinary and compare favorably with larger and more expensive PLCs.

The specification tables to the right are meant for quick reference only. Detailed specifications and wiring information for each model of the DL05 and DL06 PLCs can be found in those specific sections.

Program capacity

Most boolean ladder instructions require a single word of program memory. Other instructions, such as timers, counters, etc., require two or more words. Data is stored in V-memory in 16-bit registers.

Performance

The performance characteristics shown in the tables represent the amount of time required to read the inputs, solve the Relay Ladder Logic program and update the outputs.

Instructions

A complete list of instructions is available at the end of this section.

Communications

The DL05 and DL06 offer powerful communication features normally found only on more expensive PLCs.

Special features

The DC input and DC output PLCs offer high-speed counting or pulse output. Option module slots allow for discrete I/O expansion, analog I/O, or additional communication options.

DL05 CPU Specifications

System capacity

Total memory available (words).....	6K
Ladder memory (words).....	2048
V-memory (words).....	4096
User V-memory.....	3968
Non-volatile user V-memory.....	128
Battery backup.....	Yes ¹
Total built-in I/O.....	14
Inputs.....	8
Outputs.....	6
I/O expansion.....	Yes ¹

Performance

Contact execution (Boolean).....	0.7 µs
Typical scan (1K Boolean) ²	1.5-3 ms.

Instructions and diagnostics

RLL ladder style.....	Yes
RLLPLUS/flowchart style (Stages).....	Yes/256
Run-time editing.....	Yes
Supports Overrides.....	Yes
Scan.....	Variable/fixed

Number of Instructions 133

Types of Instructions:

Control relays.....	512
Timers.....	128
Counters.....	128
Immediate I/O.....	Yes
Subroutines.....	Yes
For/next loops.....	Yes
Timed interrupt.....	Yes
Integer math.....	Yes
Floating-point math.....	No
PID.....	Yes
Drum sequencers.....	Yes
Bit of word.....	Yes
ASCII print.....	Yes
Real-time clock/calendar.....	Yes ¹
Internal diagnostics.....	Yes
Password security.....	Yes
System and user error log.....	No

Communications

Built-in ports: Two RS-232C

Protocols supported:

K-sequence (proprietary protocol).....	Yes
DirectNet Client/Server.....	Yes
Modbus RTU Client/Server.....	Yes
ASCII out.....	Yes
Baud rate.....	
Port 1.....	9,600 baud (fixed)
Port 2.....	selectable 300-38,400 baud (default 9,600)

Specialty Features

Filtered inputs.....	Yes ¹
Interrupt input.....	Yes ³
High speed counter.....	Yes, 5kHz ²
Pulse output.....	Yes, 7kHz ²
Pulse catch input.....	Yes ³

1- These features are available with use of certain option modules. Option module specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

DL06 CPU Specifications

System capacity

Total memory available (words).....	14.8K
Ladder memory (words).....	7680
V-memory (words).....	7616
User V-memory.....	7488
Non-volatile user V-memory.....	128
Built-in battery backup (D2-BAT-1).....	Yes
Total I/O.....	36
Inputs.....	20
Outputs.....	16
I/O expansion.....	Yes ¹

Performance

Contact execution (Boolean).....	0.6 µs
Typical scan (1K Boolean) ²	1-2 ms.

Instructions and diagnostics

RLL ladder style.....	Yes
RLLPLUS/flowchart style (Stages).....	Yes/1024
Run-time editing.....	Yes
Supports Overrides.....	Yes
Scan.....	Variable/fixed
Number of Instructions.....	229

Types of Instructions:

Control relays.....	1024
Timers.....	256
Counters.....	128
Immediate I/O.....	Yes
Subroutines.....	Yes
For/next loops.....	Yes
Table functions.....	Yes
Timed interrupt.....	Yes
Integer math.....	Yes
Trigonometric functions.....	Yes
Floating-point math.....	Yes
PID.....	Yes
Drum sequencers.....	Yes
Bit of word.....	Yes
Number type conversion.....	Yes
ASCII in, out, print.....	Yes
LCD instruction.....	Yes
Real-time clock/calendar.....	Yes
Internal diagnostics.....	Yes
Password security.....	Yes
System and user error log.....	No

Communications

Built-in ports:

One RS-232C
One multi-function RS232C/RS422/RS485

NOTE: RS485 is for MODBUS RTU only.

Protocols supported:

K-sequence (proprietary protocol).....	Yes
DirectNet Client/Server.....	Yes
Modbus RTU Client/Server.....	Yes
ASCII in/out.....	Yes
Baud rate.....	
Port 1.....	600 baud (fixed)
Port 2.....	selectable 300-38,400 baud (default 9,600)

Specialty Features

Filtered inputs.....	Yes ³
Interrupt input.....	Yes ³
High speed counter.....	Yes, 7kHz ²
Pulse output.....	Yes, 10kHz ²
Pulse catch input.....	Yes ³

1- These features are available with use of certain option module. Option module specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

Features at a Glance

DirectSOFT software

The DL05 and DL06 PLCs use the same familiar DirectSOFT programming software that our larger PLCs use. A FREE version of DirectSOFT gives you all the great features of the full version, but with a 100-word PLC program download limitation. For programs larger than 100 words, the full package is required. The FREE PC-DS100 software may be sufficient to program the DL05 and DL06. If you are programming with a full package version prior to v6.0, you will need v2.4 or later for the DL05 PLCs and v4.0 or later for the DL06. We always recommend the latest version for the most robust features. See the DirectLOGIC Overview section DL in this catalog for a complete description of DirectSOFT including features, part numbers of programming packages and upgrades.

Programming

Handheld programmer...D2-HPP \$679.00


DirectSOFT Programming for Windows

PC-DSOFT6


\$462.00

PC-DS100 Free

PC-R60-U (upgrade) \$291.00

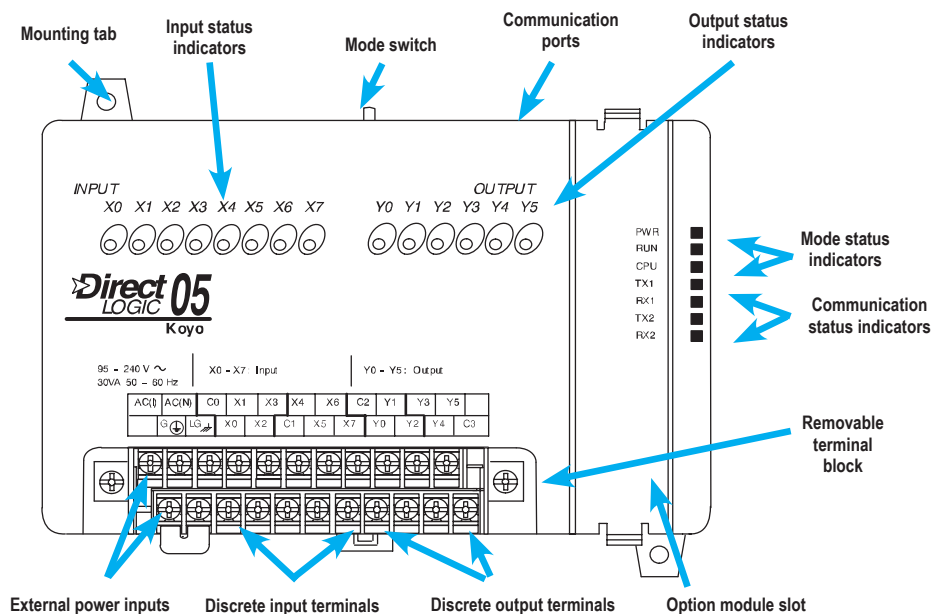

Hardware features diagrams

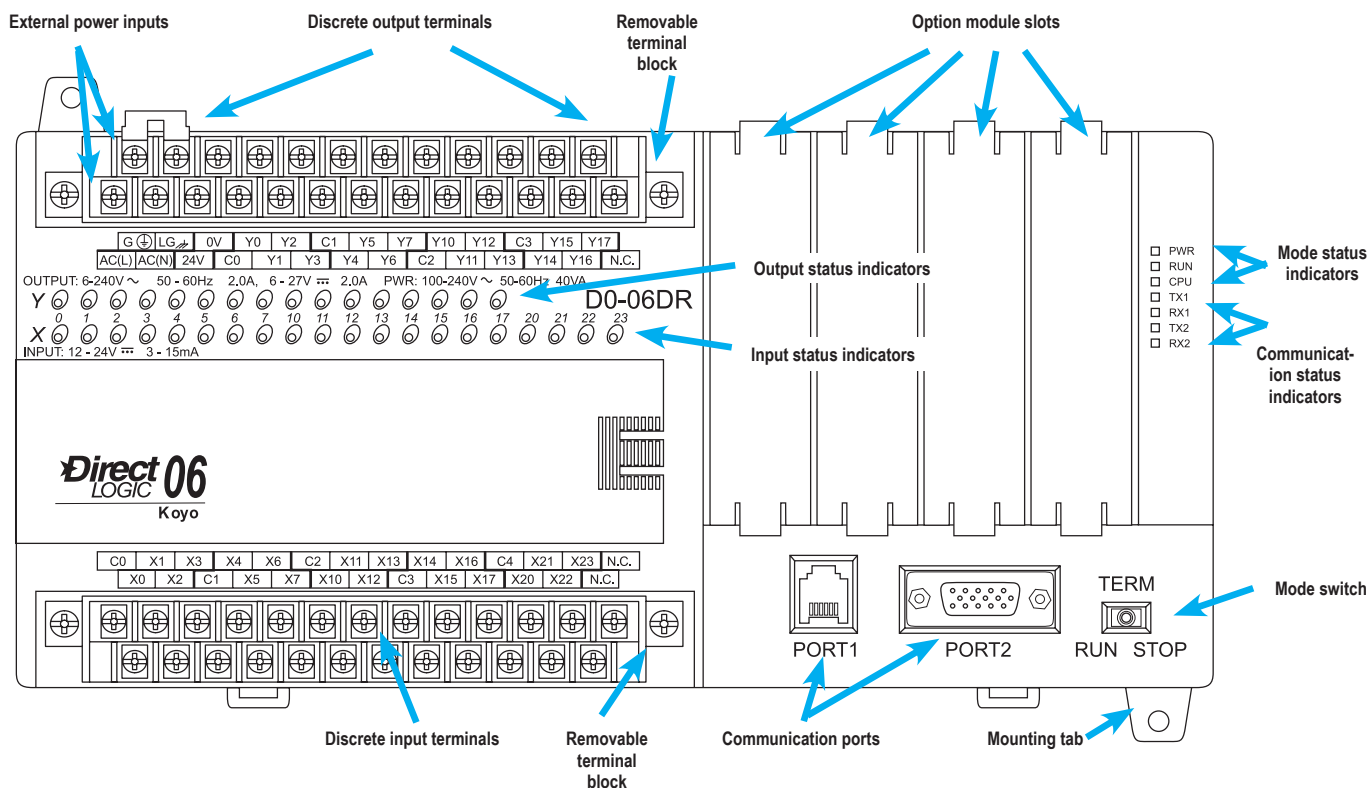




Product Dimensions and Installation

It is important to understand the installation requirements for your DL05 or DL06 system. Your knowledge of these requirements will help ensure that your system operates within its environmental and electrical limits.

Plan for safety

This catalog should never be used as a replacement for the user manual. You can purchase, download free, or view online the user manuals for these products. The [D0-USER-M](#) is the publication for the DL05 PLCs, and the [D0-06USER-M](#) is the publication for the DL06 PLCs. The [D0-OPTIONS-M](#) is the user manual for the option modules. These user manuals contain important safety information that must be followed. The system installation should comply with all appropriate electrical codes and standards.

Unit dimensions and

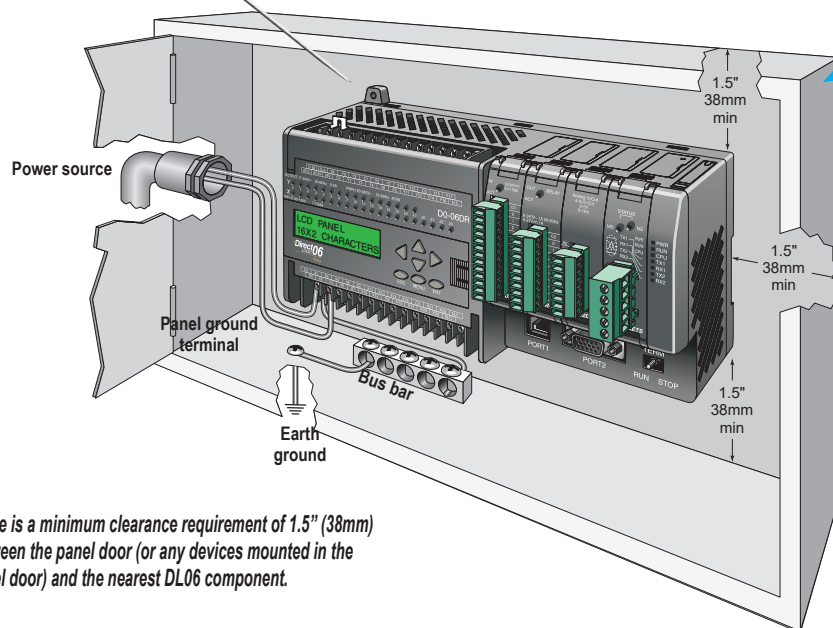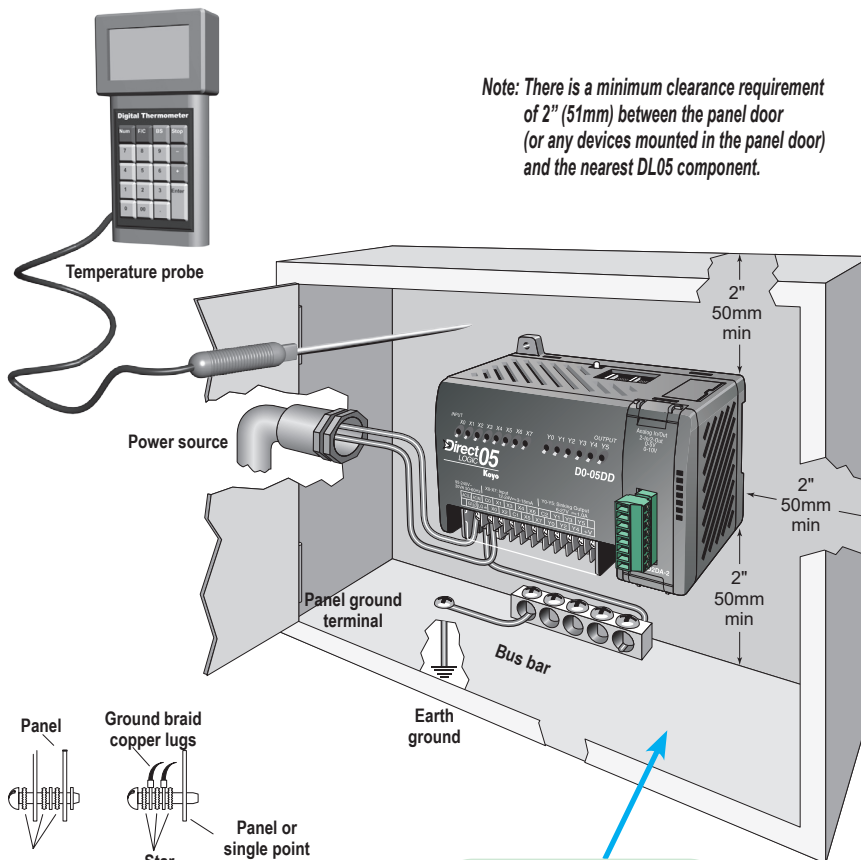

See the Enclosure section to find an enclosure that fits your application



Environmental Specifications for DL05 and DL06

Storage Temperature	-4° F-158°F (-20°C to 70°C)
Ambient Operating Temperature	32°F-131°F (0° to 55°C)
Ambient Humidity	5 to 95% relative humidity (non-condensing)
Vibration Resistance	MIL STD 810C Method 514.2
Shock Resistance	MIL STD 810C Method 516.2
Noise Immunity	NEMA (ICS3-304)
Atmosphere	No corrosive gases


Product Dimensions and Installation

Mounting Orientation





DL05 and DL06 PLCs must be mounted properly to ensure ample airflow for cooling purposes. It is important to follow the unit orientation requirements and to verify that the PLC's dimensions are compatible with your application. Notice particularly the grounding requirements and the recommended cabinet clearances.

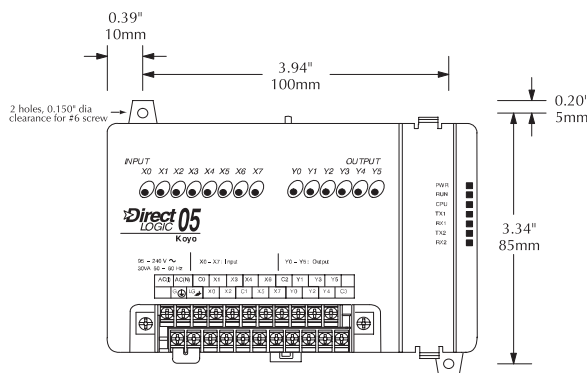

Mounting orientation

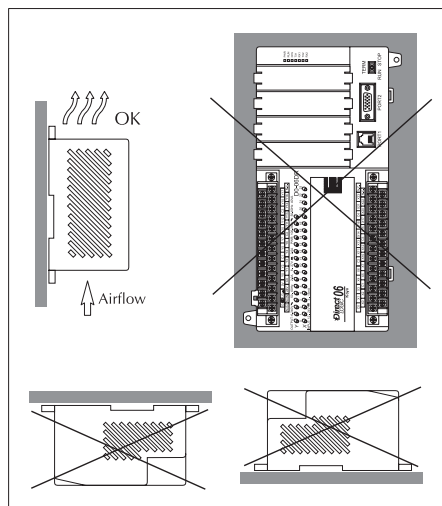

Mounting orientation

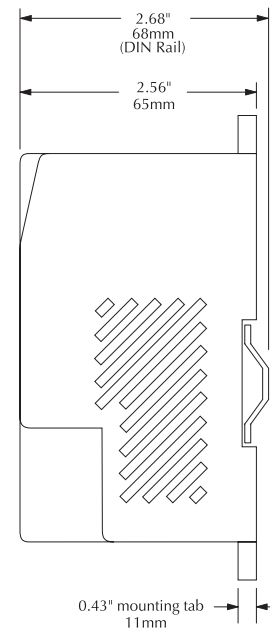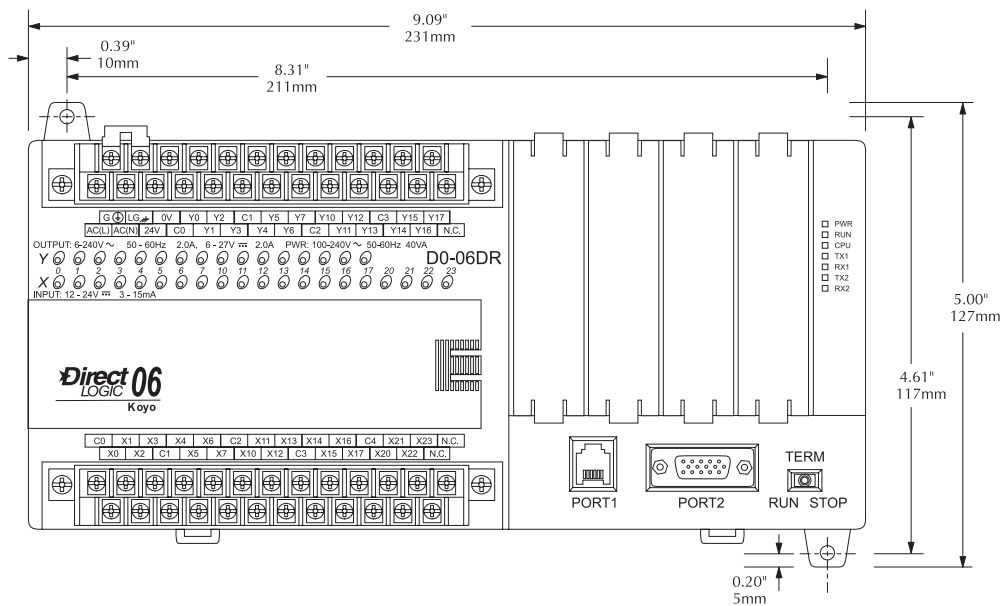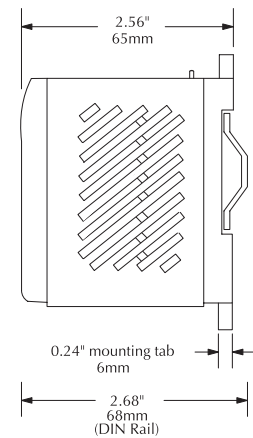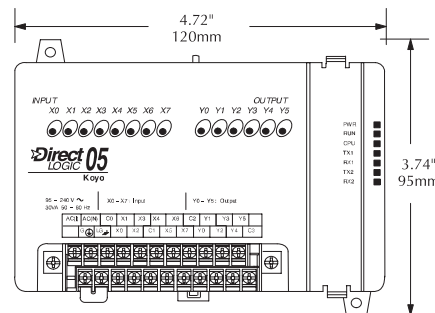

Choosing I/O Type

The DL05 and DL06 product families offer a number of different I/O configurations. Choose the configuration that is right for your application. Also, keep in mind that both the DL05 and the DL06 PLCs offer the ability to add I/O with the use of option modules.

Fixed discrete I/O

All DL05 micro PLCs have eight built-in inputs and six built-in outputs on the base unit. The DL06 micro PLCs have 20 built-in inputs and 16 built-in outputs on the base unit. We offer the most common I/O types for your convenience, including AC inputs and outputs, DC sinking and sourcing inputs and outputs, and relay outputs. Refer to the tables to the right to see the I/O combinations available and their voltage ranges.

Option module slots

The DL05 has one option module slot and the DL06 has four option module slots. Check out the discrete and analog I/O you can add by purchasing inexpensive option modules. Specialty modules are also available and are discussed later in this section.

Automatically assigned addresses

The DL05 uses automatic addressing, so for the vast majority of applications, there is no setup required. We use octal addressing for these products, which means there are no 8s or 9s. The DL05's eight input points use addresses X0-X7, and the six output points use addresses Y0-Y5. Similarly, the DL06 uses addresses X0-X23 and Y0-Y17.

Review the I/O specs and wiring diagrams

The Base Unit I/O tables give a brief description of the I/O combinations offered for the DL05 and DL06 PLCs. The I/O specifications are discussed in more detail later in this section.

DL05 Base Unit I/O Table

Part Number	Inputs			Outputs			Price
	I/O type/ commons	Sink or source	Voltage ranges	I/O type/ commons	Sink or source	Voltage/current ratings	
<u>D0-05AR</u>	AC/2	N/A	90–120 VAC	Relay/2	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$283.00
<u>D0-05DR</u>	DC/2	Sink or Source	12–24 VDC	Relay/2	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$252.00
<u>D0-05AD</u>	AC/2	N/A	90–120 VAC	DC/1	Sink	6–27 VDC, 0.5 A (Y0-Y1) 6–27 VDC, 1.0 A (Y2-Y5)	\$287.00
<u>D0-05DD</u>	DC/2	Sink or Source	12–24 VDC	DC/1	Sink	6–27 VDC, 0.5 A (Y0-Y1) 6–27 VDC, 1.0 A (Y2-Y5)	\$254.00
<u>D0-05AA</u>	AC/2	N/A	90–120 VAC	AC/2	N/A	17–240 VAC 47–63 Hz 0.5 A	\$279.00
<u>D0-05DA</u>	DC/2	Sink or Source	12–24 VDC	AC/2	N/A	17–240 VAC 47–63 Hz 0.5 A	\$273.00
<u>D0-05DR-D</u>	DC/2	Sink or Source	12–24 VDC	Relay/2	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$283.00
<u>D0-05DD-D</u>	DC/2	Sink or Source	12–24 VDC	DC/1	Sink	6–27 VDC, 0.5 A (Y0-Y1) 6–27 VDC, 1.0 A (Y2-Y5)	\$287.00

Sinking/sourcing

If you are using a DC field device, you should consider whether that device requires a sinking or sourcing PLC I/O configuration. For more information on sinking and sourcing concepts, please refer to the Appendix of this catalog.

Sink/source inputs — All built-in DC inputs on the DL05 and DL06 micro PLCs can be wired in a sinking or sourcing configuration. However, all inputs on a single common must use the same configuration. In some cases, the DC inputs on option modules are fixed as sinking or sourcing. Refer to the table on the next page.

Sinking outputs — All built-in DC outputs on the DL05 are sinking. The DL06 family offers two PLCs with sinking DC outputs, and two with sourcing outputs.

Sourcing outputs — The DL06 PLC family includes the [D0-06DD2\(-D\)](#) with sourcing outputs. If a sourcing output is required, you might also consider using the [D0-xxTD2](#) option module with sourcing outputs, which can also be installed in a DL05 or DL06 PLC.

High-speed inputs and pulse outputs

DL05s and DL06s with DC inputs offer high-speed input features, and DC output units offer pulse output features. The first three DC inputs on the DL05 PLCs are set up by default as filtered inputs with a 10 ms filter. Likewise, the first four DC inputs on the DL06 PLCs are set to the same default value. By entering a setup code in a special V-memory location, you can choose other features. In some modes of operation, you have a choice as to how you use each point. For example, if you use X0 as an up counter, you can use X2 as a reset input for the counter or as a filtered discrete input. If these features interest you, take a look at the detailed high-speed I/O descriptions found later in this section.

Choosing I/O Type

DL06 Base Unit I/O Table							
Part Number	Inputs			Outputs			Price
	I/O Type/ Commons	Sink or source	Voltage Ranges	I/O Type/ Commons	Sink or Source	Voltage/Current Ratings	
<u>D0-06AA</u>	AC/5	N/A	90–120 VAC	AC/4	N/A	17–240 VAC, 0.5 A 50/60 Hz	\$533.00
<u>D0-06AR</u>	AC/5	N/A	90–120 VAC	Relay/4	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$507.00
<u>D0-06DA</u>	DC/5	Sink or source	12–24 VDC	AC/4	N/A	17–240 VAC, 0.5 A 50–60 Hz	\$506.00
<u>D0-06DD1</u>	DC/5	Sink or source	12–24 VDC	DC/4	Sink	6–27 VDC, 0.5 A (Y0-Y1) 6–27 VDC, 1.0 A (Y2-Y17)*	\$470.00
<u>D0-06DD2</u>	DC/5	Sink or source	12–24 VDC	DC/4	Source	12–24 VDC, 0.5 A (Y0-Y1) 12–24 VDC, 1.0 A (Y2-Y17)	\$474.00
<u>D0-06DR</u>	DC/5	Sink or source	12–24 VDC	Relay/4	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$493.00
<u>D0-06DD1-D</u>	DC/5	Sink or source	12–24 VDC	DC/4	Sink	6–27 VDC, 0.5 A (Y0-Y1) 6–27 VDC, 1.0 A (Y2-Y17)*	\$472.00
<u>D0-06DD2-D</u>	DC/5	Sink or source	12–24 VDC	DC/4	Source	12–24 VDC, 0.5 A (Y0-Y1) 12–24 VDC, 1.0 A (Y2-Y17)	\$476.00
<u>D0-06DR-D</u>	DC/5	Sink or source	12–24 VDC	Relay/4	N/A	6–27 VDC, 2A 6–240 VAC, 2A	\$487.00

* These outputs must be derated to 0.6 A for EN61131-2 compliance.

Discrete I/O Option Modules							
Part Number	Inputs			Outputs			Price
	I/O Type/ Number/ Commons	Sink or source	Voltage Ranges	I/O Type/ Number/ Commons	Sink or Source	Voltage/Current Ratings	
<u>D0-07CDR</u>	DC/4/1	Sink or source	12–24 VDC	Relay/3/1	N/A	6–27 VDC, 1A 6–240 VAC, 1A	\$95.00
<u>D0-08CDD1</u>	DC/4/2	Sink or source	12–24 VDC	DC/4/2	Sink	6–27 VDC, 0.3 A	\$95.00
<u>D0-08TR</u>	N/A	N/A	N/A	Relay/8/2	N/A	6–27 VDC, 1A 6–240 VAC, 1A	\$112.00
<u>D0-10ND3</u>	DC/10/2	Sink or source	12–24 VDC	N/A	N/A	N/A	\$84.00
<u>D0-10ND3F</u>	DC/10/2	Sink or source	12–24 VDC	N/A	N/A	N/A	\$95.00
<u>D0-10TD1</u>	N/A	N/A	N/A	DC/10/2	Sink	6–27 VDC, 0.3 A	\$100.00
<u>D0-10TD2</u>	N/A	N/A	N/A	DC/10/2	Source	12–24 VDC, 0.3 A	\$102.00
<u>D0-16ND3</u>	DC/16/4	Sink or source	20–28 VDC	N/A	N/A	N/A	\$86.00
<u>D0-16TD1</u>	N/A	N/A	N/A	DC/16/2	Sink	6–27 VDC, 0.1A	\$94.00
<u>D0-16TD2</u>	N/A	N/A	N/A	DC/16/2	Source	12–24 VDC, 0.1A	\$85.00
<u>F0-04TRS</u>	N/A	N/A	N/A	Relay/4/4	N/A	5–30 VDC, 3A 5–125 VAC, 3A	\$80.00
<u>F0-08NA-1</u>	AC/8/2	N/A	80–132 VAC 90–150 VDC	N/A	N/A	N/A	\$98.00
<u>F0-08SIM</u>	8-pt. Input simulator						\$68.00

Communications and Specialty Option Modules		
Part Number	Description	Price
H0-ECOM100	Ethernet Communications Module 10/100 Mbit	\$321.00
D0-DEVNETS	DeviceNET Server Module	\$260.00
H0-CTRIO2	High Speed Counter I/O Module	\$315.00
D0-DCM	Serial Communications Module	\$260.00
F0-CP128	ASCII CoProcessor Module	\$345.00

Analog I/O

By using option modules, you can add analog inputs or outputs to your DL05 or DL06 PLC. The table below shows the input and output types at a glance. Detailed specifications are provided later in this section.

Analog I/O Option Modules					
Part Number	Inputs		Outputs		Price
	No.	Input Type	No.	Output Type	
F0-04AD-1	4	0–20 mA or 4–20 mA	0	N/A	\$153.00
F0-04AD-2	4	0–5 VDC or 0–10 VDC	0	N/A	\$224.00
F0-08ADH-1	8	0–20 mA	0	N/A	\$259.00
F0-08ADH-2	8	0–5 VDC or 0–10 VDC	0	N/A	\$273.00
F0-04DAH-1	0	N/A	4	4–20 mA	\$276.00
F0-08DAH-1	0	N/A	8	4–20 mA	\$363.00
F0-04DAH-2	0	N/A	4	0–10 VDC	\$260.00
F0-08DAH-2	0	N/A	8	0–10 VDC	\$345.00
F0-4AD2DA-1	4	0–20 mA or 4–20 mA	2	0–20 mA or 4–20 mA	\$370.00
F0-2AD2DA-2	2	0–5 VDC or 0–10 VDC	2	0–5 VDC or 0–10 VDC	\$290.00
F0-4AD2DA-2	4	0–5 VDC or 0–10 VDC	2	0–5 VDC or 0–10 VDC	\$409.00
F0-04RTD	4	RTD	0	N/A	\$380.00
F0-04THM*	4	Thermo- couple / Voltage	0	N/A	\$400.00

* See module specifications page for thermocouple types and voltage input ranges supported

Power budgeting

No power budgeting is necessary for the DL05. The built-in power supply is sufficient for powering the base unit, any of the option modules, the handheld programmer, and even a [DV1000](#) operator interface.

Power budgeting is necessary for the DL06. With four option module slots and an optional LCD display, it is necessary to verify that sufficient power is available for all optional devices. Power budgeting is described in detail on page 2-29 and in the DL06 User Manual.

Networking the DL05 and DL06

All DL05 and DL06 PLCs have built-in networking capability. The DL05 family offers two 6-pin, RS-232 ports. You can use these ports for programming, networking, or connecting an operator interface device. The RS-232 ports support point-to-point communications using the optional [D0-CBL](#) cable. If you need to create a multi-drop network or require longer distances between devices, you can use the [FA-ISOCAN](#) at each DL05 to convert the RS-232 signal to RS-422 or RS-485.

The DL06 family of PLCs offers even greater communications flexibility. Port 1 is a fixed baud rate port identical to port 1 on the DL05 PLCs, but port 2 is a multi-function port that can be used as RS-232, RS-422, or RS-485 (Modbus/ASCII only) without using external converters. This allows you to create multi-drop networks with minimal installation headaches.

Protocols supported

Each port is capable of communicating using K-sequence, DirectNET and Modbus RTU protocols. Port 1 can only be a Server for each of the protocols. Port 2 can serve as a K-sequence Server or a network Client or Server for either DirectNET or Modbus RTU protocols.

Serial Bus Protocols

We also offer option modules that allow you to connect a DL05 or DL06 PLC to a variety of networks as a Server device. Our [D0-DEVNETS](#) (DeviceNet) modules plug into any DL05 or DL06 PLC. The [D0-DCM](#) Data Communications module supports DirectNET and Modbus RTU protocols.

ZIPLink communication adapter modules


The **ZIPLink** communications adapter modules offer fast and convenient screw terminal connection for the bottom port of the DL06 CPU. The adapter modules are RS232/422 DIP switch selectable and are offered with or without indicating LEDs and surge protection. See the Wiring Solutions section in this catalog for more information.

Optional Ethernet communication modules



Need to connect to a high speed HMI or computer system? We offer a 100Base-T Ethernet communications module. You can use the [H0-ECOM100](#) Ethernet communication module with our Stride

Ethernet switches or with most off-the-shelf Ethernet hubs or switches. The [H0-ECOM100](#) option module plugs into any DL05 or DL06 PLC and supports the industry standard Modbus TCP protocol.


Point-to-point

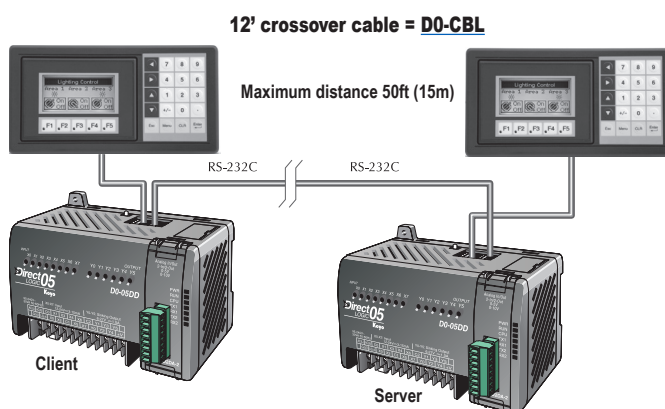

Multi-drop

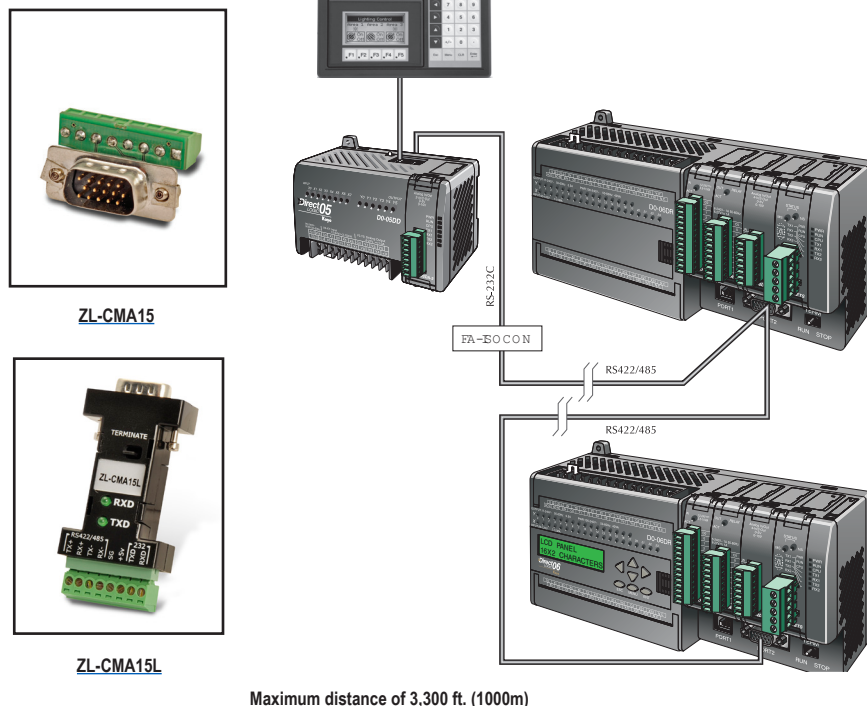

ZL-CMA15



ZL-CMA15L



Ports, Status Indicators, and Modes

Port 1

Port 1 is a 6-pin, fixed configuration port and has the same pin assignments on the DL05 and the DL06. Please refer to the table and diagrams on this page. This port can be used to connect to an HPP, DirectSOFT, an operator interface, or other external device. Features include:

- 9600 baud
 - 8 data bits
 - Odd parity
 - 1 start bit, 1 stop bit
 - Station address of 1
 - Asynchronous, half-duplex, DTE
- Protocols supported (as Server):
- K sequence, **DirectNET**, Modbus RTU

DL05 & DL06 Port 1 Pin Descriptions		
1	0V	Power (-) connection (GND)
2	5V	Power (+) connection
3	RXD	Receive data (RS-232C)
4	TXD	Transmit data (RS-232C)
5	5V	Power (+) connection
6	0V	Power (-) connection (GND)

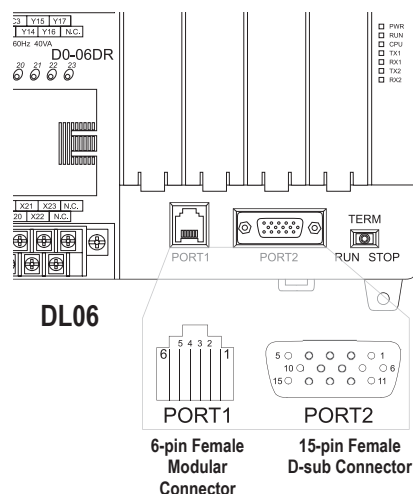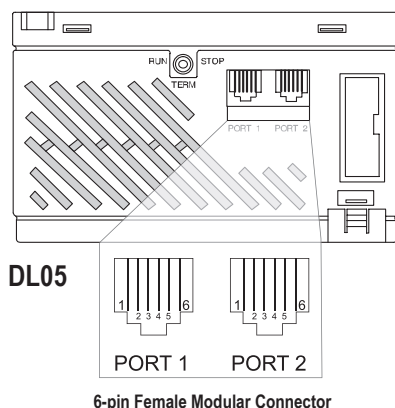

Port 2

Port 2 is a configurable port on both the DL05 and the DL06 PLCs. The DL05 PLC uses a 6-pin modular connector and offers RS-232 communications only. The DL06 PLC uses a 15-pin HD-sub connector and offers RS-232, RS-422, or RS-485 communications. Please refer to the table and diagrams on this page for more information. This port can be used to connect to an HPP, DirectSOFT, an operator interface, or other external device. Features of port 2 include:

- 300, 600, 1200, 2400, 4800, 9600 (default), 19,200, 38,400 baud
 - 8 data bits
 - Odd (default), even, or no parity
 - 1 start bit, 1 stop bit
 - Station address: 1 (default)
 - 1-90 DirectNET, K sequence
 - 1-247 Modbus RTU
 - Asynchronous, half-duplex, DTE
- Protocols supported:
- K sequence (Server), **DirectNET** (Client/Server), Modbus (Client/Server)

DL05 Port 2 Pin Descriptions		
1	0V	Power (-) connection (GND)
2	5V	Power (+) connection
3	RXD	Receive data (RS-232C)
4	TXD	Transmit data (RS-232C)
5	RTS	Ready to send
6	0V	Power (-) connection (GND)

DL06 Port 2 Pin Descriptions		
1	5V	Power (+) connection
2	TXD	Transmit data (RS-232C)
3	RXD	Receive data (RS-232C)
4	RTS	Ready to send (RS232C)
5	CTS	Clear to send (RS232C)
6	RXD-	Receive data (-) (RS-422/485)
7	0V	Power (-) connection (GND)
8	0V	Power (-) connection (GND)
9	TXD+	Transmit data (+) (RS-422/485)
10	TXD-	Transmit data (-) (RS-422/485)
11	RTS+	Ready to send (+) (RS-422/485)
12	RTS-	Ready to send (-) (RS-422/485)
13	RXD+	Receive data (+) (RS-422/485)
14	CTS+	Clear to send (+) (RS-422/485)
15	CTS-	Clear to send (-) (RS-422/485)


DL05 and DL06 status indicators

Status Indicators		
Indicator	Status	Meaning
PWR	ON	Power good
	OFF	Power failure
RUN	ON	CPU is in Run Mode
	OFF	CPU is in Stop or Program Mode
CPU	ON	CPU self diagnostics error
	OFF	CPU self diagnostics good
TX1	ON	Data is being transmitted by the CPU-Port 1
	OFF	No data is being transmitted by the CPU-Port 1
RX1	ON	Data is being received by the CPU-Port 1
	OFF	No data is being received by the CPU-Port 1
TX2	ON	Data is being transmitted by the CPU-Port 2
	OFF	No data is being transmitted by the CPU-Port 2
RX2	ON	Data is being received by the CPU-Port 2
	OFF	No data is being received by the CPU-Port 2

DL05 and DL06 mode switches

Mode Switch Position	CPU Action
RUN (Run Program)	CPU is forced into the RUN mode if no errors are encountered. No program changes are allowed by the programming/monitoring device.
TERM (Terminal)	RUN PROGRAM and the TEST modes are available. Mode and program changes are allowed by the programming/monitoring device.
STOP	CPU is forced into the STOP mode. No changes are allowed by the programming/monitoring device.

Use the optional low profile 15-pin adapter to make option module wiring easier.

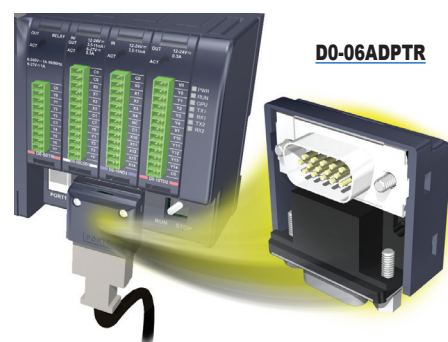

ASCII and Modbus Instructions

ASCII instructions for DL06

The DL06 PLC supports several easy-to-use instructions, which allow ASCII strings to be read into or written from the communication ports when using either the CPU port 2, or the **D0-DCM** Data Communications Module port 2.

Raw ASCII: CPU/DCM Port 2 can be used for either reading or writing raw ASCII strings, but not for both.

Embedded ASCII: With these instructions, you can use the DL06 PLC to locate ASCII strings embedded within a supported protocol via CPU/DCM Port.

Receiving ASCII strings

1. **ASCII IN (AIN)** - This instruction configures CPU/DCM Port 2 for raw ASCII input strings, with parameters such as fixed and variable length ASCII strings, termination characters, byte swapping options, and instruction control bits. Use barcode scanners, weigh scales, etc., to write raw ASCII input strings into CPU/DCM Port 2 based on the AIN instruction's parameters.
2. Write embedded ASCII strings directly to V-memory from an external HMI (or

similar Client device). The ASCII string is transmitted through CPU/DCM Port 2 using any supported communications protocol. This method uses the familiar RX/WX instructions previously available.

3. If the DL06 is used as a network Client, the Network Read embedded ASCII data from a network Server device. Again, the ASCII string would be transmitted through CPU/DCM Port 2, using any supported communications protocol.

Writing ASCII strings

1. **Print from V-memory (PRINTV)** - Use this instruction to write raw ASCII strings out of CPU/DCM port 2 to a display panel, serial printer, etc. The instruction features the starting V-memory address, string length, byte swapping options, etc. When the instruction's permissive bit is enabled, the string is written to CPU/DCM Port 2.
2. **Print to V-memory (VPRINT)** - Use this instruction to create pre-coded ASCII strings in the PLC (e.g. alarm messages). When the instruction's permissive bit is enabled, the message is loaded into a pre-defined V-memory address location. Then the PRINTV instruction may be used to write the pre-coded ASCII string out of CPU/DCM Port 2. American, European, and Asian Time/Dates taps are supported.
3. **Print Message (PRINT)** - This existing instruction can be used to create pre-coded ASCII strings in the PLC. When the instruction's permissive bit is enabled, the string is written to CPU/DCM Port 2. The VPRINT/PRINTV instruction combination is more powerful and flexible than the PRINT instruction.
4. If the DL06 PLC is a network Client, the Network Write (WX) can be used to write embedded ASCII data to an HMI or Server device directly from V-memory. This is done via a supported communications protocol using CPU/DCM Port 2.

More ASCII instructions

ASCII Find (AFIND) - Finds where a specific portion of the ASCII string is located in continuous V-memory addresses.

ASCII Extract (AEX) - Extracts a specific portion (usually some data value) from the ASCII find location or other known ASCII data location.

Compare V-memory (CMPV) - This instruction is used to compare two blocks of V-memory addresses and is usually used to detect a change in an ASCII string. Compared data types must be of the same format (e.g. BCD, ASCII, etc.).

Swap Bytes (SWAPB) - Swaps V-memory bytes on ASCII data that was written directly to V-memory from an external HMI or similar Client device via a communications protocol. The AIN and AEX instructions have a built-in byte swap feature.

The **F0-CP128** option module is also available for more extensive ASCII communications.

Modbus RTU instructions for DL06

The DL06 CPU/DCM port 2 supports Modbus Read/Write instructions that simplify setup. The MRX and MWX instructions allow you to use native Modbus addressing, eliminating the need for octal to decimal conversions.

Function Codes 05 and 06 and the ability to read Server Exception Codes have been added. These flexible instructions allow the user to select the following parameters within one instruction window:

- 584/984 or 484 Modbus data type
- Server node (0-247)
- Function code
- Starting Client/Server memory address
- Number of bits
- Exception code starting address

Power Budgeting for the DL06

The DL06 has four option module slots. To determine whether the combination of modules you select will have sufficient power, you will need to perform a power budget calculation.

Power supplied

Power is supplied from two sources: the internal base unit power supply and, if required, an external supply (customer furnished). The D0-06xx (AC powered) PLCs supply a limited amount of 24VDC power. The 24VDC output can be used to power external devices.

For power budgeting, start by considering the power supplied by the base unit. All DL06 PLCs supply the same amount of 5VDC power. Only the AC units offer 24VDC auxiliary power.

Be aware of the trade-off between 5VDC power and 24VDC power. The amount of 5 VDC power available depends on the amount of 24VDC power being used, and the amount of 24VDC power available depends on the amount of 5VDC power consumed. Determine the amount of internally supplied power from the table to the right.

Power required by base unit

Because of the different I/O configurations available in the DL06 family, the power consumed by the base unit itself varies from model to model. Subtract the amount of power required by the base unit from the amount of power supplied by the base unit. Be sure to subtract 5VDC and 24VDC amounts.

Power required by option modules

Next, subtract the amount of power required by the option modules you are planning to use. Again, remember to subtract both 5VDC and 24VDC.

If your power budget analysis shows surplus power available, you should have a workable configuration.

DL06 Power Supplied by Base Units		
Part Number	5 VDC (mA)	24 VDC (mA)
D0-06xx	1500mA	300mA
	2000mA	200mA
D0-06xx-D	1500mA	none

DL06 Base Unit Power Required		
Part Number	5 VDC (mA)	24 VDC (mA)
D0-06AA	800mA	none
D0-06AR	900mA	none
D0-06DA	800mA	none
D0-06DD1	600mA	280mA*
D0-06DD2	600mA	none
D0-06DR	950mA	none
D0-06DD1-D	600mA	none
D0-06DD2-D	600mA	none
D0-06DR-D	950mA	none

* Only if auxiliary 24VDC power is connected to V+ terminal.

DL06 Power Consumed by Other Devices		
Part Number	5 VDC (mA)	24 VDC (mA)
D0-06LCD	50mA	none
D2-HPP	200mA	none
DV-1000	150mA	none
C-more Micro-Graphic	210mA	none

Power Budgeting Example			
Power Source		5VDC power (mA)	24VDC power (mA)
D0-06DD1 (select row A or B)	A	1500mA	300mA
	B	2000mA	200mA
Current Required		5VDC power (mA)	24VDC power (mA)
D0-06DD1		600mA	280mA*
D0-16ND3		35mA	0
D0-10TD1		150mA	0
D0-08TR		280mA	0
F0-4AD2DA-1		100mA	0
D0-06LCD		50mA	0
Total Used		1215mA	280mA
Remaining	A	285mA	20mA
	B	785mA	note 1

* Auxiliary 24 VDC used to power V+ terminal of D0-06DD1 sinking outputs.

Note 1: If the PLC's auxiliary 24 VDC power source is used to power the sinking outputs, use power choice A, above.

DL05/06 Power Consumed by Option Modules		
Part Number	5 VDC (mA)	24 VDC (mA)
D0-07CDR	130mA	none
D0-08CDD1	100mA	none
D0-08TR	280mA	none
D0-10ND3	35mA	none
D0-10ND3F	35mA	none
D0-10TD1	150mA	none
D0-10TD2	150mA	none
D0-16ND3	35mA	none
D0-16TD1	200mA	none
D0-16TD2	200mA	none
F0-04TRS	250mA	none
F0-08NA-1	5mA	none
F0-04AD-1	50mA	none
F0-04AD-2	75mA	none
F0-08ADH-1	25mA	25mA
F0-08ADH-2	25mA	25mA
F0-04DAH-1	25mA	150mA
F0-08DAH-1	25mA	220mA
F0-04DAH-2	25mA	30mA
F0-08DAH-2	25mA	30mA
F0-2AD2DA-2	50mA	30mA
F0-4AD2DA-1	100mA	40mA
F0-4AD2DA-2	100mA	none
F0-04RTD	70mA	none
F0-04THM	30mA	none
D0-DEVNETS	45mA	none
H0-CTRIO2	250mA	none
H0-ECOM100	300mA	none
F0-08SIM	1mA	none
D0-DCM	250 mA	none
F0-CP128	150 mA	none
F0-08SIM	1 mA	none

DL06 LCD Display

The optional [D0-06LCD](#) (\$127.00) is a cost effective LCD display panel that is easy to install. This device is available exclusively for the DL06 PLCs.

16 X 2 backlit display

The 16 character x 2 row display mounts directly on the face of the PLC. The LCD is backlit and is accessible using the seven function keys on the front of the display.

Monitor or change data values

You can view V-memory registers, I/O status, PLC mode, or system errors without interrupting the PLC's control function.

Display messages required for alarm or monitoring purposes can be pre-programmed or imported as ASCII data.

Password protection

Two layers of password protection prevent unauthorized changes to clock and calendar setup and V-memory data values. Individuals with password authorization can change clock, calendar, V-memory values, force bits on or off, etc.

One simple ladder instruction is used to set up the display. The LCD configuration instruction is available in DirectSOFT, version 4.0 or later.

Note: The [D2-HPP](#) handheld programmer does not support DL06 LCD configuration.

The DL06 User Manual ([D0-06USER-M](#)) describes more fully the installation and operation of the [D0-06LCD](#). Be sure to consult this manual before installing the DL06 LCD. The manual is available free on our Web site, or it can be purchased separately.

Snap-in installation

The display installs easily into any model DL06 PLC.

Note: Remove power to the PLC before installing or removing the LCD display.

Remove the plastic cover (located between the input and output terminals) by sliding the cover to the left. In its place, slide in the LCD display until it snaps into place.

Display or change individual bits (up to 16 bits per screen) or 32-bit double word values from V-memory.

Buzzer

The piezoelectric buzzer can be configured to provide pushbutton feedback.


Keypad navigation

Seven function keys on the face of the LCD display provide navigation through messages or menu items. Messages fall into two categories:

- Error messages
- User-defined pre-programmed messages

At power-up the default screen is displayed. The default screen can be user-defined.

Seven menu choices allow you to view or change all accessible data values (see next page).

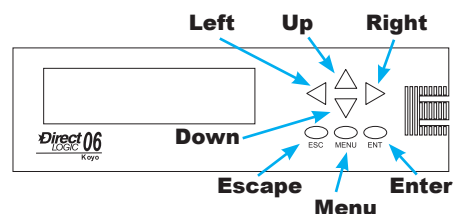

DL06 LCD Display

Menu choices

Pressing the Menu key takes you to the last accessed menu (or the first menu selection, if you haven't previously accessed a menu). Each time you press the Menu key (or if you simply hold the menu key down) the display will step through all menu choices.

There are seven built-in menus. Use the Menu key to locate the menu you need, and press the Enter key to view or change values.


From the default screen or a message screen, press and hold the Menu key. The display will scroll through the following choices:

- M1 : PLC information
- M2 : System configuration
- M3 : Monitor
- M4 : Calendar R/W
- M5 : Password operation
- M6 : Error history read
- M7 : LCD test and set

Make a menu selection by pressing the Enter key. Change data values using the direction arrow keys.

Ladder instruction

The LCD instruction in DirectSOFT gives the PLC programmer a convenient way to define screen messages. A literal string can be programmed using the LCD instruction. Embedding variables allows you to customize the messages for an application that involves changing values. The following example shows an embedded date and time on an alarm message:

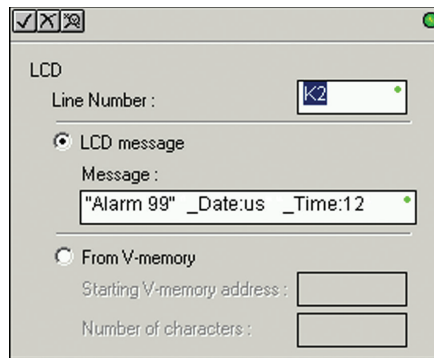


Message with embedded date and time

The top line (16 characters) is designated K1, and the second line is K2. The sample instructions on this page show how a message is developed. A permissive contact turns on the instruction block, which sends the message to the display.


Messages can also be retrieved from V-memory and sent to the display. Select K1 or K2 to indicate which line you want to write to and select "From V-memory" as the source of the string.

Up to 16 characters of ASCII text can be displayed per line. In the example, K16 indicates that 16 bytes (8 words) of ASCII text is retrieved for display.

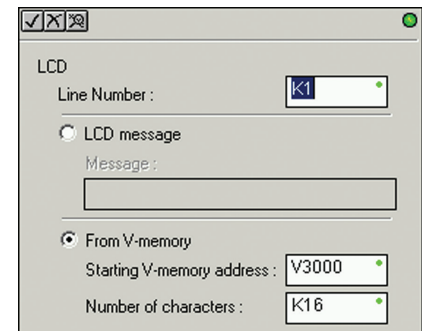


Message from PLC memory

Message programming examples

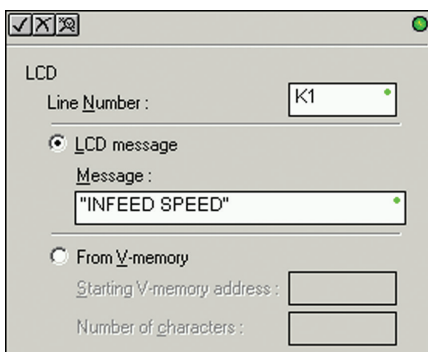

Simple text message

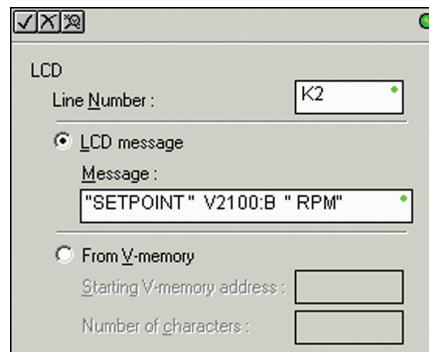

Message with embedded data



Accessories

DL05, DL06 and Option Module Accessories		
Part Number	Description	Price
<u>D0-MC-BAT</u>	Replacement battery for Do-more H2 and T1H series CPU modules, and D0-01MC optional memory cartridge for DL05 PLCs.	\$3.25
<u>D2-BAT-1</u>	Replacement RAM retentive memory backup battery for the DL06.	\$9.75
<u>F0-IOCON</u>	DL05 or DL06 replacement terminal blocks, 8-position, for the F0-04AD-1, F0-04AD-2, F0-2AD2DA-2, F0-4AD2DA-1, F0-4AD2DA-2 and H0-CTRIO2 option modules (qty. 2).	\$24.00
<u>F0-IOCON-THM</u>	DL05 or DL06 thermocouple option module replacement terminal block, quantity one.	\$23.00
<u>D0-CBL</u>	12ft. (3.66 m) RS-232C shielded networking cable without RTS connections for DL05 or DL06 RJ12 networking ports. Enables direct networking of two PLCs.	\$47.50
<u>D0-ACC-1</u>	DL05 accessory pack includes one each of the I/O terminal block, I/O terminal block cover, and option slot cover.	\$39.50
<u>D0-ACC-2</u>	DL06 replacement terminal blocks (qty. 2), terminal block covers (qty. 2), terminal block labels (qty. 2) and short bar (qty. 1).	\$47.00
<u>D0-ACC-3</u>	DL06 replacement option module slot covers (qty. 4), DL06 top covers (qty. 4), and LCD slot cover.	\$19.00
<u>D0-ACC-4</u>	DL05 or DL06 discrete I/O option module replacement terminal blocks, includes 13-position (qty. 2) and 10-position (qty. 2).	\$30.00
<u>D0-06ADPTR</u>	DL06 15-pin high density D-sub vertical adapter for DL06 Port 2 serial communications port.	\$29.00
<u>D2-FUSE-1</u>	DL05 or DL06 F0-04TRS replacement fuse	\$17.50
<u>ZL-CMA15</u>	ZIPLink PLC communication adapter for 15-pin port	\$19.50
<u>ZL-CMA15L</u>	ZIPLink PLC communication adapter for 15-pin port with surge protection plus Power, Transmit, and Receive LED indicators	\$59.00




ZL-CMA15




ZL-CMA15L

DL06 replacement terminal blocks, terminal block covers, terminal block labels and short bar
[D0-ACC-2](#)

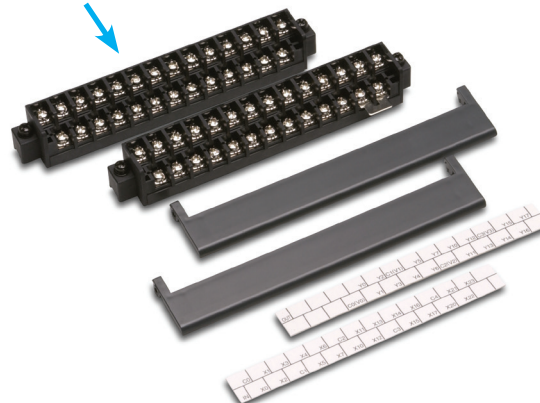


Discrete and analog option module terminal blocks
[D0-ACC-4](#)

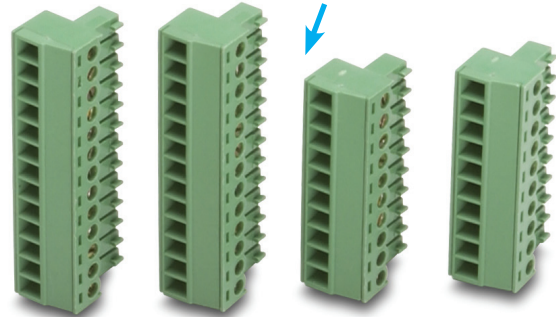

DL05 option module slot cover, I/O terminal block, and I/O terminal block cover
[D0-ACC-1](#)



DL06 replacement option module slot covers, DL06 top covers, and LCD slot cover
[D0-ACC-3](#)



DL06 15-pin high density D-sub port adapter
[D0-06ADPTR](#)

See the Wiring Solutions section in this catalog for more information.





DL05 I/O Specifications

D0-05AA

\$279.00

Wiring diagram and specifications

D0-05AA Specifications		
AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
AC Input Specifications	Number of Input Pts.	8
	Number of Commons	2 (isolated)
	Input Voltage Range	90–120 VAC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100 VAC at 50 Hz 10mA @ 100 VAC at 60Hz
	On Current/Voltage Level	>6mA/75VAC
	OFF Current/Voltage Level	<2mA/20VAC
	OFF to ON Response	<40ms
	ON to OFF Response	<40ms
	Fuses	None
AC Output Specifications	Number of Output Points	6
	Number of Commons	2 (isolated)
	Output Voltage Range	17–240 VAC 47–63 Hz
	Peak Voltage	264VAC
	ON Voltage Drop	1.5 VAC>50mA 4.0 VAC<50mA
	Maximum Current	0.5 A/pt 1.5 A/ common
	Maximum Leakage Current	4mA at 264VAC
	Maximum Inrush Current	10A for 10ms
	Minimum Load	10mA
	OFF to ON Response	1ms
	ON to OFF Response	1ms + 1/2 cycle
	Fuses	None (external recommended)

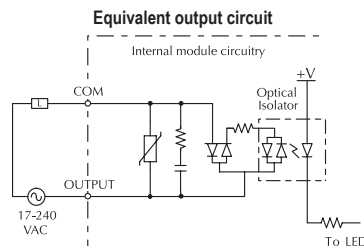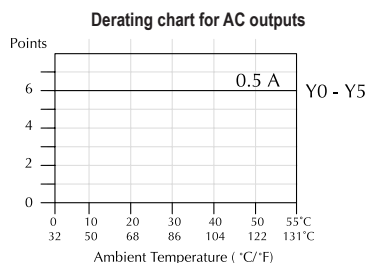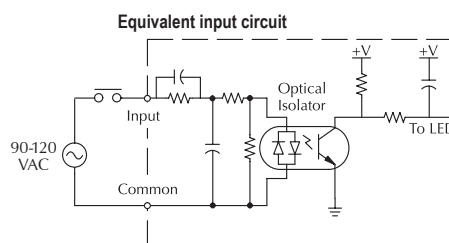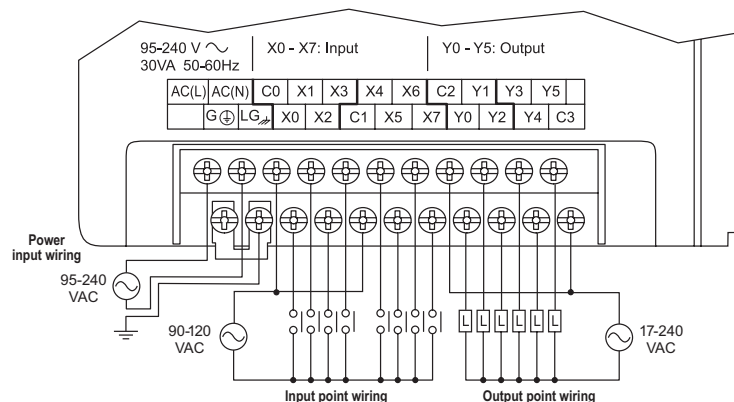





DL05 I/O Specifications

D0-05AD **\$287.00**

Wiring diagram and specifications

D0-05AD Specifications		
AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
AC Input Specifications	Number of Input Pts.	8
	Number of Commons	2 (isolated)
	Input Voltage Range	90–120 VAC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100VAC at 50Hz 10mA @ 100VAC at 60Hz
	On Current/Voltage Level	>6mA/75VAC
	OFF Current/Voltage Level	<2mA/20VAC
	OFF to ON Response	<40ms
	ON to OFF Response	<40ms
	Fuses	None
DC Output Specifications	Number of Output Points	6 (sinking)
	Number of Commons	1
	Output Voltage Range	6–27 VDC
	Peak Voltage	50VDC
	Max. Frequency (Y0, Y1)	7kHz
	ON Voltage Drop	0.5 VDC @ 1A
	Maximum Current	0.5 A/pt (Y0-Y1)* 1.0 A pt (Y2-Y5)
	Maximum Leakage Current	15µA @ 30VDC
	Maximum Inrush Current	2A for 100ms
	OFF to ON Response	<10µs
	ON to OFF Response	<30µs (Y0-Y1) <60µs (Y2-Y5)
	External DC Power Required	20–28 VDC 150mA max
	Status Indicators	Logic side
	Fuses	None (external recommended)





*When output points Y0 and Y1 are not used in pulse mode, the maximum output current is 1.0 A

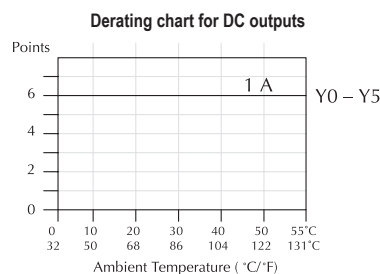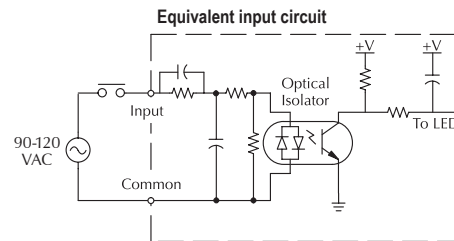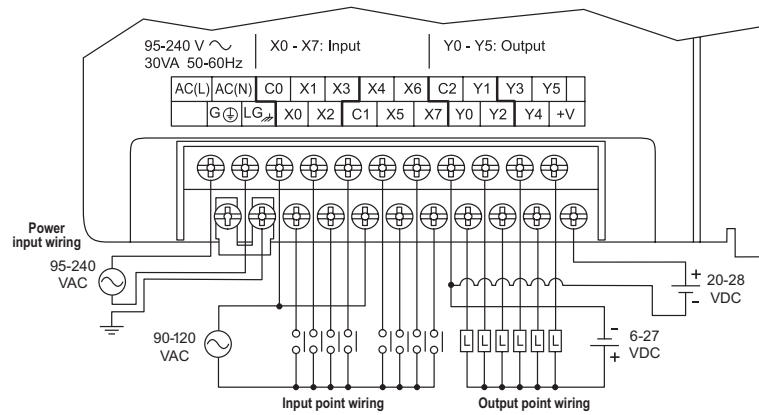

DL05 I/O Specifications

D0-05AR **\$283.00**
Wiring diagram and specifications

D0-05AR Specifications		
AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
	Number of Input Pts.	8
	Number of Commons	2 (isolated)
	Input Voltage Range	90–120 VAC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100 VAC at 50 Hz 10mA @ 100 VAC at 60Hz
	On Current/Voltage Level	>6mA/75VAC
	OFF Current/Voltage Level	<2mA/20VAC
	OFF to ON Response	<40ms
	ON to OFF Response	<40ms
AC Input Specifications	Fuses	None
	Number of Output Points	6
	Number of Commons	2 (isolated)
	Output Voltage Range	6–240 VAC, 47–63 Hz 6–27 VDC
	Maximum Voltage	264VAC, 30VDC
	Maximum Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
	Status Indicators	Logic side
	Fuses	None (external recommended)

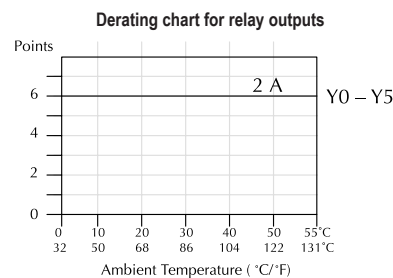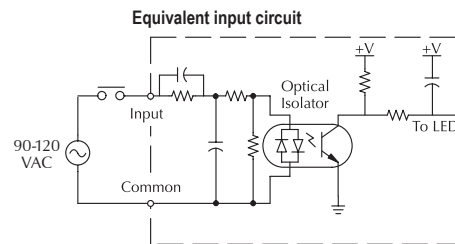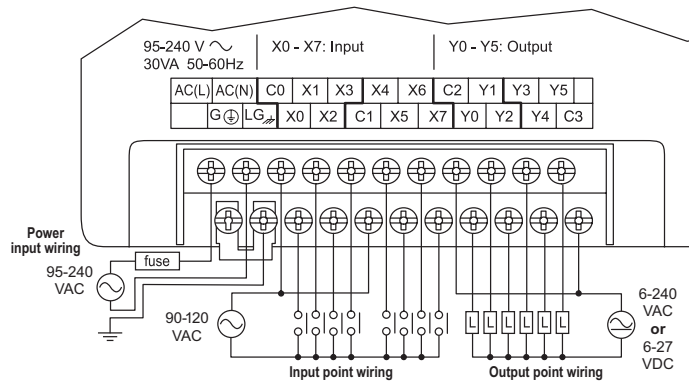

Typical Relay Life (Operations) at Room Temperature

Voltage and Type of Load	Load Current	
	1A	2A
24 VDC Resistive	600K	270K
24 VDC Solenoid	150K	60K
110 VAC Resistive	900K	350K
110 VAC Solenoid	350K	150K
220 VAC Resistive	600K	250K
220 VAC Solenoid	200K	100K

DL05 I/O Specifications






D0-05DA

\$273.00

Wiring diagram and specifications

D0-05DA Specifications

AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
DC Input Specifications	Number of Input Pts.	8 (sink/source)
	Number of Commons	2 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X2) 1.8K @ 12–24 VDC (X3-X7) 2.8K @ 12–24 VDC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100VAC at 50Hz 10mA @ 100VAC at 60Hz
	On Current/Voltage Level	>5mA/10VDC
	OFF Current/Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X2 X3-X7
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
	Fuses	None
AC Output Specifications	Number of Output Points	6
	Number of Commons	2 (isolated)
	Output Voltage Range	17–240 VAC 47–63 Hz
	Peak Voltage	264VAC
	ON Voltage Drop	1.5 VAC>50mA 4.0 VAC<50mA
	Maximum Current	0.5 A / point
	Maximum Leakage Current	4mA @ 264VAC
	Maximum Inrush Current	10A for 10ms
	Minimum Load	10mA
	OFF to ON Response	1ms
	ON to OFF Response	1ms + 1/2 cycle
	Fuses	None (external recommended)

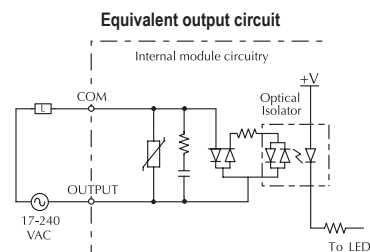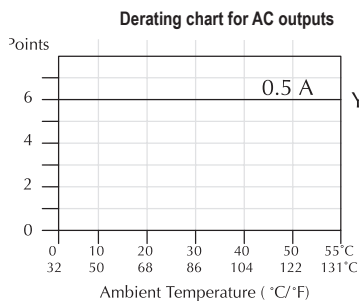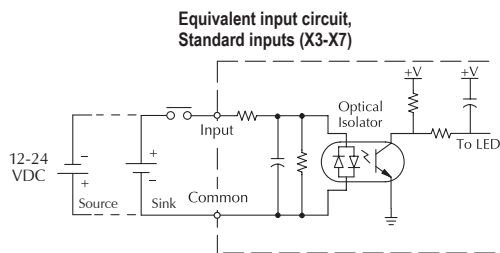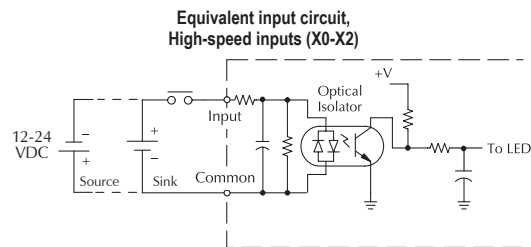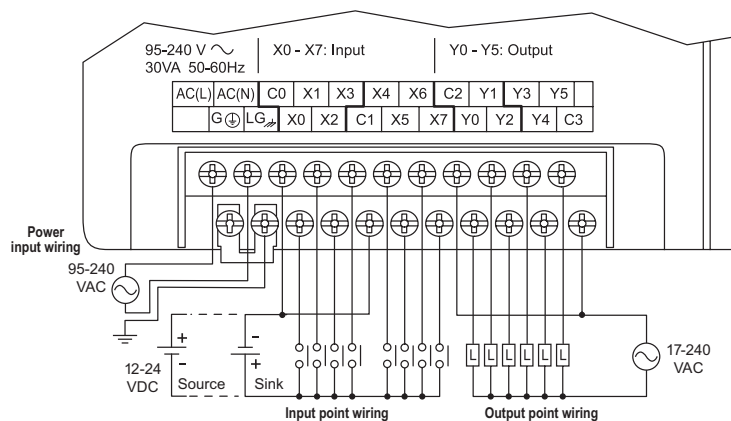


DL05 I/O Specifications


D0-05DD**\$254.00****Wiring diagram and specifications**

D0-05DD Specifications		
AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
DC Input Specifications	Number of Input Pts.	8 (sink/source)
	Number of Commons	2 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X2) 1.8K @ 12–24 VDC (X3-X7) 2.8K @ 12–24 VDC
	On Current/Voltage Level	>5mA/10VDC
	OFF Current/Voltage Level	<0.5mA/<2VDC
	Response Time	X0-X2 X3-X7
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
	Fuses	None
DC Output Specifications	Number of Output Points	6 (sinking)
	Number of Commons	1
	Output Voltage Range	6–27 VDC
	Peak Voltage	50VDC
	Max. Frequency (Y0,Y1)	7kHz
	ON Voltage Drop	0.5 VDC @ 1A
	Maximum Current	0.5 A / point (Y0-Y1)* 1.0 A / point (Y2-Y5)
	Maximum Leakage Current	15µA @ 30VDC
	Maximum Inrush Current	2A for 100ms/10A for 10ms
	OFF to ON Response	<10µs
	ON to OFF Response	<30µs (Y0-Y1) <60µs (Y2-Y5)
	External DC Power Required	20–28 VDC 150mA max.
	Status Indicators	Logic side
	Fuses	None (external recommended)


*When output points Y0 and Y1 are not used in pulse mode, the maximum output current is 1.0 A

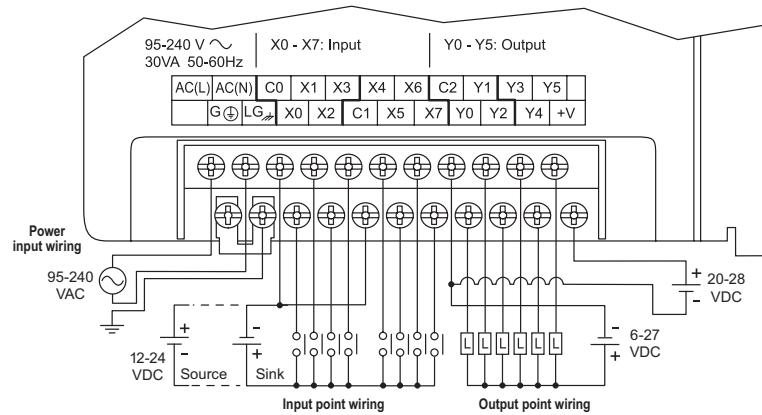


Equivalent input circuit, high-speed inputs (X0-X2)

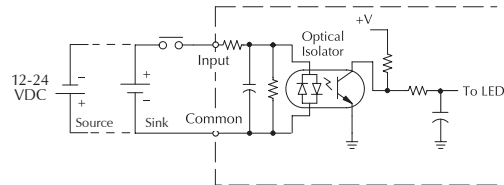


Equivalent input circuit, standard inputs (X3-X7)

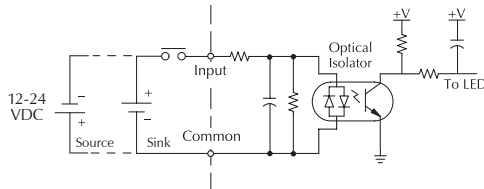


Equivalent output circuit pulse outputs (Y0-Y1)



Equivalent output circuit standard outputs (Y2-Y5)



Derating chart for DC outputs








DL05 I/O Specifications

D0-05DR **\$252.00**
Wiring diagram and specifications

D0-05DR Specifications		
AC Power Supply Specifications	Voltage Range	95–240 VAC (30VA)
DC Input Specifications	Number of Input Pts.	8 (sink/source)
	Number of Commons	2 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0–X2) 1.8K @ 12–24 VDC (X3–X7) 2.8K @ 12–24 VDC
	On Current/Voltage Level	>5mA/10VDC
	OFF Current/Voltage Level	<0.5 mA/<2VDC
	Response Time	X0–X2 X3–X7
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
	Fuses	None
Relay Output Specifications	Number of Output Points	6
	Number of Commons	2 (isolated)
	Output Voltage Range	6–240 VAC, 47–63 Hz 6–27 VDC
	Maximum Voltage	264VAC, 30VDC
	Maximum Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
	Status Indicators	Logic side
	Fuses	None (external recommended)

Typical Relay Life (Operations) at Room Temperature		
Voltage and Type of Load	Load Current	
	1A	2A
24 VDC Resistive	600K	270K
24 VDC Solenoid	150K	60K
110 VAC Resistive	900K	350K
110 VAC Solenoid	350K	150K
220 VAC Resistive	600K	250K
220 VAC Solenoid	200K	100K

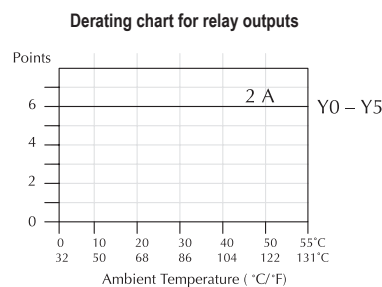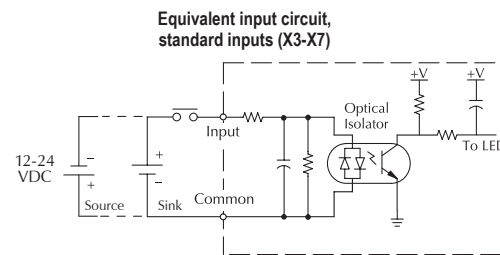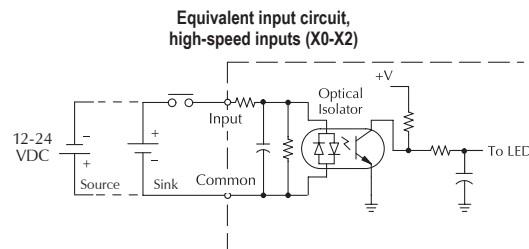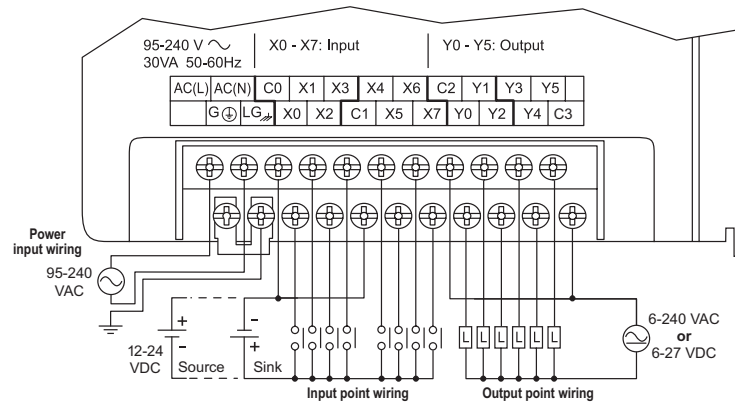


DL05 I/O Specifications


D0-05DD-D **\$287.00**
Wiring diagram and specifications

D0-05DD-D Specifications		
DC Power Supply Specifications	Voltage Range	12–24 VDC 20W max.
	Number of Input Pts.	8 (sink/source)
	Number of Commons	2 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X2) 1.8K @ 12–24 VDC (X3-X7) 2.8K @ 12–24 VDC
	On Current/ Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X2 X3-X7
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
	Fuses	None
DC Input Specifications	Number of Output Pts.	6 (sinking)
	Number of Commons	1
	Output Voltage Range	6–27 VDC
	Peak Voltage	50VDC
	Max. Frequency (Y0, Y1)	7kHz
	ON Voltage Drop	0.5 VDC @ 1A
	Maximum Current	0.5 A / point (Y0-Y1)* 1.0 A / point (Y2-Y5)
	Maximum Leakage Current	15µ @ 30VDC
	Maximum Inrush Current	2A for 100ms 10A for 10ms
	OFF to ON Response	<10µ
	ON to OFF Response	<30µs (Y0-Y1) <60µs (Y2-Y5)
	External DC Power Required	20–28 VDC 150mA max.
DC Output Specifications	Status Indicators	Logic side
	Fuses	None (external recommended)


*When output points Y0 and Y1 are not used in pulse mode, the maximum output current is 1.0 A

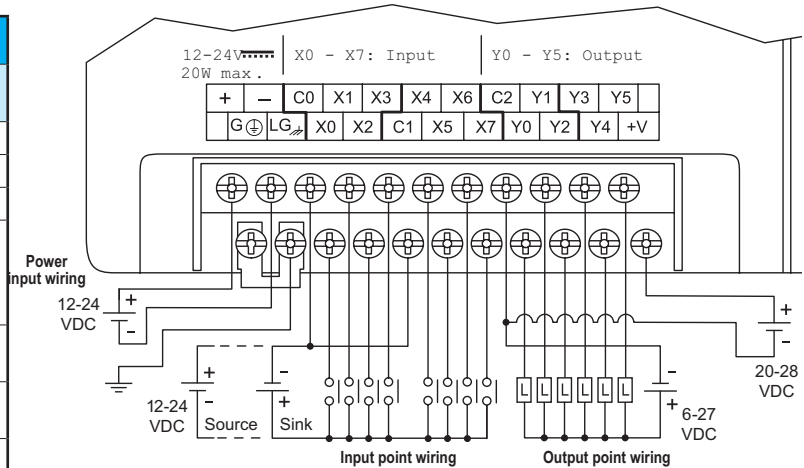


Equivalent input circuit,
high-speed inputs (X0-X2)

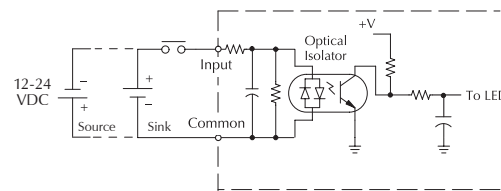


Equivalent input circuit,
standard inputs (X3-X7)

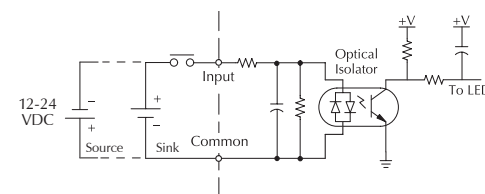


Equivalent output circuit
standard outputs (Y2-Y5)



Equivalent output circuit
pulse outputs (Y0-Y1)



Derating chart for DC outputs






DL05 I/O Specifications



D0-05DR-D \$283.00

Wiring diagram and specifications

D0-05DR-D Specifications		
DC Power Supply Specifications	Voltage Range	12-24 VDC 20W max.
DC Input Specifications	Number of Input Pts.	8 (sink/source)
	Number of Commons	2 (isolated)
	Input Voltage Range	12-24 VDC
	Input Impedance	(X0-X2) 1.8K @ 12-24 VDC (X3-X7) 2.8K @ 12-24 VDC
	On Current/ Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X2 X3-X7
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
	Fuses	None
Relay Output Specifications	Number of Output Points	6
	Number of Commons	2 (isolated)
	Output Voltage Range	6-240 VAC, 47-63 Hz 6-27 VDC
	Maximum Voltage	264VAC, 30VDC
	Maximum Output Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
	Status Indicators	Logic side
	Fuses	None (external recommended)

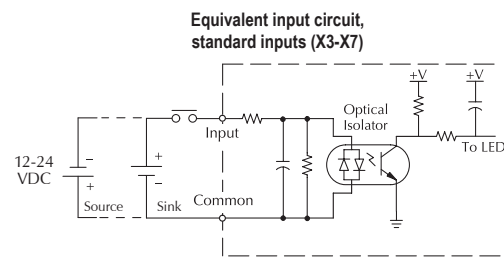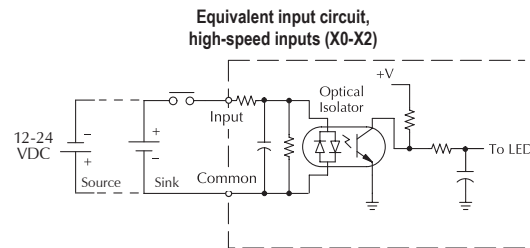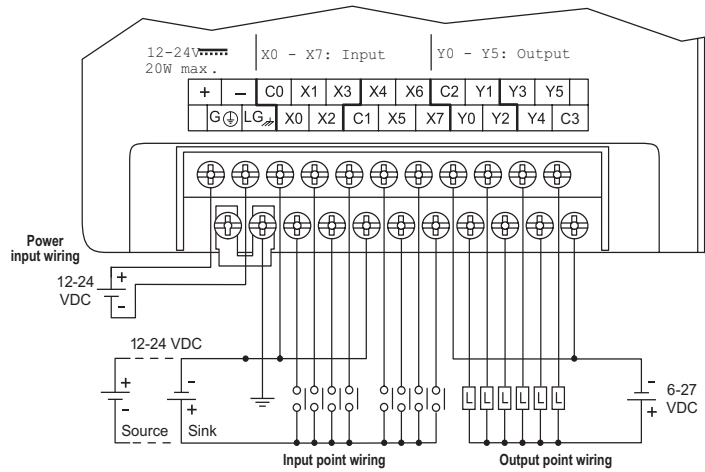

Typical Relay Life (Operations) at Room Temperature		
Voltage and Type of Load	Load Current	
	1A	2A
24 VDC Resistive	600K	270K
24 VDC Solenoid	150K	60K
110 VAC Resistive	900K	350K
110 VAC Solenoid	350K	150K
220 VAC Resistive	600K	250K
220 VAC Solenoid	200K	100K

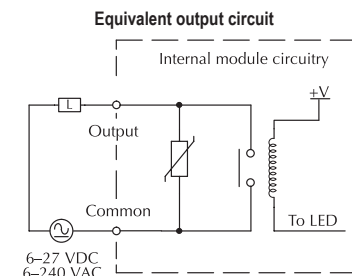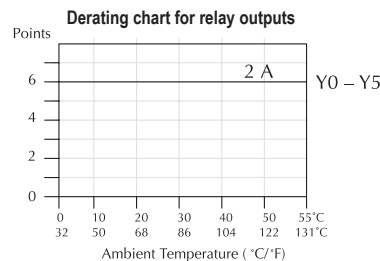


DL06 I/O Specifications




D0-06AA **\$533.00**

Wiring diagram and specifications

D0-06AA Specifications		
AC Power Supply Specifications	Voltage Range	100–240 VAC/ 50–60 Hz, 40VA maximum
	Number of Input Pts.	20
	Number of Commons	5 (isolated)
	Input Voltage Range	90–120 VAC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100 VAC at 50Hz
		10mA @ 100 VAC at 60Hz
	On Current/Voltage Level	>6mA/75VAC
	OFF Current/ Voltage Level	<2mA/20VAC
AC Input Specifications	OFF to ON Response	<40ms
	ON to OFF Response	<40ms
	Fuses	None
	Number of Output Points	16
	Number of Commons	4 (isolated)
	Output Voltage Range	17–240 VAC 47–63 Hz
	Peak Voltage	264VAC
	ON Voltage Drop	1.5 VAC>50mA 4.0 VAC<50mA
	Maximum Current	0.5 A/pt 2.0 A/common
	Maximum Leakage Current	4mA at 264VAC
	Maximum Inrush Current	10A for 10ms
	Minimum Load	10mA
	OFF to ON Response	<1ms
	ON to OFF Response	<1ms + 1/2 cycle
	Fuses	None (external recommended)

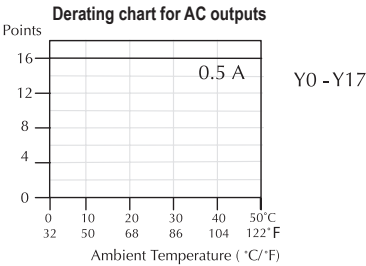

Note: Refer to Power Budgeting for Auxiliary 24VDC current available

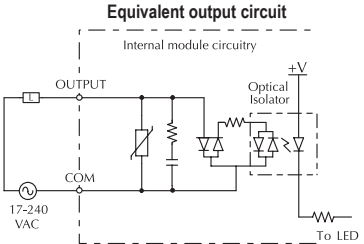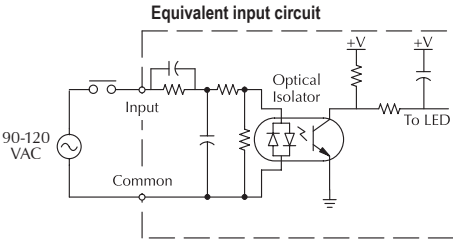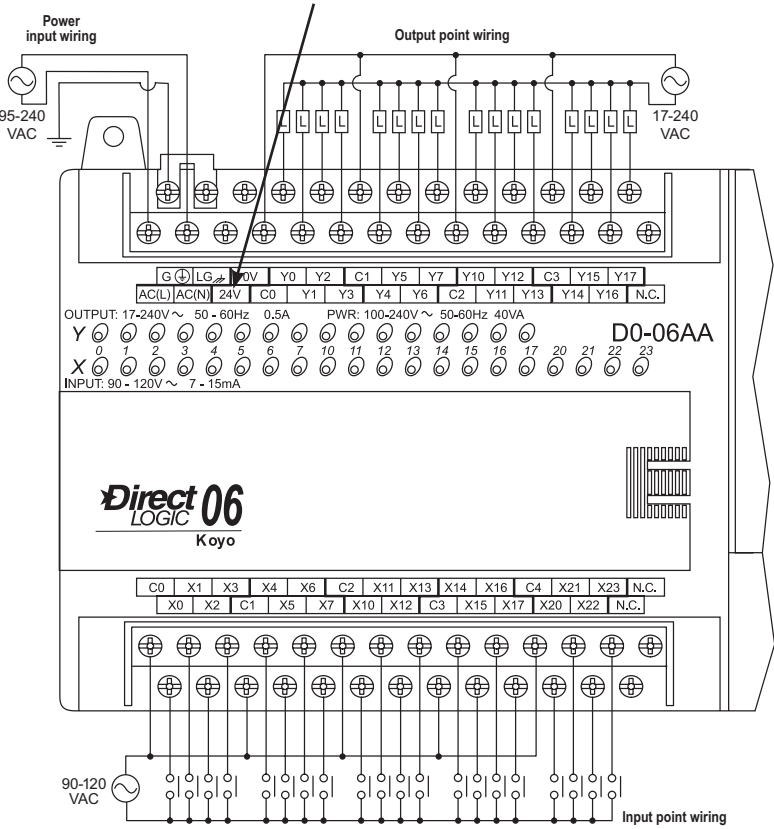


DL06 I/O Specifications

D0-06AR



\$507.00

Wiring diagram and specifications

D0-06AR Specifications		
AC Power Supply Specifications	Voltage Range	100–240 VAC/ 50–60 Hz, 40VA maximum
AC Input Specifications	Number of Input Pts.	20
	Number of Commons	5 (isolated)
	Input Voltage Range	90–120 VAC
	Frequency Range	47–63 Hz
	Input Current	8mA @ 100 VAC at 50Hz 10mA @ 100 VAC at 60Hz
	On Current/ Voltage Level	>6mA/75VAC
	OFF Current/ Voltage Level	<2mA/20VAC
	OFF to ON Response	<40ms
	ON to OFF Response	<40ms
Relay Output Specifications	Fuses	None
	Number of Output Points	16
	Number of Commons	4 (isolated)
	Output Voltage Range	6–240 VAC, 47–63 Hz 6–27 VDC
	Maximum Voltage	264VAC, 30VDC
	Maximum Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
	Status Indicators	Logic side
	Fuses	None (external recommended)

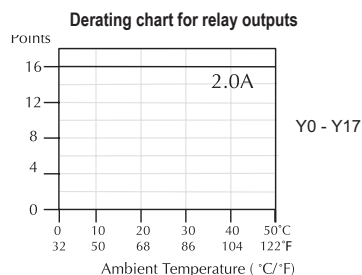

Note: Refer to Power Budgeting for Auxiliary 24VDC current available.

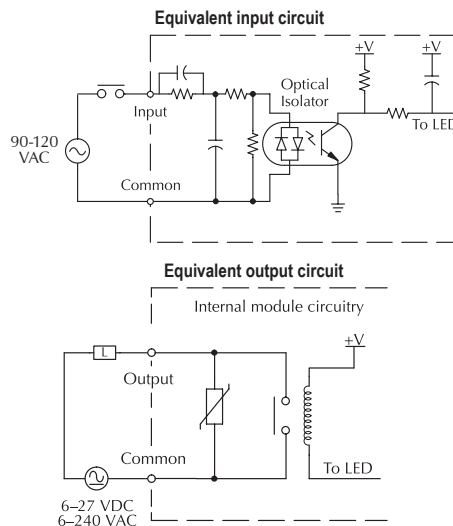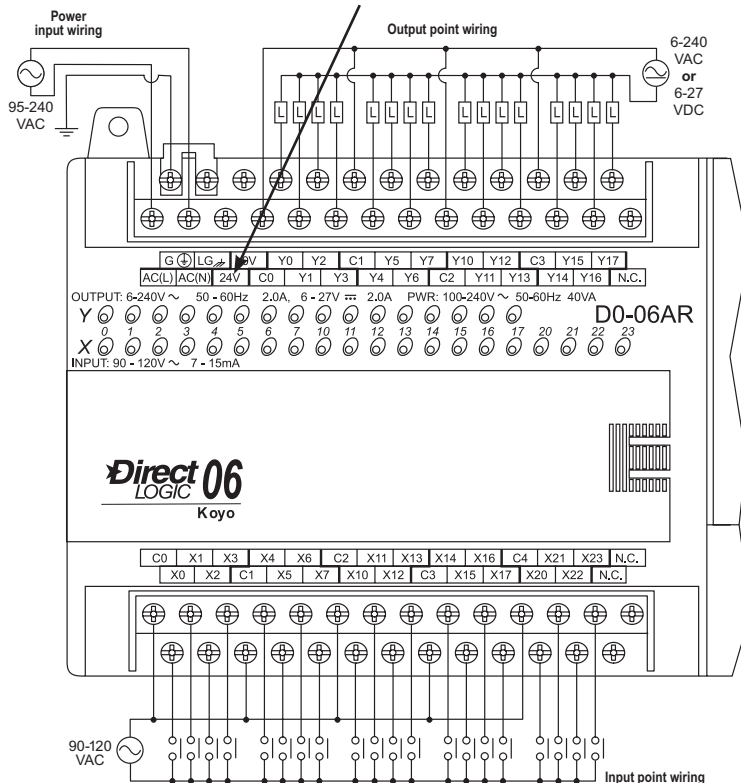

Typical Relay Life (Operations) at Room Temperature

Voltage and Type of Load	Load Current	
	At 1A	At 2A
24 VDC Resistive	500K	250K
24 VDC Inductive	100K	50K
110 VAC Resistive	500K	250K
110 VAC Inductive	200K	100K
220 VAC Resistive	350K	200K
220 VAC Inductive	100K	50K






DL06 I/O Specifications

D0-06DA

\$506.00

Wiring diagram and specifications

D0-06DA Specifications		
AC Power Supply Specifications	Voltage Range	100-240 VAC/ 50-60 Hz, 40VA maximum
	Number of Input Pts.	20 (sink/source)
DC Input Specifications	Number of Commons	5 (isolated)
	Input Voltage Range	10.8-26.4 VDC
	Input Impedance	(X0-X3) 1.8K @ 12-24 VDC (X4-X23) 2.8K @ 12-24 VDC
	On Current/Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<70µs 2-8ms
	ON to OFF Response	<70µs 2-8ms
	Fuses	None
AC Output Specifications	Number of Output Points	16
	Number of Commons	4 (isolated)
	Operating Voltage Range	17-240 VAC 47-63 Hz
	Peak Voltage	264VAC
	ON Voltage Drop	1.5 VAC>50mA 4.0 VAC<50mA
	Maximum Current	0.5 A / point; 1.5 A /common
	Maximum Leakage Current	4mA @ 264VAC, 60Hz
	Maximum Inrush Current	10A for 10ms
	Minimum Load	10mA
	OFF to ON Response	1ms
	ON to OFF Response	1ms + 1/2 cycle
	Fuses	None (external recommended)

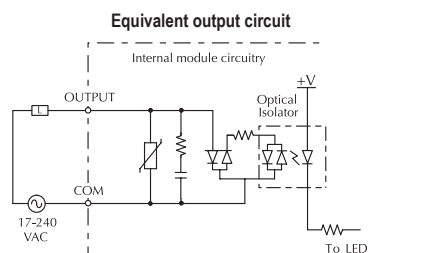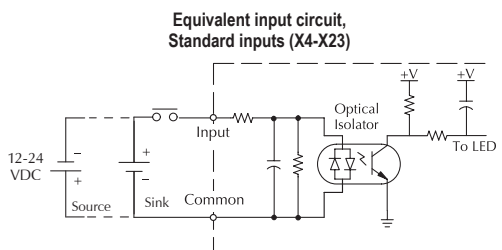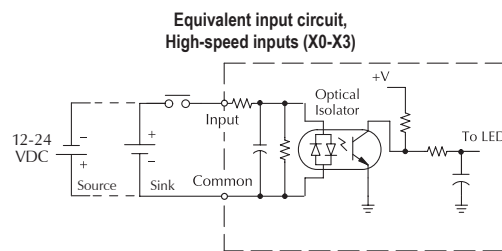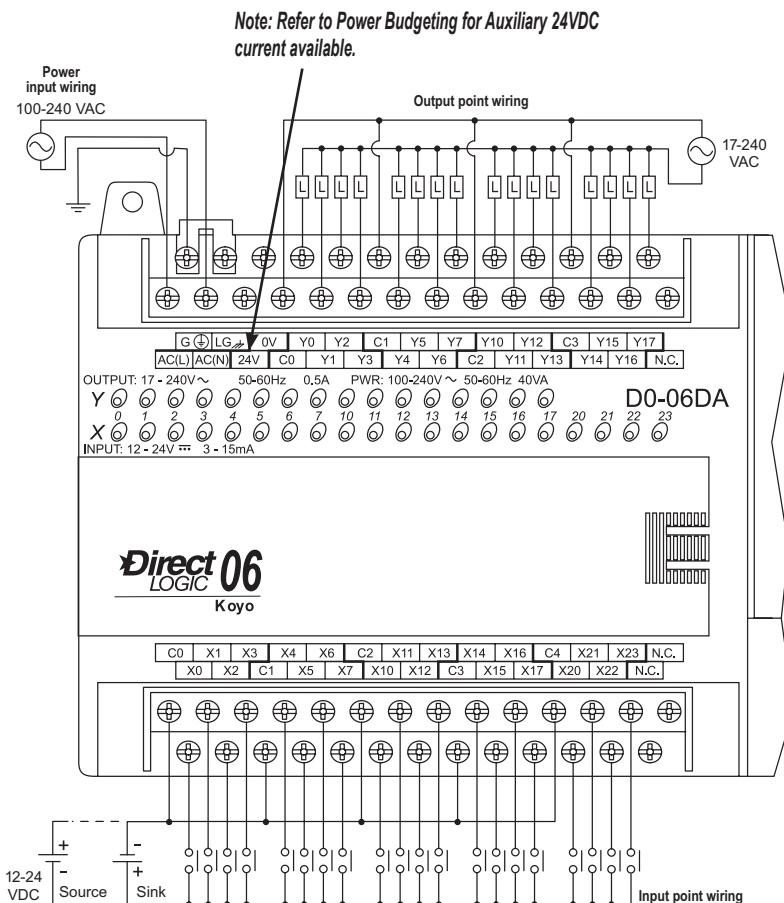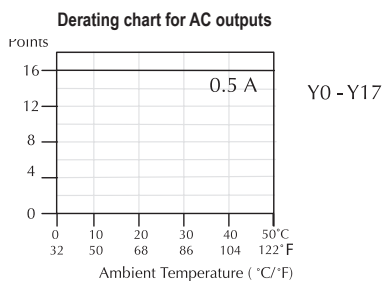


DL06 I/O Specifications

D0-06DD1**\$470.00****Wiring diagram and specifications**


D0-06DD1 Specifications		
AC Power Supply Specifications	Voltage Range	100–240 VAC/ 50–60 Hz, 40VA maximum
	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X3) 1.8K @ 12–24 VDC (X4-X23) 2.8K @ 12–24 VDC
	On Current/ Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
DC Input Specifications	Fuses	None
	Number of Output Points	16 (sinking)
	Number of Commons	4 isolated
	Output Voltage Range	6–27 VDC
	Peak Voltage	50VDC
	Max. Frequency (Y0,Y1)	7kHz
	ON Voltage Drop	0.3 VDC @ 1A
	Maximum Current	0.5 A / pt (Y0-Y1)* 1.0 A pt (Y2-Y17)**
	Maximum Leakage Current	15µA @ 30VDC
	Maximum Inrush Current	2A for 100ms
	OFF to ON Response	<10µs
	ON to OFF Response	<20µs (Y0-Y1) <60µs (Y2-Y17)
	External DC Power Required	20–28 VDC 150mA max. (Y0-Y1) 280 mA max. (Y2-Y17)
	Status Indicators	Logic side
	Fuses	None (external recommended)

* When Y0-Y1 are not used for pulse outputs, maximum current output is 1.0 A**.


** These outputs must be derated to 0.6A for EN61131-2 compliance.

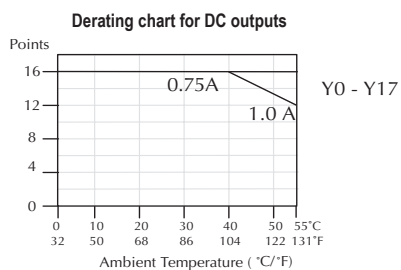


Note: Refer to Power Budgeting for Auxiliary 24VDC current available.

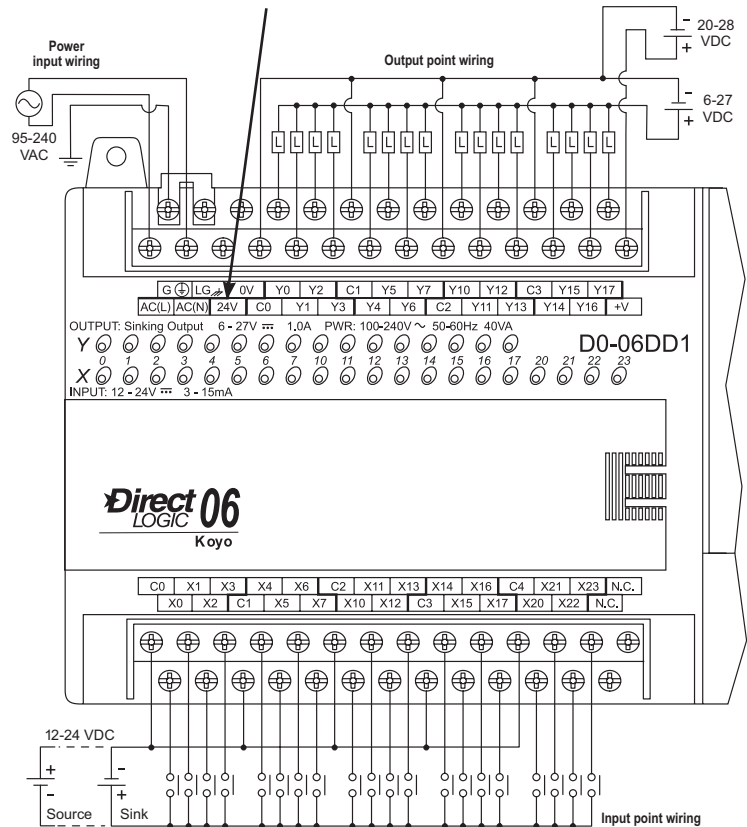


**Equivalent input circuit,
Standard inputs (X4-X23)**

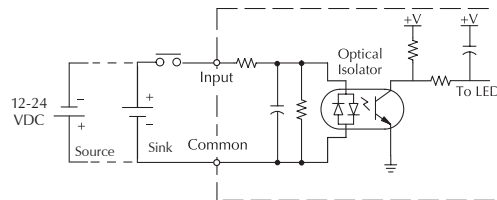


**Equivalent input circuit,
High-speed inputs (X0-X3)**

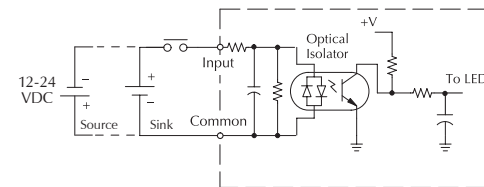

**Equivalent output circuit
Pulse output (Y0-Y1)**



**Equivalent output circuit
Standard output (Y2-Y17)**





DL06 I/O Specifications


D0-06DD2 **\$474.00**
Wiring diagram and specifications

D0-06DD2 Specifications		
AC Power Supply Specifications	Voltage Range	100-240 VAC/ 50-60 Hz, 40VA maximum
	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12-24 VDC
	Input Impedance	(X0-X3) 1.8 k Ω @ 12-24 VDC (X4-X23) 2.8 k Ω @ 12-24 VDC
	On Current/Voltage Level	5mA/ >10VDC
	OFF Current/Voltage Level	0.5mA / <2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<70 μ s 2-8 ms Typ. 4ms
	ON to OFF Response	<70 μ s 2-8 ms Typ. 4ms
DC Input Specifications	Fuses	None
	Number of Output Points	16 (sourcing)
	Number of Commons	4 isolated
	Output Voltage Range	12-24 VDC
	Peak Voltage	30VDC
	Max. Frequency (Y0, Y1)	10kHz
	ON Voltage Drop	0.5 VDC @ 1A (Y0-Y1) 1.2 VDC @ 1A (Y2-Y17)
	Maximum Current	0.5 A / pt (Y0-Y1)* 1.0 A pt (Y2-Y17)
	Maximum Leakage Current	15 μ A @ 30VDC
	Maximum Inrush Current	2A for 100ms
	OFF to ON Response	<10 μ s
	ON to OFF Response	<20 μ s (Y0-Y1) <0.5 ms (Y2-Y17)
	External DC Power Required	N/A
	Status Indicators	Logic side
	Fuses	None (external recommended)


*When Y0-Y1 are not used for pulse outputs, maximum current output is 1.0 A.

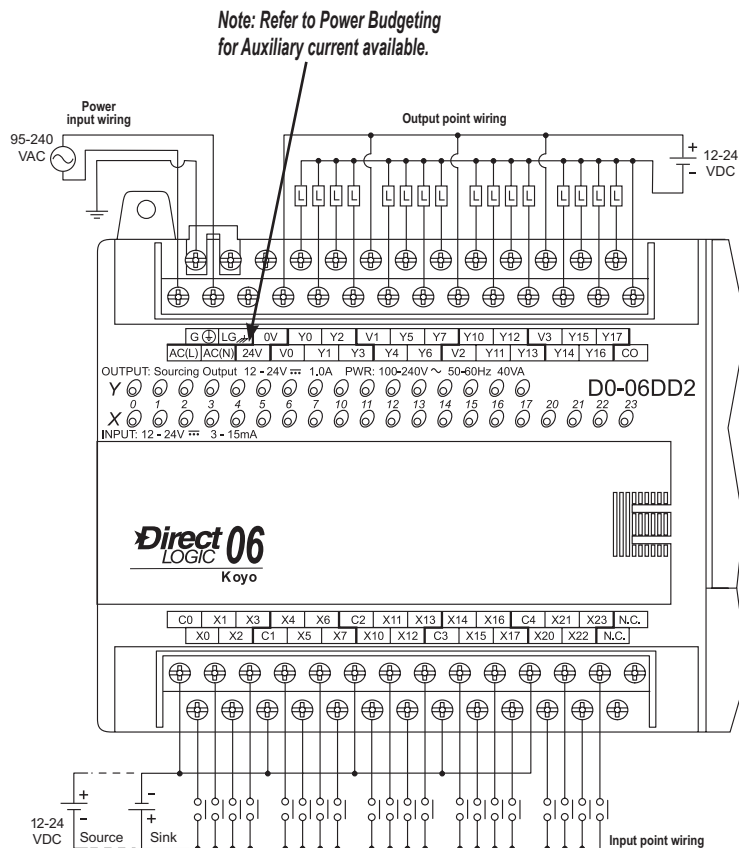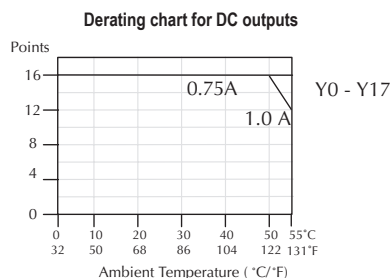


Equivalent input circuit, Standard inputs (X4-X23)

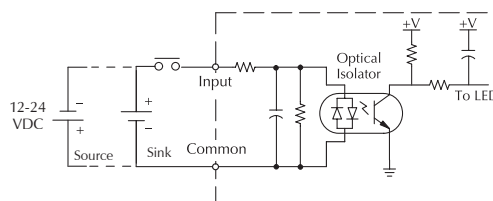


Equivalent input circuit, High-speed inputs (X0-X3)

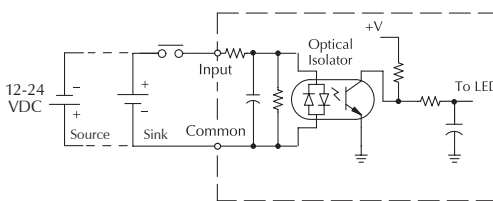

Equivalent output circuit Pulse output (Y0-Y1)

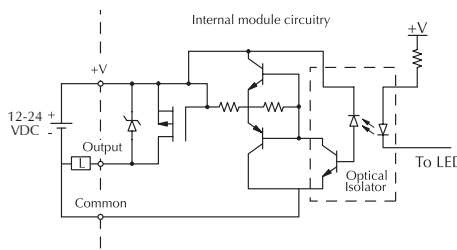

Equivalent output circuit Standard output (Y2-Y17)




DL06 I/O Specifications


D0-06DR \$493.00

Wiring diagram and specifications


D0-06DR Specifications		
AC Power Supply Specifications	Voltage Range	100-240 VAC/ 50-60 Hz, 40VA maximum
	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12-24 VDC
	Input Impedance	(X0-X3) 1.8K @ 12-24 VDC (X4-X23) 2.8K @ 12-24 VDC
	On Current/ Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
DC Input Specifications	Fuses	None
	Number of Output Points	16
	Number of Commons	4 (isolated)
	Output Voltage Range	6-240 VAC, 47-63 Hz 6-27 VDC
	Maximum Voltage	264VAC,30VDC
	Maximum Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
Relay Output Specifications	Status Indicators	Logic side
	Fuses	None (external recommended)

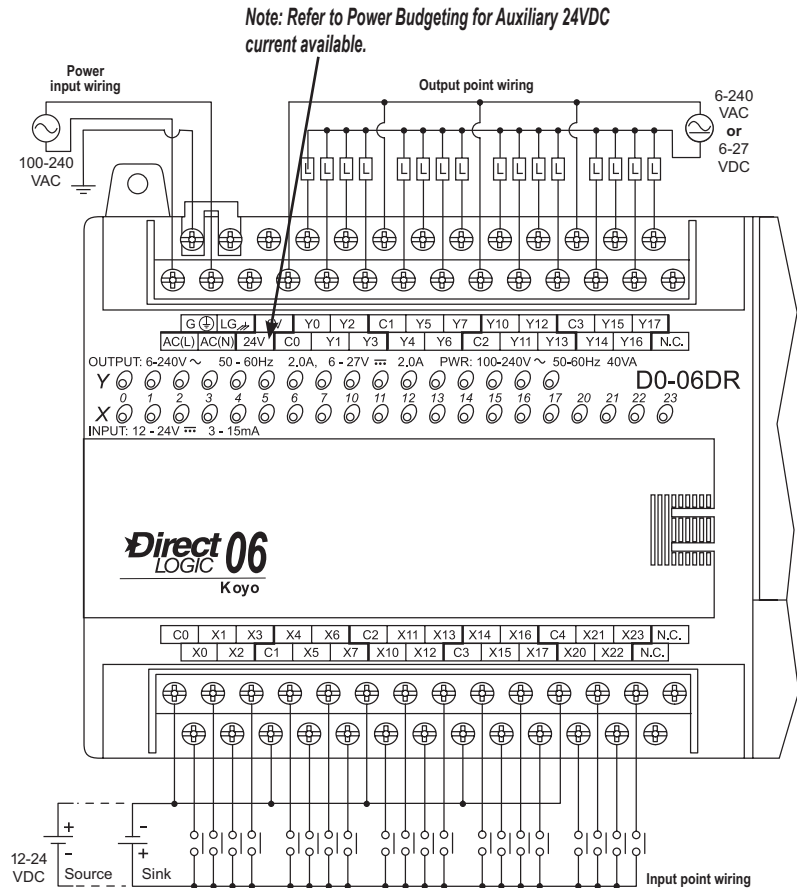


Equivalent input circuit, Standard inputs (X4-X23)

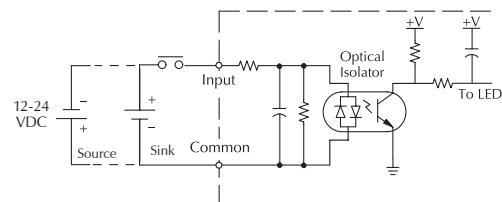


Equivalent input circuit, High-speed inputs (X0-X3)

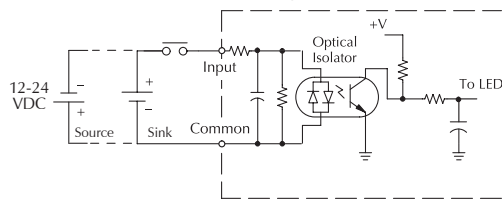

Derating chart for relay outputs

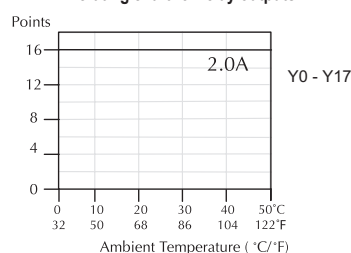

Equivalent output circuit

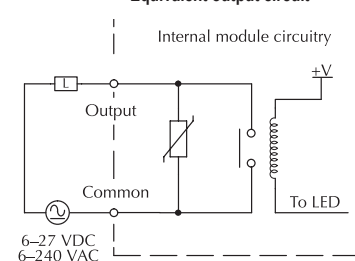


Typical Relay Life (Operations) at Room Temperature		
Voltage and Type of Load	Load Current	
	At 1A	At 2A
24 VDC Resistive	500K	250K
24 VDC Inductive	100K	50K
110 VAC Resistive	500K	250K
110 VAC Inductive	200K	100K
220 VAC Resistive	350K	200K
220 VAC Inductive	100K	50K

DL06 I/O Specifications


D0-06DD1-D **\$472.00**

Wiring diagram and specifications


D0-06DD1-D Specifications		
DC Power Supply Specifications	Voltage Range	12–24 VDC (20W)
	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X3) 1.8K @ 12–24 VDC (X4-X23) 2.8K @ 12–24 VDC
	On Current/Voltage Level	>5mA/10VDC
	OFF Current/Voltage Level	<0.5mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
DC Input Specifications	Fuses	None
	Number of Output Points	16 (sinking)
	Number of Commons	4 isolated
	Output Voltage Range	6–27 VDC
	Peak Voltage	50VDC
	Max. Frequency (Y0, Y1)	7kHz
	ON Voltage Drop	0.3 VDC @ 1A
	Maximum Current	0.5 A / point (Y0-Y1)* 1.0 A / point (Y2-Y17)**
	Maximum Leakage Current	15µA @ 30VDC
	Maximum Inrush Current	2A for 100ms
	OFF to ON Response	<10µs
	ON to OFF Response	<20µs (Y0-Y1) <60µs (Y2-Y17)
	External DC Power Required	20–28 VDC 150mA max.
	Status Indicators	Logic side
	Fuses	None (external recommended)

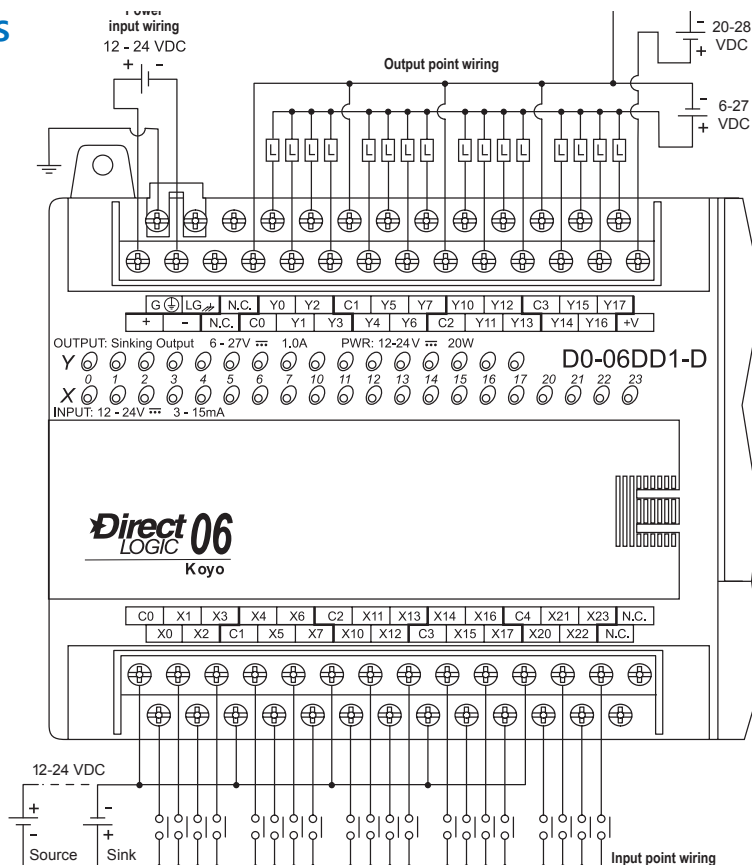

Equivalent input circuit, Standard inputs (X4-X23)

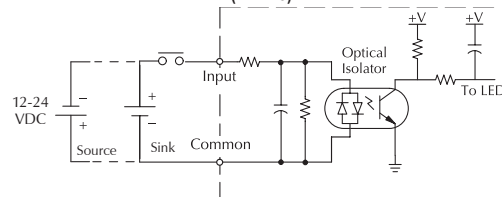


Equivalent input circuit, High-speed inputs (X0-X3)

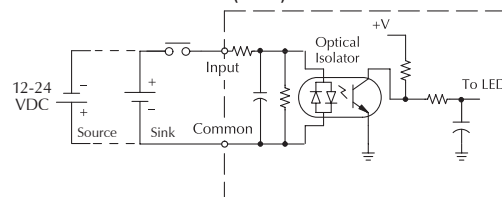


*When Y0-Y1 are not used for pulse outputs, maximum current output is 1.0 A**.


** These outputs must be de-rated to 0.6A for EN61131-2 compliance.

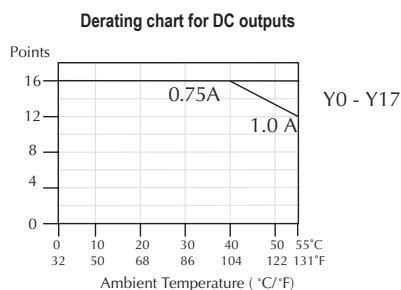

Equivalent output circuit Pulse output (Y0-Y1)



Equivalent output circuit Standard output (Y2-Y17)





DL06 I/O Specifications


D0-06DD2-D \$476.00
Wiring diagram and specifications

D0-06DD2-D Specifications		
DC Power Supply Specifications	Voltage Range	12–24 VDC (20W)
DC Input Specifications	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12–24 VDC
	Input Impedance	(X0-X3) 1.8K @ 12–24 VDC (X4-X23) 2.8K @ 12–24 VDC
	On Current/ Voltage Level	5mA/>10VDC
	OFF Current/ Voltage Level	0.5 mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<70µs 2-8 ms Typ. 4ms
	ON to OFF Response	<70µs 2-8 ms Typ. 4ms
	Fuses	None
DC Output Specifications	Number of Output Points	16 (sourcing)
	Number of Commons	4 isolated
	Output Voltage Range	12–24 VDC
	Peak Voltage	30VDC
	Max. Frequency (Y0,Y1)	10kHz
	ON Voltage Drop	0.5 VDC @ 1A (Y0-Y1) 1.2 VDC @ 1A (Y2-Y17)
	Maximum Current	0.5 A / point (Y0-Y1)* 1.0 A / point (Y2-Y17)
	Maximum Leakage Current	15µA @ 30VDC
	Maximum Inrush Current	2A for 100ms
	OFF to ON Response	<10µs
	ON to OFF Response	<20µs (Y0-Y1) <0.5 ms (Y2-Y17)
	External DC Power Required	N/A
	Status Indicators	Logic side
	Fuses	None (external recommended)


*When Y0-Y1 are not used for pulse outputs, maximum current output is 1.0 A.

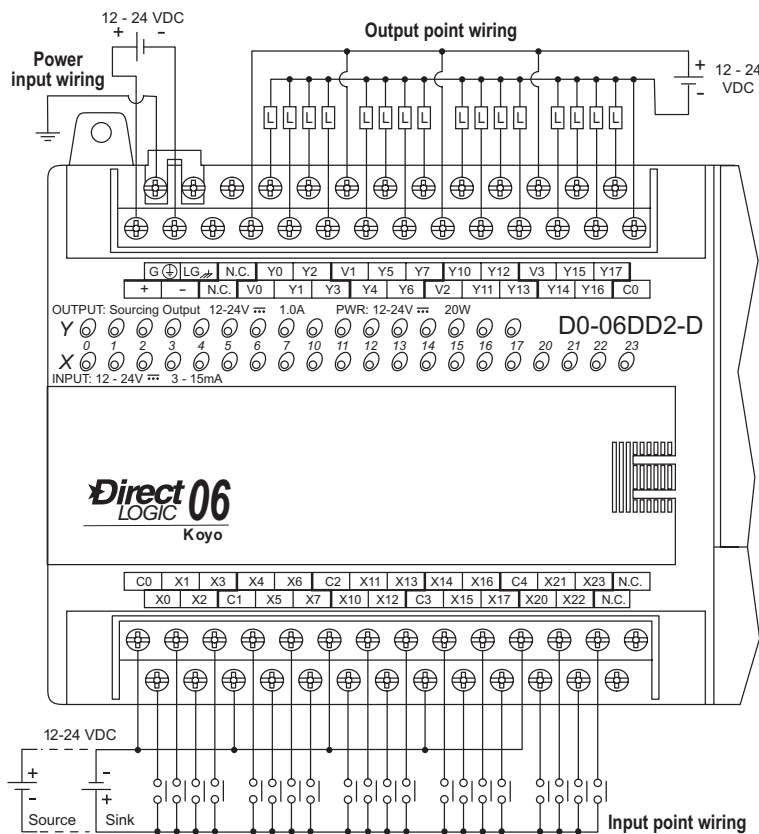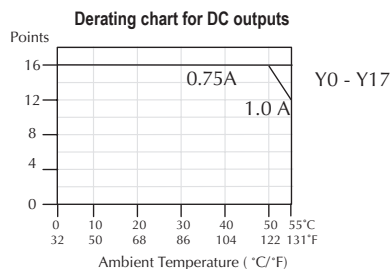


Equivalent input circuit, Standard inputs (X4-X23)

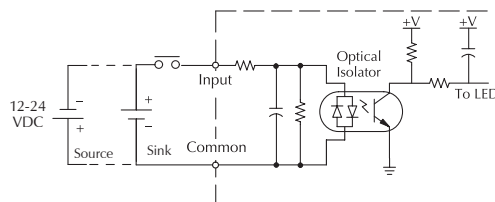


Equivalent input circuit, High-speed inputs (X0-X3)

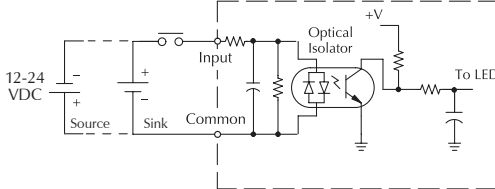

Equivalent output circuit
Pulse output (Y0-Y1)

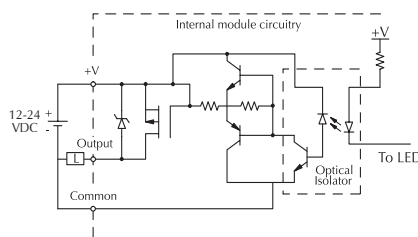

Equivalent output circuit
Standard output (Y2-Y17)

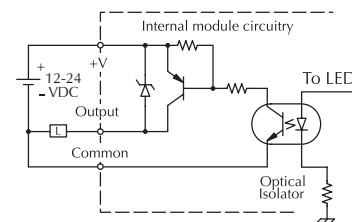


DL06 I/O Specifications


D0-06DR-D \$487.00

Wiring diagram and specifications


D0-06DR-D Specifications		
DC Power Supply Specifications	Voltage Range	12-24 VDC 20W max.
	Number of Input Pts.	20 (sink/source)
	Number of Commons	5 (isolated)
	Input Voltage Range	12-24 VDC
	Input Impedance	(X0-X3) 1.8K @ 12-24 VDC (X4-X23) 2.8K @ 12-24 VDC
	On Current/ Voltage Level	>5mA/10VDC
	OFF Current/ Voltage Level	<0.5 mA/<2VDC
	Response Time	X0-X3 X4-X23
	OFF to ON Response	<100µs <8ms
	ON to OFF Response	<100µs <8ms
Relay Output Specifications	Fuses	None
	Number of Output Points	16
	Number of Commons	4 (isolated)
	Output Voltage Range	6-240 VAC, 47-63 Hz 6-27 VDC
	Maximum Voltage	264VAC, 30VDC
	Maximum Current	2A/point 6A/common
	Maximum Leakage Current	0.1 mA @ 246VAC
	Smallest Recommended Load	5mA @ 5VDC
	OFF to ON Response	<15ms
	ON to OFF Response	<10ms
	Status Indicators	Logic side
	Fuses	None (external recommended)

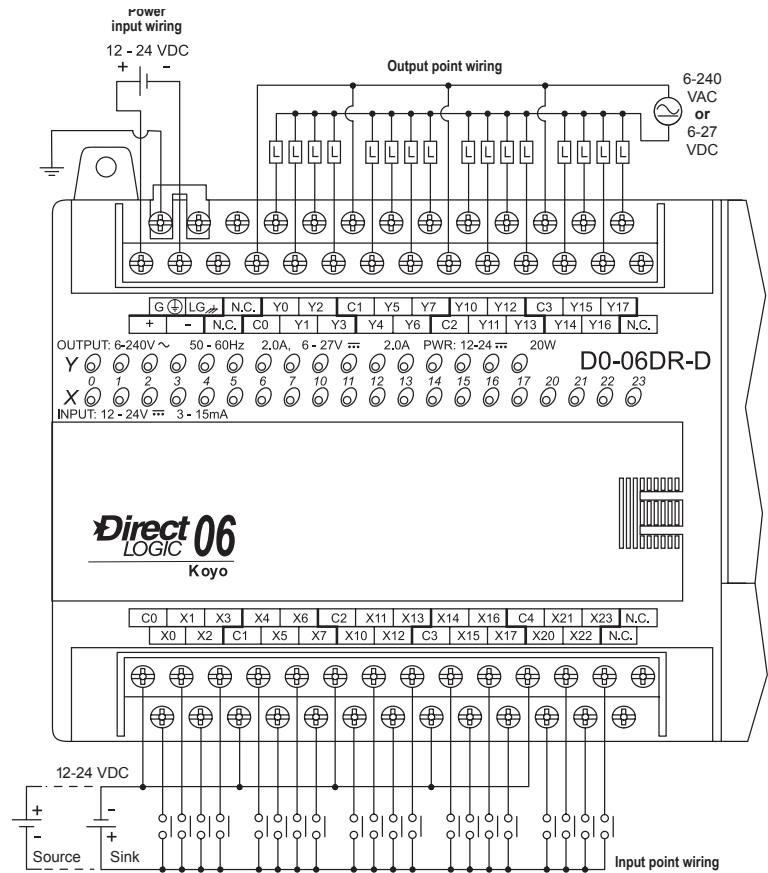

Equivalent input circuit, High-speed inputs (X0-X3)

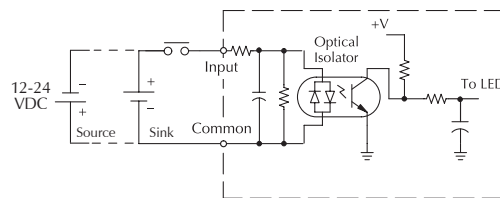


Equivalent input circuit, Standard inputs (X4-X23)

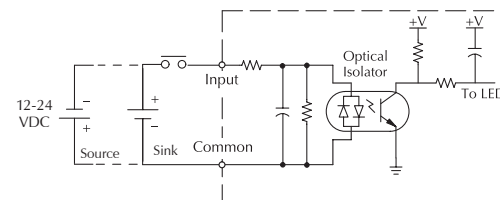


Typical Relay Life (Operations) at Room Temperature

Voltage and Type of Load	Load Current	
	At 1A	At 2A
24 VDC Resistive	500K	250K
24 VDC Inductive	100K	50K
110 VAC Resistive	500K	250K
110 VAC Inductive	200K	100K
220 VAC Resistive	350K	200K
220 VAC Inductive	100K	50K

Derating chart for relay outputs



Equivalent output circuit




DL05/06 Option Modules

Need to expand your DL05 or DL06?

Customize your DL05 or DL06 PLC to fit your application by adding option modules in the built-in slots. You can add these features without adding size. We offer the following option modules:

- Discrete I/O modules
- High-resolution analog I/O modules
- Ethernet communications modules
- Data Communications module
- High-Speed Counter module
- DeviceNet Server module
- Profibus Server module
- CoProcessor module

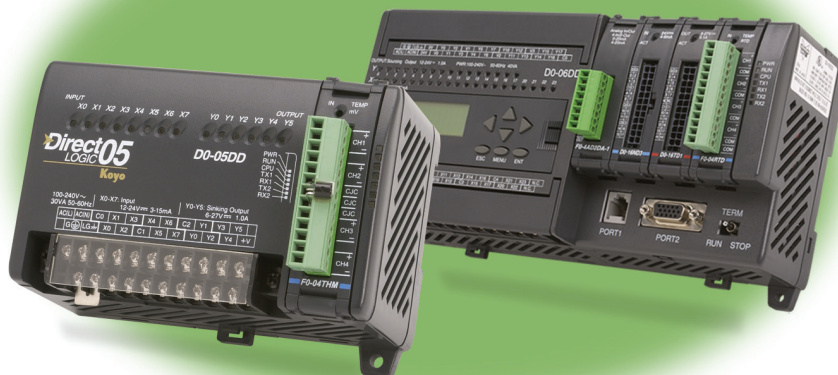

DL05 (only) Memory Module

MEMORY MODULE

DO-01MC \$90.00



DL05 flash memory

The standard DL05 PLC uses non-volatile flash memory to back-up the user program. Program data (V-memory) is backed by a super capacitor. If you need longer retention of program data, we recommend the D0-01MC. We also recommend the D0-01MC for applications that require transferring programs without a programming device or that require a real-time clock.

Simple and inexpensive

The D0-01MC slides easily into the option module slot in any DL05 PLC to back up PLC programs and data for extended periods of time.

Battery-backed RAM

The memory cartridge makes programs portable from one DL05 PLC to another. The memory map is identical to the internal memory in the DL05 PLC, so no program changes are necessary.

The on-board lithium battery lasts up to three years. If PLC power is lost and the battery is already dead, an on-board super capacitor backs up the memory four to seven days, allowing time to insert a new battery.

Real-time clock

Access the year, month, day of the week, hour, minute and second for event scheduling or data logging applications.

Operation

The D0-01MC installs into any of the DL05 PLCs. The MC module backs up all ladder and data in CMOS RAM.

The module's V-memory maps one-for-one to the PLC's memory locations. If the memory cartridge is inserted in the option slot, it automatically becomes the source of the controlling program.

You may choose to overwrite the PLC program, but it is not necessary. You can transfer the program from the PLC to the module, or from the module to the PLC, or you can operate directly from the memory cartridge. By removing the module, you return control to the PLC's internal program.

Two pushbuttons on the face of the module initiate memory transfers. The pushbuttons are clearly marked to indicate the direction of the transfer, and an LED flashes to confirm the direction and success of the memory transfer.

A jumper enables/disables the write function in the D0-01MC. Write disable prevents overwriting of the module's memory. Write enable allows overwriting of the module's memory.

An LED alerts you to a low battery condition. If the battery drops below 2.5 V the "BATT" LED comes on, and an internal bit is set. You can use the internal bit to activate alarm functions or to execute an orderly shutdown.

The date and time are easily set or accessed in the ladder logic program. Environmental specifications for the D0-01MC are the same as for the DL05 PLCs.

Firmware Requirements

Requires DL05 firmware V5.40 or newer. Older firmware will not recognize newer D0-01MC models.

DL05/06 DeviceNet™ Server Comm. Module

DEVICENET SERVER MODULE

D0-DEVNETS \$260.00



The D0-DEVNETS option module transforms any DL05 or DL06 into a smart device node on your DeviceNet™ controller network. Now you don't have to turn to a more expensive PLC to get DeviceNet capability.

DeviceNet is a low-cost control bus used to connect field devices to PLCs and PCs. DeviceNet is designed to reduce the need for hard-wiring while providing device-level diagnostics. This industrial protocol links up to 64 nodes on a single network.

The D0-DEVNETS Server module slides into the option module slot of any DL05 or DL06 PLC. The module collects and reports all discrete I/O data to a DeviceNet Client.

The D0-DEVNETS module has a removable connector that makes the four-wire connection easy to implement and maintain. The DeviceNet module incorporates advanced diagnostics not commonly found on traditional industrial networks. This module has the quick response time and high dependability expected from any DeviceNet device.



General Specifications	
DeviceNet Compatibility	Predefined Group 2 Client/Server communications
Maximum Field Devices per Bus	64 (see table below)
Communication to Field Devices	Standard 4-wire shielded cable to cabinet connector, molded 4-wire cable @ up to 500 Kbps to field devices
Module Connector	5-position removable terminal (European style)
Operating Temperature	0 to 55°C (32 to 131° F)
Storage Temperature	20 to 70°C (-4 to 158° F)
Relative Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	MIL STD 810C 514.2
Shock	MIL STD 810C 516.2
Noise Immunity	Impulse noise 1es, 1000V FCC class A RFI (144MHz, 430MHz 10W, 10cm)
Power Consumption	45mA @ 5VDC

Trunk Length		Bits per sec	Branch Length		Devices
Feet	Meters		Feet	Meters	
328ft	100m	500Kbps	20ft	6m	64
820ft	250m	250Kbps	20ft	6m	64
1,640ft	500m	125Kbps	20ft	6m	64

Other DeviceNet specifications, compatible products, and latest DeviceNet information are made available through:
 Open DeviceNet Vendor Association
 Phone: (954) 340-5412 Fax: (954) 340-5413
 Internet Address: <http://www.odva.org>
 e-mail: odva@powerinternet.com
 ODVA, Inc.
 20423 State Road 7
 Boca Raton, FL 33498

DeviceNet
ODVA

Removable
connector

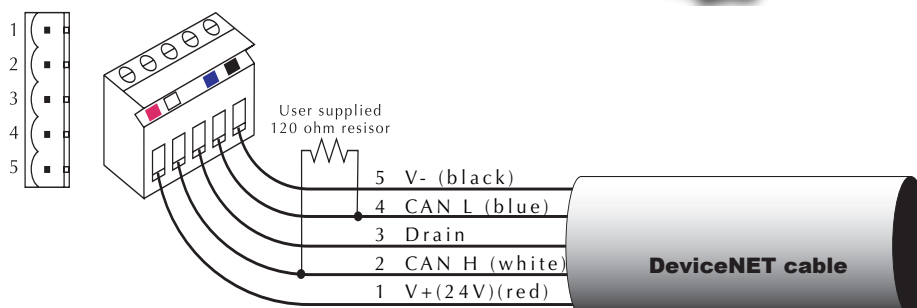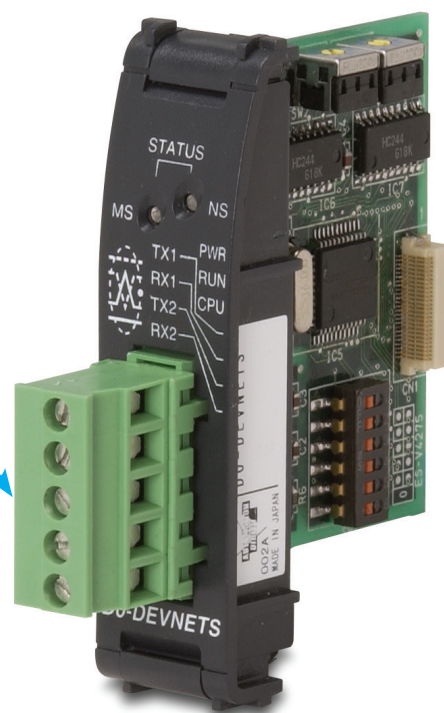

DL05/06 Ethernet Communications Modules

ETHERNET COMMUNICATION MODULES

H0-ECOM100 \$321.00



Overview

Ethernet Communications Modules offer features such as:

- High-speed peer-to-peer networking of PLCs
- Fast updates with DirectSOFT Programming Software
- High-performance access for Human Machine Interface (HMI), ERP, MES or other Windows-based software
- Industry standard Modbus TCP Client/Server Protocol
- Free SDK for custom drivers
- Easy setup

The Ethernet Communication (ECOM) Module represents a price breakthrough for high-speed peer-to-peer networking of PLCs. No longer are you forced to designate a single PLC to be the network Client. Any PLC can initiate communications with any other PLC. Link your PLCs with PCs using industry standard Modbus TCP protocol connected through standard cables, hubs, and repeaters. Or, use KEPServerEX* I/O Server to link your favorite HMI/SCADA, data historian, MES or ERP software to DirectLOGIC PLCs. DirectSOFT Programming Software can be used to monitor or update the program in any DirectLOGIC PLC on the network.

*KEPServerEX may be purchased from Kepware and will support any existing applications. (<https://www.kepware.com/en-us/products/kepserverex>)

Simple connections

Use Category 5 UTP cables which can be run up to 100 meters between nodes. Use repeaters to extend distances and expand the number of nodes.

Choose your slot

The H0-ECOM100 module plugs into any option module slot of any DL05 PLC or DL06 PLC. The module maintains identification data, descriptive information, and communication parameters for PLC-to-PLC communications in flash memory. Disconnect power before installing or removing any PLC module.

Specifications	H0-ECOM100
Communications	10/100 BaseT Ethernet
Data Transfer Rate	100 Mbps
Link Distance	100 meters
Ethernet Port	RJ45
Ethernet Protocols	TCP/IP, IPX, Modbus TCP/IP, DHCP, HTML Configuration
Power Consumption	300mA @ 5 VDC
Manufacturer	Host Automation Products, LLC

CPU	Firmware Required	DirectSOFT Required
DL05	ECOM100: Version 4.90 or later ECOM (retired): Version 4.60 or later	Version 3.0c or later
DL06	ECOM100: Version 1.80 or later ECOM (retired): Version 1.40 or later	Version 4.0, Build 16 or later

H0-ECOM100 IBox communications instructions

Over 40 Communications IBox instructions are available when using the H0-ECOM100 with a DL05/06 PLC and DirectSOFT6 programming software. These easy-to-use instructions allow you to:

- Enable/disable module DHCP
- Read/write module IP, Gateway and Subnet Mask addresses
- Read/write module ID, Name and Description
- Send E-mail messages
- Read/Write PLC memory to networked Hx-ECOM100 modules
- Read/Write PLC memory to networked Hx-ECOM(-F) modules

See the following page for example Communications IBox instructions.



The H0-ECOM100 supports the Industry Standard Modbus TCP Client/Server Protocol




See the Communications section for details on Stride Ethernet Switches

DL05/06 Ethernet Communications Modules

Modbus TCP support

The [H0-ECOM100](#) supports the industry standard Modbus TCP Client/Server protocol in addition to the standard IP and IPX protocols. This allows the DL06/06 PLC with an H0-ECOM100 module to serve as a client (Client) or as a server (Server) on a Modbus TCP Ethernet network. The H0-ECOM100 can actively issue Modbus commands to other nodes or devices on the Modbus TCP network or simply respond to connected Modbus TCP clients.

ModbusTCP communications architecture

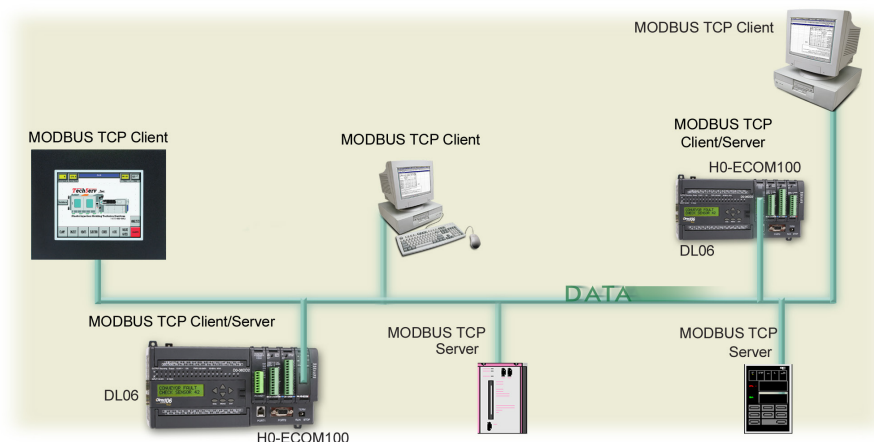

PLC-to-PLC communications

PLC-to-PLC or PLC to a Modbus TCP device communications can be accomplished using standard Read from Network (RX) and Write to Network (WX) instructions (all DL05/06 PLCs, all H0 series ECOMs and all DirectSOFT versions). If you're using our DirectSOFT6 programming software, a DL05 or DL06 PLC and an [H0-ECOM100](#), you can use fill-in-the-blank IBox instructions to simplify your communications programming. The H0-ECOM100 supports the ECOM100 Configuration IBox for use with the ECRX and ECWX IBox instructions to read/write to other ECOM100s. All H0 series ECOM modules support the NETCFG Configuration IBox for use with the NETRX and NETWX IBox instructions to read/write to other ECOM modules (remember DirectSOFT5 or later is required). The Communications IBox instructions execute with built-in interlocking to greatly simplify communications programming.

ECOM100 Configuration IBox

ECOM100 Config		IB-710
ECOM100 #	K0	
Slot	K1	
Status	V2000	
Workspace	V2100	
Msg Buffer (65 WORDs)	V2000	

ECOM100 Read Network IBox

ECOM100 RX Network Read		IB-740
ECRX	K0	
Workspace	V2200	
Slave ID	K0	
From Slave Element (Src)	C0	
Number Of Bytes	K1	
To Master Element (Dest)	V2000	
Success	C0	
Error	C0	

H0-ECOM100 has e-mail capability!

The H0-ECOM100 Send Email (ECEMAIL) IBox instruction will allow the module to behave as an e-mail client and send an SMTP request to your SMTP Server to send a specified e-mail message to the e-mail addresses in the IBox's To: field. The Body: field allows you to embed real-time data in your e-mail message. DirectSOFT5 or later is required to use the IBox instructions.

NetEdit3 software

NetEdit3 Software is installed with DirectSOFT and it can be downloaded on the AutomationDirect.com website. Use NetEdit3 to configure the ECOM modules for your network. Flexible addressing allows you to use your choice of protocols and identifying methods. Assign each module a number or a name or both. You don't have to use an IP address, but you can if it's necessary for your network. NetEdit3 uses two protocols for PC-to-PLC communications: IPX and TCP/IP. The NetEdit3 screen displays all identifiers and troubleshooting information for each module on the network. You can use NetEdit3 to adjust parameters for PLC-to-PLC communications by clicking on Advanced Settings. The network identifiers can also be changed from DirectSOFT Programming Software.

ECOM100 Send EMAIL IBox

ECOM100 Send Email		IB-711
ECEMAIL	K0	
Workspace	V2200	
Success	C0	
Error	C1	
Error Code	V2100	
To	docteam@work.com	
Subject	Team Busy	
Body	<p>"Machine #": V5010:B "went offline at" _time:24 "on" _date:us</p>	

DL05/06 Data Communications Module

DATA COMMUNICATIONS MODULE

D0-DCM \$260.00



Overview

The D0-DCM Data Communications Module offers two communication ports for a variety of simultaneous communications possibilities:

- Extra communications port to connect a PC, operator interface, etc.
- Network interface to DirectNET
- Network interface to a Modbus network using the RTU protocol


The top RJ12 RS-232 port (Port 1) can be used for PLC programming, connection to an OI panel or as a single K-sequence, DirectNet or Modbus RTU Server. The 15-pin front port (Port 2) can be used for RS-232/422/485 communications and supports the following protocols: K-sequence Server, DirectNET Client/Server and Modbus RTU Client/Server.

Module Configuration


Since the D0-DCM does not have DIP switches to set baud rate, station address, parity, etc., ladder logic programming is required to configure its communication parameters, unless the default settings are acceptable for your application. If the D0-DCM is to be used as a network Client, you must use ladder logic code to configure these parameters.

Specifications	
Module Type	Intelligent
Modules per CPU	DL05: one; DL06: up to four
Field Wiring Connectors	Port 1: 6-pin RJ12 RS-232 Port 2: 15-pin HD-sub connector RS-232, RS-422/485
Communications	Port 1 RS-232 signal levels, DirectNET Server, K-sequence Server, Modbus RTU Server, protocols, baud rate selectable from 9.6K to 115.2K baud, odd or no parity, selectable address, 8 data bits, one start/stop bit, DirectNET HEX or ASCII mode. (Defaults: Server, 9600 bps, odd parity, address 1, auto-detect protocols)
	Port 2 RS-232/422/485 signal levels, DirectNET Client/Server, K-sequence Server, Modbus RTU Client/Server, non-sequence ASCII protocols, baud rate selectable from 300 to 115.2K baud, odd/even/no parity, selectable address, 7 or 8 data bits, one start bit, 1 or 2 stop bits, selectable timeout/response-delay times, DirectNET HEX or ASCII mode. (Defaults: Server, 19200 bps, odd parity, address 1, eight data bits, one stop bit, auto-detect protocols)
Recommended Cable	RS-422: Belden 9729 or equivalent; RS-485: Belden 9841 or equivalent
Internal Power Consumption	250mA maximum at 5VDC (supplied by base)
Operating Environment	0°C to 60°C (32°F to 140°F), 5% to 95% humidity (non-condensing)
Manufacturer	Koyo Electronics

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.00 or later	Version 3.0c or later
DL06	Version 1.90 or later	Version 4.0, Build 16 or later. ASCII functions require version 5.1 or higher.

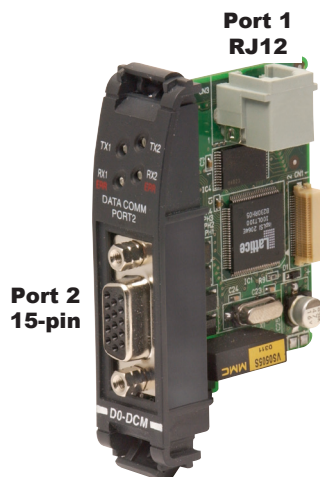

**Port 2
15-pin**

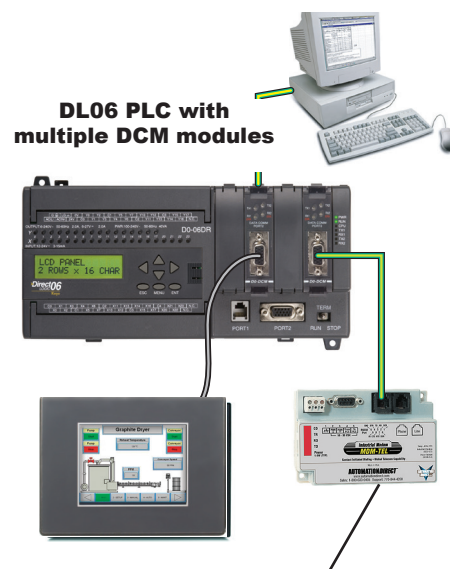

Connect the DCM to our MDM-TEL serial modem

Extra communications ports for DL05/06

If additional communication ports are needed in the PLC, they can easily be added by installing DCM modules. Connect additional devices such as operator interfaces, PCs, etc. Set the

DCM communication parameters using DirectSOFT programming software, connect the cables, and start transferring data. Make sure the connected device has a DL05/06 compatible driver.


DL05/06 Data Communications Module

DirectNET network interface

The DCM can be used as a network interface for applications requiring data to be shared between PLCs, or between PLCs and an intelligent device such as a host PC. DirectNET allows you to upload or download virtually any type of system data including Timer/Counter data, I/O information, and V-memory information from any DirectLOGIC or compatible PLC. Port 2 on the DCM allows the DL05/06 to function as a DirectNET network Client or Server using RS-422 communications (RS-232 can be used for single Server networks). Use RX and WX instructions in your RLL program to initiate communications.

*KEPSeverEX may be purchased from Kepware and will support any existing applications.
(<https://www.kepware.com/en-us/products/kepserverex>)


DirectNET network

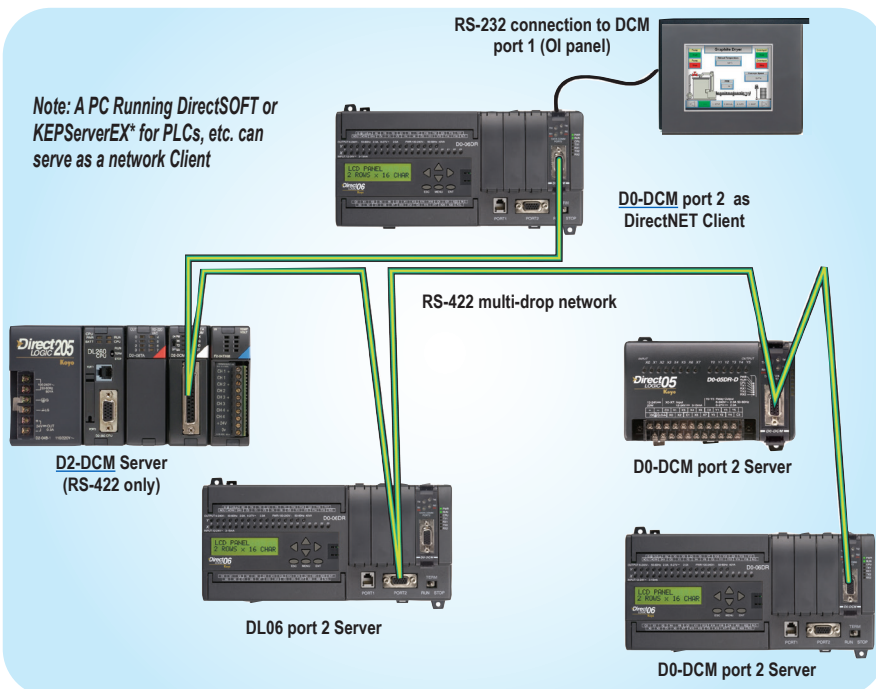

Modbus RTU interface

The DCM can be used as a Client or Server station interface to connect your DL05/06 system to a Modbus® network using the Modbus RTU protocol. Port 2 on the DCM allows the DL05/06 to function as a Modbus RTU network Client or Server using RS-422 or RS-485 communications (RS-232 can be used for single Server networks). Use RX and WX instructions in your RLL program to initiate communications.

Modbus RTU networks

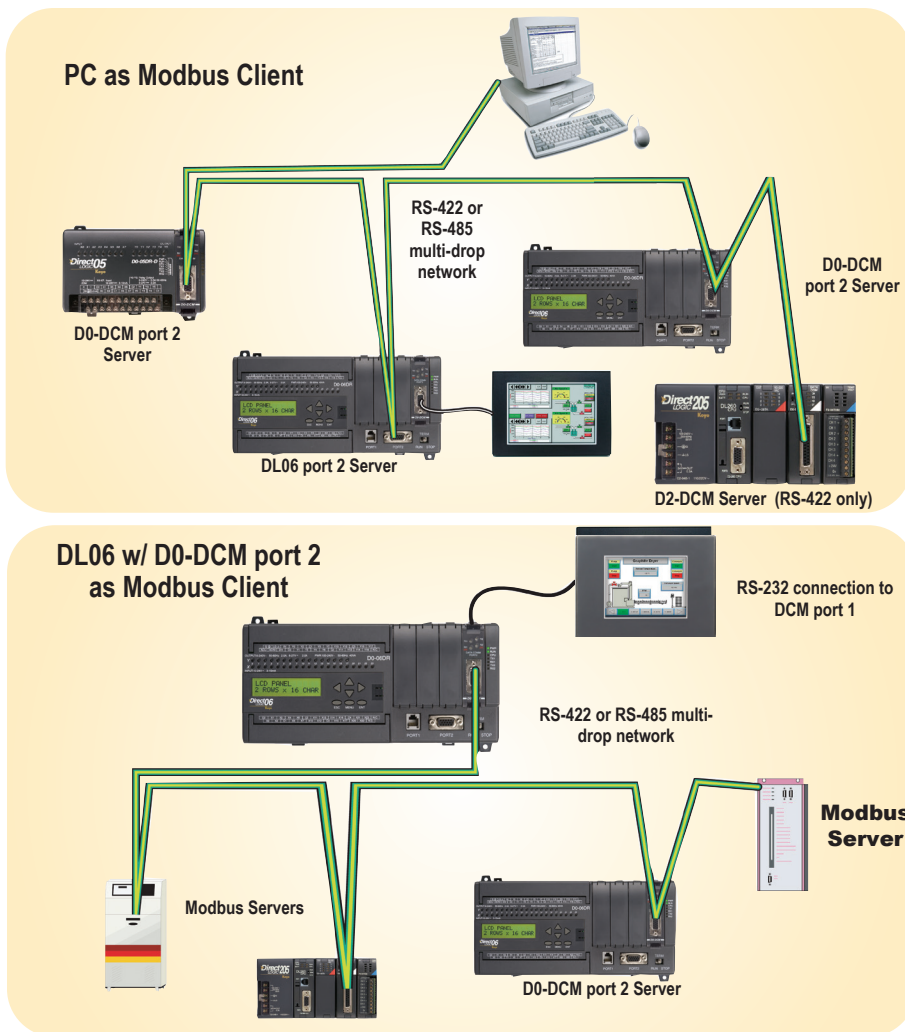

DL05/06 CoProcessor Module

TRIPLE-PORT BASIC CoPROCESSOR

F0-CP128 \$345.00



Overview

The BASIC CoProcessor Module interfaces the DL05/06 family of programmable controllers with bar code readers, operator interface terminals, instrumentation equipment, computers and other serial devices.

BASIC CoProcessor applications


BASIC CoProcessors are designed for use with intelligent devices such as:

- Bar code readers
- Welders
- Board level controllers
- Serial printers
- Intelligent sensors
- Almost any device with an RS-232 or RS-485 port

They are also good solutions for applications requiring complex math, such as floating point math, sine, cosine, tangent, exponential, square roots, etc.

Features

- FACTS Extended BASIC and ABM Commander for Windows software for IBM PCs makes program development fast and simple. (The software is included with the CoPro module on CD-ROM). It allows online, full-screen BASIC program editing and the ability to upload/download programs on disk. The included CD has Modbus Client and Server BASIC programs and other application examples.
- Non-volatile memory of up to 128K allows multiple program storage and execution, DL05/06 register expansion, and retentive data storage and retrieval.
- 100 MHz BASIC CoProcessor provides fast program execution independent of the CPU scan.
- Three buffered ports permit communication from the module to three external devices.
- The module is programmable from port 1 or 3 for complete serial port utilization without switching cables.
- A real-time clock/calendar maintains time/date with battery backup when power outages occur.
- Programmable time based BASIC interrupts to 5ms.
- Direct access of up to 256 bytes of DL05/06 CPU memory per scan is possible. No supporting ladder logic is required.
- Floating point math solves complex formulas to eight significant digits.
- An RJ12 Port 1 and Port 3 splitter, included with the module, provides easy connection of RS-232 cables to both Port 1 and Port 3. (If you are using RTS1 and CTS1 for port 1, then port 3 is not available.)

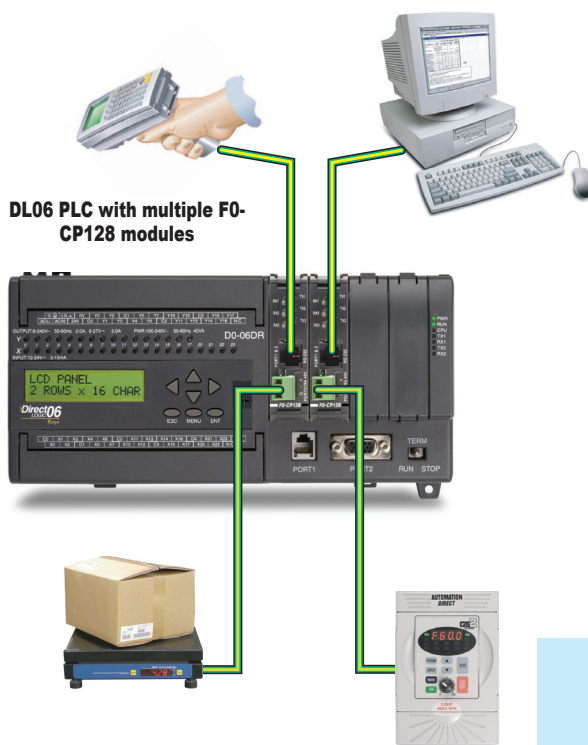

Included with CoPro

The following items are included with the F0-CP128 module:

- ABM Commander CD-ROM
- 7 ft. 6P6C-to-6P6C cable (phone-style RJ12 connectors)
- 9-pin D-sub connector (9-pin female to RJ12) to adapt to PC comm port
- RJ12 port splitter

DL05/06 CoProcessor Module

Triple-Port BASIC CoProcessor Module Specifications	
Module Type	CoProcessor™, Intelligent
Modules per CPU	DL05: one; DL06: up to four
Communication	256 character type-ahead input buffer on all ports. Ports are independently programmed by software. Seven or eight data bits, one or two stop bits, even, odd, or no parity. XON/XOFF software flow control and RTS/CTS handshake.
Clock Speed	100MHz
User Memory	128K total (64K data, 64K program) non-volatile; Real time battery backed calendar/clock
F0-CP128 Ports	Port 1: RS-232 512K baud maximum Port 2: RS-485, 512K baud maximum Port3*: RS-232, 115.2K baud max. * Port 3 physically located in the same RJ12 jack as Port 1 (RS-232). Port 3 uses the RTS1/CTS1 pins on that jack. If you use these lines for other purposes (e.g. hardware handshaking on Port 1), then Port 3 cannot be used.
ABM Commander for Windows (CD included with module)	Standard programming/documentation software for IBM PCs is shipped with each coprocessor module Key features include: • Runs under Windows 98/ME/2000/XP • On-line full-screen BASIC program editing (similar to GW Basic, with industrial application enhancements added for easier programming) • Internal Editor for block copy, block move, search and replace • Text upload and download BASIC programs on disk • Binary upload and download BASIC programs and data on disk • Download control statement allows multiple programs to be downloaded and saved with one download file. • CD includes Modbus Client and Server BASIC programs and other application examples
Field Termination	One RJ12 jack: Port 1 and 3 RS-232; One three-position removable terminal block: Port 2 RS-485
Indicator LEDs	RX1, TX1, RX2, TX2, RX3 (CTS1), TX3 (RTS1)
Power Consumption	150mA @ 5VDC
Operating Environment	0°C - 60°C (32°F - 140°F), 5% to 95% humidity (non-condensing)
Manufacturer	FACTS Engineering

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.00 or later	Version 3.0c or later
DL06	Version 1.90 or later	Version 4.0, Build 16 or later

DL05/06 High-Speed Counter I/O Module

High-Speed Counter I/O Module

H0-CTRIO2 \$315.00



DirectLOGIC DL05 and DL06 PLCs

You can use the H0-CTRIO2 module with any of the DL05 and DL06 PLCs.

Typical applications

- High-speed cut-to-length operations using encoder input
- Pick-and-place or indexing functions controlling a stepper/servo drive
- Dynamic registration for web material control
- Accurate frequency counting for speed control with onboard scaling
- PLS (Programmable Limit Switch) functions for high-speed packaging, gluing, or labeling
- Sub 10µs pulse-catch capability for high-speed product detection
- Functions for level or flow

Supported systems

Multiple CTRIO2 modules can reside in the same PLC, provided the base power budget is adequate.

Overview

The High-Speed Counter I/O module is designed to accept high-speed pulse-type input signals for counting or timing applications and to provide high-speed pulse-type output signals for stepper/servo motor control, monitoring, alarm or other discrete control functions. The H0-CTRIO2 module offer great flexibility for applications that call for precise counting or timing, based on an input event or for high-speed control output applications.

The module has its own microprocessor and operate asynchronously from the PLC/controller. This means that the on-board outputs respond in real time to incoming signals so there is no delay waiting for the PLC/controller to scan I/O.

The module is designed to work with incremental encoders or other field devices that send pulse outputs.

Terminal block supplied. Replacement terminal block: Order part no. [F0-IOCON](#).

H0-CTRIO2 features

The H0-CTRIO2 module offers the following I/O features:

- 4 DC sink/source inputs, 9–30 VDC
- 2 isolated sink/source DC outputs, 5–36 VDC, 0.5 A per point


Inputs supported:

- 1 quadrature encoder counter up to 250kHz, or 2 single-channel counters also up to 250kHz using module terminals A and B
- High-speed edge timers, dual edge timers, pulse catch, count reset, count inhibit, count capture or home search limits using module terminals C or D


Outputs supported:

- 2 independently configurable high-speed discrete outputs or 1 channel pulse output control (20Hz–250kHz)
- Pulse and direction or cw/ccw pulses supported for pulse output control
- Raw control of discrete output directly from user control program

CTRIO Workbench main configuration screen

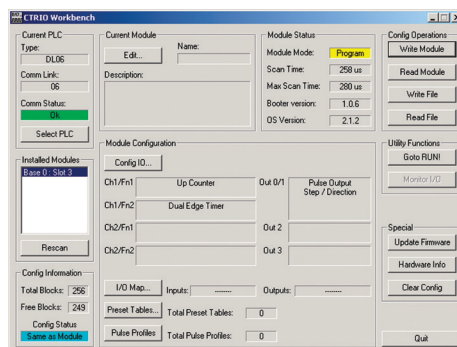

Configure I/O screen

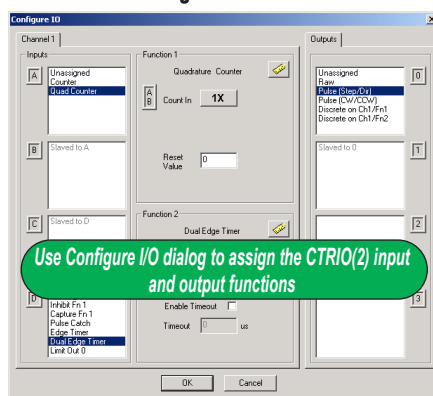

Note: CTRIO Workbench Version 2.2.0 is required to use H0-CTRIO2.

Software configuration

All scaling and configuration is done via CTRIO Workbench, a Windows software utility program. This eliminates the need for PLC ladder programming or other interface device programming to configure the module. CTRIO Workbench runs under Windows 98/2000/XP/7 and NT 4.0 SP5 or later.

DL05/06 High-Speed Counter I/O Module

I/O Specifications

General	
Module Type	Intelligent
Modules Per Base	Limited only by power consumption
I/O Points Used	None, I/O map directly in PLC V-memory or PC control access
Field Wiring Connector	Removable terminal block
Internal Power Consumption	250 mA Max at +5V from base power supply; (All I/O in ON state at max voltage/current)
Operating Environment	32°F to 140°F (0°C to 60°C), humidity (non-condensing) 5% to 95%
Manufacturer	Host Automation Products, LLC
Isolation	1500V I/O to Logic (H0-CTRIO2), 1000V among input channels and all outputs

H0-CTRIO2 Input Specifications	
Module	H0-CTRIO2
Inputs	4 pts sink/source 250kHz Max
Minimum Pulse Width	0.5 μ s
Input Voltage Range	9-30 VDC
Maximum Voltage	30 VDC
Input Voltage Protection	Zener Clamped at 33 VDC
Rated Input Current	8 mA typical, 12 mA maximum
Minimum ON Voltage	9.0 VDC
Maximum OFF Voltage	2.0 VDC
Minimum ON Current	5.0 mA (9 VDC required to guarantee ON state)
Maximum OFF Current	2.0 mA
OFF to ON Response	Less than 0.5 μ s
ON to OFF Response	Less than 0.5 μ s

H0-CTRIO2 Output Specifications		
Module	H0-CTRIO2	
Outputs	2 pts, independently isolated, current sourcing or sinking FET outputs: open drain and source with floating gate drive	
Voltage Range	5 - 36 VDC	
Maximum Voltage	36VDC	
Output clamp Voltage	60VDC	
Maximum Load Current	0.5 A at 23 °C, 0.33 A at 60 °C	
Maximum Load Voltage	33 VDC	
Maximum Leakage Current	100 µA	
Inrush Current	1.0 A for 10 ms	
OFF to ON Response	less than 3 µsec	
ON to OFF Response	less than 3 µsec	
ON State V Drop	0.3 V max.	
External Power Supply	For loop power only, not required for internal module function. User supplied power source required for stepper drive configuration.	
Overcurrent Protection	15A max Self resetting overcurrent protection	
Thermal Shutdown	T-junction = 150°C	
Overtemperature Reset	T-junction = 130°C	
Duty Cycle Range	1% to 99% in 1% increments (default = 50%)	
Configurable Presets a) Single b) Multiple	a) each output can be assigned one preset, or b) each output can be assigned one table of presets, one table can contain max. 128 presets, max. predefined tables = 255	
Maximum Output Frequency	Velocity Mode	65 kHz
	Run to Limit Mode	
	Run to Position Mode	
	Trapezoid	
	S-Curve	
	Symmetrical S-Curve	
	Dynamic Positioning	
	Home Search	
	Free Form	
	Dynamic Velocity	
	Dynamic Positioning Plus	250 kHz
	Trapezoid Plus	
	Trapezoid with Limits	

H0-CTRIO2 Input Resources	
Counter/Timer	2
Resource Options	1X, 2X, or 4X Quadrature, Up or Down Counter, Edge Timer, Dual Edge Timer, Input Pulse Catch, Reset, Inhibit, Capture
Timer Range / Resolution	4.2 billion (32 bits); 1 μ s
Counter Range	\pm 2.1 billion (32 bits or 31 bits + sign bit)

H0-CTRIO2 Output Resources	
Module	H0-CTRIO2
Pulse output / Discrete outputs	Pulse outputs: 1 channel (20Hz–250kHz); Discrete outputs: 2 pts. Pulse outputs: pulse/direction or cw/ccw
Resource Options	Output Profiles: Trapezoid S-Curve Symmetrical S-Curve Dynamic Positioning Dynamic Velocity Home Search Free Form Dynamic Positioning Plus Trapezoid Plus Trapezoid w/Limits Velocity Mode Run to Limit Mode Run to Position Mode
	Discrete outputs: configurable for set, reset, pulse on, pulse off, toggle, reset count functions (assigned to respond to Timer/Counter input functions)
	Raw mode: Direct access to discrete output from user application program
Target Position Range	\pm 2.1 billion (32 bits or 31 bits + sign bit)

DL05/06 High-Speed Counter I/O Module

Status indicators

H0-CTRIO2 LED Descriptions	
OK	Module OK
ER	User Program Error
A	Channel 1 Fn1 Status
B	Channel 1 Fn2 Status
Y0 - Y1	Output Status

H0-CTRIO2 LED Diagnostic Definitions		
OK	ERR	Description
ON	OFF	RUN mode
ON	ON	Hardware failure
Blinking	Blinking	Boot Mode - used for field OS upgrades
Blinking	OFF	Program mode
OFF	Blinking	Module self-diagnostic failure
OFF	ON	Module error due to watchdog timeout
OFF	OFF	No power to module

H0-CTRIO2 LED Diagnostic Definitions	
A	Blinks when Channel 1 Function 1 is counting or timing
B	Blinks when Channel 1 Function 2 is counting or timing
Y0 - Y1	Follow actual output state; ON = output is passing current

Installation and wiring

The H0-CTRIO2 module has one input channel, consisting of four optically isolated input points (pts. A-D on common M). The inputs can be wired to either sink or source current. The module has two optically isolated output points (pts. Y0-Y1 on common YC).

The outputs must be wired so positive current flows into the YC terminal and then out of the Yn terminal. The module's internal jumpers must be set to the High Side Common position for high side switching (sourcing) outputs or to the Low Side Common position for low side switching (sinking) outputs. Source operation is the factory default setting. See the schematic on the next page for sample jumper settings.



The module is configured, using CTRIO Workbench, to accommodate the user's application. The function of each input (counting, timing, reset, etc.) and output (pulse output, discrete output, etc.) is defined in the configuration of the module.

Terminal block supplied. Replacement terminal block: Order part no. [F0-IOCON](#)

See the notes below for further details about power source considerations, circuit polarities, and field devices.

Notes:

- Inputs (A, B, C, D) require user-provided 9-30 VDC power sources. Terminal M is the common for Channel 1 inputs. Maximum current consumption is 12 mA per input point.
- Polarity of the input power sources can be reversed. Consideration must be given, however, to the polarity of the field device. Many field devices are designed for only one polarity and can be damaged if power wiring is reversed.
- Outputs have one polarity only and are powered by user-provided 5-36 VDC power sources. The maximum allowable current per output circuit is 0.5 A for the H0-CTRIO2.
Module output jumpers must be set to the High side or Low side common position for Source/Sink applications. Refer to the diagrams on the next page for sample jumper settings.

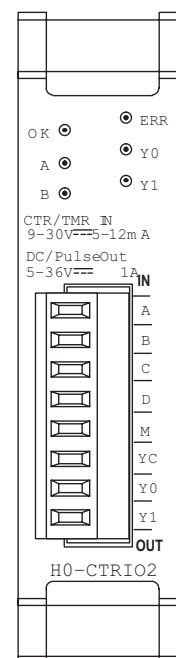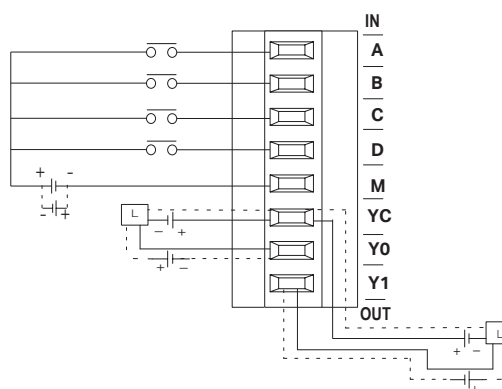


DL05/06 High-Speed Counter I/O Module


Solid state input wiring device

DC types of field devices are configured to either sink or source current. This affects the wiring of the device to the **H0-CTRIO2** module. Refer to the sinking/sourcing section in the Appendix for a complete explanation of sinking and sourcing concepts.


NPN Field Device (sink)

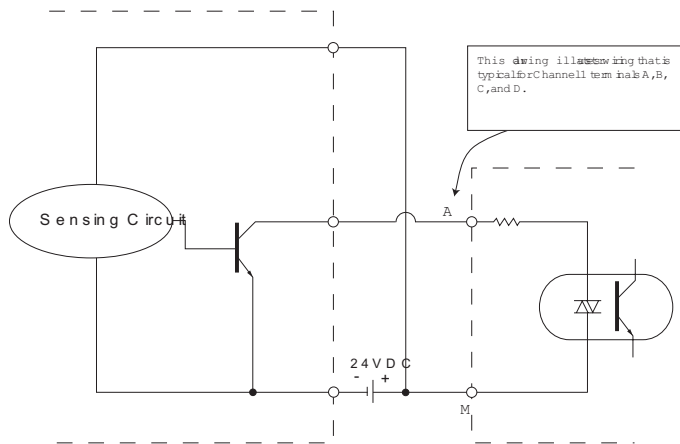

PNP Field Device (source)


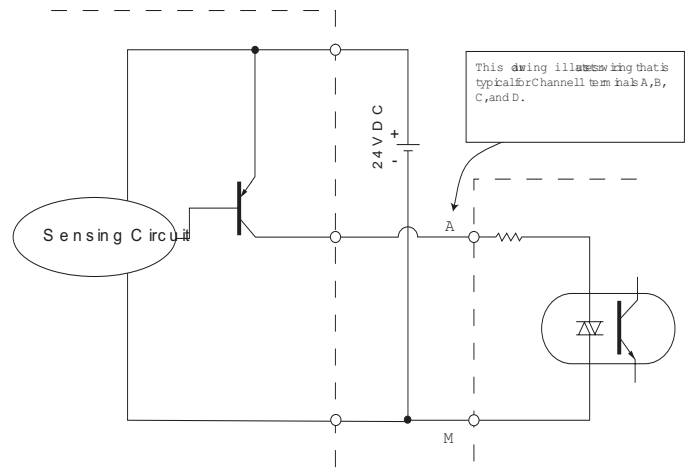


Pulse output schematic

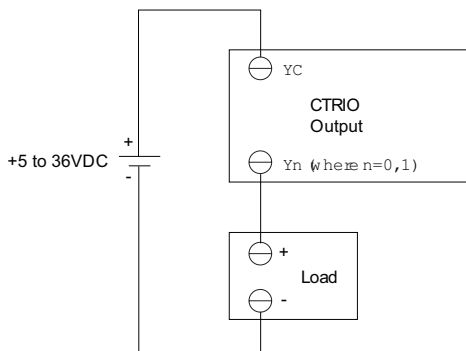


Set the module jumpers to Hi Common position when switching the high side of a DC load.

H0-CTRIO2

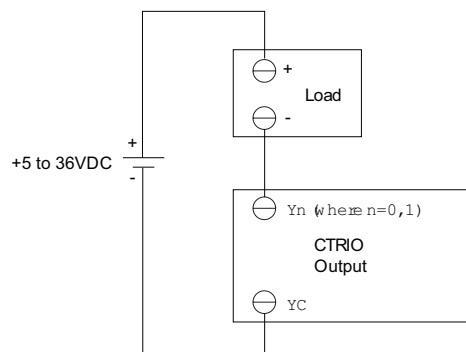


Set the module jumpers to LO Common position when switching the low side of a DC load.


H0-CTRIO2




Stepper/servo drive wiring example

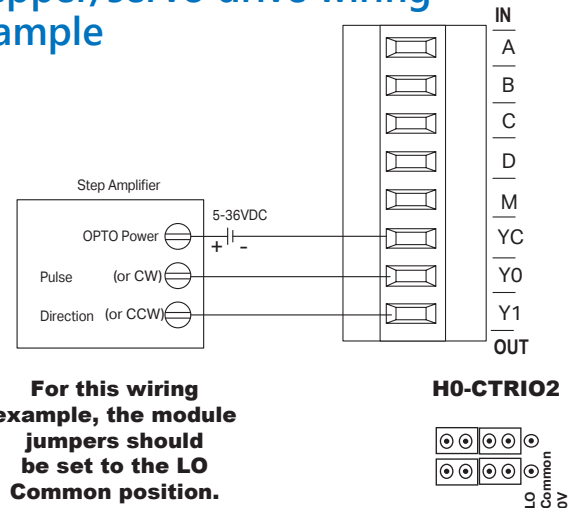

H0-CTRIO2



H0-CTRIO2 Jumper Location

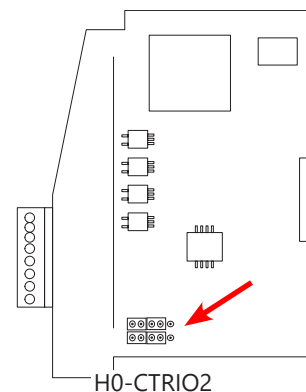


DL05/06 High-Speed Counter I/O Module

Fill-in-the-blank configuration software

The CTRIO Workbench is the software utility used to configure the CTRIO modules and to scale signals to desired engineering units. Workbench also allows you to perform various other functions, such as switching between the CTRIO's Program mode and Run mode, monitoring I/O status and functions, and diagnostic control of module functions. The latest version of the CTRIO Workbench utility can be downloaded for free at Host Engineering's Web site: www.hosteng.com.

CTRIO Workbench main configuration screen

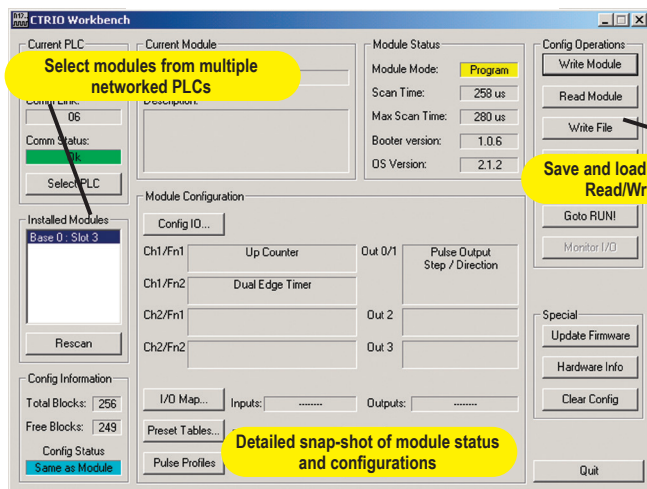


CTRIO Workbench configure I/O setup

The Configure I/O dialog is the location where input and output functions are assigned to the module. The choice of input and output functions determines which options are available. The input function boxes prompt you with selections for supported functions. The Workbench software automatically disallows any unsupported configurations.



H0-CTRIO2


Configure I/O screen

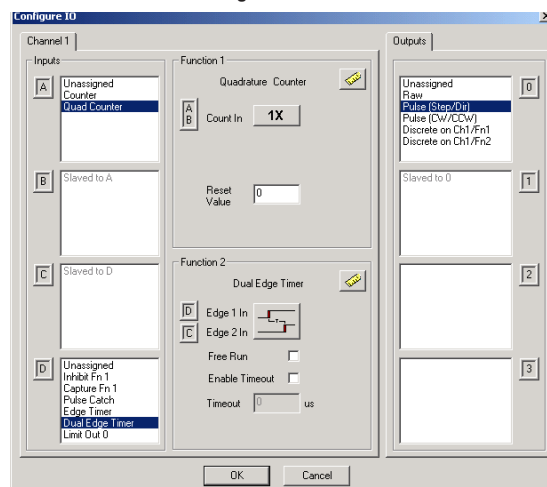

CTRIO Workbench diagnostics and monitoring

The Monitor I/O dialog is accessible from the main Workbench dialog when the module is in Run Mode. This allows for a convenient way to test and debug your configuration prior to installation. The Monitor I/O dialog is divided into three functional areas: Input Functions, Output Functions and System Functions. The data displayed under the Input Functions tab includes all input Dword parameters, status bits and the current status of each configured input and output function. The fields displayed under the Output Functions tab includes all output parameters and configuration information that can be altered during runtime and the bits that indicate successful transfers or errors. The System Functions can be used to read from or write to the CTRIO's internal registers.


Monitor I/O screen

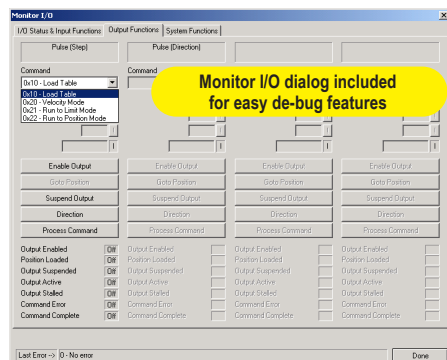

CTRIO Workbench on-board scaling

Scaling raw signals to engineering units is accomplished using the Scaling Wizard. The Scaling Wizard options are different for the Counter functions as compared with the Timer functions. "Position" and "Rate" scaling are available when you select a Counter function. "Interval" scaling is available when you select a Timing function.

Scaling Wizard screen

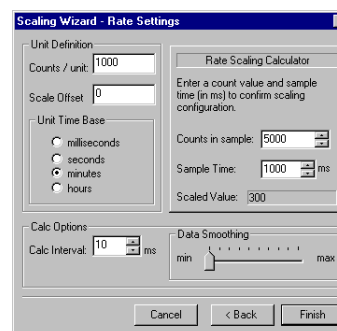

DL05/06 High-Speed Counter I/O Module


High-speed input operations

The CTrio2 module is capable of a wide variety of high speed input and output operations all within one module. With single channel input and separate single channel output design, the H0-CTrio2 module can satisfy both high-speed counting, timing, pulse catch operations, along with high speed discrete output or several profile choices of pulse output operations. Not all combinations of input functions and output functions are possible within the resources of the module, but the following examples are some of the most common applications for the H0-CTrio2 module. Check out these examples and see how they relate to your high speed application needs.

High-speed timing


The H0-CTrio2 module can be configured for timing functions based on count or rate. Using a common configuration of a proximity switch sensing the teeth on a gear, the module is able to calculate the velocity of the gear based on the rate it receives counts. This value can be scaled within the module to the engineering units required for the application.

High-speed timing application

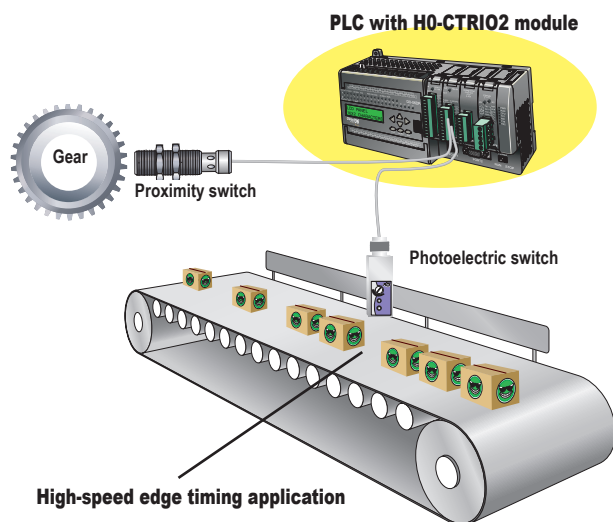

High-speed edge timing application

Using Configure I/O screen to configure H0-CTrio2 module for high-speed timing

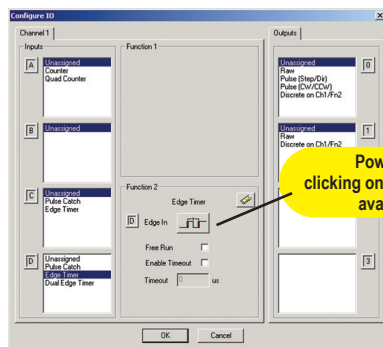


Powerful edge timing functions - clicking on the edge button cycles through the available edge timing functions


High-speed counting

The H0-CTrio2 module can be configured for counting functions with an encoder input with available connections for external reset, capture and inhibit signals. In a simple cut-to-length application as shown, the encoder provides an input position reference for the material to the module. The module's high speed outputs are wired to the cutting device and to the clutch and/or braking device. When the count from the encoder is equal to a pre-programmed setpoint within the module, the high speed outputs are activated to stop and cut the material to a repeatable fixed length. Additionally, the clutch/brake signal can be used for an inhibit signal to not accumulate counts while the material is being cut.

High-speed cut-to-length application

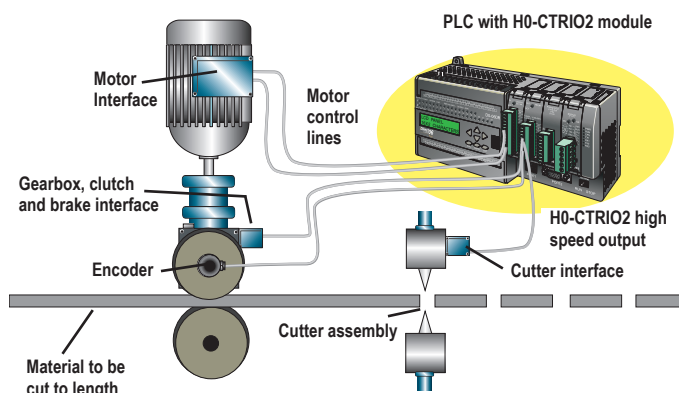


Using Configure I/O screen to configure H0-CTrio2 module for high-speed counting

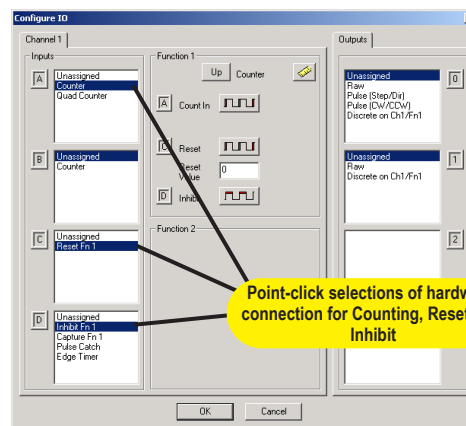

DL05/06 High-Speed Counter I/O Module

Pulse output operations

Using Edit Pulse Profile screen to select Trapezoid pulse output profile

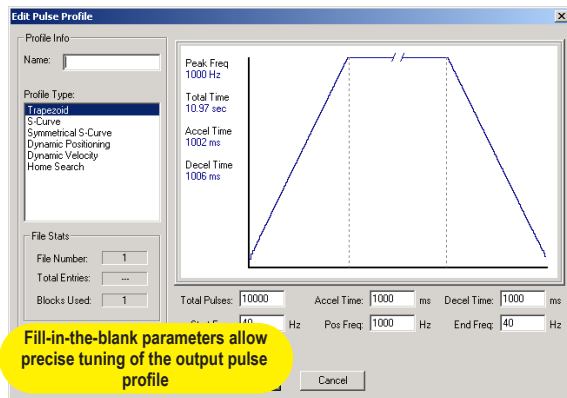


Pulse output for stepper/servo control

The H0-CTRIO2 module is capable of multiple configurations for pulse output control, most often when connected to a stepper or servo drive system. The module can deliver a pulse output signal up to a maximum of 250 kHz, along with support for pulse-and-direction or CW/CCW pulses. The available profile choices include Trapezoid, S-Curve, Symmetrical S-Curve, Dynamic Positioning, Dynamic Velocity, Home Search, Free Form, Dynamic Positioning Plus, Trapezoid Plus and Trapezoid w/Limits. All profiles can be easily configured using the CTRIO Workbench software with fill-in-the-blank parameter fields and a graphic representation of the selected profile. Three additional profiles are available that are completely controlled by the user program (no H0-CTRIO2 Workbench profile is configured). They are Velocity Mode, Run to Limit Mode and Run to Position Mode.

Example application

In a simple rotary indexing application, as shown above, a fixed Trapezoid profile is chosen. The H0-CTRIO2 module for this application is wired to a stepper drive for pulse-and-direction. The requirement for this application is to provide a smooth movement of the rotary table to allow product to be filled into individual containers an equal distance apart. The predetermined number of pulses required for each movement is entered into the CTRIO Workbench as "Total Pulses" along with the Starting Frequency, Ending Frequency, and Positioning Frequency (speed after acceleration). The Acceleration and Deceleration parameters are entered in units of time, so no ramp-distance calculations are required. After all parameters are entered, a graphical representation of the configured profile is shown automatically. Once the configuration has been downloaded to the module, all that is needed from the PLC CPU is the Enable Output signal to begin a movement.

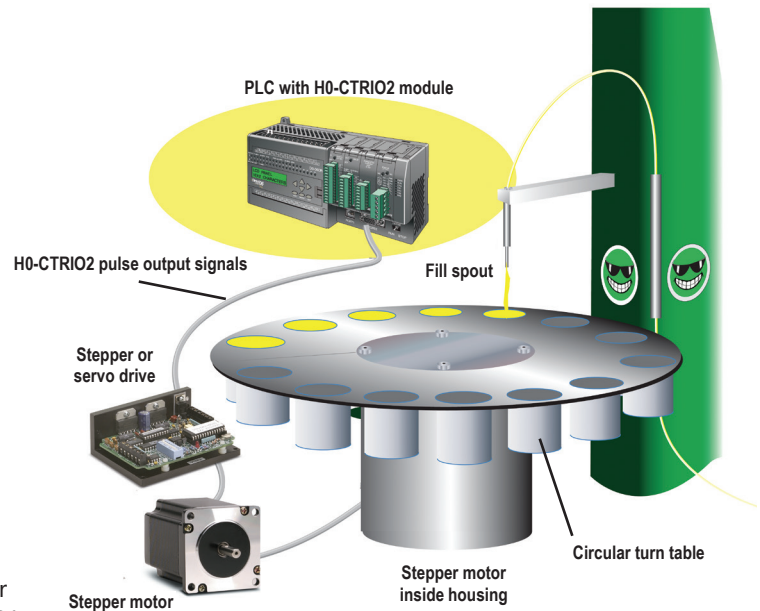


Rotary indexing liquid fill application

Other common pulse output applications:

- S-Curve accel/decel profile for signaling a stepper or servo drive that needs a curved acceleration and deceleration profile, i.e. for diminishing any initial "jerk" upon movement of static products, boxes on conveyors, liquids in containers on an indexer, printing registrations, etc.
- Dynamic Positioning for any run-to-a-specific-position requirement, either by a pre-programmed count of an external high speed discrete input wired to the module. This is popular in winding or webcontrol with any dynamic registration mark or variable speed requirement.
- Home search routines to seek a home position based on CTRIO module discrete input limit(s).

Example of S-Curve acceleration and deceleration pulse output profile


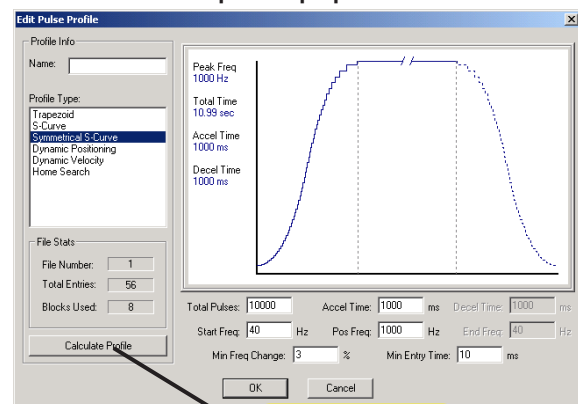


Calculate Profile displays graphical representation of output pulse profile

DL05/06 High-Speed Counter I/O Module

Combining high-speed input and pulse output operations


Using CTRIO Workbench to configure the module for simultaneous high-speed input and high-speed pulse output operation

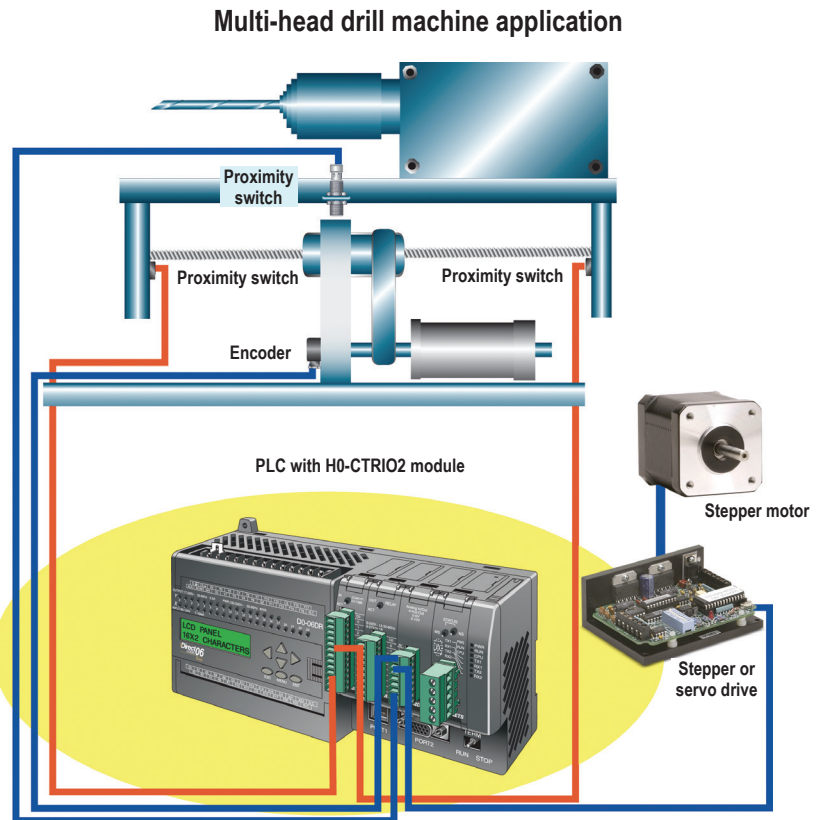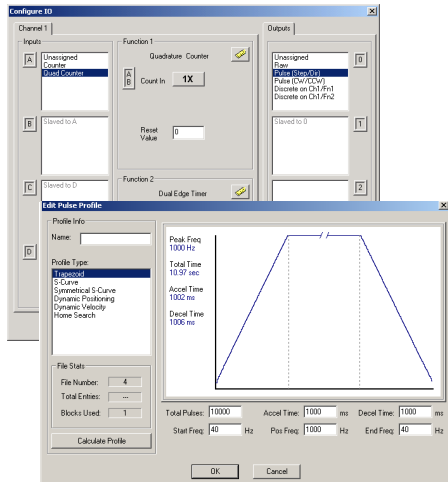

Use Encoder for Position

Three profiles offer the option to Use Encoder for Position. They are Dynamic Position Plus, Trapezoid Plus and Trapezoid w/ Limits. When Use Encoder for Position is enabled, the target positions are specified in units of the encoder and the move is complete when the encoder reaches that position, not when the output has finished generating a certain number of pulses. This functionality is useful for hitting a target position more accurately with a mechanical system that slips or has excessive lash.

Example application

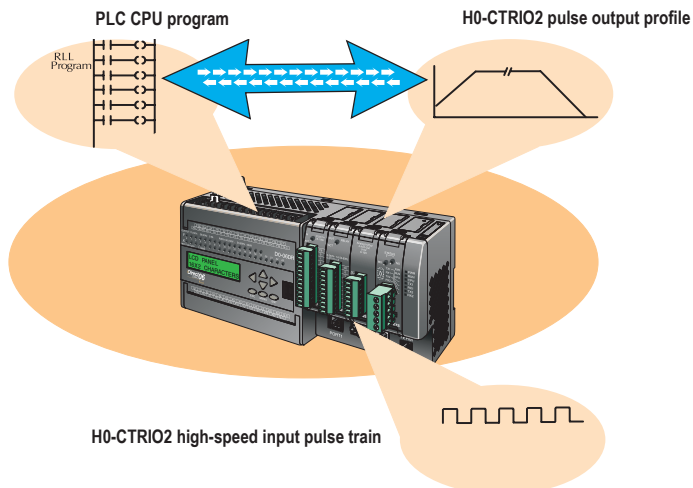

In the simple drill head application shown above, the H0-CTRIO2 module pulse outputs are wired to a stepper or servo drive. The inputs are wired to an encoder attached to the lead screw on the movable portion of the drill head assembly. The H0-CTRIO2 module outputs a pulse train to the drive that allows the motor to spin the lead screw, making the drill move forward into the passing material. The encoder monitors the speed and position of the drill head. Proximity switches at each end act as limit switches ensuring the drill head will not over-travel. A home sensor is positioned in the middle of the assembly, which allows the PLC to reset the count.

As shown in diagram on left, using an encoder to calculate the appropriate position for a move using H0-CTRIO2 is done manually through ladder logic. The inherent lag of doing this slows the process considerably. The H0-CTRIO2 can handle this functionality natively on-the-fly when Use Encoder for Position is enabled, eliminating the scan time delay and the need for extra ladder code.



Wiring Solutions

Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end.

Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the **ZIPLink** System ranging from

PLC I/O-to-**ZIPLink** Connector Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of **ZIPLink** modules are provided with **ZIPLink** cables. See the following solutions to help determine the best **ZIPLink** system for your application.

Solution 1: DirectLOGIC I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a **ZIPLink** connector module used in conjunction with a prewired **ZIPLink** cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

Using the PLC I/O Modules to **ZIPLink** Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a **ZIPLink** module.
3. Select a corresponding **ZIPLink** cable.



Solution 2: DirectLOGIC I/O Modules to 3rd Party Devices

For connecting I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIPLink** Pigtail Cables. **ZIPLink** Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a **ZIPLink** pigtail cable that is compatible with your 3rd party device.



Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar soft starters and AC drives. Add a **ZIPLink** communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your drive and type of communications.
2. Select a **ZIPLink** cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

1. Locate your connector type.
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIPLink** modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIPLink** Specialty Modules selector table located in this section,

1. Locate the type of application.
2. Select a **ZIPLink** module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible **ZIPLink** connector modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

1. Select module type.
2. Select the number of pins.
3. Select cable.





PLC I/O Modules to ZIPLink Connector Modules - DL05/06

DL05/06 PLC Input Module ZIPLink Selector				
PLC		ZIPLink		
<i>Input Module</i>	<i># of Terms</i>	<i>Component</i>	<i>Module Part No.</i>	<i>Cable Part No.</i>
<u><i>D0-10ND3</i></u>	13	Feedthrough	ZL-RTB20	<u><i>ZL-D0-CBL13</i></u>
<u><i>D0-10ND3F</i></u>	13	Feedthrough		<u><i>ZL-D0-CBL24-L</i></u>
<u><i>D0-16ND3</i></u>	24	Feedthrough	ZL-LTB16-24-1	<u><i>ZL-D0-CBL24-1L</i></u>
		Sensor		<u><i>ZL-D0-CBL24-2L</i></u>
<u><i>F0-08NA-1</i></u>	10	See Note 2		

DL05/06 PLC Combo In/Out Module ZIPLink Selector				
PLC		ZIPLink		
Combo Module	# of Terms	Component	Module Part No.	Cable Part No.
D0-07CDR	10	See Note 2		
D0-08CDD1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13

DL05/06 PLC Analog Module ZIPLink Selector				
PLC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
<u>F0-04AD-1</u>	8	See Note 2		
<u>F0-04AD-2</u>	8			
<u>F0-08ADH-1</u>	13	Feedthrough	ZL-RTB20	<u>ZL-D0-CBL13</u>
<u>F0-08ADH-2</u>	13			
<u>F0-04DAH-1</u>	13			
<u>F0-08DAH-1</u>	13			
<u>F0-04DAH-2</u>	13			
<u>F0-08DAH-2</u>	13			
<u>F0-2AD2DA-2</u>	8	See Note 2		
<u>F0-4AD2DA-1</u>	8			
<u>F0-4AD2DA-2</u>	8			
<u>F0-04RTD</u>	Matched Only			
<u>F0-04THM</u>	Matched Only			



Note: ZIPLink Connector Modules and ZIPLink Cables specifications are in the ZIPLink catalog section.

DL05/06 PLC Output Module ZIPLink Selector				
PLC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
D0-10TD1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13
D0-16TD1	24	Feedthrough	ZL-RTB20	ZL-D0-CBL24 *
		Fuse	ZL-RFU20 ³	ZL-D0-CBL24 *
		Relay (sinking)	ZL-RRL16-24-1	ZL-D0-CBL24 *
D0-10TD2	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13
D0-16TD2	24	Feedthrough	ZL-RTB20	ZL-D0-CBL24 *
		Fuse	ZL-RFU20 ³	ZL-D0-CBL24 *
		Relay (sourcing)	ZL-RRL16-24-2	ZL-D0-CBL24 *
D0-08TR	10	See Note 2		
F0-04TRS¹	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13

DL05/06 PLC Fixed I/O ZIPLink Selector				
PLC		ZIPLink		
PLC	# of Terms	Component	Module Part No.	Cable Part No.
DL05	18	See Note 2		
DL06	20 (Input side only)	Feedthrough	ZL-RTB20	ZL-D06X-CBL20
	20 (Output side only)	Feedthrough	ZL-RTB20	ZL-D06Y-CBL20

* Select the cable length by replacing the * with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

¹ Caution: The F0-04TRS relay outputs are derated not to exceed 2A per point when used with the ZIPLink wiring system.

² These modules are not supported by the ZIPLink wiring system.

³ Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400mA per circuit.



DL05/06 I/O Option Modules


F0-08SIM

\$68.00

8-input simulator module

F0-08SIM addressing example

F0-08SIM Input Specifications	
Number of Inputs	8
Base Power Required (5VDC)	1mA
Terminal Type	None
Status Indicator	None
Weight	1.6 oz. (45.36 g)

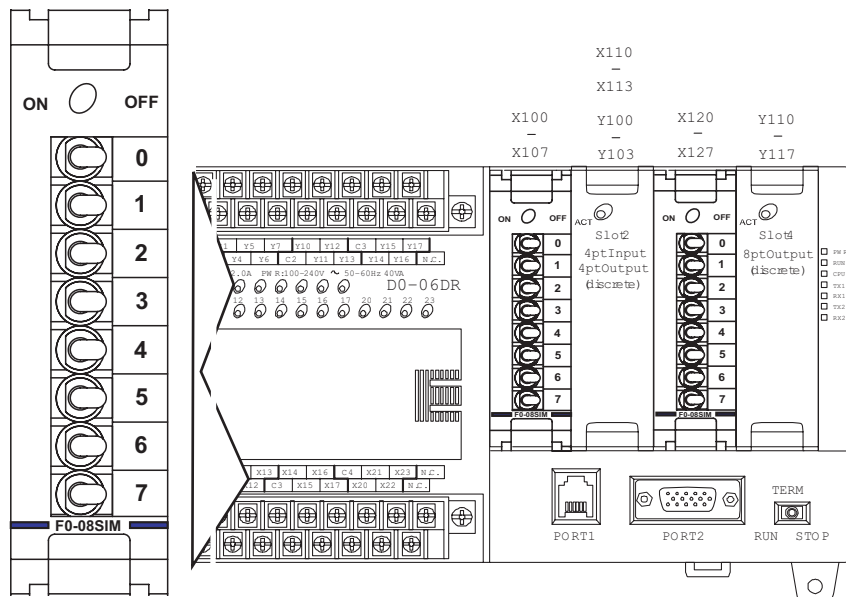



CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.90 or later	Version 3.0c or later
DL06	Version 1.80 or later	Version 4.0, Build 16 or later

D0-10ND3


\$84.00

10-point DC input module

D0-10ND3 Input Specifications	
Number of Inputs	10 (sink/source)
Input Voltage Range	10.8-26.4 VDC
Peak Voltage	30.0 VDC
Input Current	Typical: 4.0 mA @ 12 VDC 8.5 mA @ 24 VDC
Maximum Input Current	11mA @ 26.4 VDC
Input Impedance	2.8 k Ω @ 12-24 VDC
On Voltage Level	> 10.0 VDC
Off Voltage Level	< 2.0 VDC
Minimum ON Current	3.5 mA
Minimum OFF Current	0.5 mA
Off to On Response	2-8 ms, Typ. 4ms
On to Off Response	2-8 ms, Typ. 4ms
Status Indicators	Module activity: one green LED
Commons	2 (5 pts/common) isolated
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	Typical. 35mA (all pts. ON)

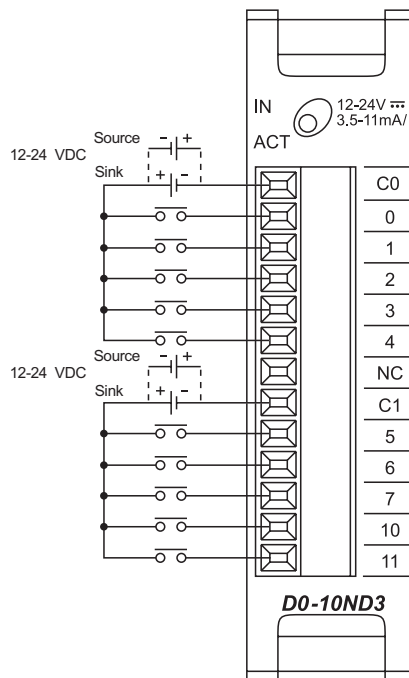

Equivalent input circuit

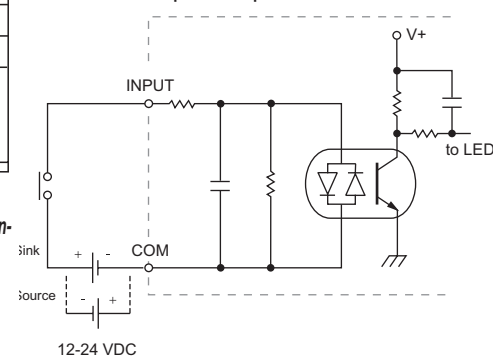

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.


For "Sinking and Sourcing Concepts", see the Appendix section in this catalog.

DL05/06 I/O Option Modules

D0-10ND3F \$95.00

10-point DC fast input module

D0-10ND3F Input Specifications	
Number of Inputs	10 (sink/source)
Input Voltage Range	10.8– 26.4 VDC
Peak Voltage	30.0 VDC
Input Current	Typical: 4.0 mA @ 12VDC 8.5 mA @ 24VDC
Maximum Input Current	11mA @ 26.4 VDC
Input Impedance	2.8 k Ω @ 12-24 VDC
On Voltage Level	> 10.0 VDC
Off Voltage Level	< 2.0 VDC
Minimum ON Current	3.5 mA
Minimum OFF Current	0.5 mA
Off to On Response	2ms, Typ. 1ms
On to Off Response	2ms, Typ. 1ms
Status Indicators	Module activity: one green LED
Commons	2 (5 pts/common) isolated
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	Typical 35mA (all pts. ON)


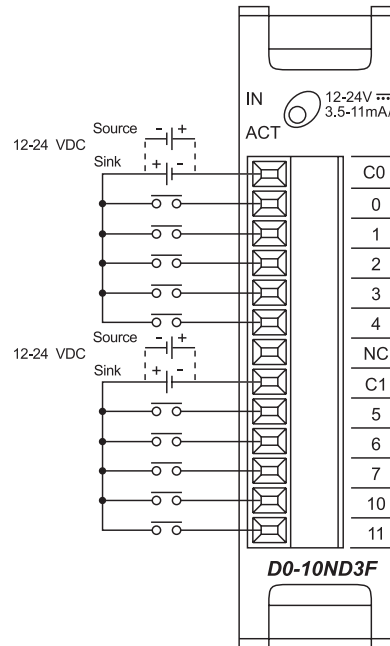


CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.70 or later	Version 3.0c or later
DL06	Version 1.50 or later	Version 4.0, Build 16 or later



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Derating chart

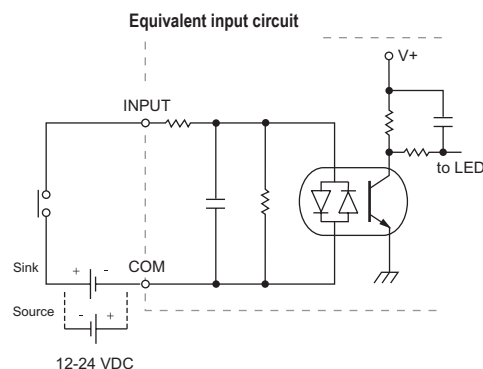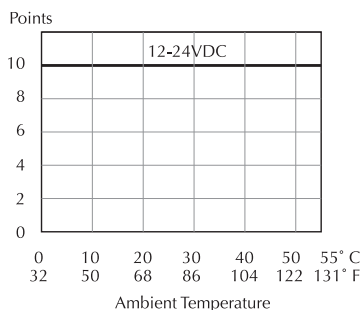


For "Sinking and Sourcing Concepts", see the Appendix section in this catalog.

DL05/06 I/O Option Modules


D0-16ND3 \$86.00

16-point DC input module


D0-16ND3 Input Specifications	
Number of Inputs	16 (sink/source)
Input Voltage Range	20–28 VDC
Peak Voltage	30.0 VDC
Input Current	Typical: 4.0 mA @ 24VDC
Maximum Input Current	6mA @ 28VDC
Input Impedance	4.7 k Ω @ 24VDC
On Voltage Level	> 19.0 VDC
Off Voltage Level	< 7.0 VDC
Minimum ON Current	3.5 mA
Minimum OFF Current	1.5 mA
Off to On Response	2-8 ms, Typ. 4ms
On to Off Response	2-8 ms, Typ. 4ms
Status Indicators	Module activity: one green LED
Commons	4 (4pts/common) isolated
Fuse	No fuse
Connector Type	24-pin Molex 43025-2400 (See ZIPLinks for wiring options)
Base Power Required	Typical. 35mA (all pts. ON)

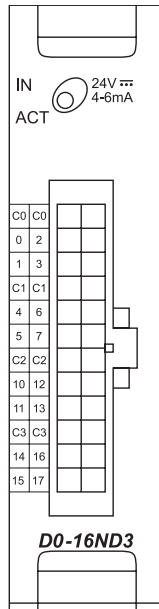

Equivalent input circuit

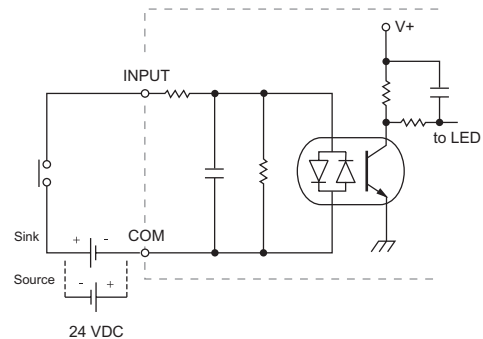


Derating chart

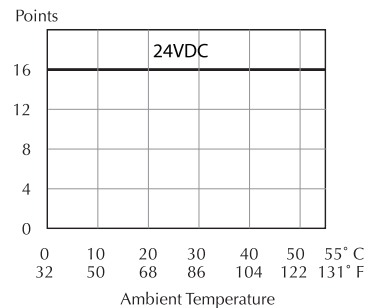

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Typical Wiring Example

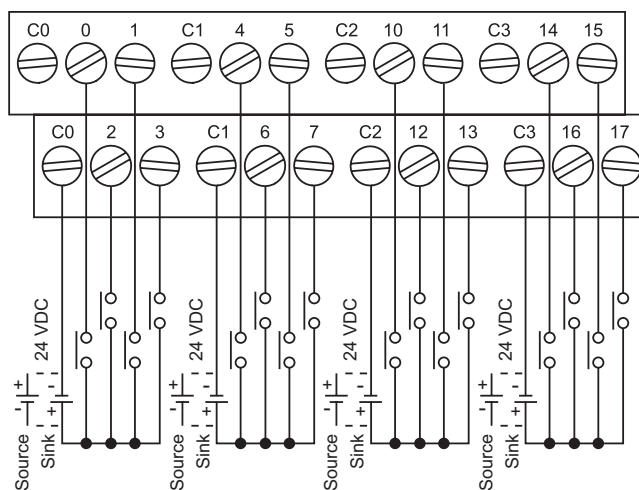

For "Sinking and Sourcing Concepts", see the Appendix section in this catalog.


DL05/06 I/O Option Modules

F0-08NA-1 \$98.00

8-point AC input module

F0-08NA-1 AC Input Specifications

Number of Inputs	8
Input Voltage Range	80–132 VAC (90–150 VDC)
AC Frequency	47–63 Hz
Input Current	4.0 mA @ 132VAC
Input Impedance	33k Ω
On Voltage Level	80VAC minimum
Off Voltage Level	20VAC maximum
Minimum On Current	2.4 mA
Maximum Off Current	1.6 mA
Off to On Response	< 20ms
On to Off Response	< 10ms
Status Indicators	None
Commons	2 (4 pts/common) isolated
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	5mA (all points ON)

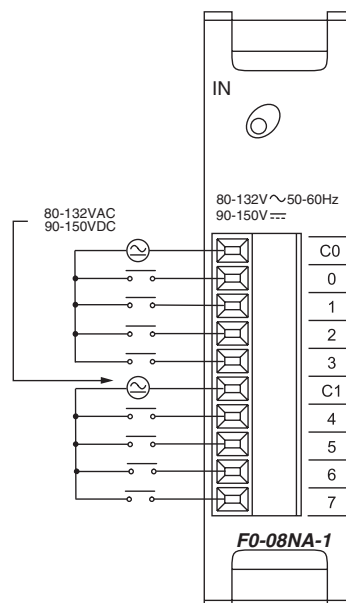


CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.70 or later	Version 3.0c or later
DL06	Version 1.50 or later	Version 4.0, Build 16 or later




See *Wiring Solutions* for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Derating chart

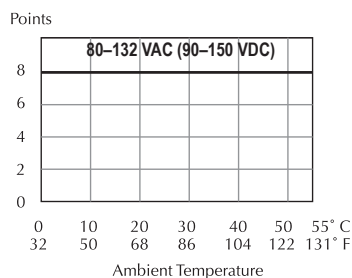

Equivalent input circuit

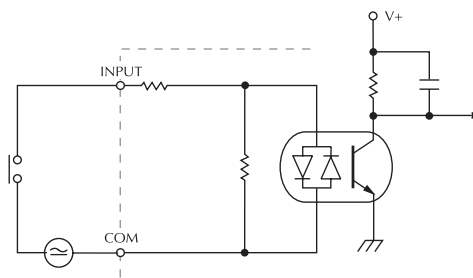


DL05/06 I/O Option Modules



D0-10TD1 \$100.00

10-point DC output module

D0-10TD1 Output Specifications	
Number of Outputs	10 (sinking)
Operating Voltage Range	6–27 VDC
Output Voltage Range	5–30 VDC
Peak Voltage	50.0 VDC
Maximum Output Current	0.3 A/point, 1.5 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	15µA @ 30.0VDC
On Voltage Drop	0.5 VDC @ 0.3 A
Maximum Inrush Current	1A for 10ms
Off to On Response	< 10es
On to Off Response	< 60es
Status Indicators	Module activity: one green LED
Commons	2 (5 points/common)
Fuse	No fuse
Terminal Type (Included)	Removable: D0- ACC-4
External DC Power Required	20–28 VDC max 200mA (all pts. ON)
Base Power Required (5V)	Max. 150mA (all pts. ON)

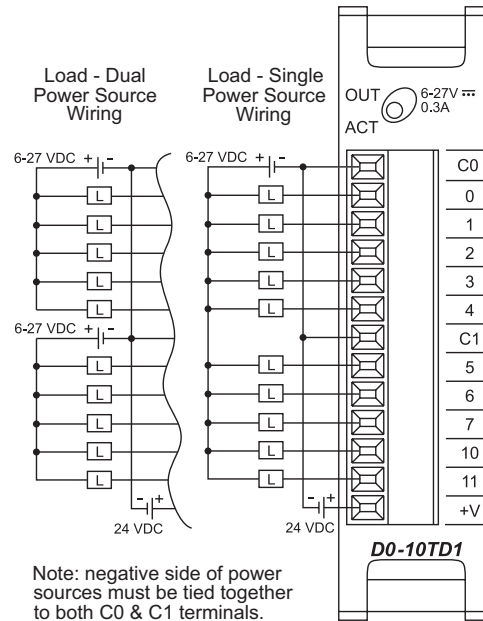

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

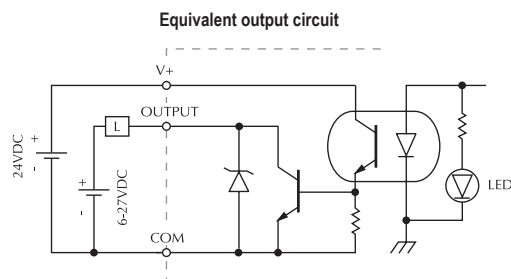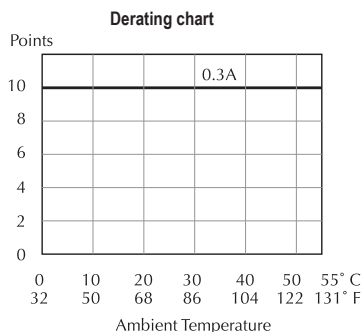

DL05/06 I/O Option Modules


D0-16TD1

\$94.00


16-point DC output module

D0-16TD1 Output Specifications


Number of Outputs	16 (sinking)
Operating Voltage Range	6–27 VDC
Output Voltage Range	5–30 VDC
Peak Voltage	50.0 VDC
Maximum Output Current	0.1 A/point, 0.8 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	15µA @ 30.0VDC
On Voltage Drop	0.5 VDC @ 0.1 A
Maximum Inrush Current	1A for 10ms
Off to On Response	< 0.5 ms
On to Off Response	< 0.5 ms
Status Indicators	Module activity: one green LED
Commons	2 (8 points/common)
Fuse	No fuse
Connector Type	24-pin Molex 43025-2400 (see ZIPLink for wiring options)
External DC Power Required	20–28 VDC max 70mA (all pts. ON)
Base Power Required (5V)	Max. 200mA (all pts. ON)

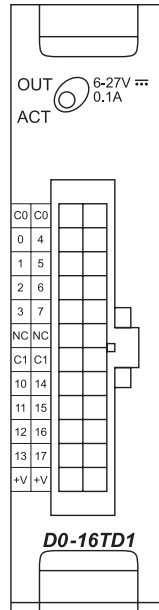

Equivalent output circuit

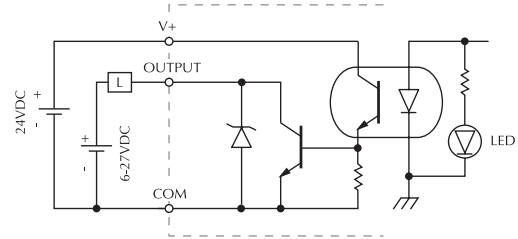


Derating chart

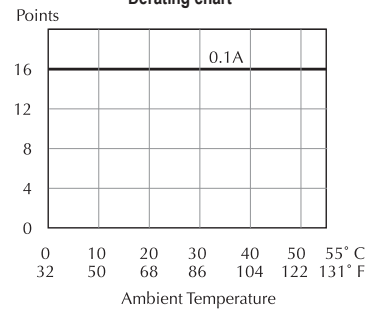

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Typical Wiring Example

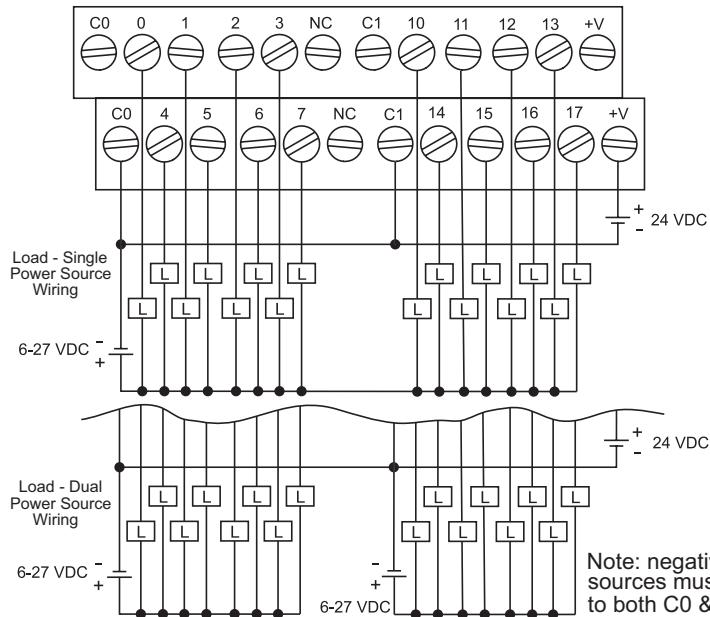


DL05/06 I/O Option Modules

D0-10TD2 \$102.00


10-point DC output module

D0-10TD2 Output Specifications


Number of Outputs	10 (sourcing)
Peak Voltage	50.0 VDC
Maximum Output Current	0.3 A/point, 1.5 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	1.5 μ A @ 26.4 VDC
On Voltage Drop	1.0 VDC @ 0.3 A
Maximum Inrush Current	1A for 10ms
Off to On Response	< 10es
On to Off Response	< 60es
Status Indicators	Module activity: one green LED
+V Terminals & Common	2 (5 points/+V Term.) Isolated, 1 Common
Fuse	No fuse
Terminal Type (Included)	Removable: D0- ACC-4
Base Power Required (5V)	Max. 150mA (all pts. ON)

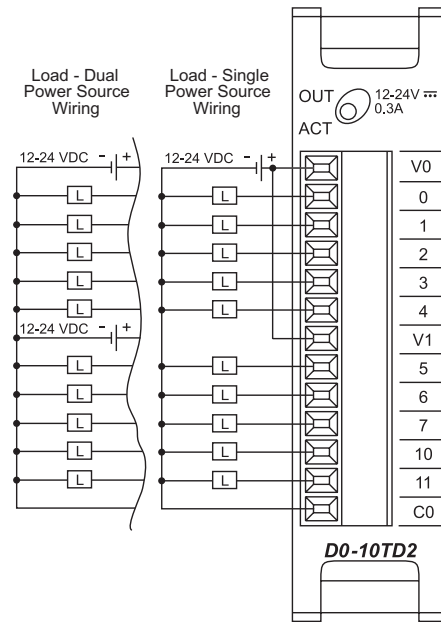

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

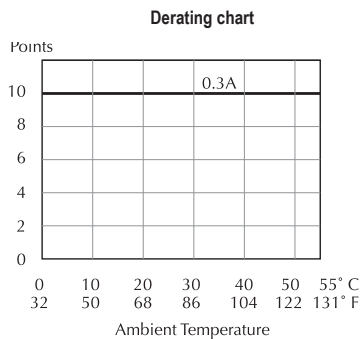

Equivalent output circuit

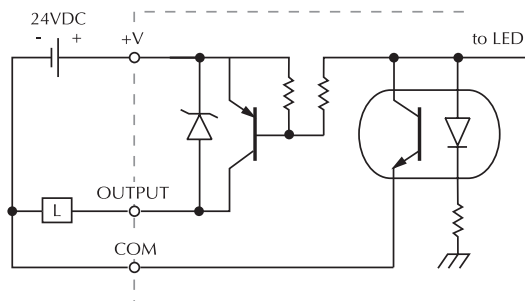

DL05/06 I/O Option Modules


D0-16TD2

\$85.00


16-point DC output module

D0-16TD2 Output Specifications


Number of Outputs	16 (sourcing)
Peak Voltage	50.0 VDC
Maximum Output Current	0.1 A/point, 0.8 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	1.5 eA @ 26.4 VDC
On Voltage Drop	1.0 VDC @ 0.1 A
Maximum Inrush Current	1A for 10ms
Off to On Response	< 0.5 ms
On to Off Response	< 0.5 ms
Status Indicators	Module activity: one green LED
+V Terminals & Common	2 (8 points/+V Term.) Isolated, 1 Common
Fuse	No fuse
Connector Type	24-pin Molex 43025- 2400 (see ZIPLinks for wiring options)
Base Power Required (5V)	Max. 200mA (all pts. ON)

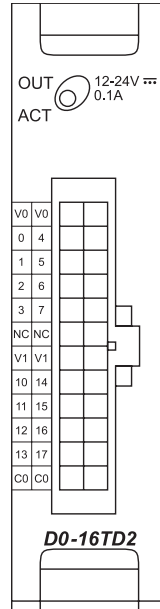

Equivalent output circuit

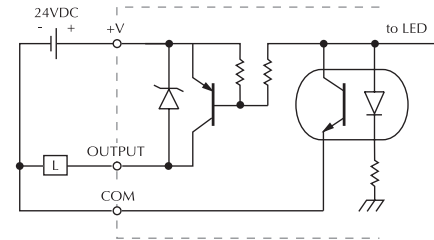


Derating chart

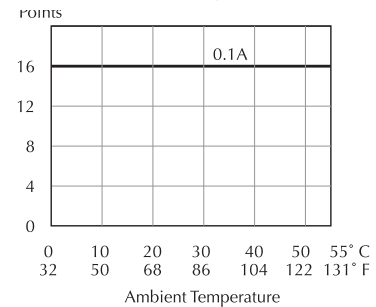

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Typical Wiring Example

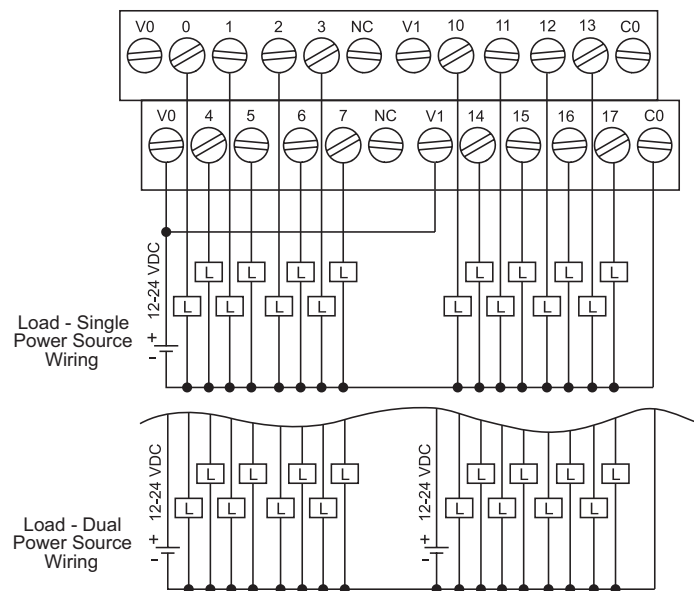

DL05/06 I/O Option Modules

D0-07CDR

\$95.00

**4-point DC input and
3-point relay output module**

D0-07CDR Input Specifications


Number of Inputs	4 (sink/source)
Input Voltage Range	10.8–26.4 VDC
Peak Voltage	30VDC
Maximum Input Current	11mA @ 26.4 VDC
Input Current	Typical: 4mA @ 12VDC 8.5 mA @ 24VDC
Input Impedance	2.8 k Ω @ 12–24 VDC
ON Voltage Level	> 10.0 VDC
OFF Voltage Level	< 2.0 VDC
Minimum ON Current	3.5 ms
Maximum OFF Current	0.5 ms
ON to OFF Response	2–8 ms, Typical 4ms
OFF to ON Response	2–8 ms, Typical 4ms
Commons	1 (4 points/common)

D0-07CDR Output Specifications


Number of Outputs	3
Output Voltage Range	6–27 VDC/6–240 VAC
Output Type	Relay, form A (SPST)
Peak Voltage	30.0 VDC/ 264VAC
Maximum Current (resist.)	1A/point, 4A/ common
Minimum Load Current	5mA @ 5VDC
Maximum Leakage Current	0.1 mA @ 264VAC
On Voltage Drop	N/A
Maximum Inrush Current	Output: 3A for 10ms Common: 10A for 10ms
Off to On Response	< 15ms
On to Off Response	< 10ms
Status Indicators	Module activity: one green LED
Commons	1 (3 points/common)
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	Max. 200mA (all pts. ON)



See Wiring Solutions for part numbers of ZIPLINK cables and connection modules compatible with this I/O module.

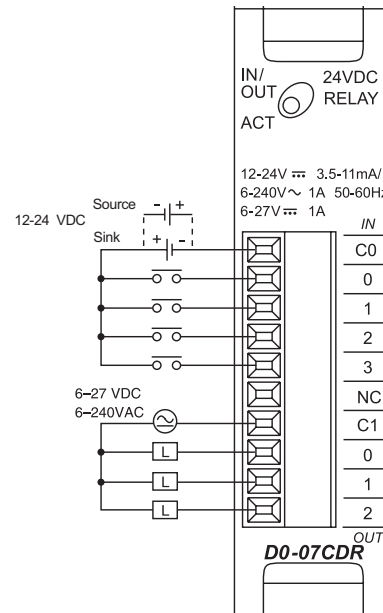


Equivalent input circuit

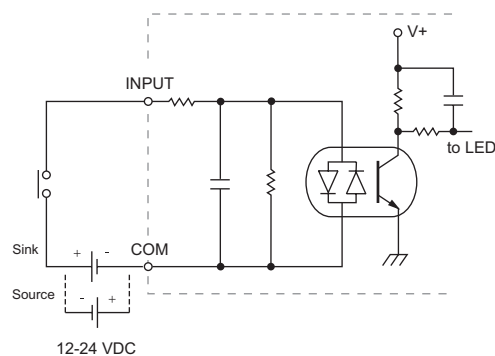


For "Sinking and Sourcing Concepts", see the Appendix section in this catalog.


Equivalent output circuit

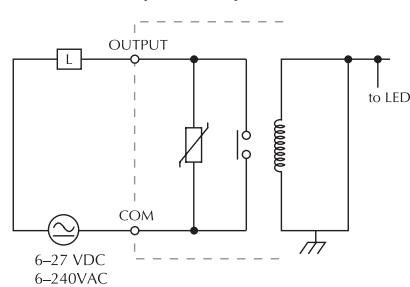

Derating chart for DC inputs

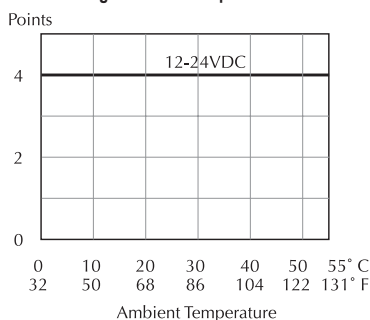

Derating chart for relay outputs

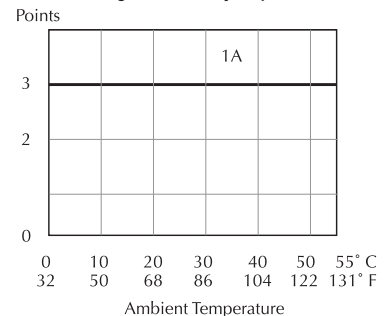


DL05/06 I/O Option Modules

D0-08TR

\$112.00


8-point relay output module

D0-08TR Output Specifications	
Number of Outputs	8
Output Voltage Range	6-27 VDC/6-240 VAC
Output Type	Relay, form A (SPST)
Peak Voltage	30.0VDC/264VAC
Maximum Current (resist.)	1A/point, 4A/common
Minimum Load Current	5mA @ 5VDC
Maximum Leakage Current	0.1 mA @ 264VAC
On Voltage Drop	N/A
Maximum Inrush Current	Output: 3A for 10ms Common: 10A for 10ms
Off to On Response	< 15ms
On to Off Response	< 10ms
Status Indicators	Module activity: one green LED
Commons	2 isolated (4 points/common)
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	Max. 280mA (all pts. ON)

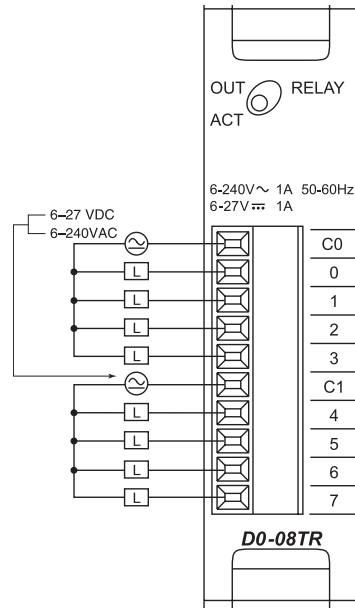


See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

Note: When used with the ZIPLink wiring system, relay outputs are derated not to exceed 2 Amps per point max.

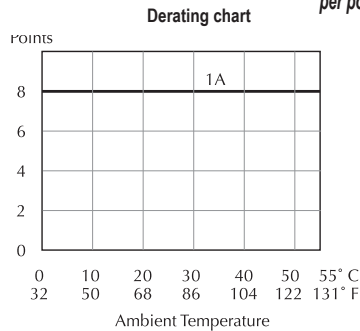

Equivalent output circuit

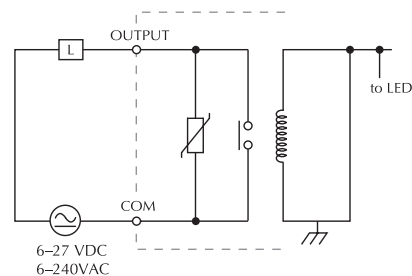

Typical Relay Life (Operations) at Room Temperature

Voltage and Type of Load	Load Current 1A
24 VDC Resistive	500K
24 VDC Solenoid	100K
110 VAC Resistive	500K
110 VAC Solenoid	200K
220 VAC Resistive	350K
220 VAC Solenoid	100K

DL05/06 I/O Option Modules

F0-04TRS

\$80.00

4-point relay output module

F0-04TRS Output Specifications	
Number of Outputs	4
Output Voltage Range	5–30 VDC/5–125 VAC
Output Type	2 - form C (SPDT) 2 - form A (SPST normally open)
Output Points Consumed	8
Peak Voltage	60VDC/220VAC
AC Frequency	47–63 Hz
Maximum Current	3A per point, General Use*
Minimum Load Current	10mA @ 5V
Maximum Leakage Current	N/A
ON Voltage Drop	N/A
Maximum Inrush Current	3A
Off to On Response	m 5ms (typical)
On to Off Response	m 5ms (typical)
Status Indicators	None
Commons	4 isolated
Fuses	4, IEC 3.15A, replaceable, D2-FUSE-1
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	250mA Max. (all points ON)

* Using the ZIPLink wiring system will derate this module to 2 Amps per point.

F0-04TRS Typical Relay Life at 30 Operations per Minute


Load Type	Rated Voltage	Rated Current	Number of Operations
Resistive	120VAC	3A	120,000
Resistive	120VAC	1A	550,000
Resistive	24VDC	1A	L2M
Inductive: SC-E5 Motor Starter	120VAC	0.1 A operating 1.7 A fault	L2M (see Note)

Note: Transient suppression must be installed with inductive loads (Ex: P6KE150CA).


CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.70 or later	Version 3.0c or later
DL06	Version 1.50 or later	Version 4.0, Build 16 or later





See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

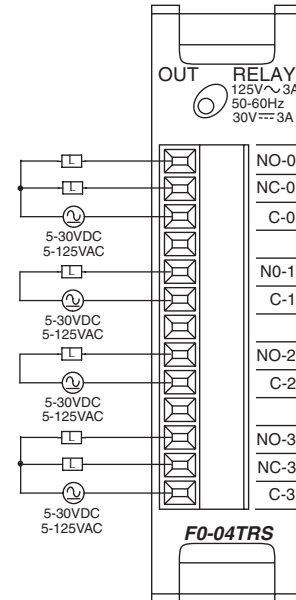

Typical Circuit

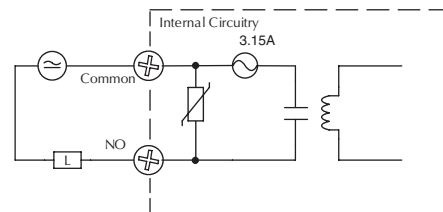

Typical Circuit

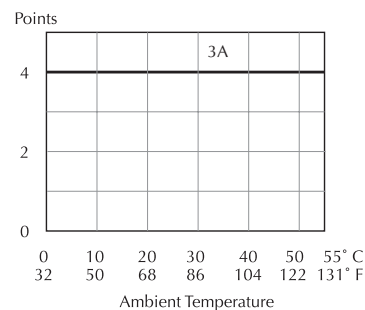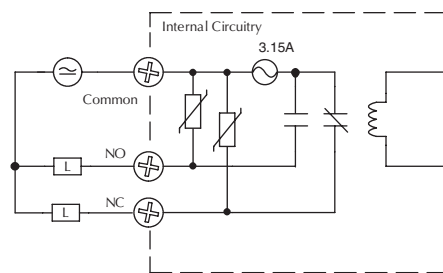

DL05/06 I/O Option Modules

D0-08CDD1 \$95.00

4-point DC input and
4-point DC output module

D0-08CDD1 Input Specifications


Number of Inputs	4 (sink/source)
Input Voltage Range	10.8–26.4 VDC
Peak Voltage	30.0 VDC
Input Current	Typical: 4.0 mA @ 12VDC 8.5 mA @ 24VDC
Maximum Input Current	11mA @ 26.4VDC
Input Impedance	2.8 k Ω @ 12–24 VDC
On Voltage Level	> 10.0 VDC
Off Voltage Level	< 2.0 VDC
Minimum ON Current	3.5 mA
Maximum OFF Current	0.5 mA
Off to On Response	2–8 ms, Typ. 4ms
On to Off Response	2–8 ms, Typ. 4ms
Commons	1(4 pts/common) non-isolated

D0-08CDD1 Output Specifications


Number of Outputs	4 (sinking)
Operating Voltage Range	6–27 VDC
Output Voltage Range	5–30 VDC
Peak Voltage	50.0 VDC
Maximum Output Current	0.3 A/point, 1.2 A/common
Minimum Output Current	0.5 mA
Maximum Leakage Current	1.5 μ A @ 30.0 VDC
On Voltage Drop	0.5 VDC @ 0.3 A
Maximum Inrush Current	1A for 10ms
Off to On Response	< 10 μ s
On to Off Response	< 60 μ s
Status Indicators	Module activity: one green LED
Commons	1(4 pts/common) non-isolated
Fuse	No fuse
Terminal Type (Included)	Removable: D0-ACC-4
Base Power Required (5V)	Max. 200mA (all pts. ON)
External DC Power Required (24V)	20–28 VDC, max. 80mA (all pts. ON)



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

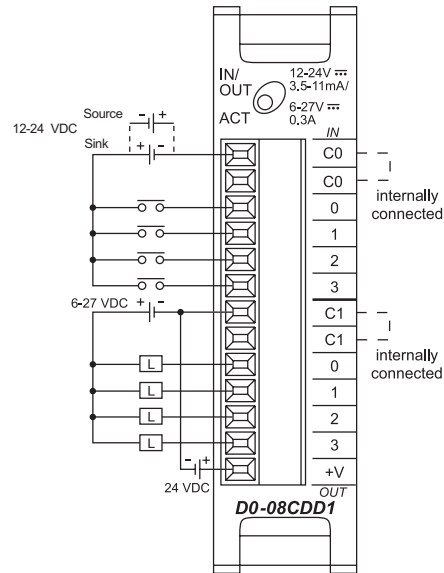


Equivalent input circuit

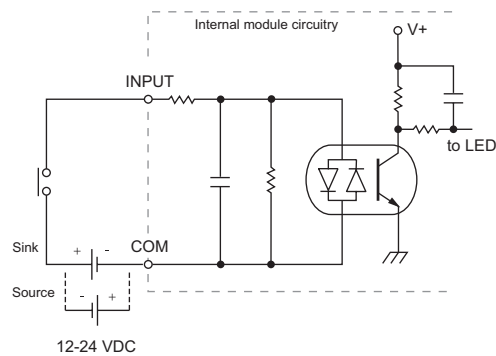


For "Sinking and Sourcing Concepts", see the Appendix section in this catalog.


Equivalent output circuit

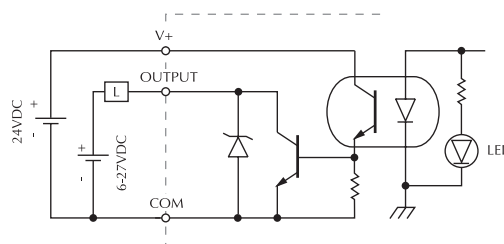

Derating chart for DC inputs

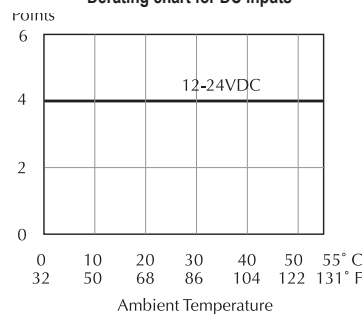

Derating chart for DC outputs

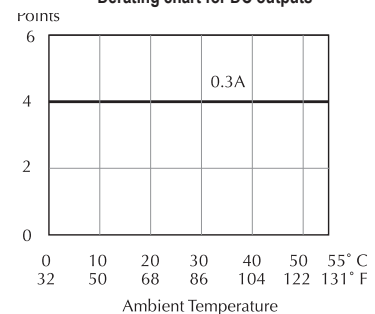

DL05/06 Option Modules

F0-04AD-1 \$153.00



4-channel analog current input module

F0-04AD-1 Input Specifications	
Number of Channels	4, single ended (one common)
Input Range	0 to 20 mA or 4 to 20 mA (jumper selectable)
Resolution	12 bit (1 in 4096)
Step Response	25.0 ms (typ.) to 95% of full step change
Crosstalk	1/2 count max (-80db)*
Active Low-pass Filtering	-3dB at 40Hz (-12dB per octave)
Input Impedance	125Ω ±0.1%, 1/8 watt
Absolute Max Ratings	-30mA to +30mA, current input
Converter Type	Successive approximation
Linearity Error (end to end)	±2 counts
Input Stability	±1 count*
Full-scale Calibration Error	±10 counts max. @ 20mA*
Offset Calibration Error	±5 counts max. @ 4mA*
Max Inaccuracy	±0.4% at 25°C (77°F) ±0.85% at 0 to 60°C (32 to 140°F)
Accuracy vs. Temperature	±100 ppm/°C typical
Terminal Type (Included)	Removable: F0-IOCON
Recommended Fuse	0.032 A, series 217 fast-acting, current inputs

* One count in the specification table is equal to one least significant bit of the analog data value (1 in 4096)



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

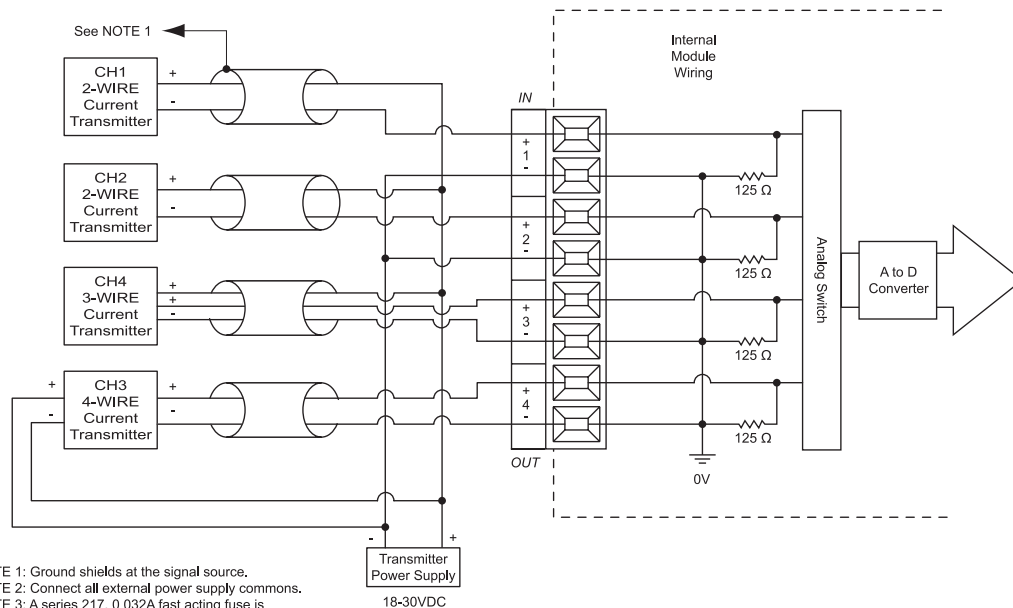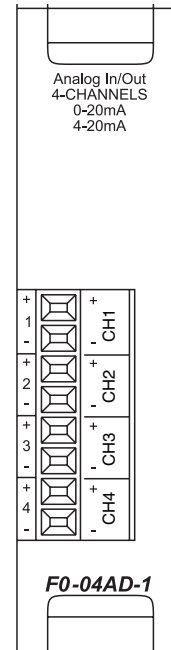

DL05/06 I/O Option Modules

F0-04AD-2 \$224.00

4-channel analog voltage input module



F0-04AD-2 Input Specifications	
Number of Channels	4, single ended (one common)
Input Range	0 to 5 VDC or 0 to 10 VDC (jumper selectable)
Resolution	12 bit (1 in 4096)
Step Response	10.0 ms to 95% of full step change
Crosstalk	1/2 count max (-80db)*
Active Low-pass Filtering	-3dB at 300Hz (-12dB per octave)
Input Impedance	L20k Ω
Absolute Max Ratings	$\pm 15V$
Linearity Error (end to end)	± 2 count (0.025% of full scale) max*
Input Stability	w1 count*
Gain Error	± 6 counts max*
Offset Error	± 2 counts max*
Terminal Type (Included)	Removable: F0- IOCON
Max Inaccuracy	$\pm 0.3\%$ at 25-C (77-F) $\pm 0.6\%$ at 0 to 60°C (32 to 140°F)
Accuracy vs. Temperature	± 100 ppm/°C typical

* One count in the specification table is equal to one least significant bit of the analog data value (1 in 4096)

CPU	Firmware Required	DirectSOFT32 Required
DL05	Version 4.60 or later	Version 3.0c or later
DL06	Version 1.40 or later	Version 4.0, Build 16 or later



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

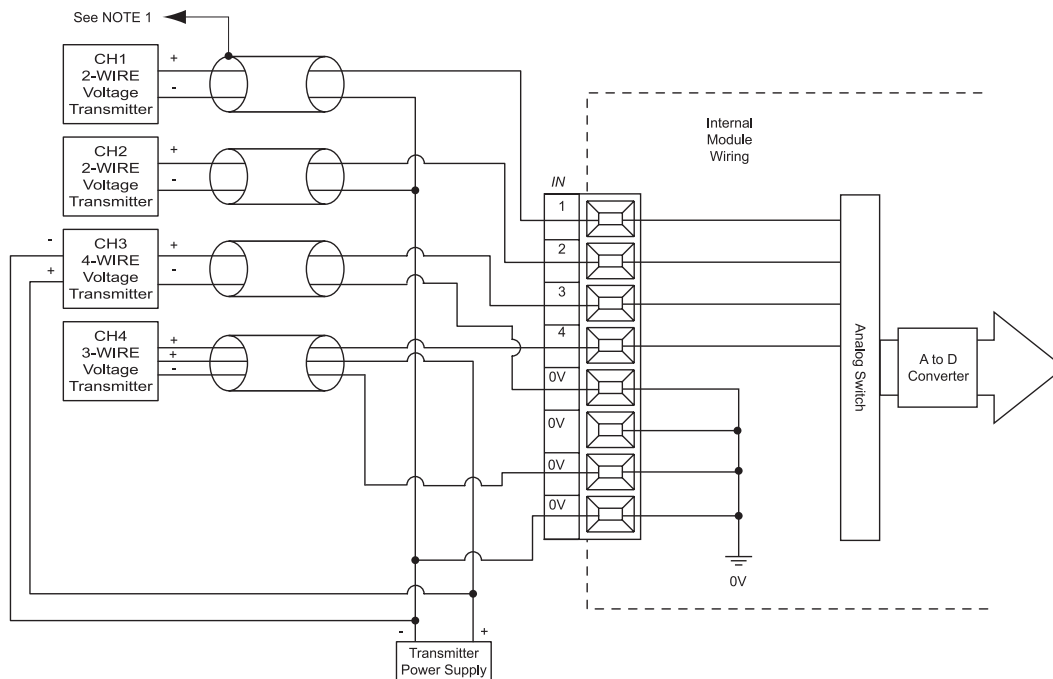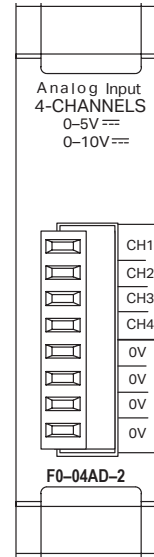

DL05/06 Option Modules

F0-08ADH-1 \$259.00



8-channel analog current input module, high resolution

Input Specifications

Number of Channels	8
Input Range	0-20 mA
Resolution	16-bit, 0.305 μ A/bit
Input Type	Single Ended (one common)
Maximum Cont. Overload	± 31 mA
Input Impedance	100 ohms, 1/10 W, current input
Filter Characteristics	Low pass, -3dB @ 60Hz
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Sample Duration Time	10.2 ms (time to 95% of full step change / channel)
All Channel Update Rate	81.6 ms
Open Circuit Detection Time	Zero reading within 1s
Conversion Method	Successive Approximation
Accuracy vs. Temperature	± 50 PPM/ $^{\circ}$ C Max.
Maximum Inaccuracy	0.2% of range (including temp. changes)
Linearity Error (End to End)	± 10 count max.; Monotonic with no missing codes
Input Stability and Repeatability	± 10 count max.
Full Scale Calibration Error	± 10 count max.
Offset Calibration Error	± 10 count max.
Maximum Crosstalk at DC, 50 Hz and 60 Hz	± 10 count max.
External 24VDC Power Required	25mA
Base Power Required (5.0V)	25mA
Terminal Type (Included)	Removable: D0-ACC-4
Recommended Fuse	Littelfuse Series 217, 0.032 A fuse



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

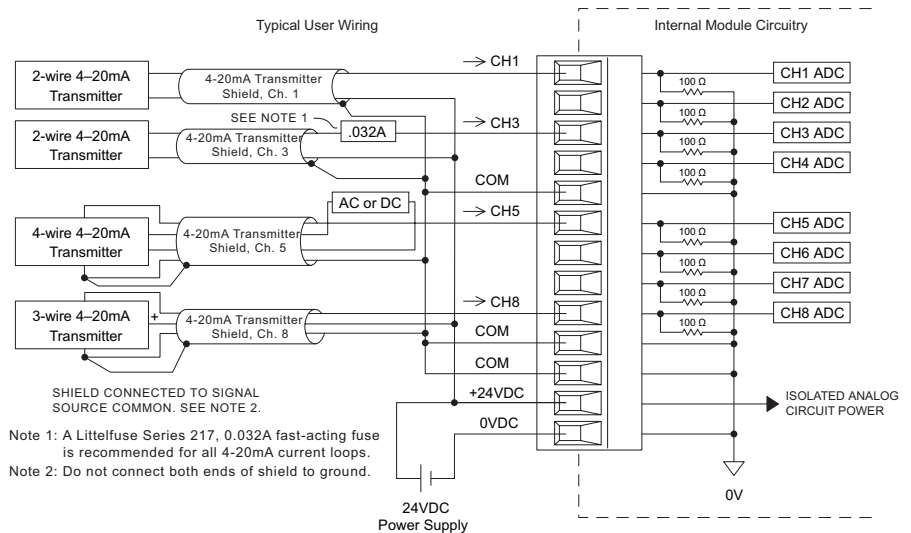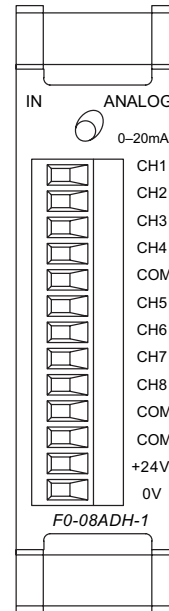



CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later

DL05/06 I/O Option Modules

F0-08ADH-2 \$273.00

8-channel analog voltage input module, high resolution

Input Specifications	
Number of Channels	8
Input Range	0-5 VDC or 0-10 VDC (Jumper select)
Resolution	16-bit, 76 μ V/bit or 152 μ V/bit
Input Type	Single Ended (one common)
Maximum Cont. Overload	± 100 V
Input Impedance	>200k Ω
Filter Characteristics	Low pass, -3dB @ 60Hz
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Sample Duration Time	10.2 ms
All Channel Update Rate	81.6 ms
Conversion Method	Successive Approximation
Accuracy vs. Temperature	± 50 PPM / $^{\circ}$ C Maximum
Maximum Inaccuracy	0.2% of range (including temp. drift)
Linearity Error (End to End)	± 10 count max. Monotonic with no missing codes
Input Stability and Repeatability	± 10 count (after 10 min. warm up)
Full Scale Calibration Error (including Offset)	± 10 counts max.
Offset Calibration Error	± 10 count max.
Maximum Crosstalk at DC, 50 Hz and 60 Hz	± 10 count max.
External 24VDC Power Required	25mA
Base Power Required (5.0V)	25mA

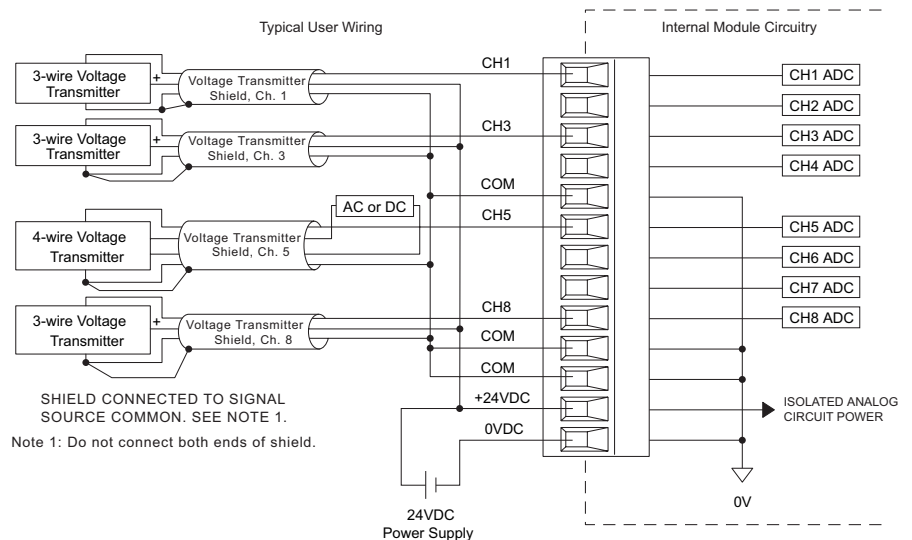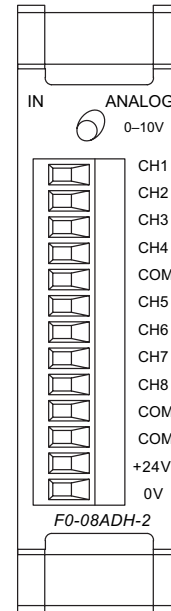

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

DL05/06 I/O Option Modules

FO-04THM

\$400.00

4-channel thermocouple input module


FO-04THM 4-Channel Thermocouple Input	
General Specifications	
Number of Channels	4, differential
Common Mode Range	-1.3 VDC to +3.8 VDC
Common Mode Rejection	100dB min. @ VDC 50–60 Hz.
Input Impedance	5M Ω
Absolute Maximum Ratings	Fault-protected inputs to ± 50 VDC
Accuracy vs. Temperature (Max. Full Scale Error)	± 15 ppm/ $^{\circ}$ C maximum 0 - 1.25V ± 35 ppm/ $^{\circ}$ C maximum (Including maximum offset change)
PLC Update Rate	4 channels per scan
Digital Inputs	None; uses special V-memory location based on slot
Base Power Required	30mA @ 5VDC supplied by base
Operating Temperature	32 $^{\circ}$ to 140 $^{\circ}$ F (0 $^{\circ}$ to 60 $^{\circ}$ C)
Storage Temperature	-4 $^{\circ}$ to 158 $^{\circ}$ F (-20 $^{\circ}$ to 70 $^{\circ}$ C)
Relative Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	MIL STD 810C 514.2
Shock	MIL STD 810C 516.2
Noise Immunity	NEMA ICS3-304
Terminal Block Replacement	FO-IOCON-THM (comes with CJC)

Thermocouple Specifications	
Input Ranges	Type J -190 to 760 $^{\circ}$ C -310 to 1400 $^{\circ}$ F
	Type E -210 to 1000 $^{\circ}$ C -346 to 1832 $^{\circ}$ F
	Type K -150 to 1372 $^{\circ}$ C -238 to 2502 $^{\circ}$ F
	Type R 65 to 1768 $^{\circ}$ C 149 to 3214 $^{\circ}$ F
	Type S 65 to 1768 $^{\circ}$ C 149 to 3214 $^{\circ}$ F
	Type T -230 to 400 $^{\circ}$ C -382 to 752 $^{\circ}$ F
	Type B 529 to 1820 $^{\circ}$ C 984 to 3308 $^{\circ}$ F
	Type N -70 to 1300 $^{\circ}$ C -94 to 2372 $^{\circ}$ F
	Type C 65 to 2320 $^{\circ}$ C 149 to 4208 $^{\circ}$ F
Display Resolution	$\pm 0.1^{\circ}$ C or $\pm 0.1^{\circ}$ F
Cold Junction Compensation	Automatic
Conversion Time	270ms per channel
Warm-Up Time	30 minutes typically $\pm 1^{\circ}$ C repeatability
Linearity Error (End to End)	$\pm 1^{\circ}$ C maximum, $\pm 0.5^{\circ}$ C typical
Maximum Inaccuracy	$\pm 3^{\circ}$ C (excluding thermocouple error)



Voltage Input Specifications	
Voltage Ranges	0-39.0625mV, ± 39.0625 mV, ± 78.125 mV, 0-156.25mV, ± 156.25 mVDC, 0-1.25V
Resolution	16 bit (1 in 65535)
Max. Offset Error (All Input Ranges)	0.05% @ 0-60 $^{\circ}$ C; Typical: 0.04% @ 25 $^{\circ}$ C
Linearity Error (All Input Ranges)	0.05% @ 0-60 $^{\circ}$ C; Typical: 0.03% @ 25 $^{\circ}$ C
Maximum Inaccuracy	0-39.0625mV, ± 39.0625 mV, ± 78.125 mV ranges: 0.1% @ 0-60 $^{\circ}$ C; Typical: 0.04% @ 25 $^{\circ}$ C 0-156.25mV, ± 156.25 mVDC, 0-1.25V ranges: 0.05% @ 0-60 $^{\circ}$ C; Typical: 0.04% @ 25 $^{\circ}$ C

CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.60 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 1.40 or later	DirectSOFT32 Version 4.0, Build 16 or later

Thermocouple Input wiring diagram

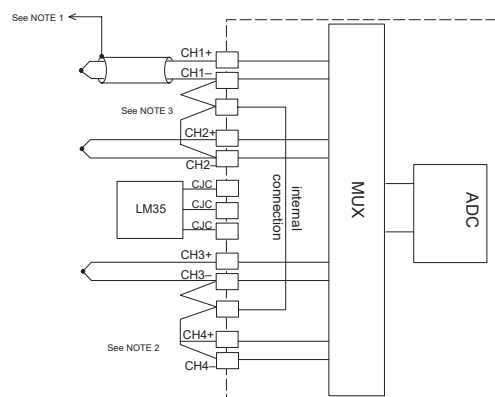

Voltage Input wiring diagram

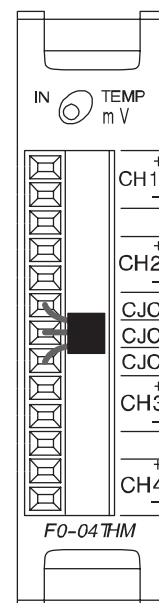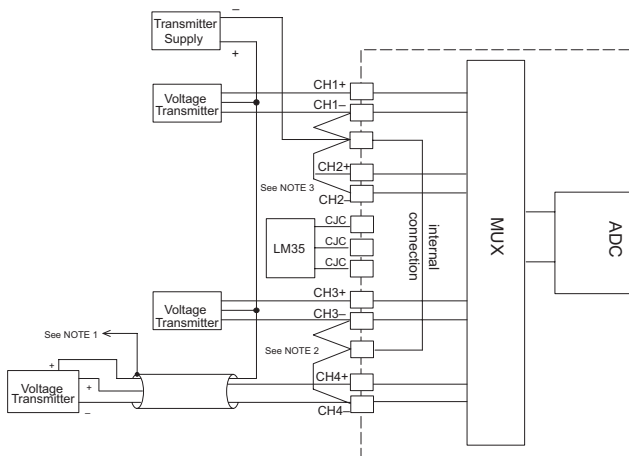

Notes:

1. Shields should be grounded at the PLC power source only.
2. Unused channels should have a shorting wire (jumper) installed from CH+ to CH-.
3. All CH- terminals must be connected together.
4. This module is not compatible with the ZIPLink wiring system.

DL05/06 Option Modules

F0-04RTD

\$380.00

4-channel RTD input module



F0-04RTD Input Specifications	
Number of Channels	4
Input Ranges	Type Pt100: -200.0/850.0°C, -328/1562°F Type Pt1000: -200.0/595.0°C, -328/1103°F Type jPt100: -38.0/450.0°C, -36/842°F Type CU-10/25: -200.0/260.0°C, -328/500°F Type NI-120: -80.0/260.0°C, -112/500°F
Resolution	16 bit (1 in 65535)
Display Resolution	±0.1°C, ±0.1°F (±3276.7)
RTD Excitation Current	200µA
Notch Filter	> 50 db notches at 50/60 Hz
Maximum Settling Time	100ms (full-scale step input)
Common Mode Range	0-5 VDC
Absolute Maximum Ratings	Fault protected inputs to ±50VDC
Sampling Rate	140ms per channel

F0-04RTD Input Specifications (cont'd)	
Terminal Type (included)	Removable: D0-ACC-4
Converter Type	Charge Balancing
Linearity Error	±.05°C maximum, ±.01°C typical
Maximum Inaccuracy	±1°C
PLC Update Rate	4 channel/scan
Digital Input Points Required	None; uses special V-memory location based on slot
Base Power Required 5VDC	70mA
Operating Temperature	32° to 140°F (0° to 60°C)
Storage Temperature	-4° to 158°F (-20° to 70°C)
Temperature Drift	15ppm / °C max
Relative Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	MIL STD 810C 514.2
Shock	MIL STD 810C 516.2
Noise Immunity	NEMA ICS3-304

CPU	Firmware Required	DirectSOFT Required
DL05	Version 4.70 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 1.50 or later	DirectSOFT32 Version 4.0, Build 16 or later

Notes:

1. The three wires connecting the RTD to the module must be the same type and length. Do not use the shield or drain wire for the third connection.
2. Unused channels require shorting wires (jumpers) installed from terminals CH+ to CH- to COM to prevent possible noise from influencing active channels. This should be done even if the unused channel is not enabled in the V-memory configuration.
3. If an RTD sensor has four wires, the plus sense wire should be left unconnected as shown.
4. This module is not compatible with the ZIPLink wiring system.

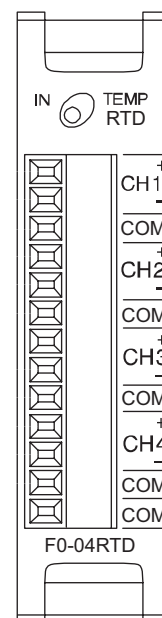
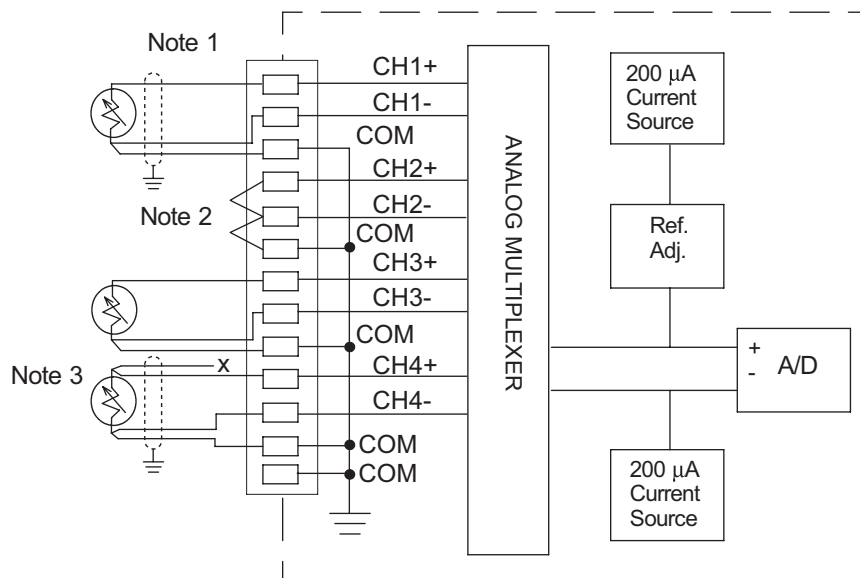


DL05/06 Option Modules

F0-04DAH-1 \$276.00

4-channel analog current output module, high resolution

Output Specifications	
Number of Channels	4
Output Range	4-20 mA
Resolution	16-bit, .244µA/bit
Output Type	Current sourcing at 20mA max.
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Output value in program mode	4mA
Load Impedance	250-750 Ohms
Maximum Inductive Load	1mH
Allowed load type	Grounded
Maximum Inaccuracy	0.2% of range
Maximum Full Scale Calibration Error (not including offset error)	±0.025% of range max.
Maximum Offset Calibration Error	±0.025% of range max.
Accuracy vs. Temperature	±50 ppm/ °C max. full scale calibration change
Maximum Crosstalk	±10 counts
Linearity Error (End to End)	±16 count maximum (±0.025% of full scale) Monotonic with no missing codes
Output Stability and Repeatability	±10 LSB after 10 min. warm-up typical
Output Ripple	0.05% of Full Scale
Output Settling Time	0.5 ms max., 5 µs min. (full scale change)
All Channel Update Rate	100µs
Maximum Continuous Overload	Outputs open circuit protected
Type of Output Protection	Electronically current limited to 20mA or less
Output signal at power-up and power-down	4mA
Terminal Type (Included)	Removable: D0-ACC-4
External 24VDC Power Required	150mA
Base Power Required (5.0V)	25mA

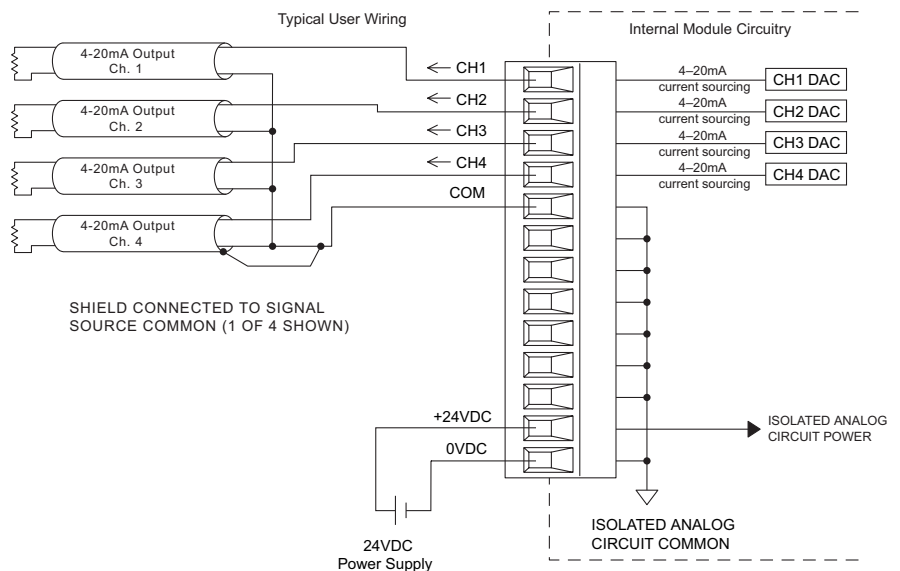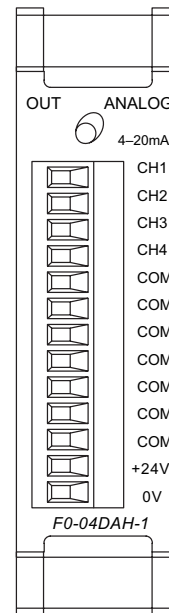

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later





See Wiring Solutions for part numbers of ZIPLINK cables and connection modules compatible with this I/O module.

DL05/06 I/O Option Modules

F0-08DAH-1 \$363.00

8-channel analog current output module, high resolution

Output Specifications	
Number of Channels	8
Output Range	4-20 mA
Resolution	16-bit, 0.244 μ A/bit
Output Type	Current sourcing at 20mA max.
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Output value in program mode	4mA
Load Impedance	250-750 Ohms
Maximum Inductive Load	1mH
Allowed load type	Grounded
Maximum Inaccuracy	0.2% of range
Maximum Full Scale Calibration Error (not including offset error)	$\pm 0.025\%$ of range maximum
Maximum Offset Calibration Error	$\pm 0.025\%$ of range maximum
Accuracy vs. Temperature	± 50 ppm/ $^{\circ}$ C maximum full scale calibration change
Maximum Crosstalk	± 10 counts
Linearity Error (End to End)	± 16 count maximum ($\pm 0.025\%$ of full scale) Monotonic with no missing codes
Output Stability and Repeatability	± 10 counts after 10 min. warm-up typical
Output Ripple	0.05% of Full Scale
Output Settling Time	0.5 ms max., 5 μ s min. (full scale change)
All Channel Update Rate	100 μ s
Maximum Continuous Overload	Outputs open circuit protected
Type of Output Protection	Electronically current limited to 20mA or less
Output signal at power-up and power-down	4mA
Terminal Type (Included)	Removable: D0-ACC-4
External 24VDC Power Required	220mA
Base Power Required (5.0V)	25mA

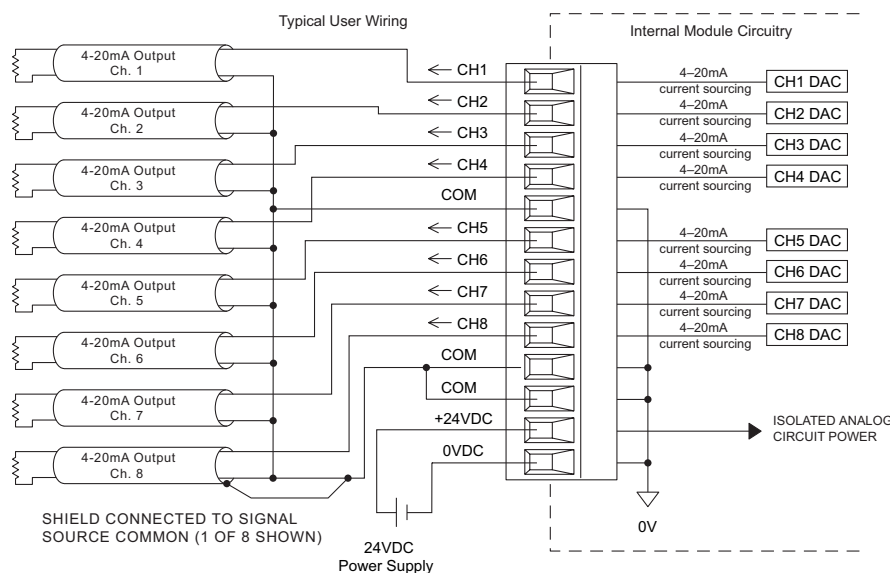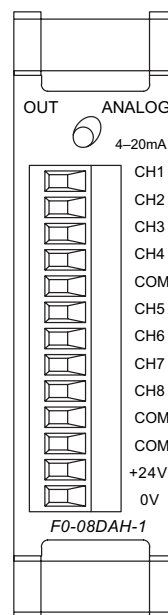

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later





See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

DL05/06 Option Modules

F0-04DAH-2 \$260.00

4-channel analog voltage output module, high resolution

Output Specifications	
Number of Channels	4
Output Range	0-10 VDC
Resolution	16-bit, 152 μ V/bit
Output Type	Voltage sourcing/ sinking at 5mA max.
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Output value in program mode	0V
Output Impedance	0.5 Ohms typical
Load Impedance	>2000 Ω
Maximum Capacitive Load	0.01 μ F maximum
Allowed load type	Grounded
Maximum Inaccuracy	0.2% of range (including temperature changes)
Maximum Full Scale Calibration Error (including offset error)	\pm 0.025% of range max.
Maximum Offset Calibration Error	\pm 0.025% of range max.
Accuracy vs. Temperature	\pm 50 ppm/ $^{\circ}$ C max. full scale calibration change
Maximum Crosstalk	\pm 10 counts
Linearity Error (End to End)	\pm 16 count max. (\pm 0.025% of full scale) Monotonic with no missing codes
Output Stability and Repeatability	\pm 10 counts after 10 min. warm-up typical
Output Ripple	0.05% of Full Scale
Output Settling Time	0.05 ms max., 5 μ s min. (full scale change)
All Channel Update Rate	100 μ s
Maximum Continuous Overload	Outputs current limited to 40mA typical. A continuous short circuit will damage the output.
Type of Output Protection	24VDC Peak Output Voltage (capacitor transient voltage suppressor)
Output signal at power-up and power-down	0V
Terminal Type (Included)	Removable: D0-ACC-4
External 24VDC Power Required	30mA
Base Power Required (5.0V)	25mA

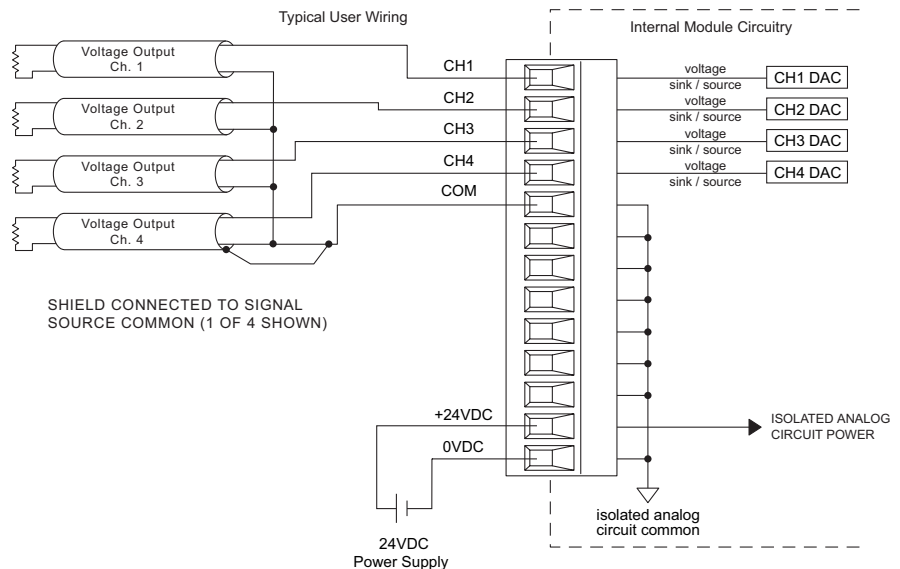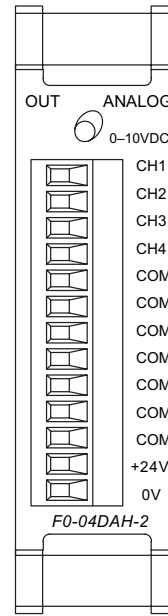



See Wiring Solutions for part numbers of
ZIPLINK cables and connection modules
compatible with this I/O module.

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later

DL05/06 I/O Option Modules

F0-08DAH-2 **\$345.00**
8-channel analog voltage output module, high resolution

Output Specifications	
Number of Channels	8
Output Range	0-10 VDC
Resolution	16-bit, 152µV/bit
Output Type	Voltage sourcing/ sinking at 5mA max.
PLC Data Format	16-bit, Unsigned Int., 0-FFFF (binary) or 0-65535 (BCD) (Both require 2 words of V-memory)
Output value in program mode	0V
Output Impedance	0.5 Ohms typical
Load Impedance	>2000Ω
Maximum Capacitive Load	0.01 µF maximum
Allowed load type	Grounded
Maximum Inaccuracy	0.2% of range (including temperature changes)
Maximum Full Scale Calibration Error (including offset error)	±0.25% of range maximum
Maximum Offset Calibration Error	±0.25% of range maximum
Accuracy vs. Temperature	±50 ppm/ °C maximum full scale calibration change
Maximum Crosstalk	10 counts
Linearity Error (End to End)	±16 count maximum (±0.025% of full scale) Monotonic with no missing codes
Output Stability and Repeatability	±10 counts after 10 min. warm-up typical
Output Ripple	0.05% of Full Scale
Output Settling Time	0.5 ms max., 5µs min. (full scale change)
All Channel Update Rate	100µs
Maximum Continuous Overload	Outputs current limited to 40mA typical. A continuous short circuit will damage the output.
Type of Output Protection	24VDC Peak Output Voltage (capacitor transient voltage suppressor)
Output signal at power-up and power-down	0V
Terminal Type (Included)	Removable: D0-ACC-4
External 24VDC Power Required	30mA
Base Power Required (5.0V)	25mA

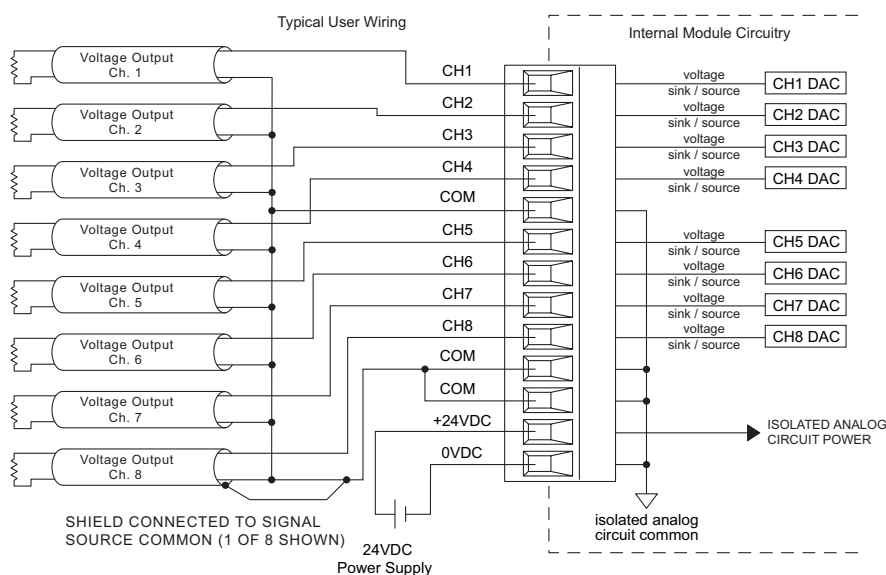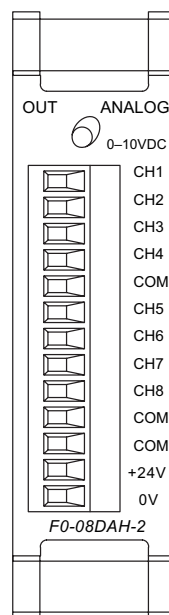

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

CPU	Firmware Required	DirectSOFT Required
DL05	Version 5.20 or later	DirectSOFT32 Version 3.0c or later
DL06	Version 2.30 or later	DirectSOFT32 Version 4.0, Build 16 or later

DL05/06 Option Modules


F0-2AD2DA-2 \$290.00

2-channel analog voltage input and
2-channel analog voltage output module


F0-2AD2DA-2 Input Specifications	
Number of Channels	2, single ended (one common)
Input Range	0 to 5 VDC or 0 to 10 VDC (jumper selectable)
Resolution	12-bit (1 in 4096)
Step Response	10.0 ms to 95% of full step change
Crosstalk	1/2 count max (-80db)*
Active Low-pass Filtering	-3dB at 300Hz (-12dB per octave)
Input Impedance	>20k Ω
Absolute Max Ratings	$\pm 15V$
Linearity Error (end to end)	± 2 counts (0.025% of full scale) max*
Input Stability	± 1 count*
Gain Error	± 6 counts max*
Offset Error	± 2 counts max*
Max Inaccuracy	$\pm 0.3\%$ at 25-C (77-F) $\pm 0.6\%$ at 0 to 60-C (32 to 140-F)
Accuracy vs. Temperature	± 100 ppm/-C typical

* One count in the specification table is equal to one least significant bit of the analog data value (1 in 4096)

F0-2AD2DA-2 Output Specifications	
Number of Channels	2, single ended (one common)
Output Range	0 to 5 VDC or 0 to 10 VDC (jumper selectable)
Resolution	12-bit (1 in 4096)
Conversion Settling Time	50 μ s for full scale change
Crosstalk	1/2 count max (-80db)*
Peak Output Voltage	\pm supply limited)
Offset Error	0.1% of range
Gain Error	0.4% of range
Linearity Error (end to end)	± 1 counts (0.075% of full scale) max*
Output Stability	± 2 counts*
Load Impedance	2k Ω min
Load Capacitance	0.01 μ F max
Terminal Type (Included)	Removable: F0-IOCON
Accuracy vs. Temperature	± 50 ppm / $^{\circ}$ C typical

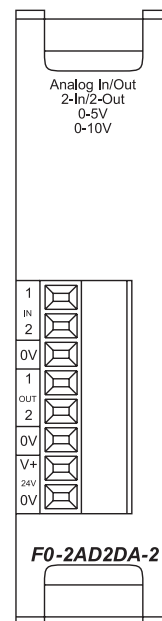


See Wiring Solutions for part numbers of ZIPLINK cables and connection modules compatible with this I/O module.

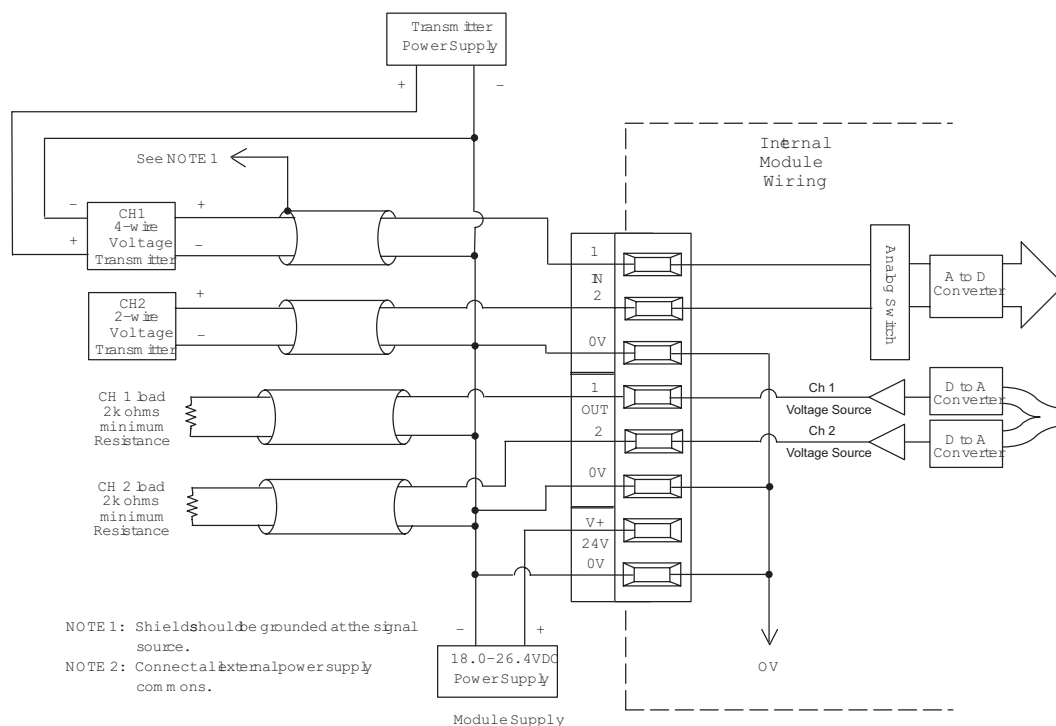

DL05/06 Option Modules

F0-4AD2DA-1 \$370.00

4-channel analog current input and
2-channel analog current output module

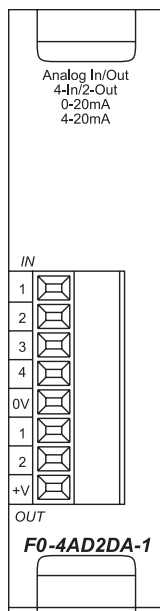


See Wiring Solutions for part numbers of ZIPLINK cables and connection modules compatible with this I/O module.

F0-4AD2DA-1 Input Specifications	
Number of Channels	4, single ended (one common)
Input Range	0 to 20 mA or 4 to 20 mA (jumper selectable)
Resolution	12 bit (1 in 4096)
Step Response	25.0 ms (typ.) to 95% of full step change
Crosstalk	1/2 count max (-80db)*
Active Low-pass Filtering	-3 dB at 40 Hz (-12dB per octave)
Input Impedance	125k \pm 0.1%, 1/8 watt
Absolute Max Ratings	-30mA to +30mA, current input
Converter Type	Successive approximation
Linearity Error (end to end)	\pm 2 counts
Input Stability	\pm 1 count*
Full-scale Calibr. Error	\pm 10 counts max. @ 20mA*
Offset Calibration Error	\pm 5 counts max. @ 0 mA*
Max Inaccuracy	\pm 0.4% at 25-C (77°F) \pm 0.85% at 0 to 60°C (32 to 140°F)
Accuracy vs. Temp.	\pm 100 ppm/°C typ.
Recommended Fuse	0.032 A, series 217 fast-acting, current inputs

F0-4AD2DA-1 Output Specifications	
Number of Channels	2, single ended (one common)
Output Range	0 to 20 mA or 4 to 20 mA (jumper selectable)
Output Type	Current sourcing
Resolution	12-bit (1 in 4096)
Max. Loop Voltage	30VDC
Load/loop Power Supply	0-300 Ω / 18-30 VDC
Linearity Error (end to end)	\pm 2 counts (0.050% of full scale) max.*
Conversion Settling Time	400 μ s max. for full scale change
Full-scale Calibration Error	\pm 26 counts max. @ 300 Ω load \pm 18 counts max. @ 250 Ω load \pm 12 counts max. @ 125 Ω load
Offset Calibration Error	\pm 10 counts max. @ 300 Ω load \pm 8 counts max. @ 250 Ω load \pm 6 counts max. @ 125 Ω load
Terminal Type (Included)	Removable: F0-IOCON
Max.Full-scale Inaccuracy (all errors included)	300 Ω load 0.4%. @ 60°C 250 Ω load 0.3%. @ 60°C 125 Ω load 0.2%. @ 60°C


* One count in the specification table is equal to one least significant bit of the analog data value (1 in 4096)

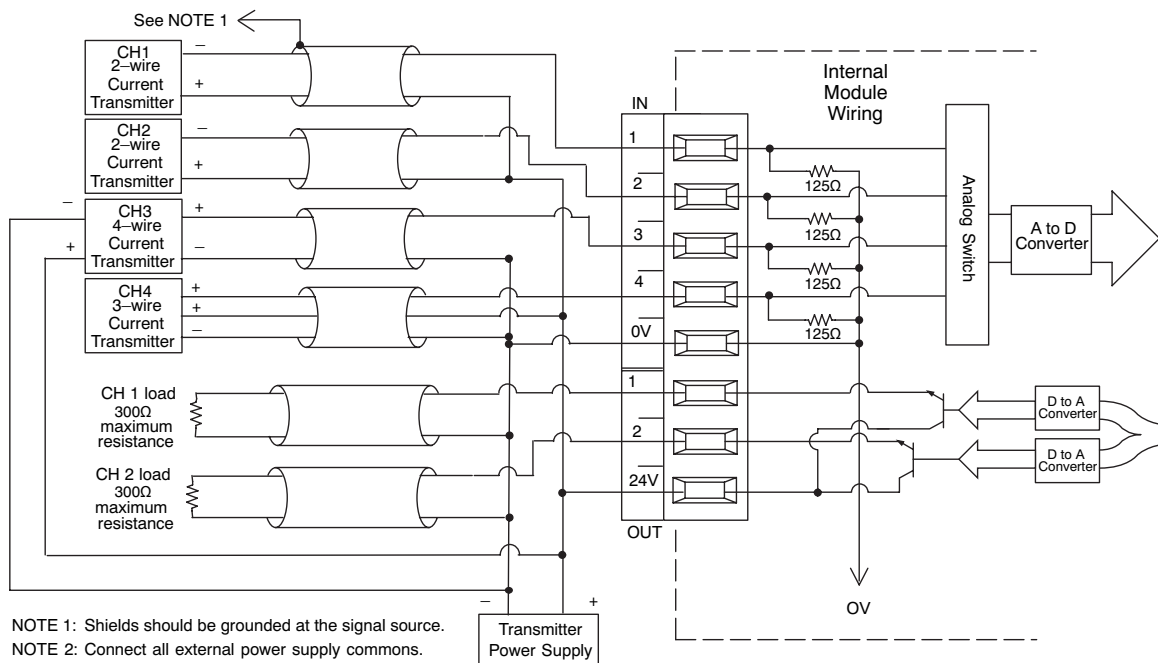

DL05/06 Option Modules

F0-4AD2DA-2 \$409.00

4-channel analog voltage input
2-channel analog voltage output module

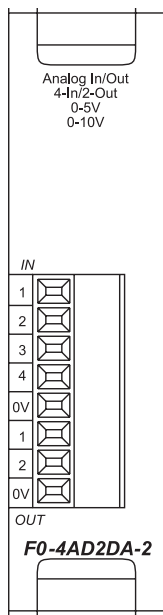


F0-4AD2DA-2 Input Specifications	
Number of Channels	4, single ended (one common)
Input Range	0 to 5 VDC or 0 to 10 VDC (jumper selectable)
Resolution	12-bit (1 in 4096)
Step Response	10.0 ms to 95% of full step change
Crosstalk	1/2 count max (-80db)*
Active Low-pass Filtering	-3dB at 300Hz (-12dB per octave)
Input Impedance	>20kΩ
Absolute Max Ratings	±15V
Linearity Error (end to end)	±2 count (0.025% of full scale) max*
Input Stability	±1 count*
Gain Error	±6 counts max*
Offset Error	±2 counts max*
Max Inaccuracy	±0.3% at 25°C (77°F) ±0.6% at 0 to 60°C (32 to 140°F)
Accuracy vs. Temperature	±100 ppm/°C typical
Terminal Type (Included)	Removable: F0-IOCON

* One count in the specification table is equal to one least significant bit of the analog data value (1 in 4096)

F0-4AD2DA-2 Output Specifications	
Number of Channels	2, single ended (one common)
Output Range	0 to 5 VDC or 0 to 10 VDC (jumper selectable)
Resolution	12-bit (1 in 4096)
Conversion Settling Time	50μs for full scale change
Crosstalk	1/2 count max (-80db)*
Peak Output Voltage	±15VDC (power supply limited)
Offset Error	0.1% of range
Gain Error	0.4% of range
Linearity Error (end to end)	±1 counts (0.075% of full scale) max*
Output Stability	±2 counts*
Load Impedance	2kΩ minimum
Load Capacitance	0.01 μF max
Accuracy vs. Temperature	±50 ppm/°C typical



See Wiring Solutions for part numbers of ZIPLINK cables and connection modules compatible with this I/O module.

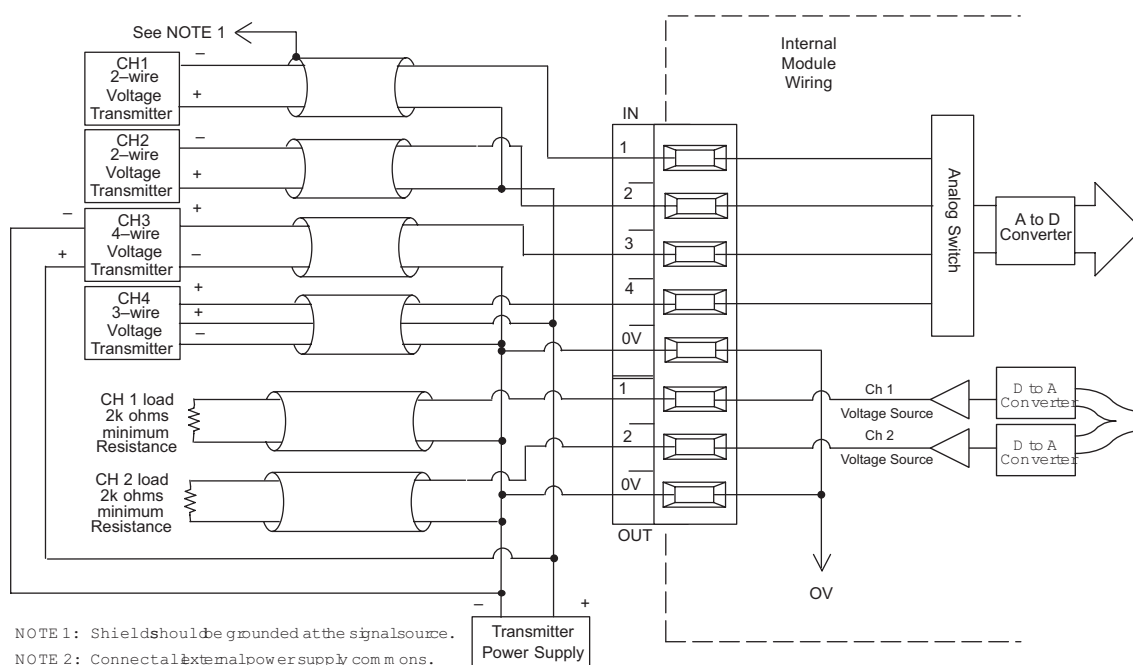

Built-in High-Speed I/O Features

Overview

You can use the DL05 or DL06 PLCs to solve a diverse range of motion and high-speed machine control applications.

DC input and DC output versions of the DL05 and DL06 PLCs offer built-in high-speed input and pulse output features. On DL05 PLCs with DC inputs, the high-speed features are accessible on the first three input points (X0-X2). On DL06 PLCs with DC inputs, the high-speed features are accessible on the first four input points (X0-X3). On DL05 or DL06 PLCs with DC outputs, the pulse output feature is accessible on the first two output points (Y0-Y1).

Several modes of operation are available that meet the needs of many applications. The operating modes are explained in detail in the DL05 and DL06 PLC User Manuals. Only one high-speed I/O mode can be in use at one time. You cannot use a high-speed input feature and the pulse output feature at the same time. A brief description of each high-speed mode is listed below:

Mode 10 - High-speed counters offer 24 presets. When the preset is reached, an interrupt routine is executed (max. count: 99,999,999)

Mode 20 - Quadrature encoder input (up/down counter) for clockwise and counterclockwise position control (max count: 0 to 99,999,999 unipolar or -8,388,608 to 8,388,607 bipolar)

Mode 30 - Pulse outputs are programmable to follow a predetermined profile. An external interrupt can be used in conjunction with separate acceleration/deceleration profiles for positioning and velocity control (max. pulse range: -8,388,608 to 8,388,607)

Mode 40 - External interrupt inputs can be used for an immediate response to urgent application tasks

Mode 50 - The pulse catch input allows the CPU to read an input with a pulse width as narrow as 0.1 ms


Mode 60 - Input filters are configurable (0-99ms) to ensure input signal integrity. The default input mode is a 10ms filter

Mode 40 option - Timed interrupts can be configured for time critical events. Interrupt 0 can be scheduled on a 5ms-999ms cycle. Interrupt 1, available on the DL05, can be scheduled on a 5ms-9999ms cycle

DL05 High-speed I/O Features					
Mode*	DC Inputs Points			DC Output Points	
	X0	X1	X2	Y0	Y1
Mode 10: High-Speed Up Counter	Counter input	Filtered input	Reset count Filtered input	Regular output	Regular output
Mode 20: Quadrature Counter	Phase A input	Phase B input	Reset count Filtered input	Regular output	Regular output
Mode 40: High-Speed Interrupt	Interrupt input	Filtered input	Filtered input	Regular output	Regular output
Mode 50: Pulse Catch	Pulse input	Filtered input	Filtered input	Regular output	Regular output
Mode 30: Pulse Output	Filtered input	Filtered input	Positioning interrupt Filtered input	Pulse CW pulse	Direction CCW pulse
Mode 60: Filtered Input	Filtered input	Filtered input	Filtered input	Regular output	Regular output

DL06 High-speed I/O Features						
Mode*	DC Inputs Points				DC Output Points	
	X0	X1	X2	X3	Y0	Y1
Mode 10: High-Speed Up Counter	Counter Ch 1	Counter Ch 2 Interrupt Pulse input Filtered input	Reset Ch 1 Interrupt Pulse input Filtered input	Reset Ch 2 Interrupt Pulse input Filtered input	Regular output	Regular output
Mode 20: Up/Down Counter	Up input	Down input	Reset Pulse input Filtered input	Pulse input Filtered input	Regular output	Regular output
Mode 20: Quadrature Counter	Phase A input	Phase B input	Reset Pulse input Filtered input	Pulse input Filtered input	Regular output	Regular output
Mode 40: High-Speed Interrupt	Interrupt input	Interrupt Pulse input Filtered input	Interrupt Pulse input Filtered input	Interrupt Pulse input Filtered input	Regular output	Regular output
Mode 50: Pulse Catch	Pulse input	Interrupt Pulse input Filtered input	Interrupt Pulse input Filtered input	Interrupt Pulse input Filtered input	Regular output	Regular output
Mode 30: Pulse Output	Filtered input	Interrupt Pulse input Filtered input	Pulse input Filtered input	Pulse input Filtered input	Pulse CW Pulse	Direction CCW pulse
Mode 60: Filtered Input	Filtered input	Filtered input	Filtered input	Filtered input	Regular output	Regular output


*The high-speed input features cannot be used if the pulse output features are in use, and vice versa.

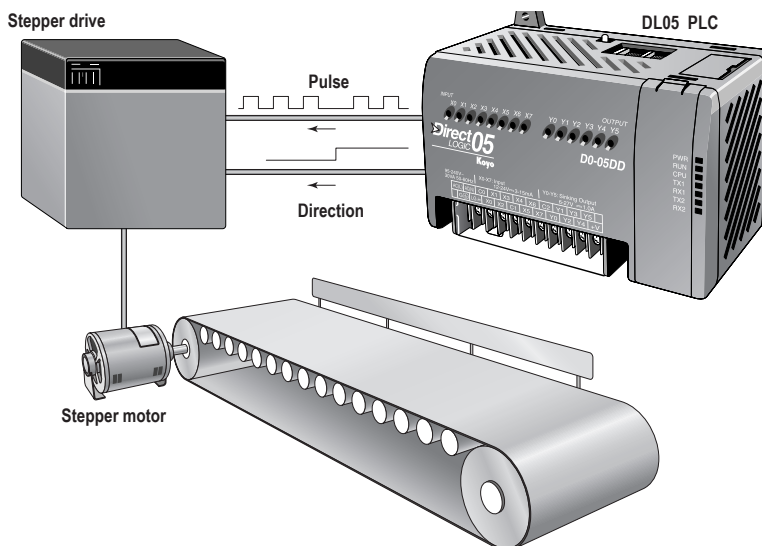


Built-in High Speed I/O Specifications

High-Speed Input Specifications


PLC	DL05	DL06
High-speed Inputs	3 pts. sink or source (X0-X2)	4 pts. sink or source (X0-X3)
Max. Input Frequency	5kHz	7kHz
Minimum Pulse Width	100µs	70µs
Input Voltage Range	12-24 VDC	
Input Impedance (hs only)	1.8 kΩ @ 12-24 VDC	
ON Current/Voltage Level	>5mA/>10VDC	
OFF Current/Voltage Level	<0.5 mA/<2VDC	
OFF to ON Response	<100µs	<70µs
ON to OFF Response	<100µs	<70µs

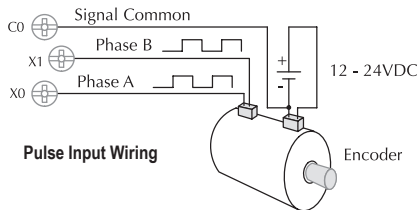


Equivalent Circuit, High-Speed Inputs

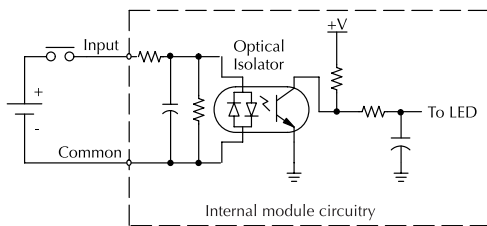

Equivalent Circuit, High-Speed Inputs (NPN) Current Sinking Field Device

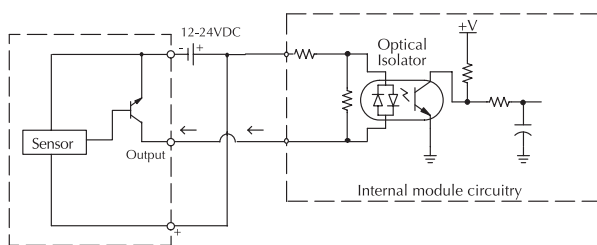


Equivalent Circuit, High-Speed Inputs (PNP) Current Sourcing Field Device

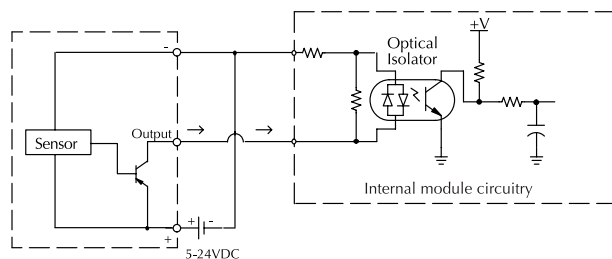


High-Speed Output Specifications


PLC	DL05	DL06
Pulse Outputs	2 pts. (Y0 and Y1) current sinking	2 pts. (Y0 and Y1) current sinking or sourcing (sourcing outputs on D0-06DD2 only)
Max. Output Frequency	7kHz	10kHz
Voltage Range	6-27 VDC	
Max. Load Current	0.5 A/point	
ON Voltage Drop	0.3 VDC @ 1.0 A	
Leakage Current	15µA @ 30VDC	
Inrush Current	2A (100ms)	
OFF to ON Response	<10µs	<10µs
ON to OFF Response	<30µs	<20µs

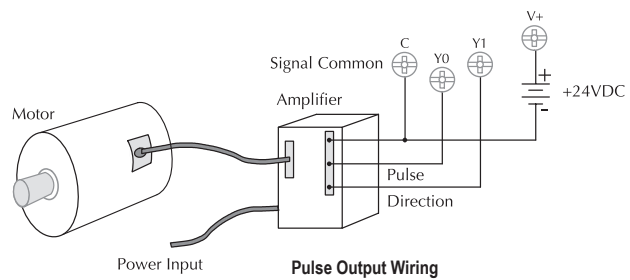

Equivalent Pulse Output Circuit Sinking Output

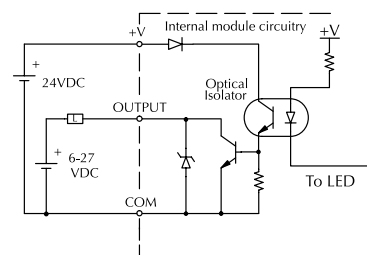

Equivalent Pulse Output Circuit Sourcing Output (D0-06DD2 only)

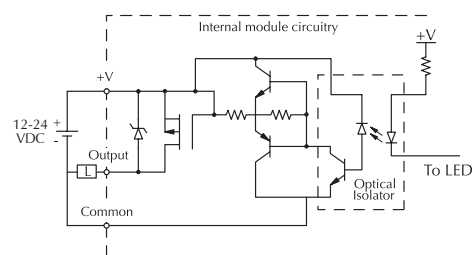

Timed Interrupt Feature

Time-based interrupts

There is a timed interrupt feature available in the DL05 and DL06 PLCs. This cyclical interrupt allows you to program a time-based interrupt that occurs on a scheduled basis. This feature is available in all units, regardless of input type.

The CPU's timed interrupt operates in a similar manner to the external interrupt input, but instead of the interrupt subroutine being triggered by an external event tied to X0, it is triggered by a cyclical interval of time. This interval can be programmed from 5ms to 999ms for INT0, which is available on either the DL05 or the DL06. The programmable time interval for INT1, which is available on the DL05, is 5 to 9999 ms.

Whenever the programmed time elapses, the CPU immediately suspends its routine scan cycle and jumps to the selected interrupt subroutine. As with the other modes, when the interrupt subroutine execution is complete, the CPU automatically resumes its routine scan cycle starting from the location where it was interrupted. Because the CPU scan time and the interrupt time interval are different, the point at which the RLL program is interrupted can change over time.

A note on timed interrupts

DL06: If you use the external hardware interrupt (mode 40), you cannot use the timed-based internal interrupt INT 0. You can use either one, but not both. This is because they share the same interrupt routine, INT 0.

DL05: The DL05 offers a second timed-based interrupt INT 1. This allows you to use an external hardware interrupt and/or a timed-based interrupt.

DL05 time-based interrupt

DL05 Designated Terminals

X0: Filtered input (uses filter time set for X1)

Timed Interrupt Specifications

Timed interrupts.....2 (internal to CPU)

Interrupt Subroutine.....INT0, INT1

Time interval:

INT0 ...5 to 999 ms (1ms increments)

INT1 ...5 to 9999 ms (1ms increments)

DL06 time-based interrupt

DL06 Designated Terminals

X0: Filtered input (uses filter time set for X1)


Timed Interrupt Specifications

Timed interrupts.....1 (internal to CPU)

Interrupt subroutine.....INT0

Time interval:

INT0 ...5 to 999 ms (1ms increments)

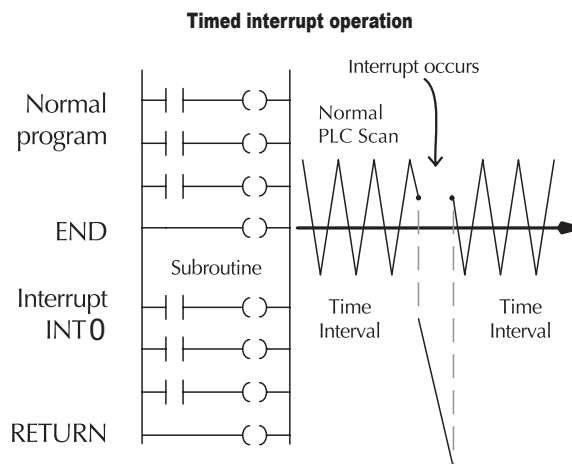

Instruction Set

Boolean Instructions

Store (STR)

Begins a new rung or an additional branch in a rung with a normally open contact.

Store Not (STRN)

Begins a new rung or an additional branch in a rung with a normally closed contact.

Store Bit-of-Word (STRB)

(DL06 only) Begins a new rung or an additional branch in a rung with a normally open V-memory bit-of-word contact.

Store Not Bit-of-Word (STRNB)

(DL06 only) Begins a new rung or an additional branch in a rung with a normally closed V-memory bit-of-word contact.

Or (OR)

Logically ORs a normally open contact in parallel with another contact in a rung.

Or Not (ORN)

Logically ORs a normally closed contact in parallel with another contact in a rung.

Or Bit-of-Word (ORB)

(DL06 only) ORs a normally open V-memory bit-of-word contact in parallel with another contact in a rung.

Or Not Bit-of-Word (ORNB)

(DL06 only) ORs a normally closed V-memory bit-of-word contact in parallel with another contact in a rung.

And (AND)

Logically ANDs a normally open contact in series with another contact in a rung.

And Not (ANDN)

Logically ANDs a normally closed contact in series with another contact in a rung.

And Bit-of-Word (ANDB)

(DL06 only) ANDs a normally open contact in series with another contact in a rung.

And Not Bit-of-Word (ANDNB)

(DL06 only) ANDs a normally closed contact in series with another contact in a rung.

And Store (ANDSTR)

Logically ANDs two branches of a rung in series.

Or Store (ORSTR)

Logically ORs two branches of a rung in parallel.

Out (OUT)

Reflects the status of the rung (on/off) and outputs the discrete (on/off) state to the specified image register point or memory location.

Or Out(OROUT)

Reflects the status of the rung and outputs the discrete (ON/OFF) state to the image register. Multiple OR OUT instructions referencing the same discrete point can be used in the program.

Out Bit-of-Word (OUTB)

(DL06 only) Reflects status of the rung (on/off) and outputs the discrete (on/off) state to the specified bit in the referenced V-memory location.

Not (NOT)

Inverts the status of the rung at the point of the instruction.

Positive differential (PD)

One-shot output coil. When the input logic produces an off to on transition, the output will energize for one CPU scan.

Store Positive Differential (STRPD)

Leading edge triggered one-shot contact. When the corresponding memory location transitions from low to high, the contact comes on for one CPU scan.

Store Negative Differential (STRND)

Trailing edge triggered one-shot contact. When the corresponding memory location transitions from high to low, the contact comes on for one CPU scan.

Or Positive Differential (ORPD)

Logically ORs a leading edge triggered one-shot contact in parallel with another contact in a rung.

Or Negative Differential (ORND)

Logically ORs a trailing edge triggered one-shot contact in parallel with another contact in a rung.

And Positive Differential (ANDPD)

Logically ANDs a leading edge triggered one-shot contact in series with another contact in a rung.

And Negative Differential (ANDND)

Logically ANDs a trailing edge triggered one-shot contact in series with another contact in a rung.

Set (SET)

An output that turns on a point or a range of points. The reset instruction is used to turn the point(s) OFF that were set ON with the set instruction.

Reset (RST)

An output that resets a point or a range of points.

Set Bit-of-Word (SETB)

(DL06 only) Sets or turns on a bit in a V-memory location.

Reset Bit-of-Word (RSTB)

(DL06 only) Resets or turns off a bit in a V-memory location.

Pause outputs (PAUSE)

Disables the update for a range of specified output points.

Comparative Boolean Instructions

Store if Equal (STRE)

Begins a new rung or additional branch in a rung with a normally open comparative contact. The contact will be on when $A = B$.

Store if Not Equal (STRNE)

Begins a new rung or additional branch in a rung with a normally closed comparative contact. The contact will be on when A is not equal to B .

Or if Equal (ORE)

Connects a normally open comparative contact in parallel with another contact. The contact will be on when $A = B$.

Or if Not Equal (ORNE)

Connects a normally closed comparative contact in parallel with another contact. The contact will be on when A is not equal to B .

And if Equal (ANDE)

Connects a normally open comparative contact in series with another contact. The contact will be on when $A = B$.

And if Not Equal (ANDNE)

Connects a normally closed comparative contact in series with another contact. The contact will be on when A is not equal to B .

Store (STR)

Begins a new rung or additional branch in a rung with a normally open comparative contact. The will be on when $A > B$.

Store Not (STRN)

Begins a new rung or additional branch in a rung with a normally closed comparative contact. The will be on when $A < B$.

Or (OR)

Connects a normally open comparative contact in parallel with another contact. The contact will be on when $A > B$.

Or Not (ORN)

Connects a normally open comparative contact in parallel with another contact. The contact will be on when $A < B$.

And (AND)

Connects a normally open comparative contact in series with another contact. The contact will be on when $A > B$.

And Not (ANDN)

Connects a normally closed comparative contact in parallel with another contact. The contact will be on when $A < B$.

Immediate Instructions

Store Immediate (STRI)

Begins a rung/branch of logic with a normally open contact. The contact will be updated with the current input field status when processed in the program scan.

Store Not Immediate (STRNI)

Begins a rung/branch of logic with a normally closed contact. The contact will be updated with the current input field status when processed in the program scan.

Or Immediate (ORI)

Connects a normally open contact in parallel with another contact. The contact will be updated with the current input field status when processed in the program scan.

Or Not Immediate (ORNI)

Connects a normally closed contact in parallel with another contact. The contact will be updated with the current input field status when processed in the program scan.

And Immediate (ANDI)

Connects a normally open contact in series with another contact. The contact will be updated with the current input field status when processed in the program scan.

And Not Immediate (ANDNI)

Connects a normally closed contact in series with another contact. The contact will be updated with the current input field status when processed in the program scan.

Out Immediate (OUTI)

Reflects the status of the rung. The output field device status is updated when the instruction is processed in the program scan.

Or Out Immediate (OROUTI)

Reflects the status of the rung and outputs the discrete (ON/OFF) state to the image register. Multiple OR OUT instructions referencing the same discrete point can be used in the program. The output field device status is updated when the instruction is processed in the program scan.

Set Immediate (SETI)

An output that turns on a point or a range of points. The reset instruction is used to turn the point(s) off that were set. The output field device status is updated when the instruction is processed in the program scan.

Reset Immediate (RSTI)

An output that resets a point or a range of points. The output field device status is updated when the instruction is processed in the program scan.

Load Immediate (LDI)

(DL06 only) Loads the accumulator with the contents of a specified 16-bit V-memory location. The status for each bit of the specified V-memory location is loaded into the accumulator. Typically used for input module V-memory addresses. Allows you to specify the V location instead of the X location and the number of points as with the LDIF.

Load Immediate Formatted (LDIF)

(DL06 only) Loads the accumulator with a specified number of consecutive inputs. The field device status for the specified inputs points is loaded into the accumulator when the instruction is executed.

Out Immediate Formatted (OUTIF)

(DL06 only) Outputs the contents of the accumulator to a specified number of consecutive outputs. The output field devices are updated when the instruction is processed by the program scan.

Timer, Counter, and Shift Register Instructions

Timer (TMR)

Single input incremental timer with 0.1 second resolution (0-999.9 secs)

Fast Timer (TMRF)

Single input incremental timer with 0.01 second resolution (0-99.99 seconds).

Accumulating Timer (TMRA)

Two input incremental timer with 0.1 second resolution (0-9,999,999.9 secs). Time and enable/reset inputs control the timer.

Accumulating Fast Timer (TMRAF)

Two input incremental timer with 0.01 second resolution (0-99,999.99 sec). Time and enable/reset inputs control the timer.

Counter (CNT)

Two input incremental counter (0-9999). Count and reset inputs control the counter.

Stage Counter (SGCNT)

Single input incremental counter (0-9999) RST instruction must be used to reset count.

Up Down Counter (UDC)

Three input counter (0-99,999,999). Up, down and reset inputs control the counter.

Shift Register (SR)

Shifts data through a range of control relays with each clock pulse. The data clock and reset inputs control the shift register.

Accumulator/Stack Load and Output Data

Load (LD)

Loads a 16-bit word into the lower 16 bits of the accumulator/stack.

Load Double (LDD)

Loads a 32-bit word into the accumulator/stack.

Load Real Number (LDR)

(DL06 only) Loads a real number contained in two consecutive V-memory locations or a real constant into the accumulator.

Load Formatted (LDF)

Loads the accumulator with a specified number of consecutive discrete memory bits.

Load Address (LDA)

Loads the accumulator with the HEX value for an octal constant (address).

Load Accumulator Indexed (LDX)

Specifies a source address (V-memory) which will be offset by the value in the first stack location.

Out (OUT)

Copies the value in the lower 16 bits of the accumulator to a specified V-memory location.

Out Double (OUTD)

Copies the value in the accumulator to two consecutive V-memory locations.

Out Formatted (OUTF)

Outputs a specified number of bits (1-32) from the accumulator to the specified discrete memory locations.

Pop (POP)

Moves the value from the first level of the accumulator stack to the accumulator and shifts each value in the stack up one level.

Out Least (OUTL)

(DL06 only) Copies the value in the lower 8-bits of the accumulator to the lower 8-bits of a specified V-memory location.

Out Most (OUTM)

(DL06 only) Copies the value in the upper 8-bits of the lower accumulator word (1st 16 bits) to the upper 8 bits of a specified V-memory location.

Output indexed (OUTX)

(DL06 only) Copies a 16-bit value from the first level of the accumulator stack to a source address offset by the value in the accumulator.

Logical Instructions (Accumulator)

And (AND)

Logically ANDs the lower 16 bits in the accumulator with a V-memory location.

And Double (ANDD)

Logically ANDs the value in the accumulator with an 8-digit constant or a value in two consecutive V-memory locations.

And Formatted (ANDF)

(DL06 only) Logically ANDs the value in the accumulator and a specified range of discrete memory bits (1-32).

And with stack (ANDS)

(DL06 only) Logically ANDs the value in the accumulator with the first value in the accumulator stack.

Instruction Set

Or (OR)

Logically ORs the lower 16 bits in the accumulator with a V-memory location.

Or Double (ORD)

Logically ORs the value in the accumulator with an 8-digit constant or a value in two consecutive V-memory locations.

Or Formatted (ORF)

(DL06 only) Logically ORs the value in the accumulator with a range of discrete bits (1-32)

Or with Stack (ORS)

(DL06 only) Logically ORs the value in the accumulator with the first value in the accumulator stack

Exclusive Or (XOR)

Performs an Exclusive Or of the value in the lower 16 bits of the accumulator and a V-memory location.

Exclusive Or Double (XORD)

Performs an Exclusive Or of the value in the accumulator and an 8-digit constant or a value in two consecutive V-memory locations.

Exclusive Or Formatted (XORF)

(DL06 only) Performs an exclusive or of the value in the accumulator and a range of discrete bits (1-32)

Exclusive Or with Stack (XORS)

(DL06 only) Performs an exclusive or of the value in the accumulator and the first accumulator stack location

Compare (CMP)

Compares the value in the lower 16 bits of the accumulator with a V-memory location.

Compare Double (CMPD)

Compares the value in the accumulator with two consecutive V-memory locations or an 8-digit constant.

Compare Formatted (CMPF)

(DL06 only) Compares the value in the accumulator with a specified number of discrete locations (1-32)

Compare with Stack (CMPS)

(DL06 only) Compares the value in the accumulator with the first accumulator stack location

Compare Real Number (CMPR)

(DL06 only) Compares the real number in the accumulator with two consecutive V-memory locations or a real number constant.

Add (ADD)

Adds a BCD value in the lower 16 bits in the accumulator with a V-memory location. The result resides in the accumulator.

Add Double (ADDD)

Adds a BCD value in the accumulator with two consecutive V-memory locations or an 8-digit constant. The result resides in the accumulator.

Add Real Number (ADDR)

(DL06 only) Adds a real number in the accumulator with a real number constant or a real number contained in two consecutive V-memory locations. The result resides in the accumulator.

Subtract (SUB)

Subtract a BCD value, which is either a V-memory location or a 4-digit constant from the lower 16 bits in the accumulator. The result resides in the accumulator.

Subtract Double (SUBD)

Subtracts a BCD value, which is either two consecutive V-memory locations or an 8-bit constant, from a value in the accumulator. The result resides in the accumulator.

Subtract Real Number (SUBR)

(DL06 only) Subtracts a real number, which is either two consecutive V-memory locations or an 8-digit constant, from the real number in the accumulator. The result resides in the accumulator.

Multiply (MUL)

Multiplies a BCD value, which is either a V-memory location or a 4-digit constant, by the value in the lower 16 bits in the accumulator. The result resides in the accumulator.

Multiply Double (MULD)

Multiplies a BCD value contained in two consecutive V-memory locations by the value in the accumulator. The result resides in the accumulator.

Multiply Real Number (MULR)

(DL06 only) Multiplies a real number, which is either two consecutive V-memory locations or a real number constant, by the real number in the accumulator. The result resides in the accumulator.

Divide (DIV)

Divides a BCD value in the accumulator by a BCD value which is either a V-memory location or a 4-digit constant. The result resides in the accumulator.

Divide Double (DIVD)

Divides a BCD value in the accumulator by a BCD value which is either two consecutive V-memory locations or a 8-digit constant. The result resides in the accumulator.

Divides Real Number (DIVR)

(DL06 only) Divides a real number in the accumulator by a real number which is either two consecutive V-memory locations or a real number constant. The result resides in the accumulator.

Increment (INC)

Increments a BCD value in a specified V-memory location by 1 each time the instruction is executed.

Decrement (DEC)

Decrements a BCD value in a specified V-memory location by 1 each time the instruction is executed.

Add Binary (ADDB)

Adds the binary value in the lower 16 bits of the accumulator to a value which is either a V-memory location or a 16-bit constant. The result resides in the accumulator.

Add Binary Double (ADDBD)

(DL06 only) Adds the binary value in the accumulator to a value which is either two consecutive V-memory locations or a 32-bit constant. The result resides in the accumulator

Subtract Binary (SUBB)

Subtract a 16-bit binary value, which is either a V-memory location or a 16-bit constant, from the lower 16 bits in the accumulator. The result resides in the accumulator.

Subtract Binary Double (SUBBD)

(DL06 only) subtracts a 32-bit binary value, which is either two consecutive V-memory locations or a 32-bit constant, from the value in the accumulator. The result resides in the accumulator

Multiply Binary (MULB)

Multiplies a 16-bit binary value, which is either a V-memory location or a 16-bit constant, by the lower 16 bits in the accumulator. The result resides in the accumulator.

Divide Binary (DIVB)

Divides the binary value in the lower 16 bits in the accumulator by a value which is either a V-memory location or a 16-bit constant. The result resides in the accumulator.

Increment Binary (INCB)

Increments a binary value in a specified V-memory location by 1 each time the instruction is executed.

Decrement Binary (DECB)

Decrements a binary value in a specified V-memory location by 1 each time the instruction is executed.

Add Formatted (ADDF)

(DL06 only) Adds the BCD value in the accumulator to a value which is a range of discrete bits (1-32). The result resides in the accumulator

Subtract Formatted (SUBF)

(DL06 only) Subtracts a BCD value which is a range of discrete bits (1-32) from the BCD value in the accumulator. The result resides in the accumulator

Multiply Formatted (MULF)

(DL06 only) Multiplies a BCD value in the lower 16-bits in the accumulator by a BCD value which is a range of discrete bits (1-16). The result resides in the accumulator

Divide Formatted (DIVF)

(DL06 only) Divides the BCD value in the lower 16-bits in the accumulator by the BCD value which is a range of discrete bits (1-16). The result resides in the accumulator

Add Top of Stack (ADDS)

(DL06 only) Adds the BCD value in the accumulator with the BCD value in the first level of the accumulator stack. The result resides in the accumulator

Subtract Top of Stack (SUBS)

(DL06 only) Subtracts the BCD value in the first level of the accumulator stack from the BCD value in the accumulator. The result resides in the accumulator.

Multiply Top of Stack (MULS)

(DL06 only) Multiplies a 4-digit BCD value in the first level of the accumulator stack by a 4-digit BCD value in the accumulator. The result resides in the accumulator

Divide by Top of Stack (DIVS)

(DL06 only) Divides the 8-digit BCD value in the accumulator by the 4-digit BCD value in the first level of the accumulator by the 4-digit BCD value in the first level of the accumulator stack. The result resides in the accumulator

Add Binary Top of Stack (ADDBS)

(DL06 only) Adds the binary value in the accumulator with the binary value in the first accumulator stack location. The result resides in the accumulator

Subtract Binary Top of Stack (SUBBS)

(DL06 only) Subtracts the binary value in the first level of the accumulator stack from the binary value in the accumulator. The result resides in the accumulator

Multiply Binary Top of Stack (MULBS)

(DL06 only) Multiplies the 16-bit binary value in the first level of the accumulator stack by the 16-bit binary value in the accumulator. The result resides in the accumulator

Divide Binary Top of Stack (DIVBS)

(DL06 only) Divides a value in the accumulator by the binary value in the top location of the stack. The accumulator contains the result

Transcendental Instructions (DL06 only)

Square Root Real (SQRTR)

Takes the square root of the real number stored in the accumulator. The result resides in the accumulator.

Sine Real (SINR)

Takes the sine of the real number stored in the accumulator. The result resides in the accumulator.

Cosine Real (COSR)

Takes the cosine of the real number stored in the accumulator. The result resides in the accumulator.

Tangent Real (TANR)

Takes the tangent of the real number stored in the accumulator. The result resides in the accumulator.

ARC Sine Real (ASINR)

Takes the inverse sine of the real number stored in the accumulator. The result resides in the accumulator.

ARC Cosine Real (ACOSR)

Takes the inverse cosine of the real number stored in the accumulator. The result resides in the accumulator.

ARC Tangent Real (ATANR)

Takes the inverse tangent of the real number stored in the accumulator. The result resides in the accumulator.

Bit Instructions (Accumulator)

Sum (SUM)

Counts the number of bits set to "1" in the accumulator. The HEX result resides in the accumulator..

Shift Left (SHFL)

Shifts the bits in the accumulator a specified number of places to the left.

Shift Right (SHFR)

Shifts the bits in the accumulator a specified number of places to the right.

Rotate Left (ROTL)

Rotates the bits in the accumulator a specified number of places to the left.

Rotate Right (ROTR)

Rotates the bits in the accumulator a specified number of places to the right.

Encode (ENCO)

Encodes the bit position set to 1 in the accumulator, and returns the appropriate binary representation in the accumulator.

Decodes (DECO)

Decodes a 5 bit binary value (0-31) in the accumulator by setting the appropriate bit position to a 1.

Number Conversion Instructions (Accumulator)

Binary (BIN)

Converts the BCD value in the accumulator to the equivalent binary value. The result resides in the accumulator.

Binary Coded Decimal (BCD)

Converts the binary value in the accumulator to the equivalent BCD value. The result resides in the accumulator.

Invert (INV)

Takes the one's complement of the 32-bit value in the accumulator. The result resides in the accumulator.

Ten's Complement (BCDCPL)

(DL06 only) Takes the 10's complement (BCD) of the 8-digit accumulator.

ASCII to HEX (ATH)

Converts a table of ASCII values to a table of hexadecimal values.

HEX to ASCII (HTA)

Converts a table of hexadecimal values to a table of ASCII values.

\Segment (SEG)

(DL06 only) Converts four digit HEX value in accumulator to seven segment display format.

Gray Code to BCD (GRAY)

Converts a 16-bit GRAY code value in the accumulator to a corresponding BCD value. The result resides in the accumulator.

Shuffle Digits (SFLDGT)

Shuffles a maximum of 8 digits, rearranging them in a specified order. The result resides in the accumulator.

Radian Real Conversion (RADR)

(DL06 only) Converts the real degree value in the accumulator to the equivalent real number in radians. The result resides in the accumulator

Degree Real Conversion (DEGR)

(DL06 only) Converts the real radian value in the accumulator to the equivalent real number of degrees. The result resides in the accumulator.

Binary to Real Number (BTOR)

(DL06 only) Converts the binary value in the accumulator into a real number. The result resides in the accumulator.

Real to Binary (RTOB)

(DL06 only) Converts the real number in the accumulator into a binary value. The result resides in the accumulator.

Table Instructions

Move (MOV)

Moves the values from one V-memory table to another V-memory table.

Move Memory Cartridge/Load Label (MOVMC/LDLBL)

DL05 Only. Copies data between V-memory and program ladder memory.

Instruction Set

Set Bit (SETBIT)

(DL06 only) Sets a single bit (to a 0) in a V-memory location.

Reset Bit (RSTBIT)

(DL06 only) Resets a single bit (to a 0) in a V-memory location.

Extended Table Instructions (DL06 only)

Fill (FILL)

Fills a table of specified V-memory locations with a value which is either a V-memory location or a 4-digit constant.

Find (FIND)

Finds a value in a V-memory table and returns the table position containing the value to the accumulator.

Find Greater Than (FDGT)

Finds a value in a V-memory table which is greater than the specified search value. The table position containing the value is returned to the accumulator.

Find Block (FINDB)

Finds a block of data values in a V-memory table and returns the starting address of the table containing the values to the accumulator.

Table to Destination (TTD)

Moves the value from the top of a V-memory table to a specified V-memory location. The table pointer increments each scan.

Remove from Bottom (RFB)

Moves the value from the bottom of a v-memory table to a specified V-memory location. The table pointer increments each scan.

Source To Table (STT)

Moves a value from a specified V-memory location to a V-memory table. The table pointer increments each scan.

Remove from Top (RFT)

Pops a value from the top of a V-memory table and stores it in a specified V-memory location. All other values in the V-memory table are shifted up each time a value is popped from the table.

Add To Top of Table (ATT)

Pushes a value from a specified V-memory location onto the top of a V-memory table. All other values in the V-memory table are shifted down each time a value is pushed onto the table.

Table Shift Left (TSHFL)

Shifts a specified number of bits to the left in a V-memory table.

Table Shift Right (TSHFR)

Shifts a specified number of bits to the right in a V-memory table.

And Move (ANDMOV)

Copies data from a table to the specified location, ANDing each word with the accumulator data as it is written.

Or Move (ORMOV)

Copies data from a table to the specified memory location, ORing each word with the accumulator data as it is written.

clusive Or Move (XORMOV)

Copies data from a table to the specified memory location, XORing each word with the accumulator data as it is written.

Swap (SWAP)

Exchanges the data in two tables of equal length.

Clock / Calendar Instructions

Date (DATE)

Use to set the date in the CPU.

Time (TIME)

Use to set the time in the CPU.

CPU Control Instructions

No Operation (NOP)

Inserts a no operation coil at specified program address.

End (END)

Marks the termination point for the normal program scan. An End instruction is required at the end of the main program body.

Stop (STOP)

Changes the operational mode of the CPU from Run to Program (Stop)

Reset Watchdog Timer (RSTWT)

Resets the CPU watchdog timer.

Program Control Instructions

Goto Label (GOTO) (LBL)

Skips all instructions between the Goto and corresponding LBL instructions. DL06 units only. Not available in DL05.

For/Next (FOR/NEXT)

Executes the logic between the FOR and NEXT instructions a specified number of times.

Goto Subroutine (GTS/SBR/RT/RTC)

When a GTS instruction is executed the program jumps to the SBR (Subroutine). The subroutine is terminated with a RT instruction (unconditional return). When a return is executed, the program continues from the instruction after the calling GTS instruction. The RTC (Subroutine return conditional) instruction is used with an input contact to implement a conditional return from the subroutine.

Client Line Set/Client Line Reset (MLS/MLR)

Allows the program to control sections of ladder logic by forming a new power rail. The MLS marks the beginning of a power rail and the MLR marks the end of the power rail control.

Interrupt Instructions

Interrupt Routine/Interrupt Return/Interrupt Return Conditional (INT/IRT/IRTC)

When a hardware or software interrupt occurs, the interrupt routine will be executed. The INT instruction is the beginning of the interrupt routine. The interrupt routine is terminated with an IRT of the interrupt routine. The interrupt routine is terminated with an IRT instruction (unconditional interrupt return). When a interrupt return is reached the execution of the program continues from the instruction where the program execution was prior to the interrupt.

Enable Interrupt (ENI)

Enables hardware and software interrupts to be acknowledged.

Disable Interrupt (DISI)

Disables hardware and software interrupts from being acknowledged.

Intelligent I/O Instructions

Read from Intelligent Module (RD)

Reads a block of data from an intelligent I/O module into CPU's V-memory.

Write to Intelligent Module (WT)

Writes a block of data to an intelligent I/O module from a block of CPU's V-memory.

Message Instructions

Fault/Data Label (FAULT/DLBL)

Displays a V-memory value or a data label constant to the hand-held programmer or personal computer using DirectSOFT.

Numerical Constant/ASCII constant (NCON/ACON)

Stores constants in numerical or ASCII form for use with other instructions.

Print Message (PRINT)

Prints the embedded text or text/data variable message to the specified communications port. Maximum message length is 255 words. Appropriate bit position to 1 in the accumulator.

Network Instructions

Read from network (RX)

Reads a block of data from another CPU on the network.

Write to network (WX)

Writes a block of data from the Client device to a Server device on the network.

Drum Instructions

Tuned Drum with Discrete Outputs (DRUM)

Time driven drum with up to 16 steps and 16 discrete output points. Output status is written to the appropriate output during each step. Specify a time base per count (in milliseconds). Each step can have a different number of counts to trigger the transition to the next step. Also define preset step as destination when reset occurs.

Time & Event Drum with Discrete Outputs (EDRUM)

Time and/or event driven drum with up to 16 steps and 16 discrete output points. Output status is written to the appropriate output during each step. Specify a time base per count (in milliseconds). Each step can have a different number of counts and an event to trigger the counting. Once the time has expired, a transition to the next step occurs. Also define preset step as destination when reset occurs.

Time and Event Drum with Discrete Outputs and Output Mask (MDRMD)

(DL06 only) Time and/or event driven drum with up to 16 steps and 16 discrete output points. Actual output status is the result of a bit-by-bit AND between the output mask and bit mask in the step. Specify a time base per count (in milliseconds). Each step can have a different number of counts and an event to trigger the counting. Once the time has expired, a transition to the next step occurs. Also define present step as destination when reset occurs.

Time and Event Drum with Word Output and Output Mask (MDRMW)

(DL06 only) Time and/or event driven drum with up to 16 steps and a single V-memory output location. Actual output word is the result of a bit-by-bit AND between the word mask and the bit mask in the step. Specify a time base per count (in milliseconds). Each step can have a different number of counts and an event to trigger the counting. Once the time has expired, a transition to the next step occurs. Also define preset step as destination when reset occurs.

RLLPLUS Programming Instructions

Initial stage (ISG)

The initial stage instruction is used for a starting point for user application program. The ISG instruction will be active on power up and PROGRAM to RUN transitions.

Stage (SG)

Stage instructions are used to create structured programs. They are program segments which can be activated or deactivated with control logic.

Jump (JMP)

Normally open coil that deactivates the active stage and activates a specified stage when there is power flow to the coil.

Not Jump (NJMP)

Normally closed coil that deactivates the active stage and activates a specified stage when there is power flow to the coil.

Converge Stages (CV)

Converge stages are a group of stages that when all stages are active the associated converge jump(s). (CVJMP) will activate another stage(s). One scan after the CVJMP is executed, the converge stages will be deactivated.

Converge Jump (CVJMP)

Normally open coil that deactivates the active CV stages and activates a specified stage when there is power flow to the coil.

Block Call/Block/Block End (BCALL w/BLK and BEND)

DL06 Only BCALL is a normally open coil that activates a block of stages when there is power flow to the coil. BLK is the label which marks the beginning of a block of stages. BEND is a label used to mark the end of a block of stages. LCI

LCD

Configures LCD display.

MODBUS Instructions (DL06 only)

MODBUS Read (MRX)

Used CPU port 2 to read a block of data from MODBUS RTU devices on the network.

MODBUS Write (MWX)

Writes a block of data from CPU port 2 to MODBUS RTU devices on the network.

ASCII Instructions (DL06 only)

ASCII IN (AIN)

Configures port 2 to read raw ASCII input strings.

ASCII Find (AFIND)

Searches ASCII strings in V-memory to find a specific portion of the string.

ASCII IN (AEX)

Extracts a specific portion from an ASCII string.

Compare V-memory (CMPV)

Compares two blocks of V-memory.

Swap Bytes (SWAPB)

Swaps V-memory bytes.

Print to V-memory (VPRINT)

Used to send pre-coded ASCII strings to a pre-defined V-memory address when enabled.

Print from V-memory (PRINTV)

Used to write raw ASCII string out of port 2 when enabled.

Here are some of the IBox Instructions available

The IBox instructions are available when using a DL05 with firmware version 5.10 or later, DL06 with firmware version 2.10 or later, and DirectSOFT5 or later.

IBox Instructions - Analog Helper

Analog Input/Output Combo Module Pointer Setup (ANLGCMB)

Generates the logic to configure the pointer method for an analog input/output combination module.

Analog Input Module Pointer Setup (ANLGIN)

Generates the logic to configure the pointer method for an analog input module.

Analog Output Module Pointer Setup (ANLGOUT)

Generates the logic to configure the pointer method for an analog output module.

Analog Scale 12 Bit BCD to BCD (ANSCL)

Scales a 12 bit BCD analog value (0-4095 BCD) into BCD engineering units. Only works with unipolar unsigned raw values.

Analog Scale 12 Bit Binary to Binary (ANSCLB)

Scales a 12 bit binary analog value (0-4095 decimal) into Binary engineering units. Only works with unipolar unsigned raw values.

Filter Over Time - BCD (FILTER)

Performs a first-order filter on the Raw Data on a defined time interval (BCD).

Filter Over Time - Binary (FILTERB)

Perform a first-order filter on the Raw Data on a defined time interval (binary).

Hi/Low Alarm - BCD (HILOALB)

Monitors a BCD value V-memory location and sets four possible alarm states, High-High, High, Low, and Low-Low.

Hi/Low Alarm - Binary (HILOALB)

Monitors a binary (decimal) value V-memory location and sets four possible alarm states, High-High, High, Low, and Low-Low.

IBox Instructions - Discrete Helper

Off Delay Timer - (OFFDTMR)

Delays the "turning off" of the Output parameter by the specified Off Delay Time (in hundredths of a second).

On Delay Timer - (ONDTMR)

Delays the "turning on" of the Output parameter by the specified amount of time (in hundredths of a second).

One Shot - (ONESHOT)

Turns on the given bit output parameter for one scan on an OFF to ON transition.

Push On / Push Off Circuit (PONOFF)

Toggles an output state whenever its input power flow transitions from off to on. Also known as a "flip-flop" circuit.

IBox Instructions - Memory

Move Single Word (MOVEW)

Moves (copies) a word to a memory location directly or indirectly via a pointer, either as a HEX constant, from a memory location, or indirectly through a pointer.

Move Double Word (MOVED)

Moves (copies) a double word to two consecutive memory locations directly or indirectly via a pointer, either as a double HEX constant, from a double memory location, or indirectly through a pointer to a double memory location.

IBox Instructions - Math

BCD to Real with Implied Decimal Point (BCDTR)

DL06 only: Converts the given 4 digit WORD BCD value to a Real number, with the implied number of decimal points (K0-K4).

Double BCD to Real with Implied Decimal Point (BCDTRD)

DL06 only: Converts the given 8 digit DWORD BCD value to a Real number, given an implied number of decimal points (K0-K8).

Math - BCD (MATHBCD)

Allows entry of complex mathematical expressions like in Visual Basic, Excel, or C++ to do complex calculations, nesting parentheses up to 4 levels deep. Every V-memory reference MUST be to a single word BCD formatted value.

Math - Binary (MATHBIN)

Allows entry of complex mathematical expressions like in Visual Basic, Excel, or C++ to do complex calculations, nesting parentheses up to 4 levels deep. Every V-memory reference MUST be to a single word binary formatted value.

Math - Real (MATHR)

DL06 only: Allows entry of complex mathematical expressions like in Visual Basic, Excel, or C++ to do complex calculations, nesting parentheses up to 4 levels deep. Every V-memory reference MUST be able to fit into a double word Real formatted value.

Real to BCD with Implied Decimal Point and Rounding (RTOBCD)

DL06 only: Converts the absolute value of the given Real number to a 4 digit BCD number, compensating for an implied number of decimal points (K0-K4) and performs rounding.

Real to Double BCD with Implied Decimal Point and Rounding (RTOBCDD)

DL06 only: Converts the absolute value of the given Real number to a 8 digit DWORDBCD number, compensating for an implied number of decimal points (K0-K8) and performs rounding.

Square BCD (SQUARE)

Squares the given 4-digit WORD BCD number and writes it as an

8-digit DWORD BCD result.

Square Binary (SQUAREB)

Squares the given 16-bit WORD binary number and writes it as a 32-bit DWORD binary result.

Square Real (SQUARER)

DL06 only: Squares the given REAL DWORD number and writes it to a REAL DWORD result.

Sum BCD Numbers (SUMBCD)

Sums a list of consecutive 4-digit WORD BCD numbers into an 8-digit DWORD BCD result.

Sum Binary Numbers (SUMBIN)

Sums a list of consecutive 16-bit WORD binary numbers into a 32-bit DWORD binary result.

Sum Real Numbers (SUMR)

DL06 only: Sums a list of consecutive Real DWORD numbers into a Real DWORD result.

IBox Instructions - Communications

ECOM100 Configuration (ECOM100)

Defines the common information for a specific ECOM100 module which is used by the other ECOM100 IBoxes and resides at the top of the ladder/stage program. If using more than one ECOM100 in a PLC system, a different ECOM100 Configuration IBox must be used for each ECOM100 module in your system that utilizes any ECOM IBox instructions.

ECOM100 Disable DHCP (ECDHCPD)

Commands the ECOM100 to use its internal TCP/IP settings.

ECOM100 Enable DHCP (ECDHCPE)

Commands the ECOM100 to obtain its TCP/IP settings from a DHCP server.

ECOM100 Query DHCP Setting (ECDHCPQ)

Determines if DHCP is enabled in the ECOM100.

ECOM100 Send E-mail (ECEMAIL)

Allows the ECOM100 to behave as an EMail client to send an SMTP request to the SMTP Server for sending EMail messages to EMail addresses in the To: field and Cc: list hard coded in the ECOM100. Messages are limited to 100 characters for the entire instruction.

ECOM100 Restore Default E-mail Setup (ECEMRDS)

Restores the original EMail Setup data stored in the ECOM100 back to the working copy based on the specified ECOM100#.

ECOM100 E-mail Setup (ECEMSUP)

Modifies the working copy of the EMail setup currently in the ECOM100 based on the specified ECOM100#. You may pick and choose any or all fields to be modified using this instruction.

ECOM100 IP Setup (ECIPSUP)

Configures the three TCP/IP parameters in the ECOM100: IP Address, Subnet Mask and Gateway Address.

ECOM100 Read Description (ECRDDES)

Reads the ECOM100's Description field up to the number of specified characters.

ECOM100 Read Gateway Address (ECRDGWA)

Reads the ECOM100's Gateway address and stores it in 4 consecutive V-memory locations in decimal format.

ECOM100 Read IP Address (ECRDIP)

Reads the ECOM100's IP address and stores it 4 consecutive V-memory locations in decimal format.

ECOM100 Read Module ID (ECRDMID)

Reads the ECOM100's binary (decimal) WORD sized Module ID and stores it in V-memory.

ECOM100 Read Module Name (ECRDNAM)

Reads the ECOM100's Module Name up to the number of specified characters and stores it in V-memory.

ECOM100 Read Subnet Mask (ECRDSNM)

Reads the ECOM100's Subnet Mask address and stores it 4 consecutive V-memory locations in decimal format.

ECOM100 Write Description (ECWRDES)

Writes the specified Description to the ECOM100 module.

ECOM100 Write Gateway Address (ECWRGWA)

Writes the specified Gateway IP Address to the ECOM100 module.

ECOM100 Write IP Address (ECWRIP)

Writes the specified IP Address to the ECOM100 module.

ECOM100 Write Module ID (ECWRMID)

Writes the specified Module ID to the ECOM100 module.

ECOM100 Write Name (ECWRNAM)

Writes the specified Name to the ECOM100 module.

ECOM100 Write Subnet Mask (ECWRSNM)

Writes the specified Subnet Mask to the ECOM100 module.

ECOM100 RX Network Read (ECRX)

Performs the RX instruction with built-in interlocking with all other ECOM100 RX (ECRX) and ECOM100 WX (ECWX) IBoxes in your program to simplify communications networking.

ECOM100 WX Network Write (ECWX)

Performs the WX instruction with built-in interlocking with all other ECOM100 RX (ECRX) and ECOM100 WX (ECWX) IBoxes in your program to simplify communications networking.

NETCFG Network Configuration (NETCFG)

Defines all the common information necessary for performing RX/WX Networking using the NETRX and NETWX IBox instructions via a local CPU serial port, DCM or ECOM module.

Network RX Read (NETRX)

Performs the RX instruction with built-in interlocking with all other Network RX (NETRX) and Network WX (NETWX) IBoxes in your program to simplify communications networking.

Network WX Read (NETWX)

Performs the WX instruction with built-in interlocking with all other Network RX (NETRX) and Network WX (NETWX) IBoxes in your program to simplify communications networking.

IBox Instructions - Counter I/O

CTRIO Configuration (CTRIO)

Defines the common information for a specific CTRIO module which is used by the other CTRIO IBox instructions and resides at the top of the ladder/stage program. If using more than one CTRIO module in your PLC system, a different CTRIO Configuration IBox must be used for each CTRIO module that utilizes CTRIO IBox instructions.

CTRIO Add Entry to End of Preset Table (CTRADPT)

Appends an entry to the end of a memory based Preset Table on a specific CTRIO Output resource. Will take more than 1 PLC scan to execute.

CTRIO Clear Preset Table (CTRCLRT)

Clears the RAM based Preset Table on a leading edge transition to this IBox. Will take more than 1 PLC scan to execute.

CTRIO Edit Preset Table Entry (CTREDPT)

Edits a single entry in a Preset Table on a specific CTRIO Output resource. Will take more than 1 PLC scan to execute.

CTRIO Edit Preset Table Entry and Reload (CTREDRL)

Performs dual operation to a CTRIO Output resource in one CTRIO command. Will take more than 1 PLC scan to execute.

CTRIO Initialize Preset Table (CTRINPT)

Creates a single entry Preset Table in memory, not as a file, on a specific CTRIO Output resource. Will take more than 1 PLC scan to execute.

CTRIO Initialize Preset Table on Reset (CTRINTR)

Configures the initial Preset Table to be automatically loaded whenever the Reset event occurs on a specific Output resource. Will take more than 1 PLC scan to execute.

CTRIO Load Profile (CTRLDPR)

Loads a CTRIO Profile File to a CTRIO Output resource on a leading edge transition to this IBox. Will take more than 1 PLC scan to execute.

CTRIO Read Error (CTRDRER)

Gets the decimal error code value from the CTRIO module and places it into the specified Error Code register. Since the Error Code in the CTRIO is only maintained until another CTRIO command is given, this instruction must be used immediately after the CTRIO IBox that reports an error via its Error bit parameter.

CTRIO Run to Limit Mode (CTRRLTM)

Loads the Run to Limit command and given parameters on a specific Output resource. The CTRIO's Input(s) must be configured as Limit(s) for this function to operate. Will take more than 1 PLC scan to execute.

CTRIO Run to Position Mode (CTRRTPM)

Loads the Run to Position command and given parameters on a specific Output resource. Will take more than 1 PLC scan to execute.

CTRIO Velocity Mode (CTRVELO)

Loads the Velocity command and given parameters on a specific Output resource. Will take more than 1 PLC scan to execute.

CTRIO Write File to ROM (CTRWFTR)

Writes the runtime changes made to a loaded CTRIO Preset Table back to Flash ROM. Will take more than 1 PLC scan to execute.