
BCS M30B4M2-PPM20C-S04G

Order Code: BCS004T





1) Sensing surface, 2) Housing, 3) Cover, 4) Potentiometer, 5) NO or NC selectable, 6) LED function indicator

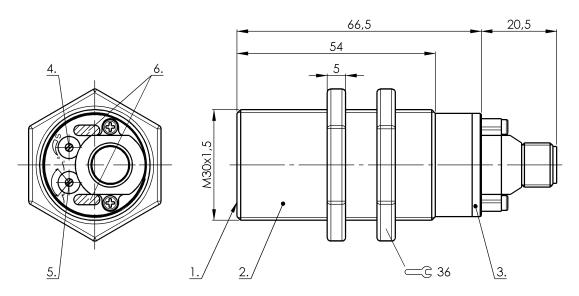





Daoid idatai do	
Approval/Conformity	CE
	cULus
	WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Nut (2x)
	Screwdriver
	Short guide
Sensitivity	Switching distance adjustable
Series	M30

Display/Operation

Function indicator	yes
Power indicator	yes

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

18 mA
1035 VDC
75 V DC
300 mA
24 V
10 %
100 Hz
DC -13
1.8 V

Environmental conditions

Ambient temperature Contamination scale IP rating	-3070 °C 1 IP66, IP64 at connector output
Functional safety	
MTTF (40 °C)	455 a
Interface	
Switching output	PNP NO/NC programmable
Material	
Cover material	PBT PE

Housing material 1.4301 stainless steel Material sensing surface PBT

Capacitive Sensors

BCS M30B4M2-PPM20C-S04G Order Code: BCS004T



Mechanical data

DimensionØ 30 x 87 mmInstallationfor flush mountingSizeM30x1.5Thread (A)M30x1.5Tightening torque90 Nm

Range/Distance

Hysteresis H max. (% of Sr)

Measuring range

1...20 mm

Rated operating distance Sn

Repeat accuracy max. (% of Sr)

Temperature drift max. (% of Sr)

20 %

Remarks

The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.


If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output. For more information about MTTF and B10d see MTTF / B10d Certificate


Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings




Wiring Diagrams





Installation remarks



2/2