

# Fuji Odyssey Series 3N Contactors



## Description

- 180 - 361A rating (AC3)
- Provides higher current and horsepower capabilities than SC-E series. Designed for reliable use in applications requiring constant switching, reduced coil energy consumption, and increased horsepower capabilities.
- Available in 154mm and 169mm frame widths
- SUPERMAGNET™ for high operating reliability.
- Use with Odyssey 3N series overload relays.

## Features

- Equipped with 2 N.O. and 2 N.C. auxiliary contacts
- Chatter-free operation eliminates contact welding and coil burning
- SUPERMAGNET™ coil operates on either AC or DC voltage
- Wire Terminal Connection Type: Crimp ring Terminal

## Agency approvals

- UL listed file E42419, Standard UL508
- cUL listed file E42419, Standard CSA C22.2 No. 14
- CE: Meets LVD EN60947-4-1
- SEMI F47-0200

## Optional accessories

- Terminal covers
- Auxiliary contacts



**3NC4H0122**

## Ecology

- Low power consumption
- Recycled thermoplastic resin used for plastic parts.
- The names of materials are indicated on all major parts to facilitate recycling.

## Odyssey 3N Series Contactors 180–361 Amps

Part Number	Fuji Type	Price	Coil Voltage	Rated Motor Capacity (HP)						Rated AC-3 Current (A) [note 1]	Rated AC-1 Thermal Current (A) [note 2]	Quantity of Auxiliary Contacts		SCCR Ratings (KA)	Frame Width (mm)
				3-Phase				1-Phase				NO	NC		
				200–208V	220–240V	440–480V	550–600V	100–120V	220–240V						
<a href="#">3NC4Q0E22</a>	SC-N8	\$;-00dtl:	24–25VAC / 24VDC	60	60	150	150	N/A	180	260	2	2	10	138	
<a href="#">3NC4Q0122</a>		\$;-00dti:	100–127VAC / 100–120VDC												
<a href="#">3NC4Q0222</a>		\$;-00dtj:	200–250VAC / 200–240VDC												
<a href="#">3NC4H0E22</a>	SC-N10	\$;00dtg:	24–25VAC / 24VDC	75	75	150	200	N/A	221	260	2	2	10	138	
<a href="#">3NC4H0122</a>		\$;00dtd:	100–127VAC / 100–120VDC												
<a href="#">3NC4H0222</a>		\$;00dte:	200–250VAC / 200–240VDC												
<a href="#">3NC4H0Q22</a>		\$;00dth:	380–450VAC												
<a href="#">3NC4H0422</a>		\$;00dtf:	460–575VAC												
<a href="#">3NC5F0E22</a>	SC-N11	\$;00dts:	24–25VAC / 24VDC	100	100	200	250	N/A	285	350	2	2	18	148	
<a href="#">3NC5F0122</a>		\$;00dto:	100–127VAC / 100–120VDC												
<a href="#">3NC5F0222</a>		\$;00dtp:	200–250VAC / 200–240VDC												
<a href="#">3NC5H0E22</a>	SC-N12	\$;00dty:	24–25VAC / 24VDC	125	150	300	350	N/A	361	450	2	2	18	148	
<a href="#">3NC5H0122</a>		\$;00dtu:	100–127VAC / 100–120VDC												
<a href="#">3NC5H0222</a>		\$;00dtt:	200–250VAC / 200–240VDC												
<a href="#">3NC5H0Q22</a>		\$;00dtz:	380–450VAC												
<a href="#">3NC5H0422</a>		\$;00dtx:	460–575VAC												

Notes: 1. AC3 type loads consist of squirrel cage three-phase motors; occasional, limited jogging duty.

2. AC1 non-inductive or slightly inductive loads. Typically resistive loads (i.e. furnaces, ovens, etc.)

## Contactors Coil Characteristics - AC Input

Part Number	Power Consumption (VA)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
<a href="#">3NC4Qxxxx</a> , <a href="#">3NC4Hxxxx</a>	277	5.4	70-80	35-50	35-41	37-45
<a href="#">3NC5Fxxxx</a> , <a href="#">3NC5Hxxxx</a>	265	5.9	70-80	35-50	40-47	36-43

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 120VAC, 60Hz.

# Fuji Odyssey Series 3N Contactors

## Contactors Coil Characteristics - DC Input - 110VDC

Part Number	Power Consumption (watts)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
3NC4Qxxxx, 3NC4Hxxxx	324	4.1	77-88	28-44	35-41	37-45
3NC5Fxxxx, 3NC5Hxxxx	340	4.5	77-88	28-44	40-47	36-43

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 110VDC.

## Contactors Coil Characteristics - DC Input - 24VDC

Part Number	Power Consumption (watts)		Pick-up Voltage (V)	Drop-out Voltage (V)	Operating Time (ms)	
	Inrush	Sealed			Coil ON to Contact ON	Coil OFF to Contact OFF
3NC4Qxxxx, 3NC4Hxxxx	250	5.9	17-19.2	6-12	35-41	37-45

NOTE: This data is based on 100-120V SUPERMAGNET™ coil, tested at 110VDC.

## Contactors Auxiliary Contact Ratings

NEMA ICS 5-2000 Ratings ( note 1 )				
AC Ratings			DC Ratings	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
A600	7200	720	Q300	69

Note 1: NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings, page MRC-tMRC-130.

## Contactors Terminal Tightening Torque Chart

Part Number	Terminal Size	Cable Size Maximum	Applicable Max. Width for Ring Terminal	Tightening Torque
3NC4Q0xxx	M10	300MCM [152mm²]	36.5 mm [1.44 in]	15-20 N·m [133-177 lb·in]
3NC4H0xxx	M10	300MCM [152mm²]	36.5 mm [1.44 in]	15-20 N·m [133-177 lb·in]
3NC5F0xxx 3NC5H0xxx	M12	400MCM [203mm²]	44.5 mm [1.75 in]	35-45 N·m [310-399 lb·in]

## Contactors Life Expectancy Performance Data

Model	Current Capacity Make/Break	Operating Cycles per Hour	Life Expectancy (million operations)	
			Electrical	Mechanical
3NC4Qxxxx through 3NC5Fxxxx	12xle/10xle	1200	1	5
3NC5Hxxxx	12xle/10xle	1200	0.5	5

Note: Rated operational current. Electrical life test: Conforming to IEC947-4-1, AC3. The endurance test complies with the requirements of international standard IEC, JIS and JEM.

Note: Super Magnet Coils on 3NC4 and 3NC5 series contactors have internal surge suppression. See diagram below.

## Optional Accessories

### Terminal covers


Prevent contact with electrified terminals.



**SZ-N8T**



**SZ-N11T**

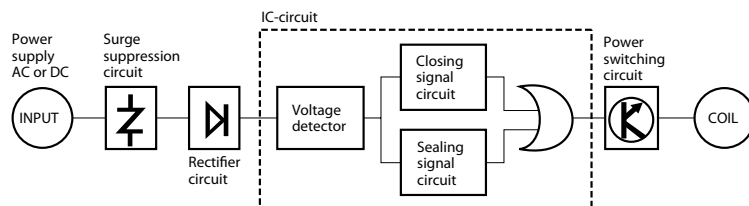



## Odyssey Series Contactor Terminal Covers

Part Number	Price	Description	Applicable Contactors
<b>SZ-N8T</b>	\$0dvs:	Terminal cover for line or load side. Prevents contact with electrified contactor terminals.	3NC4Qxxxx, 3NC4Hxxxx contactors
<b>SZ-N11T</b>	\$0dvq:		3NC5Fxxxx, 3NC5Hxxxx contactors

# Fuji Odyssey Series 3N Contactors

## Dimensions (mm)



3NC4Q0#22  
3NC4H0#22

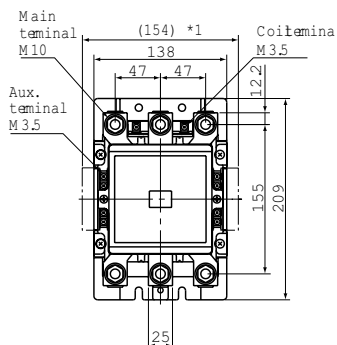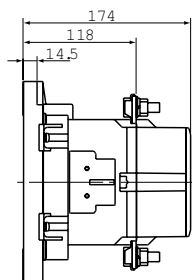

\* 1Aux. contact block is mounted

Weight: 49kg


3NC5F0#22  
3NC5H0#22

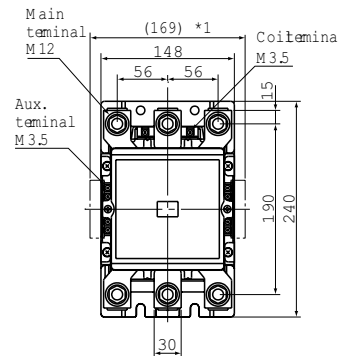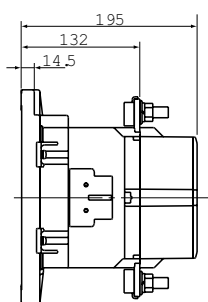

\* 1Aux. contact block is mounted

Weight: 7.8kg

## Mounting Dimensions

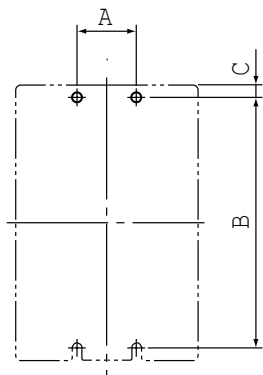


Frame Size	A	B	C	Screw Size
3NC4Qxxxx	45	190	9.5	4-M6
3NC4Hxxxx	45	190	9.5	4-M6
3NC5Fxxxx	60	220	10	4-M8
3NC5Hxxxx	60	220	10	4-M8



## Wiring Diagrams

### Non-reversing Contactors

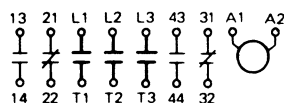

# Fuji Odyssey Series 3N Overload Relays

## General Information

- Use with Odyssey 3N series contactors.
- Protects motor windings from burning due to overloads, locked rotor currents, or open phases.

### Agency approvals:

- UL listed file E42419, Standard UL 508
- cUL listed file E42419, Standard CSA C22.2 No. 14
- CE: LVD EN60947-4-1

**3NK4QL****3NK4HN****3NK5HQ**

Odyssey Series Overload Relays						
Part Number	Fuji Type	Price	Adjustable Current Range (A)	Frame Width	Compatible Contactor	Trip Class IEC 60947-4-1
<a href="#">3NK4QL</a>	TK-N8	\$;00dt?:	85 - 125	119mm [4.69 in]	3NC4Qxxxx	10A
<a href="#">3NK4QN</a>	TK-N8	\$00dvd:	110 - 160			
<a href="#">3NK4QP</a>	TK-N8	\$00dve:	125 - 185			
<a href="#">3NK4HP</a>	TK-N10	\$;00dt_:	125 - 185	138mm [5.43 in]	3NC4Hxxxx	20
<a href="#">3NK4HQ</a>	TK-N10	\$;00dt#:	160 - 240			
<a href="#">3NK5HQ</a>	TK-N12	\$00dvh:	160 - 240	142mm [5.59 in]	3NC5Fxxxx, 3NC5Hxxxx	20
<a href="#">3NK5HR</a>	TK-N12	\$-00dvi:	200 - 300			
<a href="#">3NK5HS</a>	TK-N12	\$-00dvj:	240 - 360		3NC5Hxxxx	

## Specifications


Overload Relay Alarm Contact Ratings				
AC Ratings ( note 1 )			DC Ratings ( note 1 )	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
<b>C600</b>	1800	180	---	---

### Notes:

1. NEMA ICS 5-2000. For more information, refer to Control Circuit Contact Electrical Ratings.

Wire Terminal Tightening Torque Chart					
Part Number	Contactor or Starter	Terminal Size	Cable Size Maximum	Applicable Max. Width for Ring Terminal	Tightening Torque
<a href="#">3NK4Qx</a>	3NC4Q0	M10	300MCM (152mm <sup>2</sup> )	36.5 mm	133-177 in.lbs., 15-20 Nm
<a href="#">3NK4Hx</a>	3NC4H0	M10	300MCM (152mm <sup>2</sup> )	36.5 mm	133-177 in.lbs., 15-20 Nm
<a href="#">3NK5Hx</a>	3NC5F0	M12	400MCM (203mm <sup>2</sup> )	44.5 mm	310-399 in.lbs., 35-45 Nm
	3NC5H0				

# Fuji Odyssey Series 3N Overload Relays Selection Tables

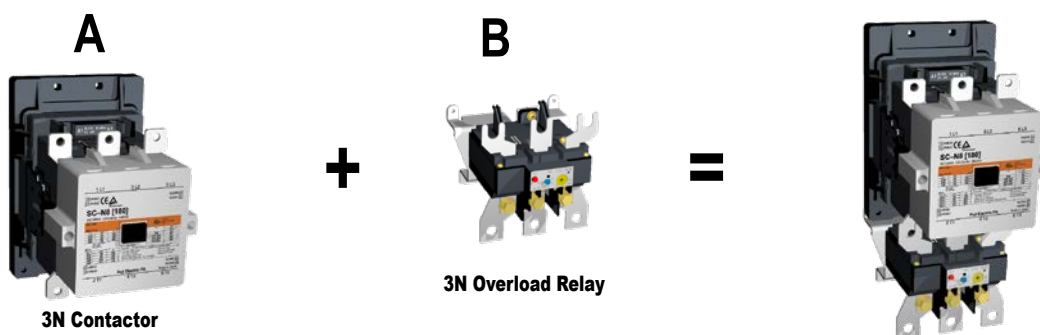

Step 1. Select an Odyssey 3N contactor from Column A based on motor voltage and horsepower.

Step 2. Select an Odyssey 3N overload relay from Column B to work with the contactor selected in Step 1. The motor full load current (FLA) should be within the adjustable current range of the overload relay.

## 220-240V 3-Phase Motor (60 to 150 hp)

Motor Rating		A	B	
HP	Motor Full Load Amperage (FLA) (See Note 1)	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
60	154	3NC4Q0x22	<a href="#">3NK4QN</a>	110 to 160 Amps
75	192	3NC4H0x22	<a href="#">3NK4HQ</a>	160 to 240 Amps
100	248	3NC5F0x22	<a href="#">3NK5HR</a>	200 to 300 Amps
125	312	3NC5H0x22	<a href="#">3NK5HS</a>	240 to 360 Amps
150	360	3NC5H0x22	<a href="#">3NK5HT</a>	300 to 450 Amps

Note 1: Per NEC 2005 Table 430.250

## 440-480V 3-Phase Motor (125 to 300 hp)

Motor Rating		A	B	
HP	Motor Full Load Amperage (FLA) (See Note 1)	Contactor	Overload Relay	
			Part Number	Adjustable Current Range
125	156	3NC4Q0x22	<a href="#">3NK4QP</a>	125 to 185 Amps
150	180	3NC4H0x22	<a href="#">3NK4HQ</a>	160 to 240 Amps
200	240	3NC5F0x22	<a href="#">3NK5HR</a>	200 to 300 Amps
250	302	3NC5H0x22	<a href="#">3NK5HS</a>	240 to 360 Amps
300	361	3NC5H0x22	<a href="#">3NK5HT</a>	300 to 450 Amps

Note 1: Per NEC 2005 Table 430.250

# Fuji Odyssey Series 3N Overload Relays


## Specifications

### Ambient temperature compensator

Overload relays are provided with an ambient temperature compensator. Their characteristics limit current value changes to approximately 10% as the ambient temperature changes between  $-5^{\circ}\text{C}$  and  $40^{\circ}\text{C}$ .


### Open-phase protection

### Compensation characteristics (Average value)

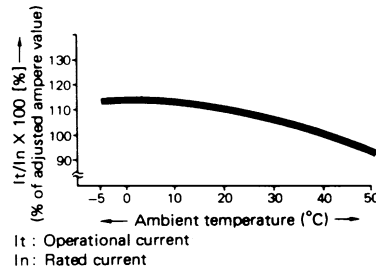


### 3NK4Qx

#### Cold start

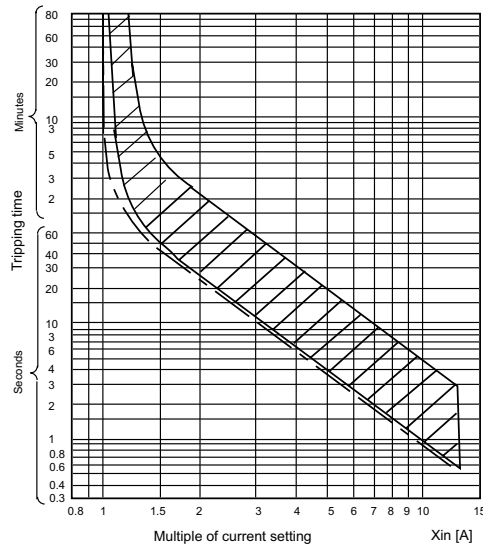


#### Hot start

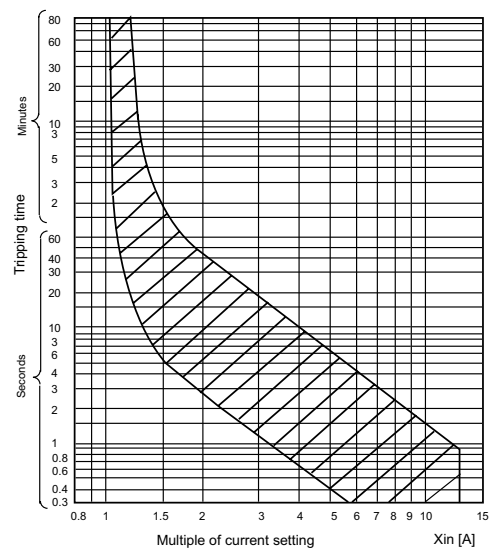


### 3NK4Hx, 3NK5Hx

#### Cold start

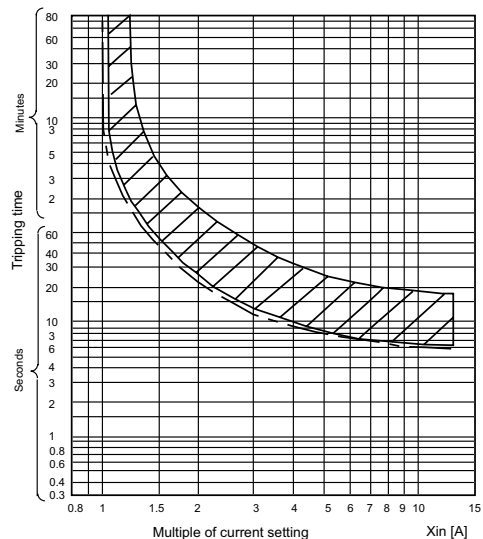

#### Hot start

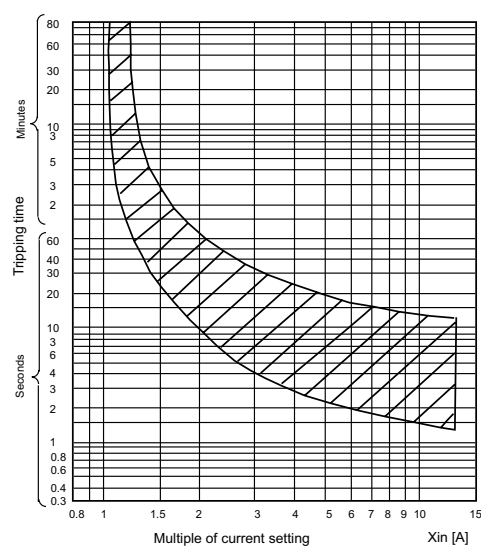

# Fuji Odyssey Series 3N Overload Relays

## Optional Accessories

### Terminal covers

NOTE: Larger terminal covers may require some adjustment for proper fit.



**SZ-WN8T**



**SZ-WN10T**



**SZ-WN11T**




### Odyssey Series Overload Relay Terminal Covers


Part number	Price	Description	Applicable Contactors, Overload Relays
<b>SZ-WN8T</b>	\$00dvv:	Terminal cover for load side.	3NK4Qx overload relays
<b>SZ-WN10T</b>	\$00dvt:	Prevents contact with electrified	3NK4Hx overload relays
<b>SZ-WN11T</b>	\$00dvv:	contactor terminals.	3NK5Hx overload relays

## Dimensions [mm]


3NK4Qx

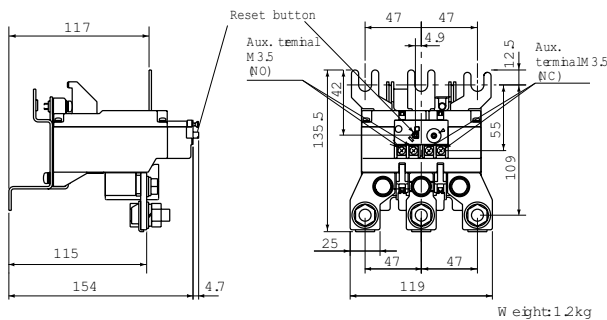

3NK4Hx

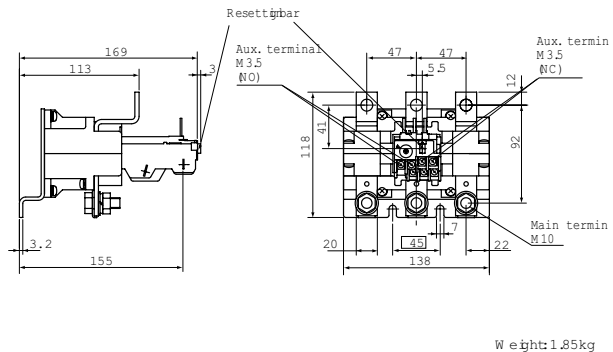


3NK5Hx

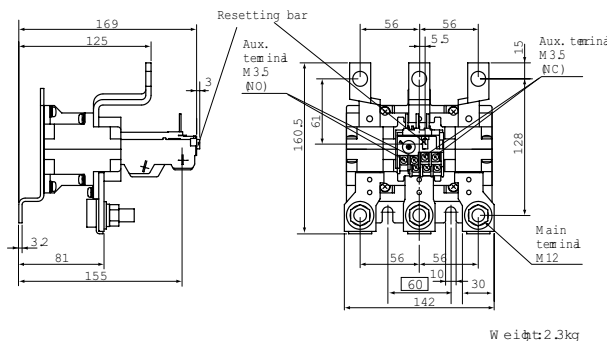


## Wiring Diagrams

3NK4Qx



3NK4 H x, 3NK 5H x

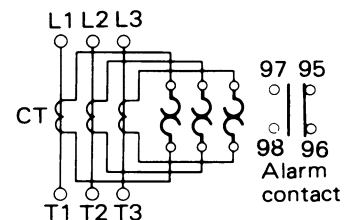




# Fuji Duo Series SC-E Contactors

## Accessories

### Optional accessories

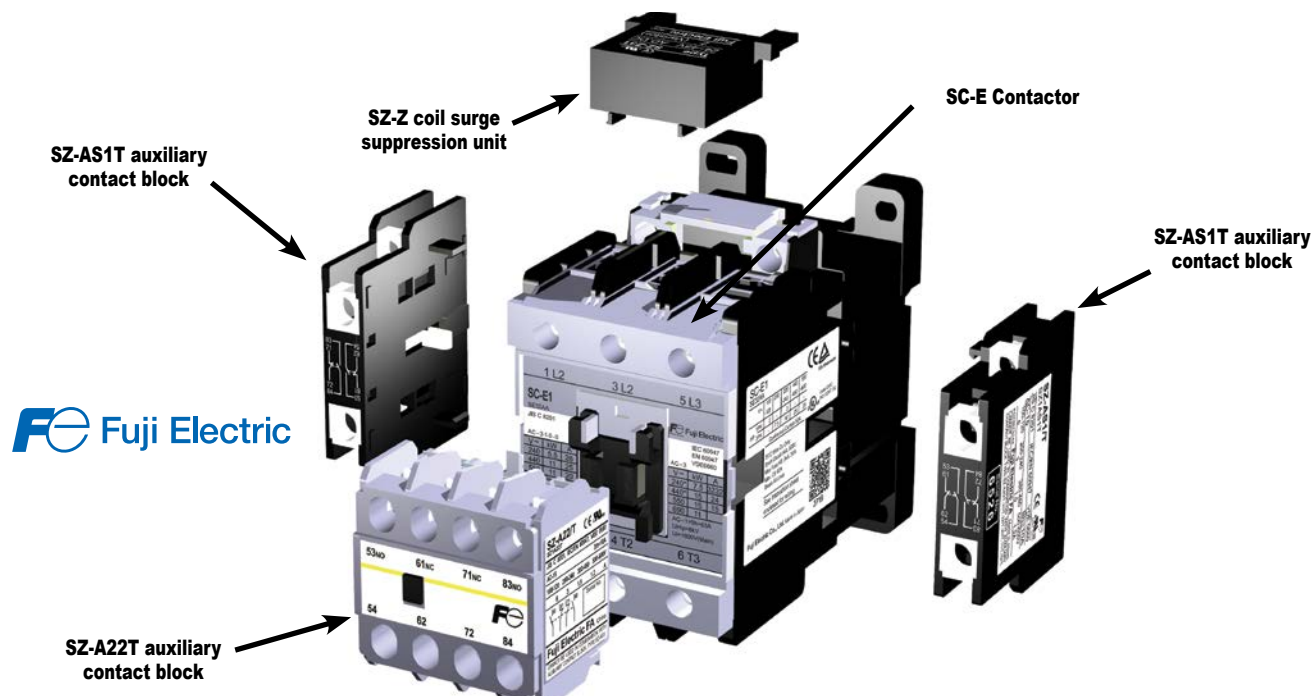

#### Auxiliary contact blocks with terminal covers

Maximum auxiliary contact blocks:

2 side mounted (1 per side) OR 1 front mounted. The front and side blocks cannot be mounted together on the same contactor.



**SZ-A22T**



**SZ-A11T**



**SZ-AS1T**



**SZ-AS2T**

#### Caution on use:

1. Front mounting auxiliary contact block and side mounting block cannot be attached to one contactor at the same time.
2. Only one front mounting block can be attached to one contactor.
3. Where interlock unit is already attached, side mounting auxiliary contact block can be attached on one side only.

#### Auxiliary Contact Blocks with Terminal Covers

Part Number	Price	Applicable Contactor	Mounting	Number of Contacts	Contact Arrangement
<a href="#"><u>SZ-A22T</u></a>	\$0du1:	SC-E02(G)-xxx to E4(G)-xxx	Front mounting	4	2NO + 2NC
<a href="#"><u>SZ-A20T</u></a>	\$0du0:			2	2NO
<a href="#"><u>SZ-A11T</u></a>	\$;0dt:				1NO + 1NC
<a href="#"><u>SZ-AS1T</u></a>	\$0du2:	SC-E02(G)-xxx to E4(G)-xxx	Side mounting	2	1NO + 1NC
<a href="#"><u>SZ-AS2T</u></a>	\$0du3:			2	1NO + 1NC

#### Accessory Auxiliary Contact Ratings - UL and CSA

NEMA ICS 5-2000 Ratings ( note 1 )				
AC Ratings			DC Ratings	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
A600	7200	720	Q300	69

Note: For more information, refer to Control Circuit Contact Electrical Ratings

Accessory Auxiliary Contact Ratings - IEC and JIS continued on next page.