

ACUAMP® GFS Series AC Ground Fault Sensors



Applications

Personnel Protection (typically 5mA)

- Detects sensitive ground fault conditions, which may be injurious to personnel and processes
- Functions as sensor and alarm trigger when part of an overall ground fault protection system

Equipment Protection (typically 10mA or 30mA)

For applications where personal protection is not the primary concern, higher setpoint capability helps eliminate nuisance tripping while still providing adequate ground fault detection to protect machine electronics.

Regulatory

Meets requirements as stipulated by governmental and industrial regulatory groups for ground fault sensing.

Features

- **Five-year warranty**
- **Wide Range of Options:** Mechanical relay outputs with Auto or Manual reset.
- **Setpoint Options:** Field selectable 5mA, 10mA or 30mA setpoints makes user adjustments fast, sure and convenient.
- **Compatible with Standard Equipment:** Applicable on single- and three-phase systems. Ideal for use with shunt trip breakers. Magnetically isolated from monitored circuit and control power.
- **Built-in feet with optional 35mm DIN rail adapter available.** Large aperture version has integral 35mm DIN rail mounting.
- **Not compatible with VFD or SCR Outputs**

Agency Approvals



Ground fault sensors help protect people, products, and processes from damage that can be caused by ground fault conditions. The GFS series monitors all current-carrying conductors in grounded single and three-phase delta or wye systems.

GFS series sensors offer jumper-selectable setpoints of 5, 10 or 30 mA. This series is available in fixed-core models only.

GFS & GFSL Series Ground Fault Sensors				
Part Number	Description	Pcs/Pkg	Wt (lb)	Price
GFS30-M1A-24-F	Ground fault sensor, SPST-N.O., manual reset, 5/10/30 mA trip, 24 VAC/DC	1	0.50	\$200.00
GFS30-M1B-24-F	Ground fault sensor, SPST-N.C., manual reset, 5/10/30 mA trip, 24 VAC/DC	1	0.50	\$200.00
GFS30-D1C-24-F	Ground fault sensor, SPDT de-energized auto reset, 5/10/30 mA trip, 24 VAC/DC	1	0.50	\$136.00
GFS30-E1C-24-F	Ground fault sensor, SPDT energized auto reset, 5/10/30 mA trip, 24 VAC/DC	1	0.50	\$145.00
GFS30-M1A-120A-F	Ground fault sensor, SPST-N.O., manual reset, 5/10/30 mA trip, 120VAC	1	0.50	\$200.00
GFS30-M1B-120A-F	Ground fault sensor, SPST-N.C., manual reset, 5/10/30 mA trip, 120VAC	1	0.50	\$200.00
GFS30-D1C-120A-F	Ground fault sensor, SPDT de-energized auto reset, 5/10/30 mA trip, 120VAC	1	0.50	\$136.00
GFS30-E1C-120A-F	Ground fault sensor, SPDT energized auto reset, 5/10/30 mA trip, 120VAC	1	0.50	\$145.00
GFSL30-M1A-120A-F	Ground fault sensor, large aperture, SPST-N.O., manual reset, 5/10/30 mA trip, 120VAC	1	0.50	\$230.00
GFSL30-M1B-120A-F	Ground fault sensor, large aperture, SPST-N.C., manual reset, 5/10/30 mA trip, 120VAC	1	0.50	\$230.00
Accessories				
DRA-2	DIN rail adapters, 1.69"x0.39"x0.75" [43x10x19 mm]	2	0.40	\$3.50


ACUAMP® GFS Series AC Ground Fault Sensors

GFS & GFSL Series Specifications		
Models Available	GFS	GFSL
Power Supply	Model 24-F: 24 VAC/DC (20.4-27.6 VAC or 19.2-30 VDC) Model 120A-F: 120VAC (66-132 VAC), 50/60 Hz	120 VAC (66-132 VAC), 50/60 Hz
Monitored Circuit	1500 VAC max, 50-400 Hz	600VAC line-to-line max., 50/60 Hz
Output Signal	SPST or SPDT	SPST (normally open or normally closed)
Output Rating	Manual: SPST Relay, 1A @ 125VAC, 2A @ 30VDC, Auto: SPDT Relay, 1A @ 125VAC, 2A @ 30VDC	Manual Reset: SPST Relay, 1A @ 125VAC, 2A @ 30VDC
Off State Leakage	None	None
Power Consumption	2.5 VA max	2.5 VA max
Setpoint (Trip Point)	5, 10 and 30 mA jumper select	5, 10 and 30 mA jumper select
Response Time	200ms @ 50% above setpoint	200ms @ 5% over setpoint 60ms @ 50% over setpoint 15ms @ 500% over setpoint
Sensing Aperture	0.75" [19.1 mm] diameter	1.82" [46mm] diameter
Isolation Voltage	5kV (tested)	UL tested to 1,048VAC
Case	UL 94V-0 Flammability Rated	UL 94V-0 Flammability Rated
Environmental	Operating temperature: -4 to 122°F (-20 to 50°C)	
	Relative humidity: 0-95% RH, Non-condensing	
	Pollution Degree 2	
	Altitude to 2000 meters	
Agency Approvals*	UL/cUL 1053 (E343037), CE	UL/cUL 508 (E222847), CE


* To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page at www.AutomationDirect.com

Connections


GFS M1A and M1B Models

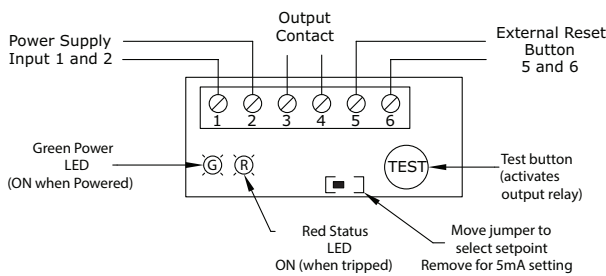

GFSL M1A and M1B Models

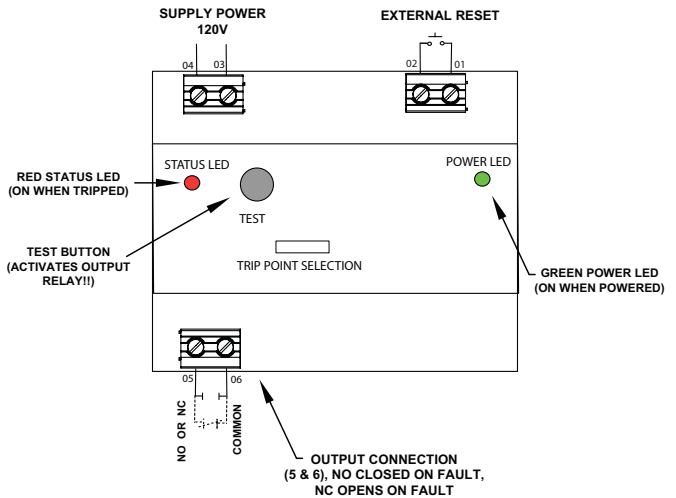

GFS D1C and E1C Models

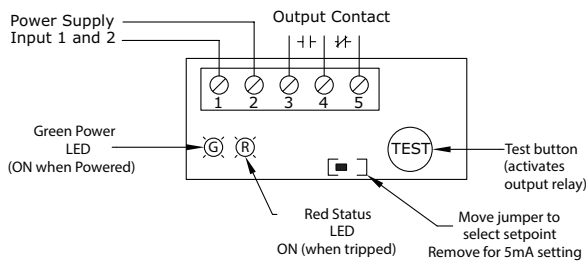

ACUAMP® GFS Series AC Ground Fault Sensors

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Limit Switches

Sensors: Encoders

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing


Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

Dimensions

Inches [mm]

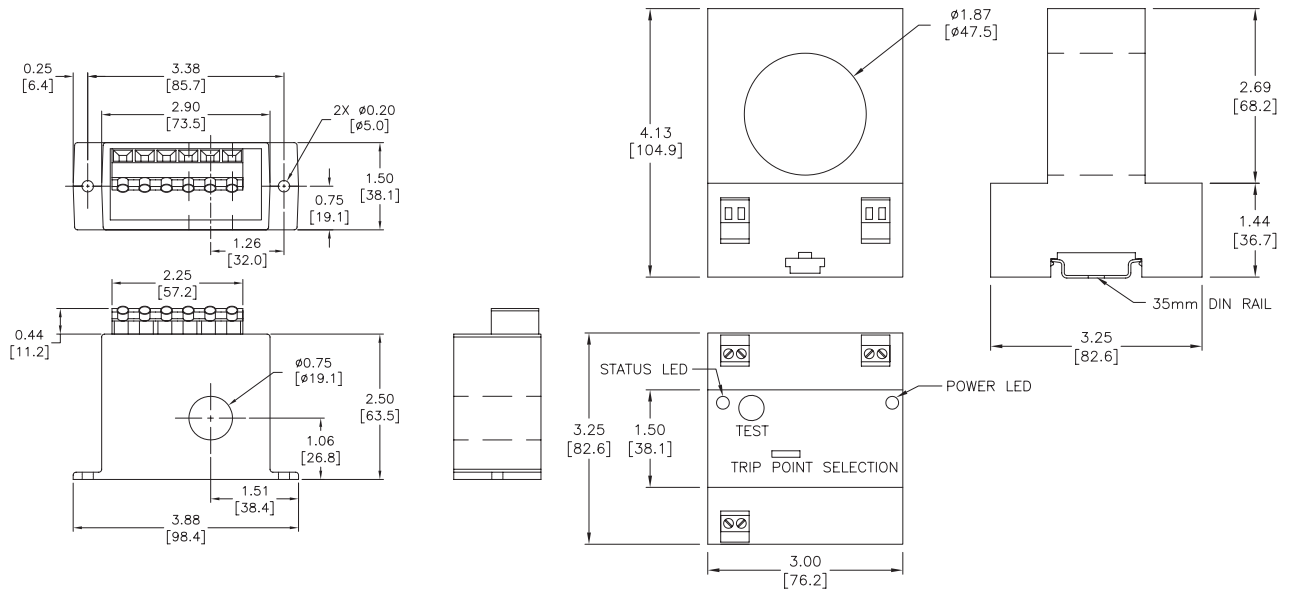

GFS M1A and M1B Models

GFSL M1A and M1B Models

GFS D1C and E1C Models

See our website www.AutomationDirect.com for complete Engineering drawings.



Ground Fault Sensors Operation and Applications


Principle of Operation

“Zero Sum” Operating Principle:

In three-phase delta and wye systems, under normal conditions current in the ‘hot’ leg of a two-wire load is equal in magnitude but opposite in sign to the

current in the neutral leg. As a result, the electromagnetic fields surrounding these two conductors cancel each other, producing a “zero sum current.” As soon as current leaks to ground

(fault condition), the two currents become imbalanced and a net magnetic field results. GFS Series sensors monitor this field and trip alarm contacts when the leakage rises above setpoint.

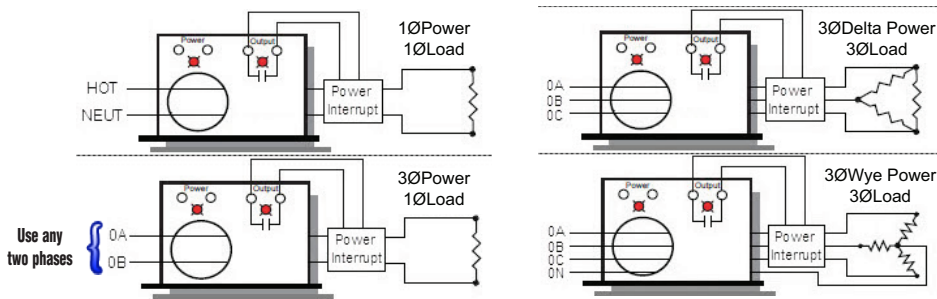

Operation/Setup

Auto Reset Sensors (E1C and D1C)

GFS Auto Reset sensors monitor all current carrying conductors and will trip when a ground fault is sensed. The output of these sensors will automatically reset when the ground fault condition is cleared. Select from three factory calibrated setpoints by moving the setpoint jumper to the desired position.

- 5mA setpoint: Detect sensitive ground fault conditions that may be injurious to personnel or processes.
- 10 mA and 30 mA setpoints: These higher setpoints help eliminate nuisance tripping while still providing adequate ground fault protection for machine electronics.

Normally Energized Models (E1C)

- Used to detect both ground faults and loss of control power

	NO POWER		CONTROL POWER APPLIED			
	Output	LED	No Fault		Fault Detected	
N.C.	Closed	OFF	Open	OFF	Closed	ON
N.O.	Open	OFF	Closed	OFF	Open	ON

Normally De-energized Models (D1C)

- Used to detect ground faults


	NO POWER		CONTROL POWER APPLIED			
	Output	LED	No Fault		Fault Detected	
N.C.	Closed	OFF	Closed	OFF	Open	ON
N.O.	Open	OFF	Open	OFF	Closed	ON

Manual Reset Sensors (M1A and M1B)


GFS Manual Reset Sensors monitor all current carrying conductors and will trip when a ground fault is sensed. When the output of these sensors trips it will latch in the tripped position even after the ground fault is cleared. If control power is removed, the sensor remains in its last output state. To reset the sensor, the ground fault condition must be removed and a momentary dry contact closed at the external reset terminals

- Models with M1A suffix: The contact is normally open with no ground fault condition, and closed when a ground fault is sensed.
- Models with M1B suffix: The contact is normally closed with no ground fault condition, and open when a ground fault is sensed.

Pump Seal Failure

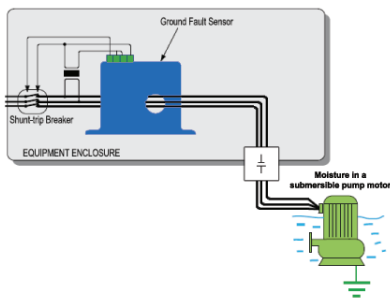

Insulation Breakdown Monitoring

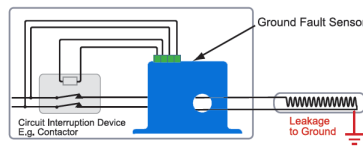

Snow Melting or Soil Warming System

