

# EAT•N FAZ-NA Miniature Circuit Breakers



## Overview

Eaton FAZ-NA and FAZ-NA-L miniature circuit breakers offer optimum and efficient protection for branch and control circuits up to 63 amps. The FAZ-NA and FAZ-NA-L series is available with B, C or D trip characteristics in accordance with UL 489. These circuit breakers are current limiting, which means they interrupt fault currents within one half cycle of the fault. The FAZ-NA and FAZ-NA-L series units are DIN-rail mountable and can be used in feeder and branch circuit applications.

## Listings

- UL Listed under UL 489  
Category DIVQ File E235139  
Busbar Accessory  
Category NMTR2.E257181  
Category DIHS E257181  
Category NMTR E307559
- CSA 22.2, No. 5 File 204453
- CE LVD 2014/35/EU
- CE RoHS 2011/65/EU
- IEC/EN 60947-2

## Features and Benefits

- Dual rated for AC or DC applications
- Complete range of UL 489 listed DIN rail mounted miniature circuit breakers up to 63 amp current rating
- Single-pole, two-pole and three-pole models
- Current limiting design provides fast short circuit interruption that reduces the let-through energy, which can damage the circuit
- Suitable for reverse feed applications Suitable for branch circuit device protection
- Thermal-magnetic overcurrent protection – three levels of short circuit protection, categorized by B, C and D curves
  - B-curve magnetic trip point: 3 to 5 times the rated current, typically used for resistive loads such as conductors or heaters.
  - C-curve magnetic trip point: 5 to 10 times the rated current, typically used for small transformers, pilot devices, etc.
  - D-curve magnetic trip point: 10 to 20 times the rated current, typically used for transformers or very high inductive loads.
- Trip-free design – breaker cannot be defeated by holding the handle in the "ON" position Captive screws cannot be lost
- SWD (switching duty) rated circuit breaker – suitable for switching fluorescent lighting loads (In m 20A)
- Fulfills UL 489, CSA C22.2 No.5 and also IEC 60947-2 Standard
- Can also be used in applications for which UL 1077 or CSA C22.2 No.235 are also allowed
- Field installable shunt trip and auxiliary switch subsequent mounting Module width of only 17.7 mm [0.70 in] (per pole) Contact position indicator (red / green)
- 35mm DIN-rail mountable, utilizing spring clip

## Applications

### Feeder and Branch Circuit Protection

- PLC I/O points
- Motor control circuits
- Control instrumentation
- Power supplies
- Relays
- Convenience receptacle circuits (internal / external)
- Load circuits leaving the equipment (external)
- HACR Equipment (Heating Air Conditioning, Refrigeration)
- Computers
- UPS
- Power conditioners



# EAT•N FAZ-NA Miniature Circuit Breakers

## Tripping Characteristics

Eaton FAZ-NA and FAZ-NA-L miniature circuit breakers are available with "B" or "C" or "D" tripping characteristics.

Type B trip curve: 3 to 5 times  $I_n$

B-curve devices are suitable for resistive loads such as conductors or heaters.


Type C trip curve: 5 to 10 times  $I_n$

C-curve devices are suitable for applications where medium levels of inrush current are expected. Applications include small transformers, lighting, pilot devices, control circuits and coils. C-curve devices provide a medium magnetic trip point.


Type D trip curve: 10 to 20 times  $I_n$

D-curve devices are suitable for applications where high levels of inrush current are expected. The high magnetic trip point prevents nuisance tripping in high inductive applications such as motors, transformers and power supplies.

Eaton FAZ-NA and FAZ-NA-L devices are current limiting, which means they interrupt fault currents within one half cycle of the fault. Current limiting devices offer superior protection by reducing peak let-through current and energy.

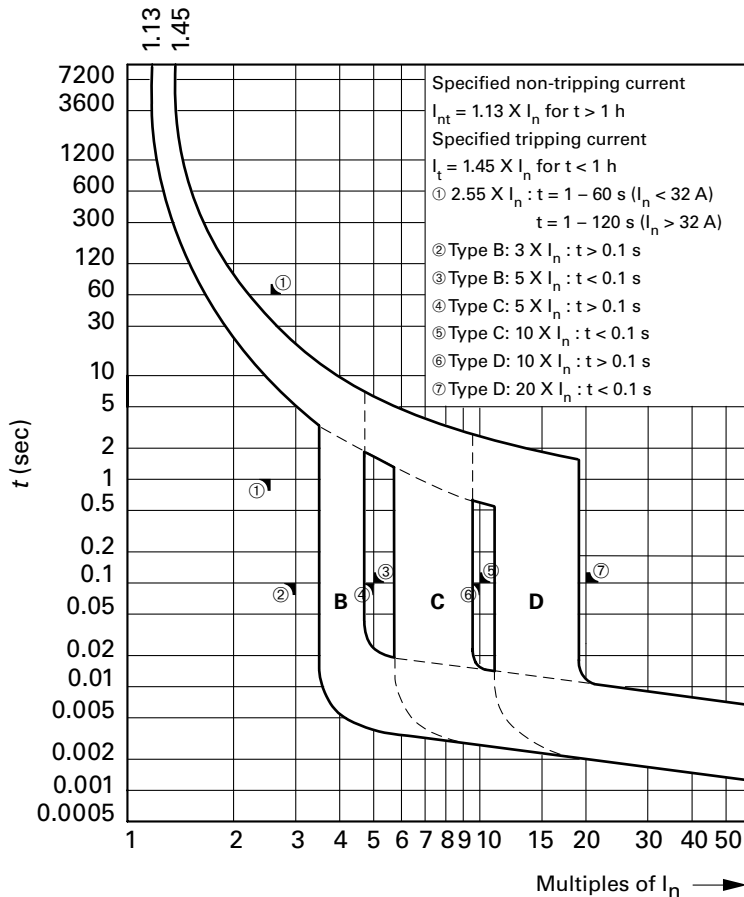

**Labeling**  
 The front of each Eaton FAZ-NA and FAZ-NA-L miniature circuit breaker is labeled for positive identification.

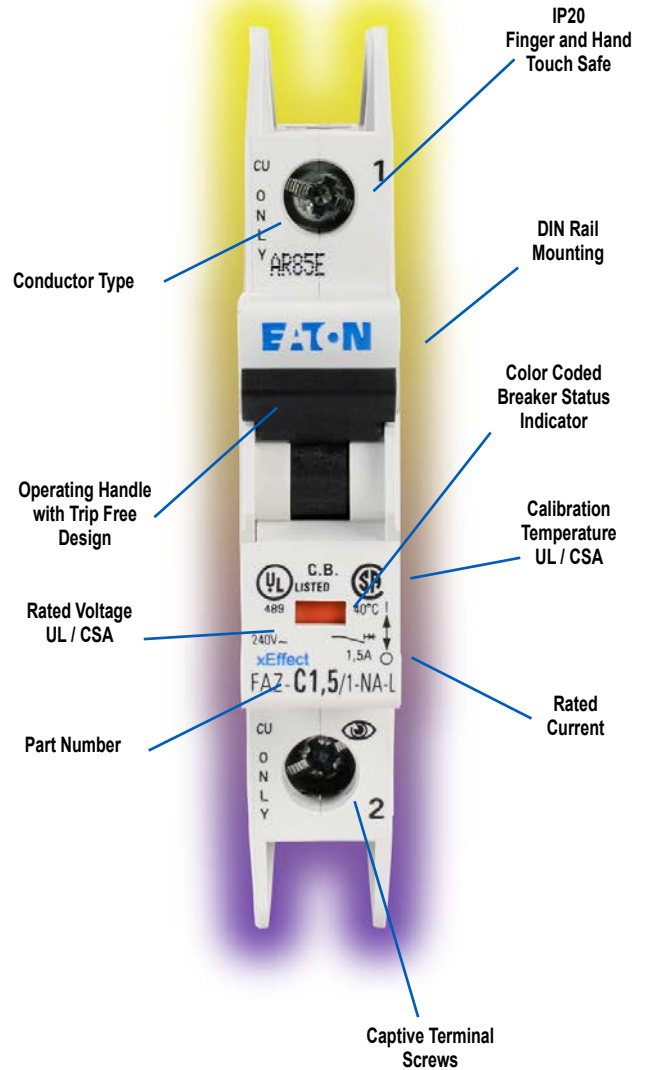

# EAT•N FAZ-NA Series Selection Guide



**Single-Pole**

FAZ-NA – Single-Pole 480/277 VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	–		<a href="#">FAZ-C0P5-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D0P5-1-NA-SP</a>	\$35.00
1	<a href="#">FAZ-B1-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C1-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D1-1-NA-SP</a>	\$35.00
1.5	<a href="#">FAZ-B1P5-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C1P5-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D1P5-1-NA-SP</a>	\$35.00
2	<a href="#">FAZ-B2-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C2-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D2-1-NA-SP</a>	\$35.00
3	<a href="#">FAZ-B3-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C3-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D3-1-NA-SP</a>	\$35.00
4	<a href="#">FAZ-B4-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C4-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D4-1-NA-SP</a>	\$35.00
5	<a href="#">FAZ-B5-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C5-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D5-1-NA-SP</a>	\$35.00
6	<a href="#">FAZ-B6-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C6-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D6-1-NA-SP</a>	\$32.00
7	<a href="#">FAZ-B7-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C7-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D7-1-NA-SP</a>	\$32.00
8	<a href="#">FAZ-B8-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C8-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D8-1-NA-SP</a>	\$32.00
10	<a href="#">FAZ-B10-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C10-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D10-1-NA-SP</a>	\$32.00
13	<a href="#">FAZ-B13-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C13-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D13-1-NA-SP</a>	\$32.00
15	<a href="#">FAZ-B15-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C15-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D15-1-NA-SP</a>	\$32.00
16	<a href="#">FAZ-B16-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C16-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D16-1-NA-SP</a>	\$32.00
20	<a href="#">FAZ-B20-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C20-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D20-1-NA-SP</a>	\$32.00
25	<a href="#">FAZ-B25-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C25-1-NA-SP</a>	\$23.50	<a href="#">FAZ-D25-1-NA-SP</a>	\$32.00
30	<a href="#">FAZ-B30-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C30-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D30-1-NA-SP</a>	\$35.00
32	<a href="#">FAZ-B32-1-NA-SP</a>	\$29.00	<a href="#">FAZ-C32-1-NA-SP</a>	\$32.00	<a href="#">FAZ-D32-1-NA-SP</a>	\$35.00



**Two-Pole**

FAZ-NA – Two-Pole 480/277 VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	–		<a href="#">FAZ-C0P5-2-NA</a>	\$66.00	<a href="#">FAZ-D0P5-2-NA</a>	\$69.00
1	<a href="#">FAZ-B1-2-NA</a>	\$67.00	<a href="#">FAZ-C1-2-NA</a>	\$69.00	<a href="#">FAZ-D1-2-NA</a>	\$69.00
1.5	<a href="#">FAZ-B1P5-2-NA</a>	\$67.00	<a href="#">FAZ-C1P5-2-NA</a>	\$69.00	<a href="#">FAZ-D1P5-2-NA</a>	\$69.00
2	<a href="#">FAZ-B2-2-NA</a>	\$67.00	<a href="#">FAZ-C2-2-NA</a>	\$69.00	<a href="#">FAZ-D2-2-NA</a>	\$69.00
3	<a href="#">FAZ-B3-2-NA</a>	\$67.00	<a href="#">FAZ-C3-2-NA</a>	\$69.00	<a href="#">FAZ-D3-2-NA</a>	\$69.00
4	<a href="#">FAZ-B4-2-NA</a>	\$67.00	<a href="#">FAZ-C4-2-NA</a>	\$69.00	<a href="#">FAZ-D4-2-NA</a>	\$69.00
5	<a href="#">FAZ-B5-2-NA</a>	\$67.00	<a href="#">FAZ-C5-2-NA</a>	\$69.00	<a href="#">FAZ-D5-2-NA</a>	\$69.00
6	<a href="#">FAZ-B6-2-NA</a>	\$62.00	<a href="#">FAZ-C6-2-NA</a>	\$63.00	<a href="#">FAZ-D6-2-NA</a>	\$63.00
7	<a href="#">FAZ-B7-2-NA</a>	\$62.00	<a href="#">FAZ-C7-2-NA</a>	\$63.00	<a href="#">FAZ-D7-2-NA</a>	\$63.00
8	<a href="#">FAZ-B8-2-NA</a>	\$62.00	<a href="#">FAZ-C8-2-NA</a>	\$63.00	<a href="#">FAZ-D8-2-NA</a>	\$63.00
10	<a href="#">FAZ-B10-2-NA</a>	\$62.00	<a href="#">FAZ-C10-2-NA</a>	\$66.00	<a href="#">FAZ-D10-2-NA</a>	\$63.00
13	<a href="#">FAZ-B13-2-NA</a>	\$62.00	<a href="#">FAZ-C13-2-NA</a>	\$63.00	<a href="#">FAZ-D13-2-NA</a>	\$63.00
15	<a href="#">FAZ-B15-2-NA</a>	\$62.00	<a href="#">FAZ-C15-2-NA</a>	\$63.00	<a href="#">FAZ-D15-2-NA</a>	\$63.00
16	<a href="#">FAZ-B16-2-NA</a>	\$62.00	<a href="#">FAZ-C16-2-NA</a>	\$63.00	<a href="#">FAZ-D16-2-NA</a>	\$63.00
20	<a href="#">FAZ-B20-2-NA</a>	\$62.00	<a href="#">FAZ-C20-2-NA</a>	\$63.00	<a href="#">FAZ-D20-2-NA</a>	\$63.00
25	<a href="#">FAZ-B25-2-NA</a>	\$62.00	<a href="#">FAZ-C25-2-NA</a>	\$63.00	<a href="#">FAZ-D25-2-NA</a>	\$63.00
30	<a href="#">FAZ-B30-2-NA</a>	\$62.00	<a href="#">FAZ-C30-2-NA</a>	\$63.00	<a href="#">FAZ-D30-2-NA</a>	\$63.00
32	<a href="#">FAZ-B32-2-NA</a>	\$67.00	<a href="#">FAZ-C32-2-NA</a>	\$69.00	<a href="#">FAZ-D32-2-NA</a>	\$69.00

Note: Eaton product part numbers will contain a [.] instead of [P] and a [/] instead of a [-]. Example: FAZ-C0P5-3-NA = FAZ-C0.5/3-NA  
 Note: Eaton parts available for sale to North America locations only.

# EATON FAZ-NA Series Selection Guide



Three-Pole

FAZ-NA – Three-Pole 480/277 VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	–		<a href="#">FAZ-C0P5-3-NA</a>	\$107.00	<a href="#">FAZ-D0P5-3-NA</a>	\$107.00
1	<a href="#">FAZ-B1-3-NA</a>	\$99.00	<a href="#">FAZ-C1-3-NA</a>	\$98.00	<a href="#">FAZ-D1-3-NA</a>	\$107.00
1.5	<a href="#">FAZ-B1P5-3-NA</a>	\$99.00	<a href="#">FAZ-C1P5-3-NA</a>	\$98.00	<a href="#">FAZ-D1P5-3-NA</a>	\$107.00
2	<a href="#">FAZ-B2-3-NA</a>	\$99.00	<a href="#">FAZ-C2-3-NA</a>	\$98.00	<a href="#">FAZ-D2-3-NA</a>	\$107.00
3	<a href="#">FAZ-B3-3-NA</a>	\$99.00	<a href="#">FAZ-C3-3-NA</a>	\$103.00	<a href="#">FAZ-D3-3-NA</a>	\$107.00
4	<a href="#">FAZ-B4-3-NA</a>	\$99.00	<a href="#">FAZ-C4-3-NA</a>	\$103.00	<a href="#">FAZ-D4-3-NA</a>	\$107.00
5	<a href="#">FAZ-B5-3-NA</a>	\$99.00	<a href="#">FAZ-C5-3-NA</a>	\$103.00	<a href="#">FAZ-D5-3-NA</a>	\$107.00
6	<a href="#">FAZ-B6-3-NA</a>	\$95.00	<a href="#">FAZ-C6-3-NA</a>	\$98.00	<a href="#">FAZ-D6-3-NA</a>	\$98.00
7	<a href="#">FAZ-B7-3-NA</a>	\$95.00	<a href="#">FAZ-C7-3-NA</a>	\$98.00	<a href="#">FAZ-D7-3-NA</a>	\$98.00
8	<a href="#">FAZ-B8-3-NA</a>	\$95.00	<a href="#">FAZ-C8-3-NA</a>	\$98.00	<a href="#">FAZ-D8-3-NA</a>	\$98.00
10	<a href="#">FAZ-B10-3-NA</a>	\$95.00	<a href="#">FAZ-C10-3-NA</a>	\$98.00	<a href="#">FAZ-D10-3-NA</a>	\$98.00
13	<a href="#">FAZ-B13-3-NA</a>	\$95.00	<a href="#">FAZ-C13-3-NA</a>	\$98.00	<a href="#">FAZ-D13-3-NA</a>	\$98.00
15	<a href="#">FAZ-B15-3-NA</a>	\$95.00	<a href="#">FAZ-C15-3-NA</a>	\$98.00	<a href="#">FAZ-D15-3-NA</a>	\$98.00
16	<a href="#">FAZ-B16-3-NA</a>	\$95.00	<a href="#">FAZ-C16-3-NA</a>	\$98.00	<a href="#">FAZ-D16-3-NA</a>	\$98.00
20	<a href="#">FAZ-B20-3-NA</a>	\$95.00	<a href="#">FAZ-C20-3-NA</a>	\$98.00	<a href="#">FAZ-D20-3-NA</a>	\$98.00
25	<a href="#">FAZ-B25-3-NA</a>	\$95.00	<a href="#">FAZ-C25-3-NA</a>	\$98.00	<a href="#">FAZ-D25-3-NA</a>	\$98.00
30	<a href="#">FAZ-B30-3-NA</a>	\$95.00	<a href="#">FAZ-C30-3-NA</a>	\$98.00	<a href="#">FAZ-D30-3-NA</a>	\$98.00
32	<a href="#">FAZ-B32-3-NA</a>	\$95.00	<a href="#">FAZ-C32-3-NA</a>	\$107.00	<a href="#">FAZ-D32-3-NA</a>	\$107.00



Single-Pole

FAZ-NA and FAZ-NA-L Single-Pole 240VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	–		<a href="#">FAZ-C0P5-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D0P5-1-NA-L-SP</a>	\$23.00
1	<a href="#">FAZ-B1-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C1-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D1-1-NA-L-SP</a>	\$23.00
1.5	<a href="#">FAZ-B1P5-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C1P5-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D1P5-1-NA-L-SP</a>	\$23.00
2	<a href="#">FAZ-B2-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C2-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D2-1-NA-L-SP</a>	\$23.00
3	<a href="#">FAZ-B3-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C3-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D3-1-NA-L-SP</a>	\$23.00
4	<a href="#">FAZ-B4-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C4-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D4-1-NA-L-SP</a>	\$23.00
5	<a href="#">FAZ-B5-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C5-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D5-1-NA-L-SP</a>	\$23.00
6	<a href="#">FAZ-B6-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C6-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D6-1-NA-L-SP</a>	\$23.00
7	<a href="#">FAZ-B7-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C7-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D7-1-NA-L-SP</a>	\$23.00
8	<a href="#">FAZ-B8-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C8-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D8-1-NA-L-SP</a>	\$23.00
10	<a href="#">FAZ-B10-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C10-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D10-1-NA-L-SP</a>	\$23.00
13	<a href="#">FAZ-B13-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C13-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D13-1-NA-L-SP</a>	\$23.00
15	<a href="#">FAZ-B15-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C15-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D15-1-NA-L-SP</a>	\$23.00
16	<a href="#">FAZ-B16-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C16-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D16-1-NA-L-SP</a>	\$23.00
20	<a href="#">FAZ-B20-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C20-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D20-1-NA-L-SP</a>	\$23.00
25	<a href="#">FAZ-B25-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C25-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D25-1-NA-L-SP</a>	\$23.00
30	<a href="#">FAZ-B30-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C30-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D30-1-NA-L-SP</a>	\$23.00
32	<a href="#">FAZ-B32-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-C32-1-NA-L-SP</a>	\$23.00	<a href="#">FAZ-D32-1-NA-L-SP</a>	\$23.00
35	<a href="#">FAZ-B35-1-NA-SP</a>	\$34.00	<a href="#">FAZ-C35-1-NA-SP</a>	\$35.00	<a href="#">FAZ-D35-1-NA-SP</a>	\$35.00
40	<a href="#">FAZ-B40-1-NA-SP</a>	\$34.00	<a href="#">FAZ-C40-1-NA-SP</a>	\$35.00	<a href="#">FAZ-D40-1-NA-SP</a>	\$35.00
50	<a href="#">FAZ-B50-1-NA-SP</a>	\$34.00	<a href="#">FAZ-C50-1-NA-SP</a>	\$34.00	–	
63	<a href="#">FAZ-B63-1-NA-SP</a>	\$34.00	<a href="#">FAZ-C63-1-NA-SP</a>	\$34.00	–	

Note: Eaton product part numbers will contain a [.] instead of [ P ] and a [/] instead of a [ - ]. Example: FAZ-C0P5-3-NA = FAZ-C0.5/3-NA

Note: Eaton parts available for sale to North America locations only.



# EATON FAZ-NA Series Selection Guide



Two-Pole

FAZ-NA and FAZ-NA-L Two-Pole 240VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	—		<a href="#">FAZ-C0P5-2-NA-L</a>	\$47.00	<a href="#">FAZ-D0P5-2-NA-L</a>	\$47.00
1	<a href="#">FAZ-B1-2-NA-L</a>	\$47.00	<a href="#">FAZ-C1-2-NA-L</a>	\$47.00	<a href="#">FAZ-D1-2-NA-L</a>	\$47.00
1.5	<a href="#">FAZ-B1P5-2-NA-L</a>	\$47.00	<a href="#">FAZ-C1P5-2-NA-L</a>	\$47.00	<a href="#">FAZ-D1P5-2-NA-L</a>	\$47.00
2	<a href="#">FAZ-B2-2-NA-L</a>	\$47.00	<a href="#">FAZ-C2-2-NA-L</a>	\$47.00	<a href="#">FAZ-D2-2-NA-L</a>	\$47.00
3	<a href="#">FAZ-B3-2-NA-L</a>	\$47.00	<a href="#">FAZ-C3-2-NA-L</a>	\$47.00	<a href="#">FAZ-D3-2-NA-L</a>	\$47.00
4	<a href="#">FAZ-B4-2-NA-L</a>	\$47.00	<a href="#">FAZ-C4-2-NA-L</a>	\$47.00	<a href="#">FAZ-D4-2-NA-L</a>	\$47.00
5	<a href="#">FAZ-B5-2-NA-L</a>	\$47.00	<a href="#">FAZ-C5-2-NA-L</a>	\$47.00	<a href="#">FAZ-D5-2-NA-L</a>	\$47.00
6	<a href="#">FAZ-B6-2-NA-L</a>	\$47.00	<a href="#">FAZ-C6-2-NA-L</a>	\$47.00	<a href="#">FAZ-D6-2-NA-L</a>	\$47.00
7	<a href="#">FAZ-B7-2-NA-L</a>	\$47.00	<a href="#">FAZ-C7-2-NA-L</a>	\$47.00	<a href="#">FAZ-D7-2-NA-L</a>	\$47.00
8	<a href="#">FAZ-B8-2-NA-L</a>	\$47.00	<a href="#">FAZ-C8-2-NA-L</a>	\$47.00	<a href="#">FAZ-D8-2-NA-L</a>	\$47.00
10	<a href="#">FAZ-B10-2-NA-L</a>	\$47.00	<a href="#">FAZ-C10-2-NA-L</a>	\$47.00	<a href="#">FAZ-D10-2-NA-L</a>	\$47.00
13	<a href="#">FAZ-B13-2-NA-L</a>	\$47.00	<a href="#">FAZ-C13-2-NA-L</a>	\$47.00	<a href="#">FAZ-D13-2-NA-L</a>	\$47.00
15	<a href="#">FAZ-B15-2-NA-L</a>	\$47.00	<a href="#">FAZ-C15-2-NA-L</a>	\$47.00	<a href="#">FAZ-D15-2-NA-L</a>	\$47.00
16	<a href="#">FAZ-B16-2-NA-L</a>	\$47.00	<a href="#">FAZ-C16-2-NA-L</a>	\$47.00	<a href="#">FAZ-D16-2-NA-L</a>	\$47.00
20	<a href="#">FAZ-B20-2-NA-L</a>	\$47.00	<a href="#">FAZ-C20-2-NA-L</a>	\$47.00	<a href="#">FAZ-D20-2-NA-L</a>	\$47.00
25	<a href="#">FAZ-B25-2-NA-L</a>	\$47.00	<a href="#">FAZ-C25-2-NA-L</a>	\$47.00	<a href="#">FAZ-D25-2-NA-L</a>	\$47.00
30	<a href="#">FAZ-B30-2-NA-L</a>	\$47.00	<a href="#">FAZ-C30-2-NA-L</a>	\$47.00	<a href="#">FAZ-D30-2-NA-L</a>	\$47.00
32	<a href="#">FAZ-B32-2-NA-L</a>	\$47.00	<a href="#">FAZ-C32-2-NA-L</a>	\$47.00	<a href="#">FAZ-D32-2-NA-L</a>	\$47.00
35	<a href="#">FAZ-B35-2-NA</a>	\$67.00	<a href="#">FAZ-C35-2-NA</a>	\$69.00	<a href="#">FAZ-D35-2-NA</a>	\$69.00
40	<a href="#">FAZ-B40-2-NA</a>	\$67.00	<a href="#">FAZ-C40-2-NA</a>	\$69.00	<a href="#">FAZ-D40-2-NA</a>	\$69.00
50	<a href="#">FAZ-B50-2-NA</a>	\$67.00	<a href="#">FAZ-C50-2-NA</a>	\$67.00	—	—
63	<a href="#">FAZ-B63-2-NA</a>	\$67.00	<a href="#">FAZ-C63-2-NA</a>	\$67.00	—	—



Three-Pole

FAZ-NA and FAZ-NA-L Three-Pole 240VAC Selection Guide						
Ampere Rating	B-Curve Part Number	Price	C-Curve Part Number	Price	D-Curve Part Number	Price
0.5	—		<a href="#">FAZ-C0P5-3-NA-L</a>	\$68.00	<a href="#">FAZ-D0P5-3-NA-L</a>	\$68.00
1	<a href="#">FAZ-B1-3-NA-L</a>	\$68.00	<a href="#">FAZ-C1-3-NA-L</a>	\$68.00	<a href="#">FAZ-D1-3-NA-L</a>	\$68.00
1.5	<a href="#">FAZ-B1P5-3-NA-L</a>	\$68.00	<a href="#">FAZ-C1P5-3-NA-L</a>	\$68.00	<a href="#">FAZ-D1P5-3-NA-L</a>	\$68.00
2	<a href="#">FAZ-B2-3-NA-L</a>	\$68.00	<a href="#">FAZ-C2-3-NA-L</a>	\$68.00	<a href="#">FAZ-D2-3-NA-L</a>	\$68.00
3	<a href="#">FAZ-B3-3-NA-L</a>	\$68.00	<a href="#">FAZ-C3-3-NA-L</a>	\$68.00	<a href="#">FAZ-D3-3-NA-L</a>	\$68.00
4	<a href="#">FAZ-B4-3-NA-L</a>	\$68.00	<a href="#">FAZ-C4-3-NA-L</a>	\$68.00	<a href="#">FAZ-D4-3-NA-L</a>	\$68.00
5	<a href="#">FAZ-B5-3-NA-L</a>	\$68.00	<a href="#">FAZ-C5-3-NA-L</a>	\$68.00	<a href="#">FAZ-D5-3-NA-L</a>	\$68.00
6	<a href="#">FAZ-B6-3-NA-L</a>	\$68.00	<a href="#">FAZ-C6-3-NA-L</a>	\$68.00	<a href="#">FAZ-D6-3-NA-L</a>	\$68.00
7	<a href="#">FAZ-B7-3-NA-L</a>	\$68.00	<a href="#">FAZ-C7-3-NA-L</a>	\$68.00	<a href="#">FAZ-D7-3-NA-L</a>	\$68.00
8	<a href="#">FAZ-B8-3-NA-L</a>	\$68.00	<a href="#">FAZ-C8-3-NA-L</a>	\$68.00	<a href="#">FAZ-D8-3-NA-L</a>	\$68.00
10	<a href="#">FAZ-B10-3-NA-L</a>	\$68.00	<a href="#">FAZ-C10-3-NA-L</a>	\$68.00	<a href="#">FAZ-D10-3-NA-L</a>	\$68.00
13	<a href="#">FAZ-B13-3-NA-L</a>	\$68.00	<a href="#">FAZ-C13-3-NA-L</a>	\$68.00	<a href="#">FAZ-D13-3-NA-L</a>	\$68.00
15	<a href="#">FAZ-B15-3-NA-L</a>	\$68.00	<a href="#">FAZ-C15-3-NA-L</a>	\$68.00	<a href="#">FAZ-D15-3-NA-L</a>	\$68.00
16	<a href="#">FAZ-B16-3-NA-L</a>	\$68.00	<a href="#">FAZ-C16-3-NA-L</a>	\$68.00	<a href="#">FAZ-D16-3-NA-L</a>	\$68.00
20	<a href="#">FAZ-B20-3-NA-L</a>	\$68.00	<a href="#">FAZ-C20-3-NA-L</a>	\$68.00	<a href="#">FAZ-D20-3-NA-L</a>	\$68.00
25	<a href="#">FAZ-B25-3-NA-L</a>	\$68.00	<a href="#">FAZ-C25-3-NA-L</a>	\$68.00	<a href="#">FAZ-D25-3-NA-L</a>	\$68.00
30	<a href="#">FAZ-B30-3-NA-L</a>	\$68.00	<a href="#">FAZ-C30-3-NA-L</a>	\$68.00	<a href="#">FAZ-D30-3-NA-L</a>	\$68.00
32	<a href="#">FAZ-B32-3-NA-L</a>	\$68.00	<a href="#">FAZ-C32-3-NA-L</a>	\$68.00	<a href="#">FAZ-D32-3-NA-L</a>	\$68.00
35	<a href="#">FAZ-B35-3-NA</a>	\$103.00	<a href="#">FAZ-C35-3-NA</a>	\$107.00	<a href="#">FAZ-D35-3-NA</a>	\$107.00
40	<a href="#">FAZ-B40-3-NA</a>	\$103.00	<a href="#">FAZ-C40-3-NA</a>	\$107.00	<a href="#">FAZ-D40-3-NA</a>	\$107.00
50	<a href="#">FAZ-B50-3-NA</a>	\$103.00	<a href="#">FAZ-C50-3-NA</a>	\$103.00	—	—
63	<a href="#">FAZ-B63-3-NA</a>	\$103.00	<a href="#">FAZ-C63-3-NA</a>	\$103.00	—	—

Note: Eaton product part numbers will contain a [L] instead of [P] and a [/] instead of a [-]. Example: FAZ-C0P5-3-NA = FAZ-C0.5/3-NA

Note: Eaton parts available for sale to North America locations only.

# EATON FAZ-NA Series

## Technical Specifications

FAZ-NA and FAZ-NA-L Miniature Circuit Breakers – UL/CSA				
		B-Curve	C-Curve	D-Curve
<b>Short Circuit Trip Response</b>		3-5 x I <sub>n</sub>	5-10 x I <sub>n</sub>	10-20 x I <sub>n</sub>
<b>Current Range</b>		1-63 A	0.5-63 A	0.5-40 A
<b>Maximum Voltage Ratings UL / CSA</b>	0.5-32 A	277/480Y VAC (FAZ-NA), 240VAC (FAZ-NA-L)		
	35-63 A	240VAC		
	Per pole	48VDC		
	2 poles in series	96VDC Max		
<b>Thermal Tripping Characteristics</b>	Single pole	40°C [104°F]		
	Multi-pole			
<b>Interrupting Ratings (@ maximum voltage)</b>	1 pole	10kA Note: 14 kAIC at select amperages B and C curves (15-25 A) D curve (13-20 A)		
	2 pole			
	3 pole			
<b>Rated Frequency</b>		50/60 Hz		
<b>Agency Approvals</b>		UL File #E235139, CSA #204453		

Notes: Line voltage connection suitable for reverse feed

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

FAZ-NA and FAZ-NA-L Miniature Circuit Breaker - IEC				
		B-Curve	C-Curve	D-Curve
<b>Short Circuit Trip Response</b>		3-5 x I <sub>n</sub>	5-10 x I <sub>n</sub>	10-20 x I <sub>n</sub>
<b>Current Range</b>		1-63 A	0.5-63 A	0.5-40 A
<b>Maximum Voltage Ratings - IEC/EN 60947-2</b>	1 pole	240/415 VAC		
	2 pole / 3 pole			
	2 poles in series			
<b>Thermal Tripping Characteristics</b>	Single pole	30°C [86°F]		
	Multi-pole			
<b>Interrupt Ratings (At Max Voltage)</b>		15kA		
<b>Rated Frequency</b>		50/60 Hz		

### General Specifications

<b>Lifespan / Endurance</b>	20,000 (1 operation = ON/OFF)		
<b>Operating Temperature</b>	UL 489, CSA C22.2 No.5 = 40°C IEC 60947-2 = 30°C		
<b>Shock (UL 489)</b>	10g 20-25 ms		
<b>Housing Material</b>	Nylon		
<b>Mounting Position</b>	Vertical		
<b>Weight</b>	1 pole	0.3 lb (136g)	
	2 pole	0.6 lb (272g)	
	3 pole	0.9 lb (408g)	

### Wire Size

Ampere Rating	Conductor Size	
0.5 - 63	One wire	18 to 6 AWG (0.75 to 13 mm <sup>2</sup> )
	Two wires	18 to 10 AWG (0.75 to 5 mm <sup>2</sup> )

Note: Eaton does not recommend the use of wire ferrules or crimping terminals. The wire gauges are specified above and in the installation instructions included with each circuit breaker.

### Tightening Torque

Conductor Size	Tightening Torque
18-12 AWG	21 lb-in (2.4 N-m)
10-8 AWG	25 lb-in (2.8 N-m)
6AWG	36 lb-in (4.1 N-m)


# EAT•N FAZ-NA Series Technical Data

## Let-Through Energy


- The X axis shows the prospective short-circuit current levels.
- The Y axis indicates the actual let-through values at those prospective fault ratings for each FAZ-NA device plotted.

*As can be interpreted from the bend in the plotted curves, each device acts to limit the damaging let-through energy at those values of short-circuit current.*


**Characteristic C (0.5-20A), 277V**

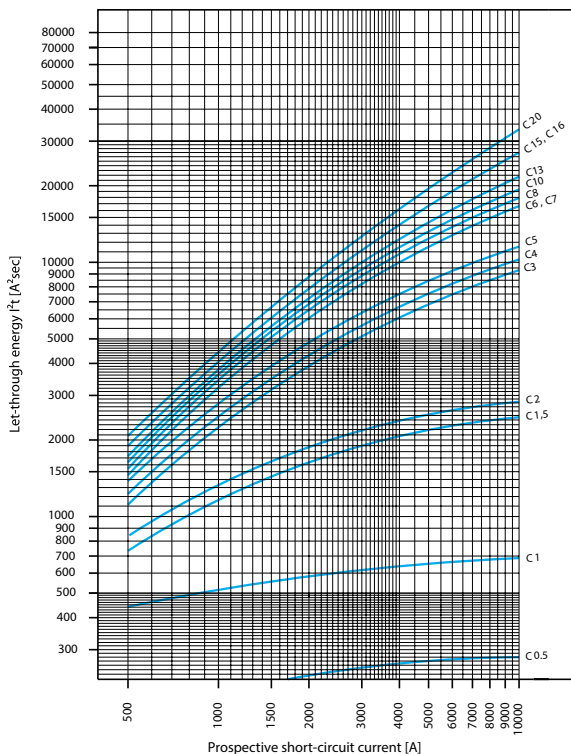


**Characteristic C (25-40A), 240V**

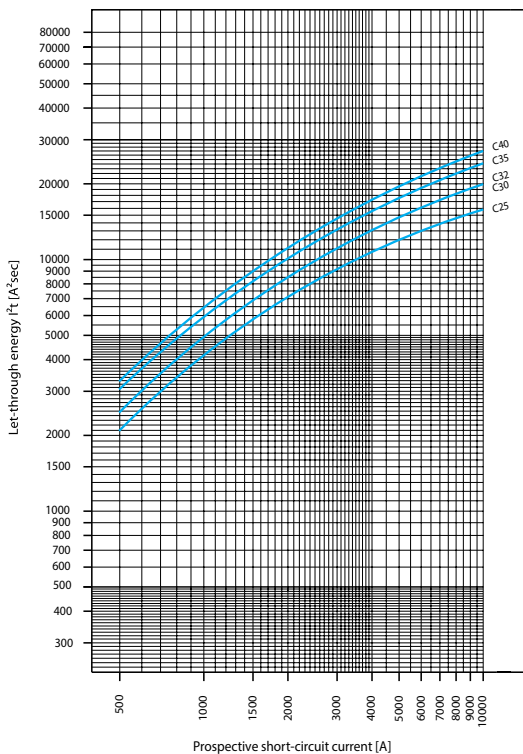

**Characteristic D (0.5-20A), 277V**

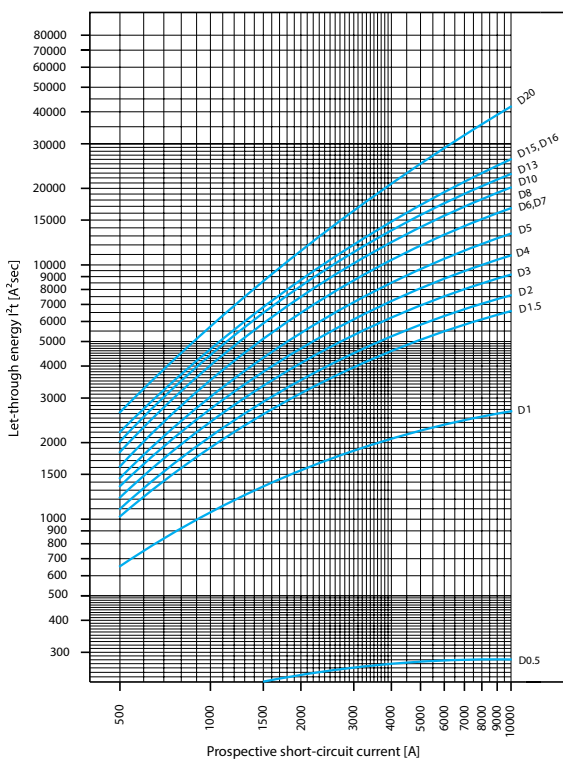

**Characteristic D (25-40A), 240V**

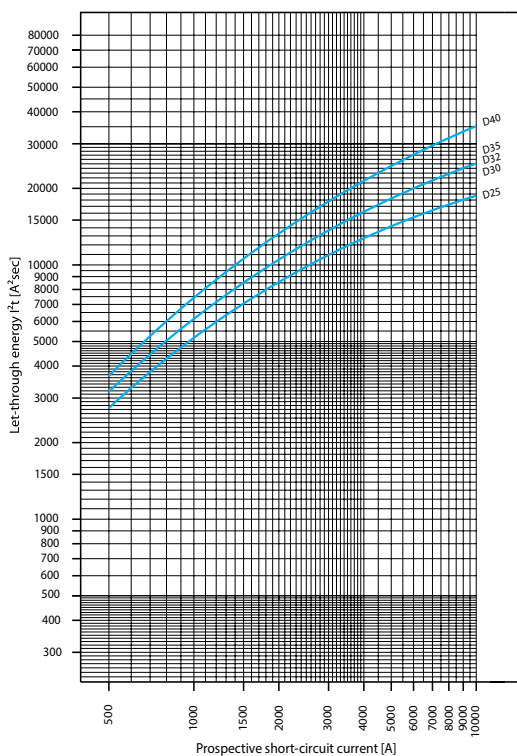




# EAT•N FAZ-NA Series Technical Data


## Let-Through Energy

- The X axis shows the prospective short-circuit current levels.
  - The Y axis indicates the actual let-through values at those prospective fault ratings for each FAZ-NA device plotted.
- As can be interpreted from the bend in the plotted curves, each device acts to limit the damaging let-through energy at those values of short-circuit current.*


Characteristic B (1–32 A), 277 V

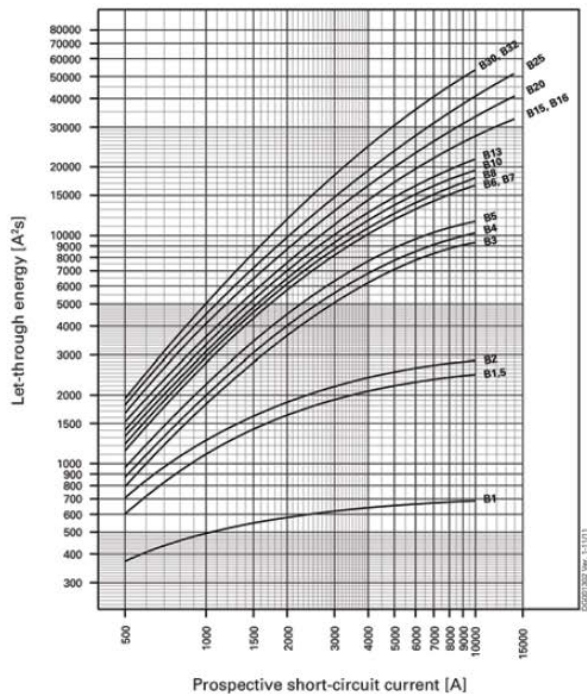


Characteristic B (35–63 A), 240 V

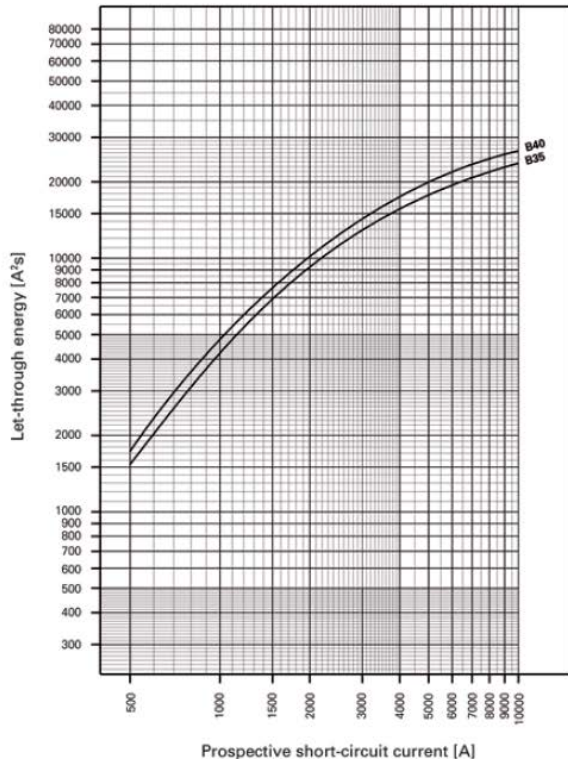

Characteristic C (35–63 A), 240 V

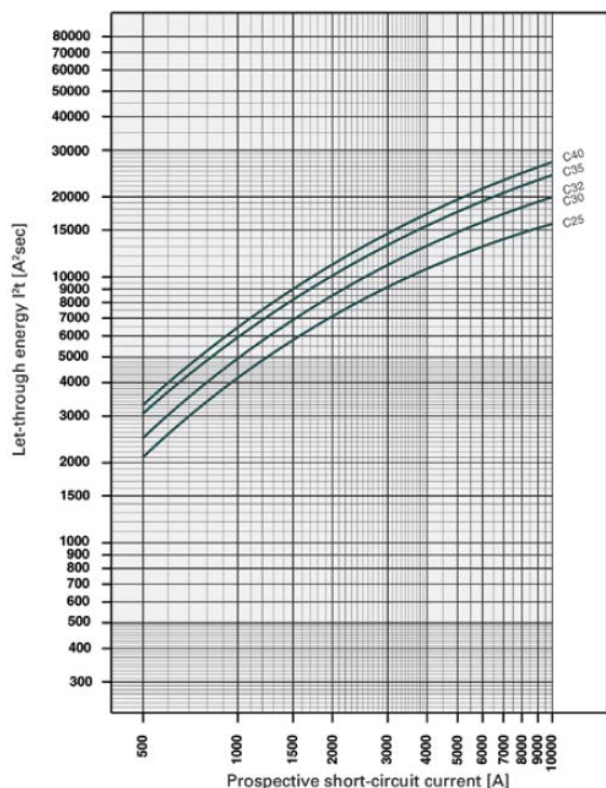

Characteristic D (35–63 A), 240 V

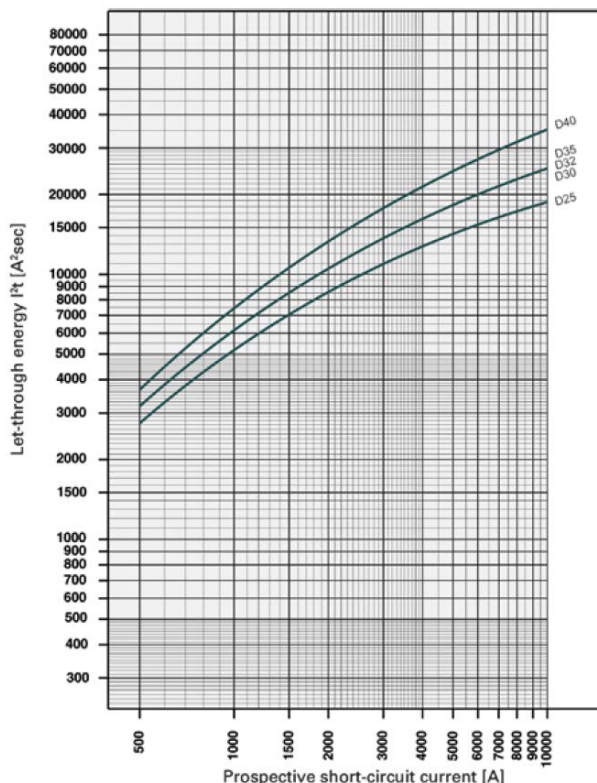



# EATON FAZ-NA Series Technical Data


## Power Loss at $I_n$

Power Loss at $I_n$			
Characteristic B			
$I_n$ [A]	1p P[W]	2p P[W]	3p P[W]
0.5	-	-	-
1	1.1	2.2	3.4
1.5	2.2	4.4	6.6
2	1.4	2.8	4.3
3	2.1	4.2	6.4
4	1.4	2.9	4.3
5	1.8	3.7	5.5
6	1.7	3.5	5.2
7	2.0	4.0	6.0
8	2.0	3.9	5.9
10	1.8	3.6	5.3
13	2.4	4.7	7.1
15	1.9	3.8	5.8
16	2.1	4.3	6.4
20	2.9	5.8	8.7
25	3.1	6.2	9.3
30	3.0	6.0	9.0
32	3.4	6.8	10.2
35	4.0	8.1	12.1
40	4.0	8.1	12.1
50	4.4	8.8	13.2
63	5.5	11.0	16.5

Power Loss at $I_n$			
Characteristic C			
$I_n$ [A]	1p P[W]	2p P[W]	3p P[W]
0.5	1.6	3.2	4.7
1	1.1	2.2	3.4
1.5	1.3	2.6	3.9
2	1.4	2.8	4.3
3	1.2	2.4	3.6
4	1.4	2.9	4.3
5	1.9	3.7	5.6
6	1.2	2.3	3.5
7	1.4	2.8	4.3
8	1.4	2.8	4.2
10	1.8	3.6	5.3
13	2.4	4.7	7.1
15	1.9	3.8	5.6
16	2.1	4.3	6.4
20	2.9	5.8	8.7
25	3.1	6.2	9.3
30	3.0	6.0	9.0
32	3.4	6.8	10.2
35	3.7	7.4	11.0
40	4.0	8.1	12.1
50	4.4	8.8	13.2
63	5.5	11.0	16.5

Power Loss at $I_n$			
Characteristic D			
$I_n$ [A]	1p P[W]	2p P[W]	3p P[W]
0.5	1.6	3.2	4.8
1	0.8	1.5	2.3
1.5	1.0	2.1	3.1
2	1.0	2.1	3.1
3	1.2	2.4	3.6
4	1.4	2.9	4.3
5	1.5	2.9	4.4
6	1.2	2.3	3.5
7	1.4	2.8	4.3
8	1.2	2.4	3.7
10	1.5	3.0	4.5
13	2.0	4.1	6.1
15	1.5	3.1	4.6
16	1.7	3.5	5.2
20	1.8	3.7	5.5
25	2.6	5.1	7.7
30	2.7	5.4	8.1
32	3.1	6.2	9.3
35	3.8	7.6	11.3
40	3.9	7.8	11.6
50	-	-	-
63	-	-	-

## Tripping Curves

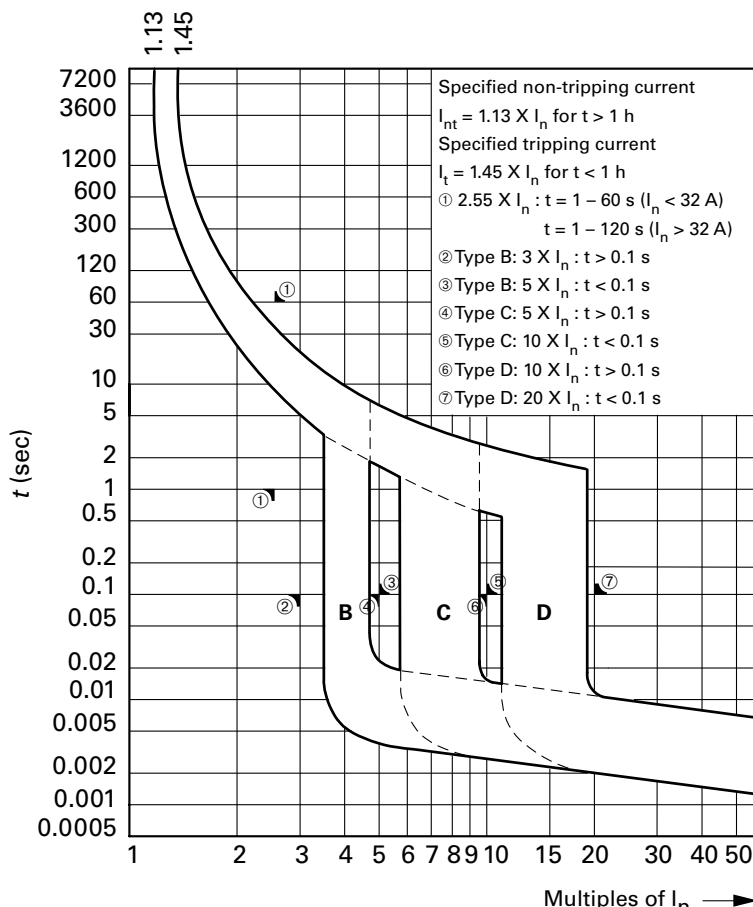

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings. Dimensions are approximate. Not for construction purposes.


# EAT•N FAZ-NA Series Technical Data

## FAZ-NA Miniature Circuit Breakers Dimensions



# EATON FAZ-NA Series Technical Data

Influence of Ambient Temperature T on Load Carrying Capacity								
Device Market Current Rating $I_n$ (A) at 40°C	$I_n$ (A) at Higher Ambient Temperature							
	15°C	20°C	25°C	30°C	40°C	50°C	55°C	60°C
0.5	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
1.0	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9
1.5	1.7	1.6	1.6	1.6	1.5	1.4	1.4	1.4
2.0	2.2	2.2	2.1	2.1	2.0	1.9	1.9	1.8
3.0	3.3	3.2	3.2	3.1	3.0	2.9	2.9	2.8
4.0	4.4	4.3	4.2	4.2	4.0	3.8	3.8	3.7
5.0	5.5	5.4	5.3	5.2	5.0	4.8	4.7	4.6
6.0	6.6	6.5	6.4	6.2	6.0	5.8	5.6	5.5
7.0	7.7	7.6	7.4	7.3	7.0	6.7	6.6	6.4
8.0	8.8	8.6	8.5	8.3	8.0	7.7	7.5	7.4
10.0	11.0	10.8	10.6	10.4	10.0	9.6	9.4	9.2
13.0	14.3	14.0	13.8	13.5	13.0	12.5	12.5	12.0
15.0	16.5	16.2	15.9	15.6	15.0	14.4	14.1	13.8
16.0	17.6	17.3	17.0	16.6	16.0	15.4	15.0	14.7
20.0	22.0	21.6	21.2	20.8	20.0	19.2	18.8	18.4
25.0	27.5	27.0	26.5	26.0	25.0	24.0	23.3	23.0
30.0	33.0	32.4	31.8	31.2	30.0	28.8	28.2	27.6
32.0	35.2	34.6	33.9	33.3	32.0	30.7	30.1	29.4
35.0	38.5	37.8	37.1	36.4	35.0	33.6	32.9	32.2
40.0	44.0	43.2	42.4	41.6	40.0	38.4	37.6	36.8
50.0	55.0	54.0	53.0	52.0	50.0	48.0	47.0	46.0
63.0	69.3	68.0	66.8	65.5	63.0	60.5	59.2	58.0

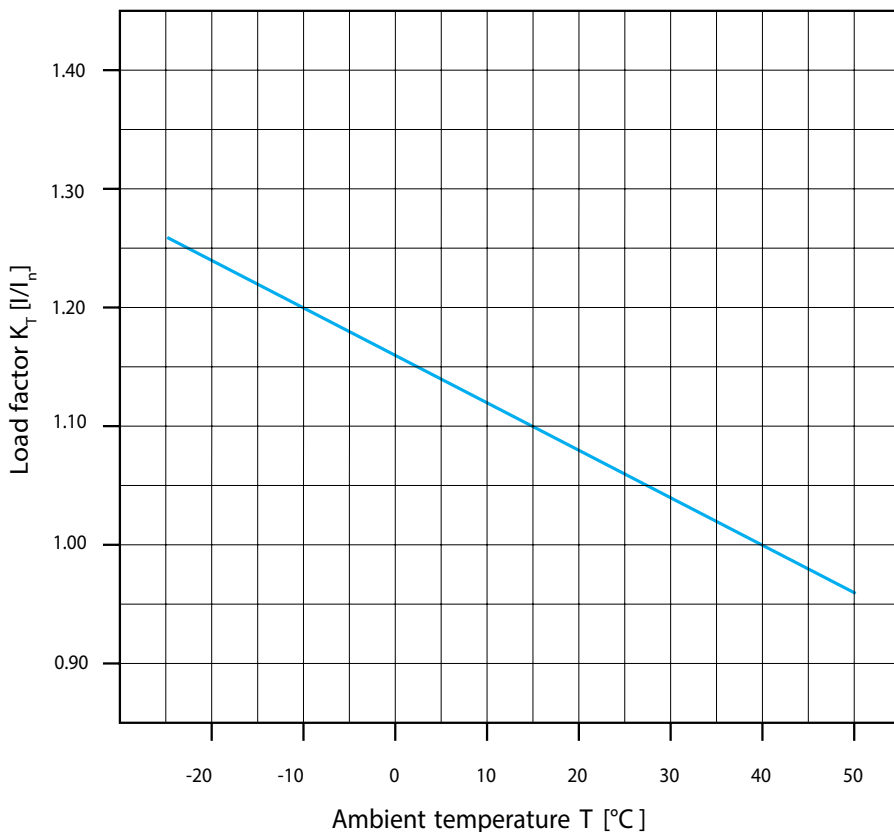

$I_L$  = Maximum Load  
 $T$  = Ambient Temperature  
 $I_N$  = Rated Current in Amps  
 $K_T$  = Load Factor

Maximum load  $I_L$  at ambient temperature T:  
 $I_L(T) = I_n \cdot K_T(T)$

# EATON FAZ-NA Series Accessories

## Field Mountable Accessories

- Auxiliary switch
- Alarm switch
- Shunt trip
- No tools required for mounting



**ZNHK**  
Alarm/Aux Contact




**ZIHK-NA**  
Auxiliary Contact


	ZNHK*	ZIHK-NA
<b>Price</b>	\$35.00	\$28.00
<b>Electrical Data</b>		
<b>Contact function</b>	2 Form C (one set changeover) (SPDT)	1 NO + 1 NC (DPST)
<b>Rated voltage</b>	230VAC / 110V AC/DC	600VAC / 230VAC / 120VAC
<b>Frequency</b>	50/60 Hz	
<b>Rated current</b>	2A / 0.5 A	1.2 A / 2A / 6A
<b>Rated thermal current <math>I_{th}</math> 60947-5-1</b>	2A / 250VAC	6A / 250VAC
<b>60947-5-1 Rated operational current <math>I_e</math></b>	<b>Utilization category AC13</b>	3A / 250VAC
	<b>Utilization category AC15</b>	2A / 250VAC
	<b>Utilization category DC12</b>	0.5 A / 110VDC
<b>Rated insulation voltage <math>U_i</math></b>	250VAC	
<b>Minimal operational voltage per Contact <math>U_{min}</math></b>	5VDC	
<b>Minimum operational current <math>I_{min}</math></b>	10mA DC	10 mAAC/DC
<b>Rated peak withstand voltage <math>U_{imp}</math> (1.2/50<math>\mu</math>)</b>	2.5 kV	4kV
<b>Conditional short-circuit current <math>I_k</math> w/ backup fuse 6A</b>	1kA	1kA
<b>Mechanical Data</b>		
<b>Tripping indicator "electrical tripping"</b>	Blue/white	-
<b>Frame size</b>	45mm	
<b>Mounting</b>	Onto FAZ-NA	
<b>Degree of protection, built-in</b>	IP40	
<b>Terminal protection</b>	Finger and hand touch safe according to BGV A3, OVE-EN 6	
<b>Terminals</b>	Lift terminals	
<b>Terminal capacity</b>	20-18 AWG (0.75 - 2.5 mm <sup>2</sup> )	20-14 AWG (0.5 - 2.5 mm <sup>2</sup> )
<b>Terminal screws</b>	M3 (Posidrive Z0 - Phillips)	
<b>Fastening torque of terminal screws</b>	7 lb-in (0.79 N·m)	Max. 10.6 lb-in (1.2 N·m)

\*Voltage of the FAZ-NA circuit breaker is limited to 300V with contact installed.

## Allowable Combinations of Accessories



Z-IHK-NA Standard Auxiliary    Z-NHK Auxiliary / Alarm Switch    FAZ-NA Miniature Circuit Breaker

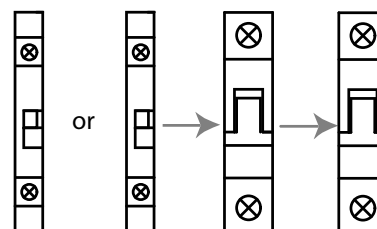

Z-IHK-NA Standard Auxiliary    Z-NHK Auxiliary / Alarm Switch    FAZ-XAA-NAxxx Shunt Trip    FAZ-NA Miniature Circuit Breaker




# EATON FAZ-NA Series Accessories

## Shunt Trip Release

- Remote release for subsequent mounting onto FAZ-NA
- Additional installation of standard auxiliary switch is possible
- Position indicator red-green



FAZ-XAA-NA Series



Circuit Diagram

	FAZ-XAA-NA12-110V	FAZ-XAA-NA110-415V
<b>Price</b>	\$52.00	\$52.00
<b>Electrical Data</b>		
<b>Can be mounted onto</b>	FAZ-NA	
<b>Operational voltage range</b>	12-110 VAC 12-60 VDC	110-415 VAC 110-230 VDC
<b>Maximum inrush current</b>	15A	2.1 A
<b>Frequency</b>	50/60 Hz	
<b>Mechanical Data</b>		
<b>Frame size</b>	45mm	
<b>Height</b>	4.13 in (105mm)	
<b>Width</b>	0.69 in (17.5 mm)	
<b>Weight</b>	0.28 lb (127g)	
<b>Mounting</b>	Quick fastening with two lock-in positions on EN 50022	
<b>Degree of protection, built-in</b>	IP40	
<b>Terminal protection</b>	Finger and hand touch safe according to BGV A3, OVE-EN 6	
<b>Terminals</b>	Open mouthed/lift	
<b>Terminal capacity, one and two wires</b>	18-10 AWG (0.8 - 5.3 mm <sup>2</sup> )	
<b>Agency Approval</b>	UL File # E257181, CSA 204453	

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


## Lockout Attachment

Lockout Attachment				
Part Number	Description	Weight	Qty	Price
<b>ZIS-SPE-1TE-3</b>	Lockout attachment for Eaton FAZ-NA series supplementary protectors and FAZ-NA mini circuit breakers, suitable to prevent unauthorized activation of a de-energized circuit, accepts lock shackles up to 9/32 in. (7.1 mm) in diameter	0.10 lb (45g)	3	\$43.00



ZIS-SPE-1TE-3 Lockout Attachment

### ZIS-SPE-1TE-3 Installation

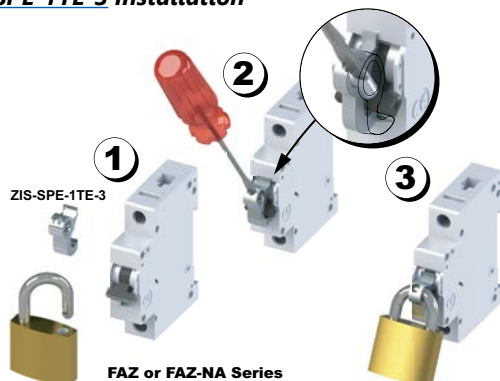

# EATON FAZ-NA Series Accessories

## Busbar System

(Without auxiliary contacts)

Busbar System for FAZ-NA Series Miniature Circuit Breakers		
Part Number	Price	Description
<a href="#">ZSVUL16-1P-1TE6SP</a>	\$14.50	Busbar for connecting up to six (6) 1-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-1P-1TE12SP</a>	\$26.50	Busbar for connecting up to twelve (12) 1-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-1P-1TE18SP</a>	\$40.50	Busbar for connecting up to eighteen (18) 1-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-2P-2TE6SP</a>	\$16.50	Busbar for connecting up to three (3) 2-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-2P-2TE12SP</a>	\$33.00	Busbar for connecting up to six (6) 2-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-2P-2TE18SP</a>	\$48.50	Busbar for connecting up to nine (9) 2-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-3P-3TE6SP</a>	\$18.00	Busbar for connecting up to two (2) 3-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-3P-3TE12SP</a>	\$34.00	Busbar for connecting up to four (4) 3-pole FAZ-NA series circuit breakers
<a href="#">ZSVUL16-3P-3TE18SP</a>	\$52.00	Busbar for connecting up to six (6) 3-pole FAZ-NA series circuit breakers


Note: FAZ-NA Busbar is not for use with FAZ supplementary protectors.





ZSVUL16-xP-xTExSP

Busbar Specifications			
Description	UL489		IEC/EN60947-2
Operating Voltage	480VAC	96VDC	240/415 VAC
Frequency	50/60 Hz	n/a	50/60 Hz
Rated Impulse Withstand Uimp	n/a		9.5 kV
Max Current - Ie Fed From End	80A @ 40°C		80A @ 30°C
Cross Section	n/a		16 mm <sup>2</sup>
Agency Approval	UL File #E257181		

## Busbar Connection Diagrams

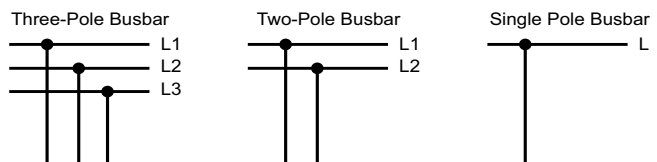

Note: Do not cut

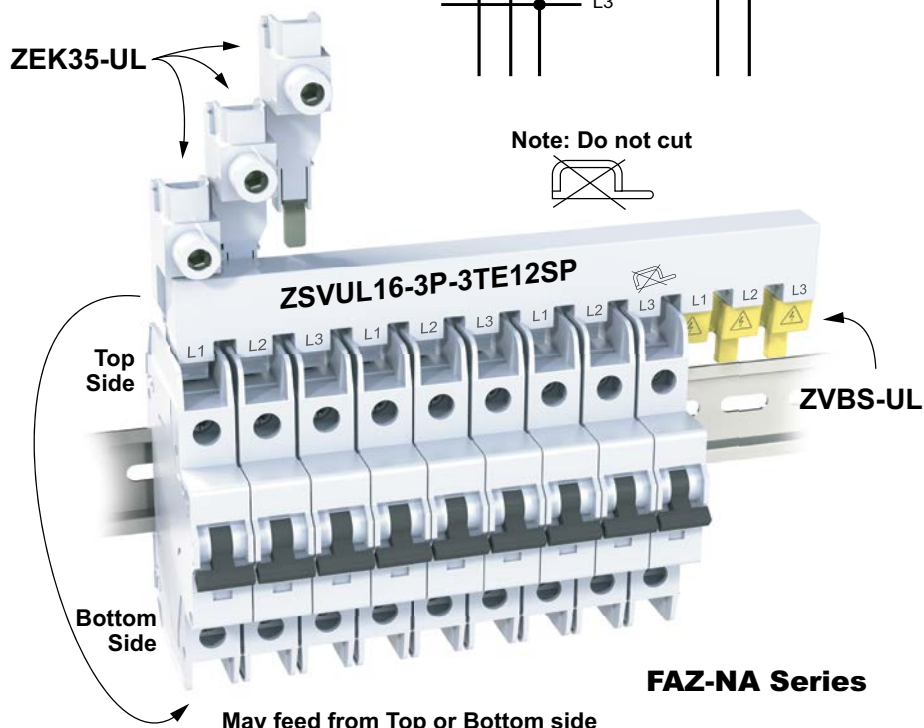

# EATON FAZ-NA Series Accessories

## Busbar Accessories



Busbar Accessories for FAZ-NA Series Miniature Circuit Breakers		
Part Number	Price	Description
<b>ZVBS-UL</b>	\$36.50	Busbar Shroud - covers for unused bus bar terminals, (10) 3-terminal covers per package
<b>ZVBS-UL-5</b>	\$20.50	Busbar Shroud - covers for unused bus bar terminals, (5) 3-terminal covers per package
<b>ZEK35-UL</b>	\$55.00	Wiring Lug, 2 - 14 AWG (35mm), 3 lugs per package
<b>ZEK35-UL-1</b>	\$19.00	Wiring Lug, 2 - 14 AWG (35mm), 1 lug per package



ZVBS-UL



ZEK35-UL









ZEK35-UL – Specifications			
Description	UL489		IEC/EN60947-2
<b>Operating Voltage</b>	480VAC	96VDC	240/415 VAC
<b>Frequency</b>	50/60 Hz	n/a	50/60 Hz
<b>Rated impulse withstand - <math>U_{imp}</math></b>	n/a		9.5 kV
<b>Max Current - <math>I_e</math></b>	80A @ 40°C		80A @ 30°C
	#2 - 14 AWG		2.5 - 35 mm <sup>2</sup>
	0.56 in		14mm
<b>Agency Approval</b>	UL File # E307559		

ZEK35-UL – Tightening Torque		
Tested According To	Cable Size	Tightening Torque
UL 486A	#14 AWG	M 20 lb·in (2.3 N·m)
UL 486B	#8 - 12 AWG	M 25 lb·in (2.8 N·m)
UL 486E	#6 - 1 AWG	35 lb·in (4 N·m)

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

# EATON FAZ-NA Series Accessories


## Accessories Dimensions in [mm]

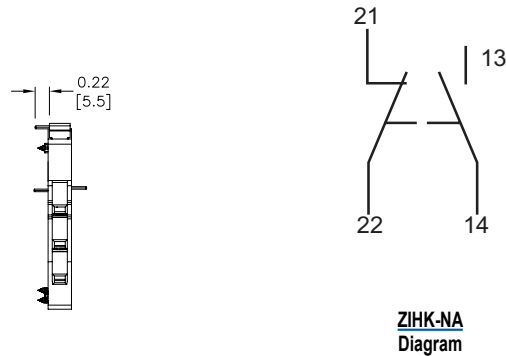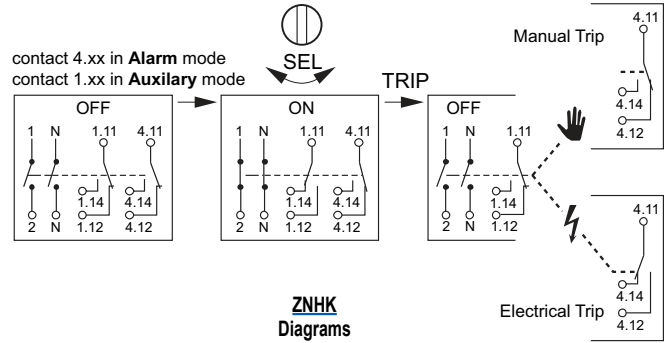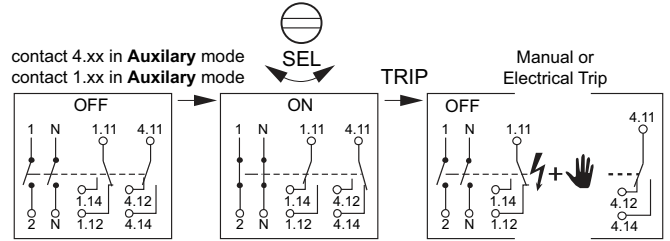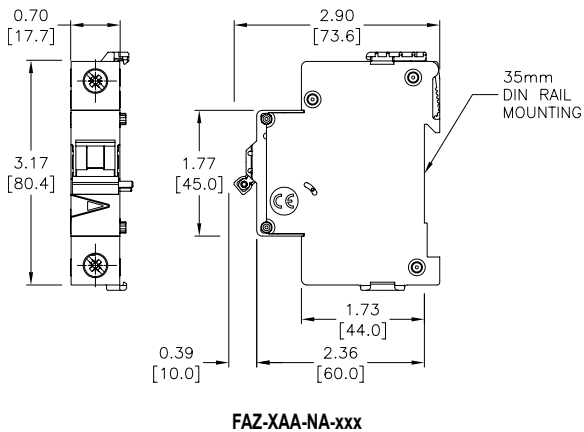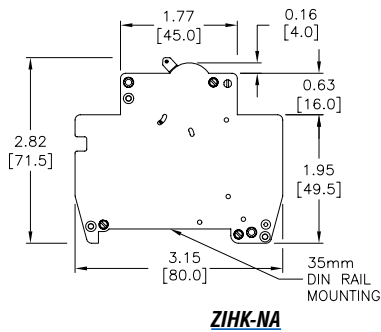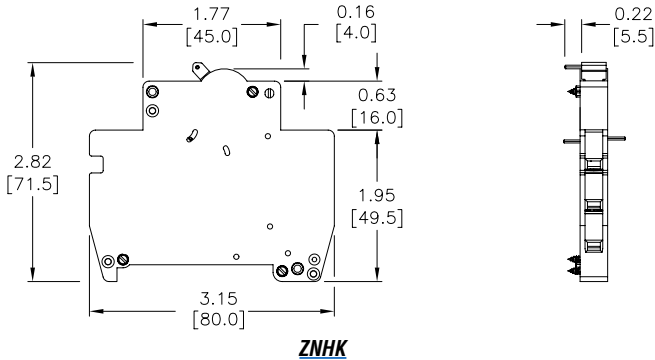


## FAZ-NA Series Miniature Circuit Breakers

### Connection Diagrams


Single Pole



Two-Pole




Three-Pole






# FAZ-NA Series Accessories

## Accessories Dimensions in [mm]

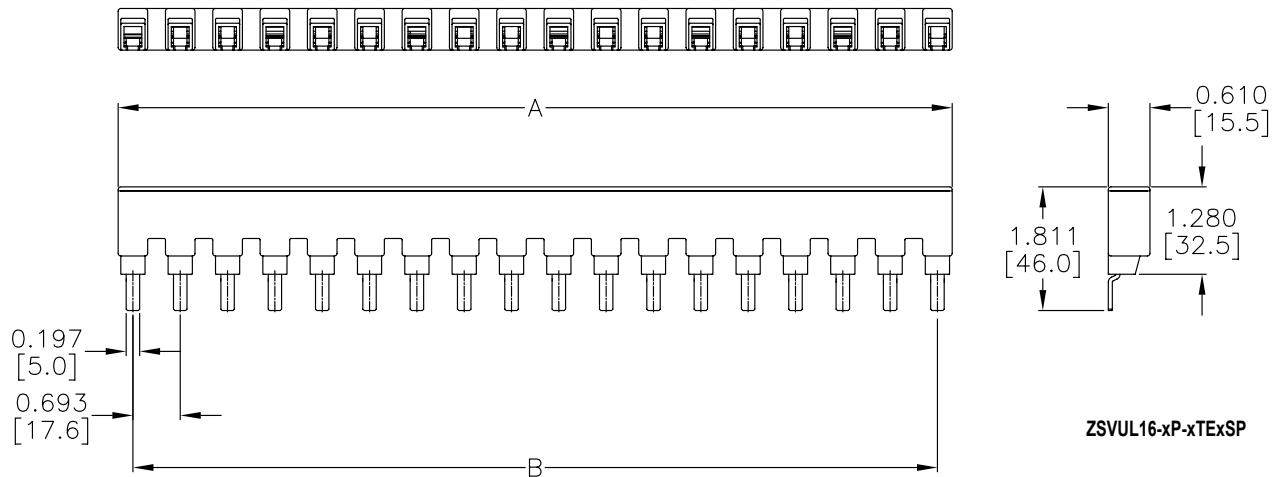


ZSVUL16-xP-xTExSP


FAZ-NA Busbar Length – in [mm]		
Part Number	A	B
ZSVUL16-xP-xTE6SP	3.90 [99.0]	3.46 [88.0]
ZSVUL16-xP-xTE12SP	8.06 [204.6]	7.62 [193.6]
ZSVUL16-xP-xTE18SP	12.21 [310.2]	11.78 [299.2]

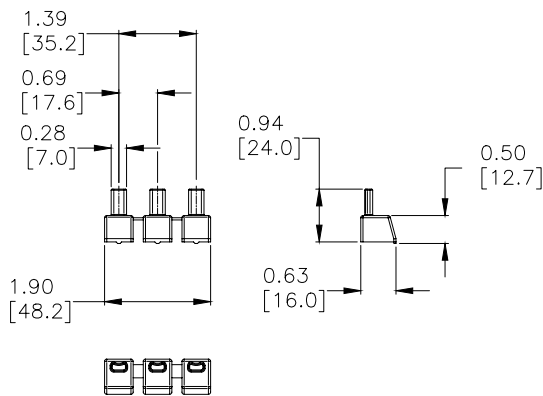

ZVBS-UL

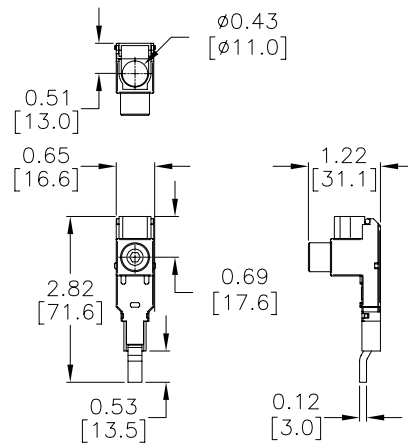

ZEK35-UL

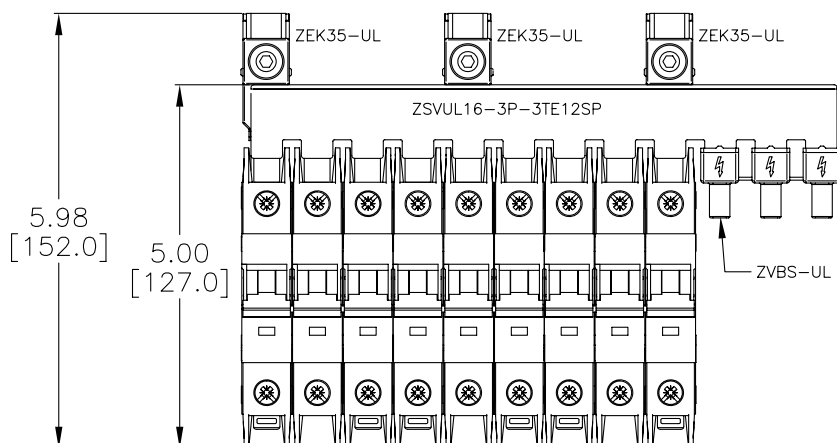

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings. Dimensions are approximate. Not for construction purposes.

# UL 489 or UL 1077? What are your Circuit Protection Requirements?

An understanding of circuit types and circuit protection products is critical to ensure their proper application.  
See NEC Sections 100, 430 and 409 for definitions.

The proper sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC (National Electric Code), CEC (Canadian Electrical Code) or other applicable standards. Per fine print note of 2008 NEC Section 100 "A current in excess of rating may be accommodated by certain equipment and conductors for a given set of conditions. Therefore, the rules for overcurrent protection are specific for particular situations."

## UL 489

### Branch Protection

## UL 1077

### Supplementary Protection



### What You Need to Know and Look For In Specifications

Certifications – Standards – Acceptance

#### UL 489 Branch Protection

- UL 489 Listed or Recognized
- CSA C22.2 No. 5
- International ratings available depending on breaker type

#### UL 1077 Supplementary Protection

- UL Recognized under UL 1077
- CSA 22.2 No. 285
- IEC 60947-2 or IEC 898

#### Function

- Opens automatically on Overload and Short Circuit when properly applied within its ratings
- Protects wire and cable against Overload and Short Circuit

- Opens automatically on Overload and Short Circuit
- Provides additional equipment protection where branch circuit protection is already provided or not required
- Not suitable for the protection of branch circuit conductors

#### Applications

- Branch circuit protection in control panels, panelboards, switchboards and motor control centers
- Motor overload and motor short circuit protection (UL 489 Recognized motor circuit protectors) for control panels and motor control centers

- Used within appliances or other electrical equipment such as control circuits, control power transformers, relays, PLC I/O points and lighting circuits
- Ideal replacement for fuses that are applied as supplementary protection

#### Features

- Bolted down or DIN rail mounted
- External handle mechanisms available
- Field mounted accessories
- Stand alone branch circuit protection
- Various levels of protection (curve type)
- High voltage and interruption levels (up to 100 kAIC @ 480V)


- DIN rail mounted
- Field mounted accessories
- Various levels of protection (curve type)
- 10 kAIC @ 240 VAC
- 10 kAIC @ 277 VAC and 5 kAIC @ 480VAC
- 10 kAIC @ 48VDC

kAIC = thousands of Amps interrupt capacity

#### Summary

**A Supplementary Protector can't be used for Branch Circuit Protection.**  
Understanding the difference between Branch Circuit Protection and Supplementary Protection helps to ensure their proper use.

# UL 1077 Supplementary Protectors and UL 489 Circuit Breakers Application Guidelines

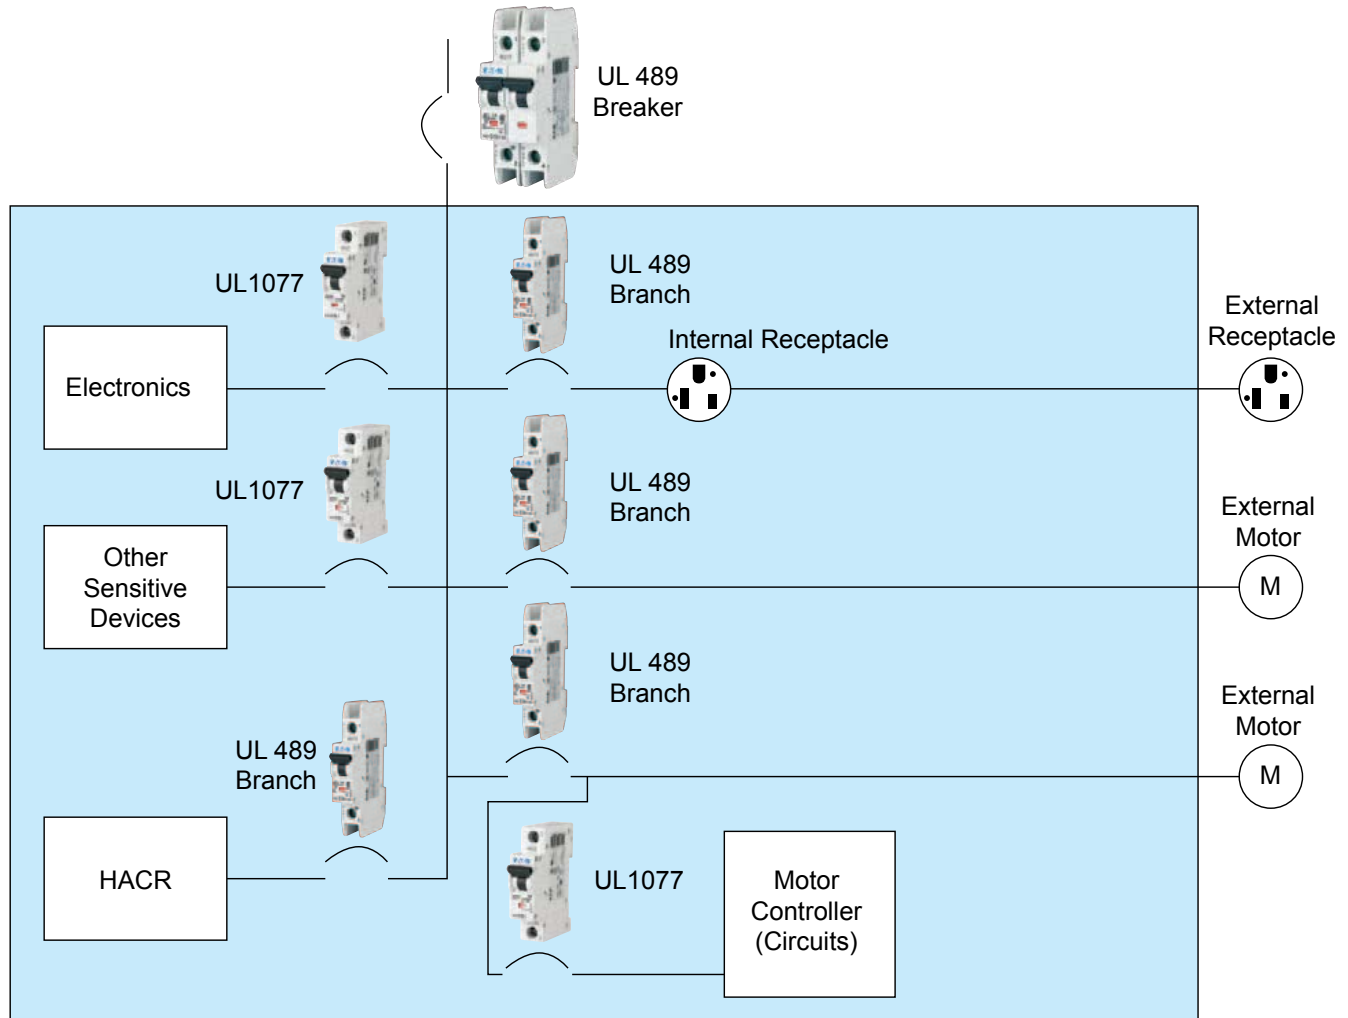

Example of UL 489 and UL 1077 Application

### **UL489 circuit breakers**

Used for branch circuit protection, internal/external receptacles, external motors and HACR equipment (heating, air conditioning and refrigeration).

### **UL1077 supplementary protectors**

Used for overcurrent protection within appliances or electrical equipment, where branch circuit protection is already provided or not required.

*Note: UL489 devices can be used in place of UL1077; UL1077 devices cannot be used in place of UL489.*