


# Analog Output Modules

## P3-04DA \$494.00

### Voltage/Current Analog Output

The P3-04DA Voltage/Current Analog Output Module provides four channels of  $\pm 10\text{VDC}$  or 4–20 mA sink/source selectable outputs.

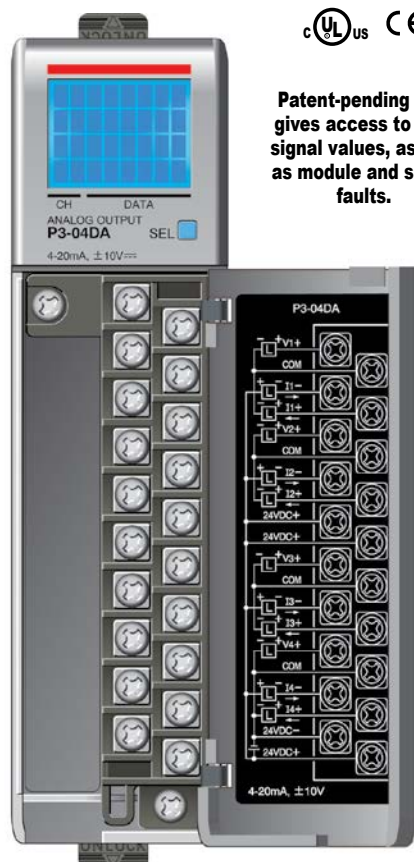

Patent-pending LCD gives access to field signal values, as well as module and signal faults.

Terminal block sold separately; terminal block cover included with module.

We recommend using prewired **ZIP**Link cables and connection modules. See Wiring Solutions.

Terminal block cover included. If you wish to hand-wire your module, a removable terminal block is sold separately. Order part number [P3-RTB](#).



### Output Specifications

<b>Output Channels</b>	4
<b>Module signal output range</b>	$\pm 10\text{V}$ or 4–20 mA sink or source selectable each channel
<b>Signal Resolution</b>	16-bit
<b>Resolution Value of LSB (least significant bit)</b>	$\pm 10\text{V} = 305\mu\text{V}/\text{count}$ 4–20mA = 0.244 $\mu\text{A}/\text{count}$ 1 LSB = 1 count
<b>Data Range</b>	0–65535 counts uni-polar and -32768 to +32767 counts bi-polar
<b>Output Type</b>	Voltage outputs sourcing/sinking at 10mA max, or Current outputs sink or source at 20mA max.
<b>Output Value in Fault Mode</b>	Voltage outputs 0V or 0mA current outputs
<b>Load Impedance (Minimum External Power Supply)</b>	>1000 $\Omega$ (voltage outputs)(19.2–30 VDC) 0–755 $\Omega$ Sinking, 0–600 $\Omega$ Sourcing (19.2 VDC) 0–875 $\Omega$ Sinking, 0–700 $\Omega$ Sourcing (21.6 VDC) 0–1000 $\Omega$ Sinking, 0–855 $\Omega$ Sourcing (24.0 VDC) 0–1110 $\Omega$ Sinking, 0–970 $\Omega$ Sourcing (26.4 VDC) 0–1350 $\Omega$ Sinking, 0–1150V Sourcing (30VDC)
<b>Maximum Capacitive Load</b>	0.01 $\mu\text{F}$ maximum voltage outputs
<b>Maximum Inductive Load</b>	1mH maximum current outputs
<b>Allowed Load Type</b>	Grounded
<b>Maximum Inaccuracy (% of range)</b>	0.1% voltage, 0.1% current (including temperature drift)
<b>Maximum Full Scale Calibration Error (not including offset error)</b>	$\pm 0.025\%$ of range maximum voltage outputs $\pm 0.025\%$ of range maximum current outputs
<b>Accuracy vs. Temperature</b>	$\pm 25\text{PPM}/^\circ\text{C}$ max. f.s. calibration change ( $\pm 0.0025\%$ of range / $^\circ\text{C}$ )
<b>Max Crosstalk</b>	-80dB, 6 LSB
<b>Linearity Error (End to End)</b>	$\pm 16$ LSB maximum ( $\pm 0.025\%$ of full scale) Monotonic with no missing codes
<b>Output Stability and Repeatability</b>	$\pm 10$ LSB after 10 minute warm-up (typical)
<b>Output Ripple</b>	0.05% of Full Scale
<b>Output Settling Time</b>	0.3 ms max., 5 $\mu\text{s}$ min. (full scale change)
<b>All Channel Update Rate</b>	0.6 ms
<b>Maximum Continuous Overload</b>	Voltage Outputs current limited to 35mA typical. Current Outputs open circuit protected
<b>Type of Output Protection</b>	15VDC Peak Output Voltage Current outputs current limited to $\leq 20\text{mA}$
<b>Output Signal (power-up, -down)</b>	0V voltage outputs, 0mA current outputs
<b>External DC Power Required</b>	94mA voltage operation 4 channels 126mA current operation 4 channels 24VDC -20% / + 25%

### Removable Terminal Block Specifications

<b>Description</b>	Part No. P3-RTB; 20 screw terminals
<b>Wire Range</b>	22–14 AWG (0.324 to 2.08 sq. mm) Solid / stranded conductor 3/64 in. (1.2 mm) insulation maximum USE COPPER CONDUCTORS, 60 $^\circ\text{C}$ or equivalent.
<b>Screw Driver Width</b>	1/4 inch (6.5 mm) maximum
<b>Screw Size</b>	M3 size
<b>Screw Torque</b>	Field terminals - 7–9 in-lb (0.882–1.02 N·m) Self-jacking screws - 2.7–3.6 in-lb (0.3–0.4 N·m). Do not overtighten screws when installing terminal block.


# Analog Output Modules

## P3-04DA (cont'd)



General Specifications	
<b>Operating Temperature</b>	0°C– 60°C (32°F–140°F),
<b>Storage Temperature</b>	-20°C–70°C (-4°F–158°F)
<b>Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	IEC60068-2-6 (Test Fc)
<b>Shock</b>	IEC60068-2-27 (Test Ea)
<b>Field to Logic Side Isolation</b>	1800VAC applied for 1s
<b>Insulation Resistance</b>	>10MΩ @ 500VDC
<b>Heat Dissipation</b>	2.6 W voltage outputs 3.4 W current outputs
<b>Enclosure Type</b>	Open equipment
<b>Module Keying to Backplane</b>	Electronic
<b>Module Location</b>	Any I/O slot in any local, expansion, or remote base in a Productivity3000 system.
<b>Field Wiring</b>	Removable terminal block (not included). Use <b>ZIPLink</b> wiring system or optional terminal block. See Wiring Solutions.
<b>Terminal Type (not included)</b>	20-position removable terminal block
<b>Weight</b>	105g (3.73 oz)
<b>Agency Approvals</b>	UL508 file E157382, Canada & USA UL1604 file E200031, Canada & USA CE (EN61131-2*) This equipment is suitable for use in Class 1, Division 2, Groups A, B, C and D or non-hazardous locations only.

\*Meets EMC and Safety requirements. See the Declaration of Conformity for details.



**WARNING: EXPLOSION HAZARD – SUBSTITUTION OF COMPONENTS MAY IMPAIR SUITABILITY FOR CLASS I, DIVISION 2.**

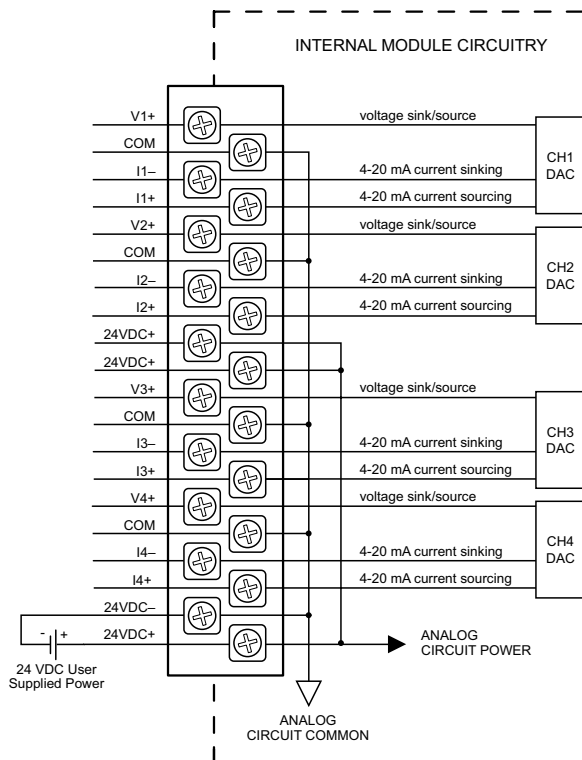



### Voltage Output



### Current Source Output (Field device is sinking)



### Current Sink Output (Field device is sourcing)



NOTE: Shield is connected to common at the source device.



# Wiring Solutions


## Wiring Solutions using the ZIPLink wiring system

**ZIPLinks** eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the **ZIPLink** System ranging from

PLC I/O-to-**ZIPLink** Connector Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of **ZIPLink** modules are provided with **ZIPLink** cables. See the following solutions to help determine the best **ZIPLink** system for your application.

### **Solution 1: Productivity Series I/O Modules to ZIPLink Connector Modules**

When looking for quick and easy I/O-to-field termination, a **ZIPLink** connector module used in conjunction with a prewired **ZIPLink** cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

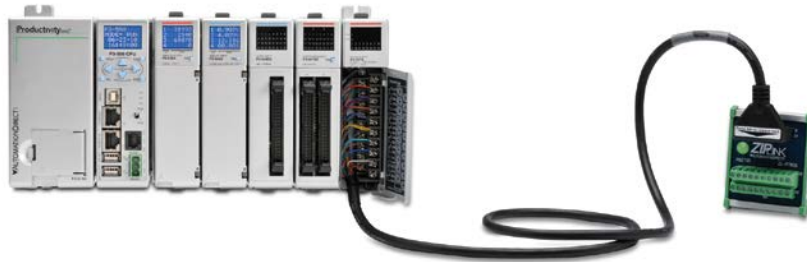


Using the PLC I/O Modules to **ZIPLink** Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a **ZIPLink** Module.
3. Select a corresponding **ZIPLink** Cable.

### **Solution 2: Productivity Series I/O Modules to ZIPLink Connector Modules**

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIPLink** Pigtail Cables. **ZIPLink** Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

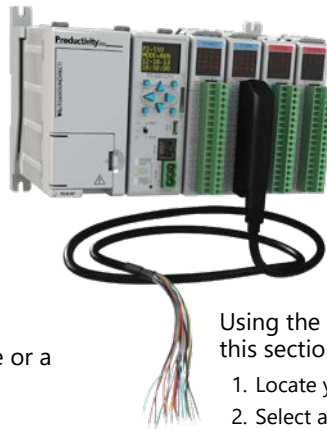

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a **ZIPLink** Pigtail Cable that is compatible with your 3rd party device.

### **Solution 3: GS Series and DuraPulse Drives Communication Cables**

Need to communicate via Modbus RTU to a drive or a network of drives?

**ZIPLink** cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a **ZIPLink** communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications.
2. Select a **ZIPLink** cable and other associated hardware.





# Wiring Solutions

## Solution 4: Serial Communications Cables

**ZIPLink** offers communications cables for use with DirectLOGIC, CLICK, and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

1. Locate your connector type
2. Select a cable.



## Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIPLink** modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIPLink** Specialty Modules selector table located in this section,

1. Locate the type of application.
2. Select a **ZIPLink** module.



## Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible **ZIPLink** Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

1. Select module type.
2. Select the number of pins.
3. Select cable.





# CPU I/O Modules to ZIPLink Connector Modules - Productivity3000®

Productivity3000 CPU Input Module ZIPLink Selector				
CPU		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
<b>P3-08NAS</b>	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
<b>P3-08ND3S</b>	20	Feedthrough		
<b>P3-16NA</b>	20	Feedthrough		ZL-P3-CBL20-1L
<b>P3-16ND3</b>	20	Feedthrough		ZL-P3-CBL20-2L
		Sensor	ZL-LTB16-24-1	
<b>P3-32ND3</b>	40	Feedthrough	ZL-RTB40	
		Sensor	ZL-LTB32-24-1	ZL-CBL40
				ZL-CBL40-1
<b>P3-64ND31</b>	40	Feedthrough	ZL-RTB40	ZL-CBL40-2
		Sensor	ZL-LTB32-24-1	

Productivity3000 CPU Analog In Module ZIPLink Selector				
CPU		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
<b>P3-04ADS</b>	20	Feedthrough	ZL-RTB20	
<b>P3-08AD</b>	20	Feedthrough		ZL-P3-CBL20-1L
<b>P3-16AD-1</b>	20	Feedthrough		ZL-P3-CBL20-2L
<b>P3-16AD-2</b>	20	Feedthrough		
<b>P3-08RTD<sup>2</sup></b>	Matched Only	See Note 2		
<b>P3-08THM<sup>2</sup></b>	T/C Wire Only	See Note 2		
<b>P3-04DA</b>	20	Feedthrough	ZL-RTB20	
<b>P3-08DA-1</b>	20	Feedthrough		
<b>P3-08DA-2</b>	20	Feedthrough		
<b>P3-16DA-1</b>	20	Feedthrough		ZL-P3-CBL20-1L
<b>P3-16DA-2</b>	20	Feedthrough		ZL-P3-CBL20-2L
<b>P3-8AD4DA-1</b>	20	Feedthrough		
<b>P3-8AD4DA-2</b>	20	Feedthrough		

Productivity3000 CPU Specialty Module ZIPLink Selector				
CPU		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
<b>P3-HSI</b>	40	Feedthrough	ZL-RTB40	ZL-CBL40-S
<b>P3-HSO</b>				ZL-CBL40-1S
				ZL-CBL40-2S



Note: ZIPLink Connector Modules specifications follow the Compatibility Matrix tables. ZIPLink Cables specifications are at the end of this ZIPLink section.

Productivity3000 CPU Output Module ZIPLink Selector				
CPU		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
<b>P3-08TAS</b>	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
<b>P3-08TD1S</b>	20	Feedthrough		ZL-P3-CBL20-1L
<b>P3-08TD2S</b>	20	Feedthrough		ZL-P3-CBL20-2L
<b>P3-08TRS</b>	20	Feedthrough		
<b>P3-16TA</b>	20	Feedthrough	ZL-RTB20	
		Fuse		
<b>P3-16TD1</b>	20	Feedthrough		
		Fuse		ZL-RFU20 <sup>4</sup>
		Relay (sinking)	ZL-RRL16-24-1	ZL-P3-CBL20
<b>P3-16TD2</b>	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20-1
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20-2
		Relay (sourcing)	ZL-RRL16-24-2	
<b>P3-16TR</b>	20	Feedthrough	ZL-RTB20	
		Fuse	ZL-RFU20 <sup>4</sup>	
<b>P3-08TRS-1<sup>3</sup></b>	20	Feedthrough	ZL-RTB20	
		Fuse	ZL-RFU20 <sup>4</sup>	
<b>P3-32TD1</b>	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 <sup>4</sup>	
<b>P3-32TD2</b>	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40
<b>P3-64TD1<sup>1</sup></b>	40	Feedthrough	ZL-RTB40	ZL-CBL40-1
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40-2
<b>P3-64TD2<sup>1</sup></b>	40	Feedthrough	ZL-RTB40	
		Fuse	ZL-RFU40 <sup>4</sup>	

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

1 The P3-64ND3, P3-64TD1 and P3-64TD2 modules have two 32-point connectors and require two ZIPLink cables and two ZIPLink connector modules.

2 These modules are not supported by the ZIPLink wiring system.

3 The P3-08TRS-1 output module is derated not to exceed 2A per point maximum when used with the ZIPLink wiring system.

4 Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.





# I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in local, expansion, and remote I/O bases. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number P3-FILL).

## Discrete Input Modules

Productivity3000 Discrete Input Modules			
Part Number	Number of Inputs	Description	Price
P3-16SIM	16	Input Simulator Module	\$214.00
P3-08ND3S	8	Isolated Sinking/Sourcing DC Input	\$109.00
P3-16ND3	16	Sinking/Sourcing DC Input	\$162.00
P3-32ND3	32	Sinking/Sourcing DC Input	\$218.00
P3-64ND3	64	Sinking/Sourcing DC Input	\$284.00
P3-08NAS	8	Isolated AC Input	\$136.00
P3-16NA	16	AC Input	\$167.00

\*ZIPLink required.

## Analog I/O Modules

Productivity3000 Analog Input Modules			
Part Number	Number of Channels	Description	Price
P3-04ADS	4	Isolated Analog Input	\$796.00
P3-08AD	8	Analog Input	\$432.00
P3-16AD-1	16	Analog Input (Current)	\$589.00
P3-16AD-2	16	Analog Input (Voltage)	\$576.00
P3-08RTD	8	Analog RTD Input	\$639.00
P3-08THM	8	Analog Thermocouple Input	\$810.00

Productivity3000 Analog Output Modules			
Part Number	Number of Channels	Description	Price
P3-04DA	4	Analog Output	\$494.00
P3-08DA-1	8	Analog Output (Current)	\$857.00
P3-08DA-2	8	Analog Output (Voltage)	\$798.00
P3-16DA-1	16	Analog Output (Current)	\$1,022.00
P3-16DA-2	16	Analog Output (Voltage)	\$1,002.00

Productivity3000 Analog Input/Output Modules			
Part Number	Number of Channels	Description	Price
P3-8AD4DA-1	8/4	Analog Input/Output (Current)	\$658.00
P3-8AD4DA-2	8/4	Analog Input/Output (Voltage)	\$679.00

## Specialty Modules

Productivity3000 Specialty Modules			
Part Number	Number of Channels	Description	Price
P3-HSI	2	High-Speed Pulse Input	\$619.00
P3-HSO*	2	High-Speed Output	\$646.00
P3-SCM	4 ports	Serial Communications Module	\$523.00


\*ZIPLink required.

## Discrete Output Modules

Productivity3000 Discrete Output Modules			
Part Number	Number of Outputs	Description	Price
P3-08TD1S	8	Isolated Sinking Output	\$164.00
P3-08TD2S	8	Isolated Sourcing Output	\$169.00
P3-16TD1	16	Sinking Output	\$175.00
P3-16TD2	16	Sourcing Output	\$180.00
P3-32TD1*	32	Sinking Output	\$228.00
P3-32TD2*	32	Sourcing Output	\$218.00
P3-64TD1*	*64	Sinking Output	\$319.00
P3-64TD2*	*64	Sourcing Output	\$289.00
P3-08TAS	8	Isolated AC Output	\$212.00
P3-16TA	16	AC Output	\$225.00
P3-08TRS	8	Isolated Relay Output	\$187.00
P3-08TRS-1	8	Isolated Relay Output	\$213.00
P3-16TR	16	Relay Output	\$190.00


\*ZIPLink required.

## Module Installation Procedure

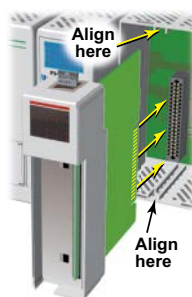

**WARNING:** DO NOT APPLY FIELD POWER UNTIL THE FOLLOWING STEPS ARE COMPLETED. SEE HOT-SWAPPING PROCEDURE FOR EXCEPTIONS.

**Step One:** Align circuit card with slot and press firmly to seat module into connector.

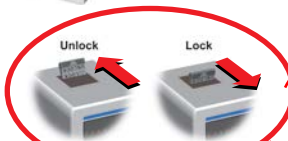


**Step Two:** Pull top and bottom locking tabs toward module face. Click indicates lock is engaged.

**Step Three:** Attach field wiring using optional terminal block or ZIPLink wiring system and install cover.



To install or remove terminal block cover, press middle to flex cover.

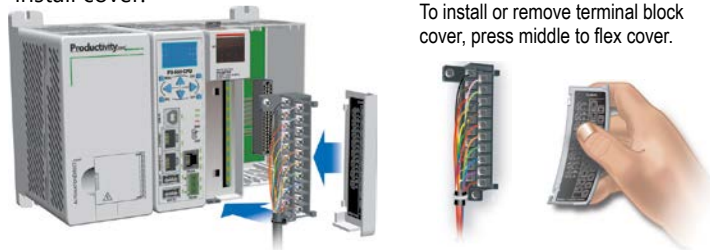

**WARNING:** EXPLOSION HAZARD – DO NOT CONNECT OR DISCONNECT CONNECTORS OR OPERATE SWITCHES WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS. DO NOT HOT-SWAP MODULES UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS.