



DC Output Modules

T1K-08TD1 \$154.00
T1K-16TD1 \$214.00

8-point and 16-point, current sinking DC output modules




The 8-point DC module uses a [T1K-08B](#) or [T1K-08B-1](#) base, which is purchased separately.

The 16-point DC module uses a [T1K-16B](#) or [T1K-16B-1](#) base, which is purchased separately.

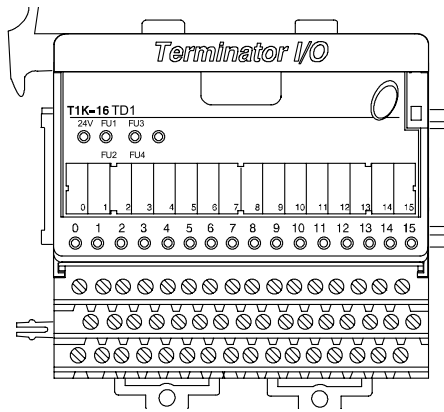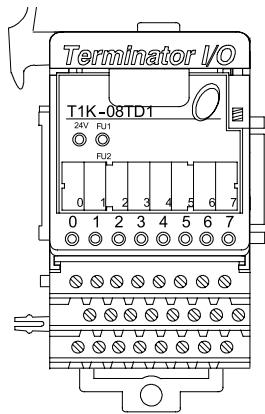

Specifications	T1K-08TD1	T1K-16TD1
Outputs per Module	8 (sink)	16 (sink)
Commons per Module	2 internally connected	4 internally connected
Operating Voltage Range	6–27 VDC min./max.	
Output Voltage Range	5–30 VDC min. / max.	
Peak Voltage	50VDC	
Max. Output Current	1A / pt, 4A / common	
Max. Leakage Current	15 μ A @ 30 VDC	
ON Voltage Drop	0.3 VDC @ 1.0 A	
Max. Inrush Current	2A for 100 ms	
OFF to ON Response	< 10 μ s	
ON to OFF Response	< 60 μ s	
Base Power Required	100 mA @ 5 VDC	200 mA @ 5 VDC
External Power Required	200 mA max. @ 20–28 VDC	400 mA max. @ 20–28 VDC
Status Indicators	Logic side	
Error Status Indicators	24V ON = low external power	
	FU1/FU2 ON = blown fuse	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown
Fuses (User Replaceable)	2	4
T1K-FUSE-1	(6.3A, 250 V / common) NQ3-6.3 SOC Corp.	
Weight	85g	140g

Equivalent Output Circuit

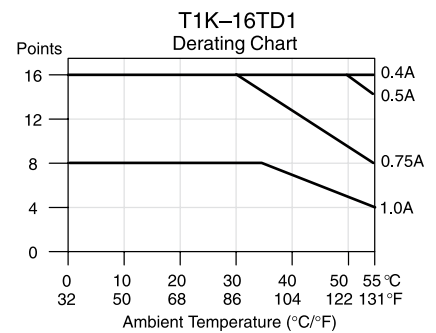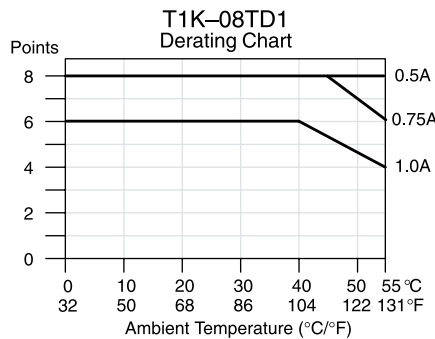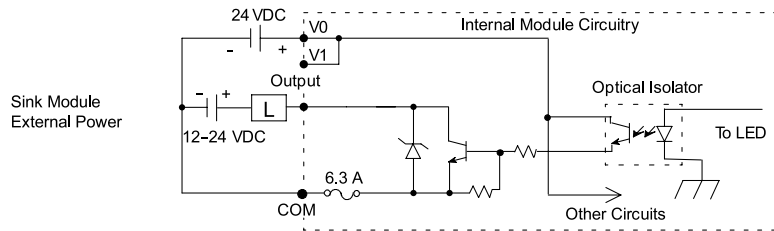

DC Output Modules



T1K-08TD2-1 \$153.00

T1K-16TD2-1 \$214.00

8-point and 16-point, 12/24 VDC current sourcing DC output module


The 8-point DC module uses a [T1K-08B](#) or [T1K-08B-1](#) base, which is purchased separately.

The 16-point DC module uses a [T1K-16B](#) or [T1K-16B-1](#) base, which is purchased separately.

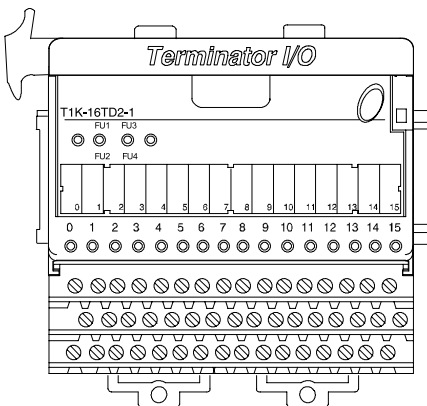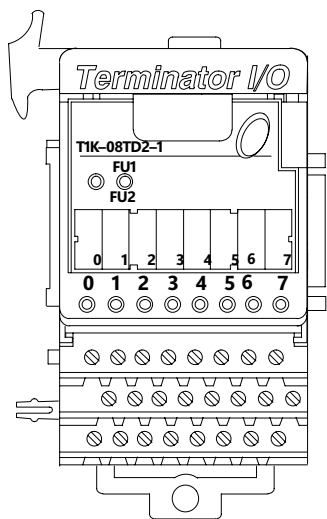


Specifications	T1K-08TD2-1	T1K-16TD2-1
Outputs per Module	8 (source)	16 (source)
Commons per Module	2 internally connected	4 internally connected
Output Voltage Range	10.8–26.4 VDC	
Operating Voltage Range	12–24 VDC	
Peak Voltage	50 VDC	
Max. Output Current	1A / pt, 4A / common	1A / pt., 4A / common (subject to derating)
Max. Leakage Current	15 µA @ 26.4 VDC	
ON Voltage Drop	1.2 VDC @ 1.0A	
Max. Inrush Current	2A for 100 ms	
OFF to ON Response	< 10 µs	
ON to OFF Response	< 0.5 ms	
Base Power Required	100 mA @ 5 VDC	200 mA @ 5 VDC
Status Indicators	Logic side	
Error Status Indications(LEDs)	FU1/FU2 ON = fuse 1 or 2 blown	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown
Fuses (User Replaceable) T1K-FUSE-1	2 qty., (6.3A, 250V / common) NQ3-6.3 SOC Corp.	4 qty., (6.3A, 250V / common) NQ3-6.3 SOC Corp.
Weight	100g	140g


Equivalent Output Circuit

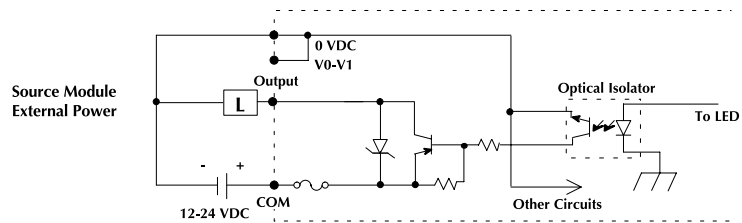

T1K-08TD2-1 Derating Chart

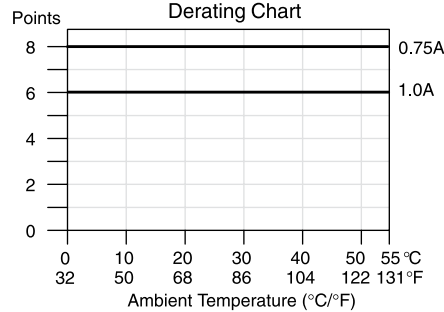

T1K-16TD2-1 Derating Chart

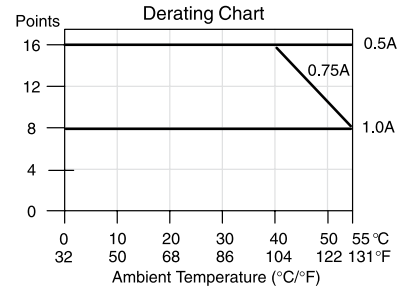


DC Output Modules

T1H-08TDS \$274.00

8-point isolated DC output module with electronic over current protection


The 8-point DC module uses a T1K-16B or T1K-16B-1 base, which is purchased separately.

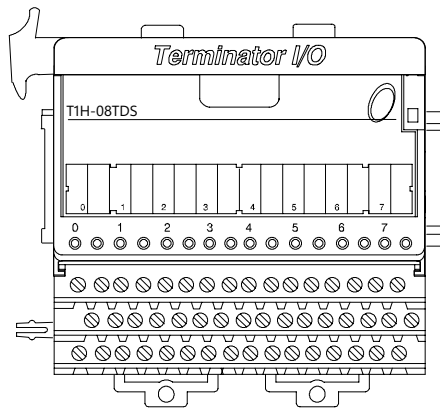



Module Specifications	T1H-08TDS
Outputs Per Module	8 (isolated, sink/source)
Commons	8 (isolated)
Operating Voltage Range	5-36 VDC
Max. Voltage	36 VDC
Output Clamp Voltage	40 VDC
Max. Load Current	2A per point, 16A per module
Electronic Over Current Protection	Output trips at 6A min., 12A max.
Max. Load Voltage	36 VDC
Max. Leakage Current	75 μ A
Max. ON State Voltage Drop	0.3V at 2A, 0.15V at 1A
Inrush Current	5A for 20 ms
OFF to ON Response	<3 μ sec
ON TO OFF Response	<100 μ sec
Base Power Required	200 mA
External Power Required	None (Output FET gates driven internally)
Thermal Shutdown	Between Tjunction = 302-374 °F (150-190 °C)
Overtemperature Reset	Thermal shutdown temp. minus 5 °F (15 °C)
Status Indicators	Logic side
Weight	93.6g

Equivalent Output Circuit

Sinking (Low Side Switching)

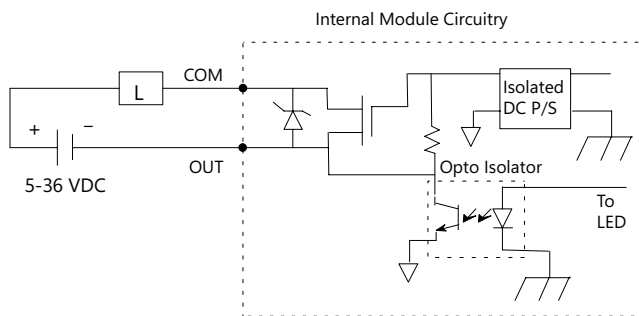

Sourcing (High Side Switching)

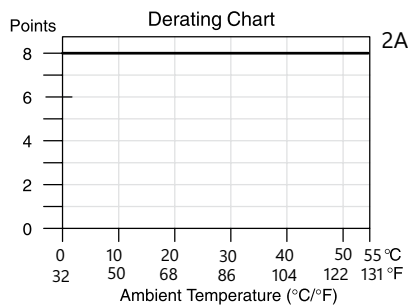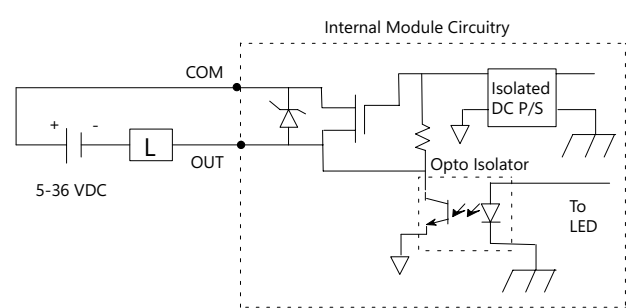



AC Output Modules

T1K-08TA \$214.00
T1K-16TA \$267.00

8-point and 16-point, AC output modules




The 8-point AC module uses a T1K-08B or T1K-08B-1 base, which is purchased separately.

The 16-point AC module uses a T1K-16B or T1K-16B-1 base, which is purchased separately.

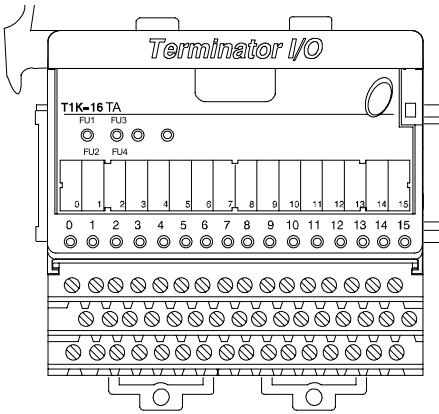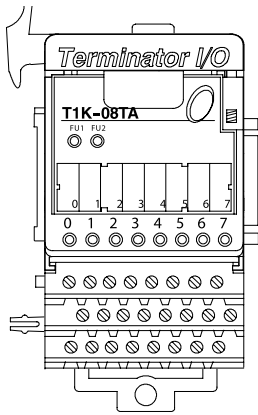

Specifications	T1K-08TA	T1K-16TA
Outputs per Module	8	16
Commons per Module	2 (4 pts / common) isolated	4 (4 pts / common) isolated
Operating Voltage Range	17-240 VAC (47-63 Hz) min./max.	
Output Voltage Range	15-264 VAC (47-63 Hz) min./max.	
Max. Load Current	1A / pt., 4A / common (subject to derating)	
ON Voltage Drop	1.5 VAC @ > 50 mA, 4.0 VAC @ < 50 mA	
Max. Leakage Current	4 mA @ 264 VAC	
Max. Inrush Current	10A for 10 ms	
Min. Load	10 mA	
OFF to ON Response	< 1 ms	
ON to OFF Response	< 1 ms + 1/2 cycle	
Base Power Required	250 mA @ 5 VDC	450 mA @ 5 VDC
Status Indicators	Logic side	
Error Status Indications(LEDs)	FU1 ON = fuse 1 blown FU2 ON = fuse 2 blown	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown
Fuses (User Replaceable)	2, (10A, 250V / common)	4, (10A, 250V / common)
T1K-FUSE-1	5 x 20mm type	5 x 20mm type
Weight	140g	190g

Equivalent Output Circuit

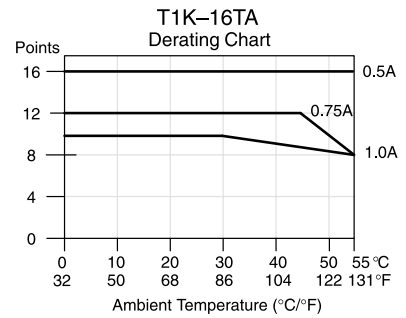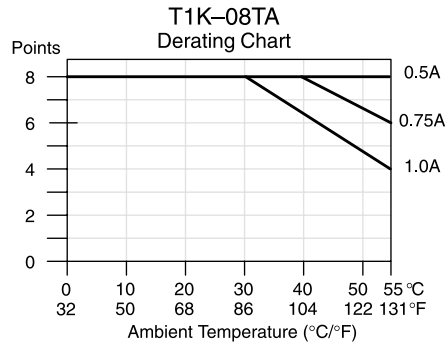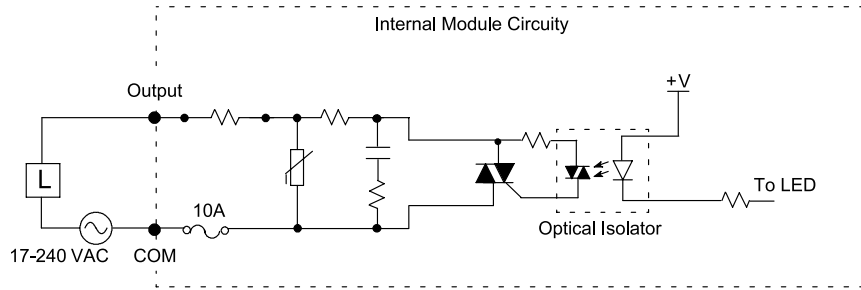


AC Output Modules

T1K-08TAS \$255.00



8-point, 17/240 VAC isolated output module

The 8-point AC module uses a T1K-16B or T1K-16B-1 base, which is purchased separately.

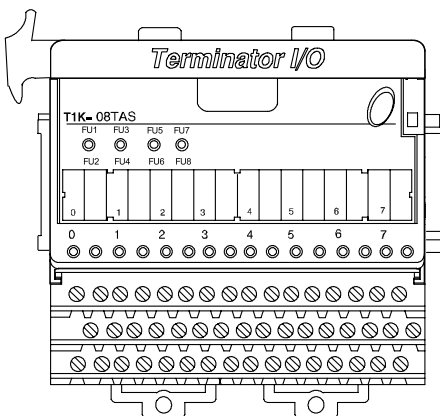

T1K-08TAS Output Specification	
Outputs per Module	8
Commons per Module	8, (1 pt /common) isolated
Operating Voltage Range	17-240 VAC (47-63 Hz)
Output Voltage Range	15-264 VAC (47-63 Hz)
Max. Load Current	2A / pt. 6A/common (subject to derating)
ON Voltage Drop	1.5 VAC @ > 50 mA, 4.0 VAC @ < 50 mA
Max. Leakage Current	4 mA @ 264 VAC
Max. Inrush Current	10A for 10 ms
Min. Load	10 mA
OFF to ON Response	< 1 ms
ON to OFF Response	< 1 ms + 1/2 cycle
Base Power Required	300 mA @ 5 VDC
Status Indicators	Logic Side
Error Status Indications(LEDs)	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown FU5/FU6 ON = fuse 5 or 6 blown FU7/FU8 ON = fuse 7 or 8 blown
Fuses (User Replaceable) T1K-FUSE-3	8, (10A, 250V / common), 1 pt. / fuse NQ3-10 SOC Corp.
Weight	190g

Equivalent Output Circuit

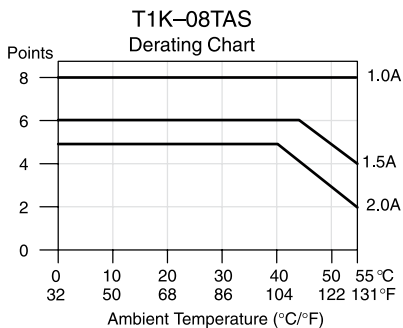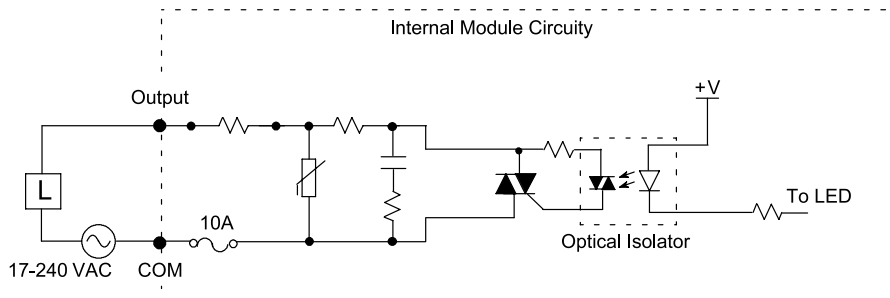



Relay Output Modules

T1K-08TR \$160.00
T1K-16TR \$261.00

8-point and 16-point, relay output modules




The 8-point relay output module uses a T1K-08B or T1K-08B-1 base, which is purchased separately.

The 16-point Relay output module uses a T1K-16B or T1K-16B-1 base, which is purchased separately.

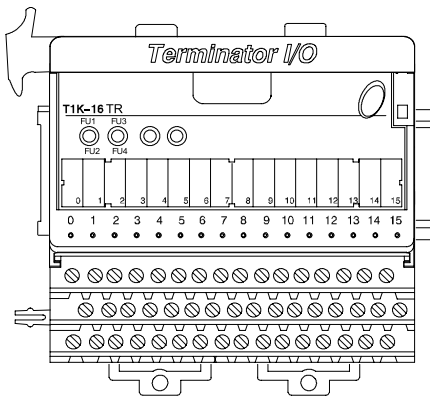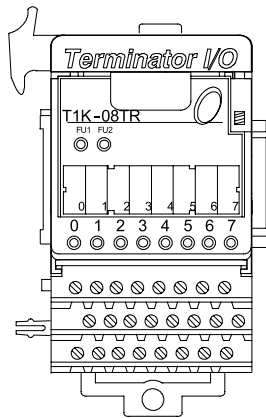

Specifications	T1K-08TR	T1K-16TR
Outputs per Module	8 normally open	16 normally open
Isolated Commons	2 (4 pts. / common) isolated	4 (4 pts. / common) isolated
Operating Voltage Range	6–240 VAC (47–63) Hz, 6–27 VDC	
Output Voltage Range	5–264 VAC (47–63) Hz, 5–30 VDC min./max.	
Max. Load Current	2A / pt., 8A / common	2A / pt., 6A / common (subject to derating)
Max. Leakage Current	0.1 mA @ 264 VAC	
Max. Inrush Current	6A for 10 ms / pt.; 20A for 10 ms / com.	
Min. Load	5 mA @ 5 VDC	
OFF to ON Response	< 15 ms	
ON to OFF Response	< 10 ms	
Base Power Required	350 mA @ 5VDC	700 mA @ 5 VDC
Status Indicators	Logic side	
Error Status Indications(LEDs)	FU1 ON = fuse 1 blown FU2 ON = fuse 2 blown	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown
Fuses (User Replaceable) T1K-FUSE-2	2, (10A, 250V / common) 5 x 20 mm type	4, (10A, 250V / common) 5 x 20 mm type
Weight	110g	200g

Typical Relay Life (Operations)		
Voltage and Load Type	Load Current	
	1A	2A
24 VDC Resistive	500 K	250 K
24 VDC Solenoid	100 K	50 K
110 VAC Resistive	500 K	250 K
110 VAC Solenoid	200 K	100 K
220 VAC Resistive	350 K	200 K
220 VAC Solenoid	100 K	50 K

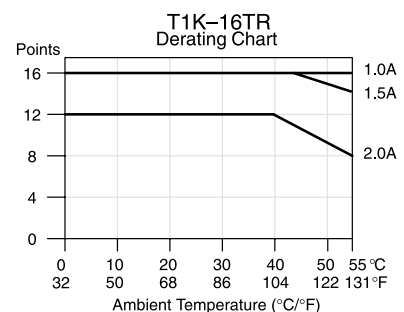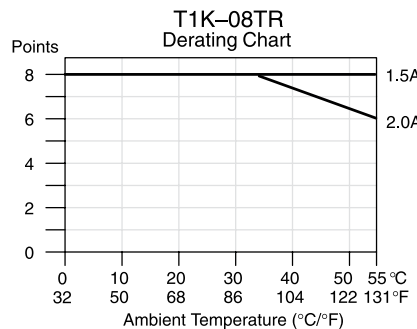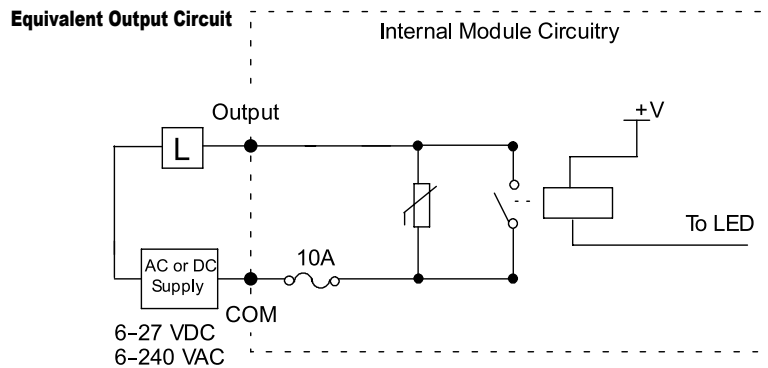


Relay Output Modules

T1K-08TRS \$265.00

8-point, isolated relay output module


The 8-point relay output module uses a T1K-16B or T1K-16B-1 base, which is purchased separately.

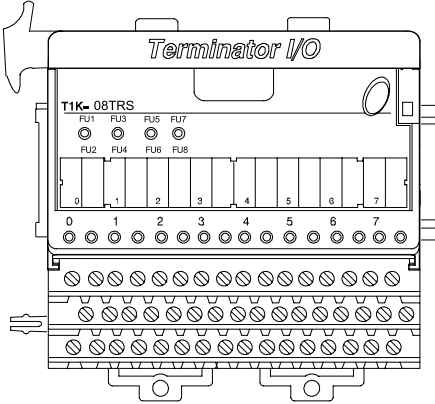


T1K-08TRS Output Specification	
Outputs per Module	8 normally open
Commons	8, 1 pt. / common (isolated)
Operating Voltage Range	6–240 VAC (47–63 Hz), 6–27 VDC
Output Voltage Range	5–264 VAC (47–63 Hz), 5–30 VDC min./max.
Max. Load Current	7A / pt. (subject to derating)
Max. Leakage Current	0.1 mA @ 264 VAC
Max. Inrush Current	8A for 10 ms
Min. Load	5 mA @ 5 VDC
OFF to ON Response	< 15 ms
ON to OFF Response	< 10 ms
Base Power Required	400 mA @ 5 VDC
Status Indicators	Logic side
Error Status Indications(LEDs)	FU1/FU2 ON = fuse 1 or 2 blown FU3/FU4 ON = fuse 3 or 4 blown FU5/FU6 ON = fuse 5 or 6 blown FU7/FU8 ON = fuse 7 or 8 blown
Fuses (User Replaceable) T1K-FUSE-3	8, (10A, 250V / common), 1 pt. / fuse NQ3-10 SOC Corp.
Weight	185g

Voltage and Load Type	Typical Relay Life (Operations)			
	Load Current			
	1A	2A	5A	7A
24 VDC Resistive	1000 K	500 K	200 K	100 K
24 VDC Solenoid	300 K	100 K	see note	see note
110 VAC Resistive	1000 K	500 K	200 K	100 K
110 VAC Solenoid	300 K	100 K	see note	see note
220 VAC Resistive	500 K	250 K	125 K	60 K
220 VAC Solenoid	300 K	100 K	see note	see note

Note: Solenoid (inductive) loads >2A cannot be used.

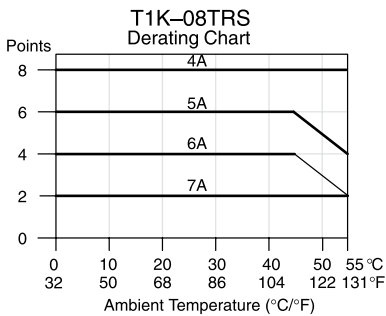

Equivalent Output Circuit

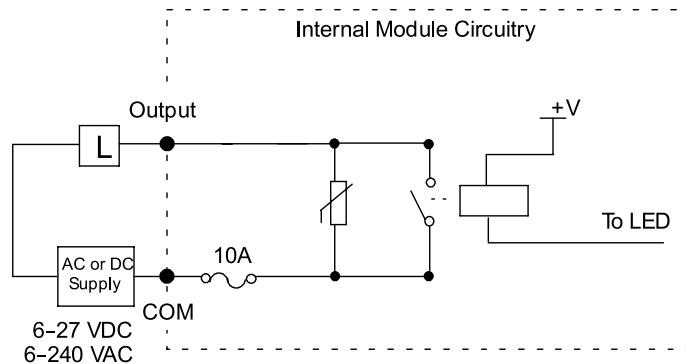

Dimensions and Installation


It is important to understand the installation requirements for your Terminator I/O system. This will ensure that the Terminator I/O products work within their environmental and electrical limits.

Plan for safety


This catalog should never be used as a replacement for the technical data sheet that comes with the products or the T1K-INST-M Installation and I/O Manual (available online at www.automationdirect.com.) The technical data sheet contains information that must be followed. The system installation should comply with all appropriate electrical codes and standards.

Unit dimensions and mounting orientation

Use the following diagrams to decide if the Terminator I/O system can be installed in your application. Terminator I/O units should be mounted horizontally. To ensure proper airflow for cooling purposes, units should not be mounted upside-down. It is important to check the Terminator I/O dimensions against the conditions required for your application. For example, it is recommended to leave 2" depth for ease of access and cable clearance. However, your distance may be greater or less. Also, check the installation guidelines for the recommended cabinet clearances.

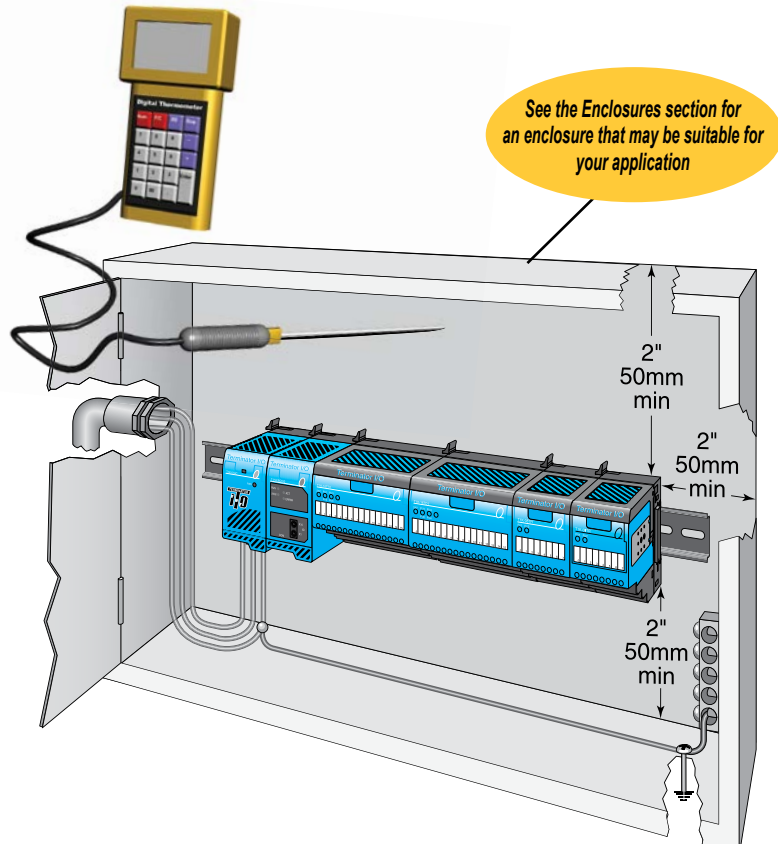

Terminator I/O Environmental Specifications	
Ambient Operating Temperature	32 to 131°F (0 to 55 °C)
Storage Temperature	-4 to +158 °F (-20 to +70 °C)
Ambient Humidity	5% to 95% (Non-condensing)
Atmosphere	No corrosive gases. The level of environmental pollution = 2 (UL 840)
Vibration Resistance	MIL STD 810C, Method 514.2
Shock Resistance	MIL STD 810C, Method 516.2
Voltage Withstand (Dielectric)	1500 VAC, 1 minute
Insulation Resistance	500 VDC, 10 Mq
Noise Immunity	NEMA ICS3-304 Impulse noise 1µs, 1000V FCC class A RFI (144 MHz, 430 MHz 10W, 10 cm)
Agency Approvals	UL, CE, FCC class A, NEC Class 1 Division 2

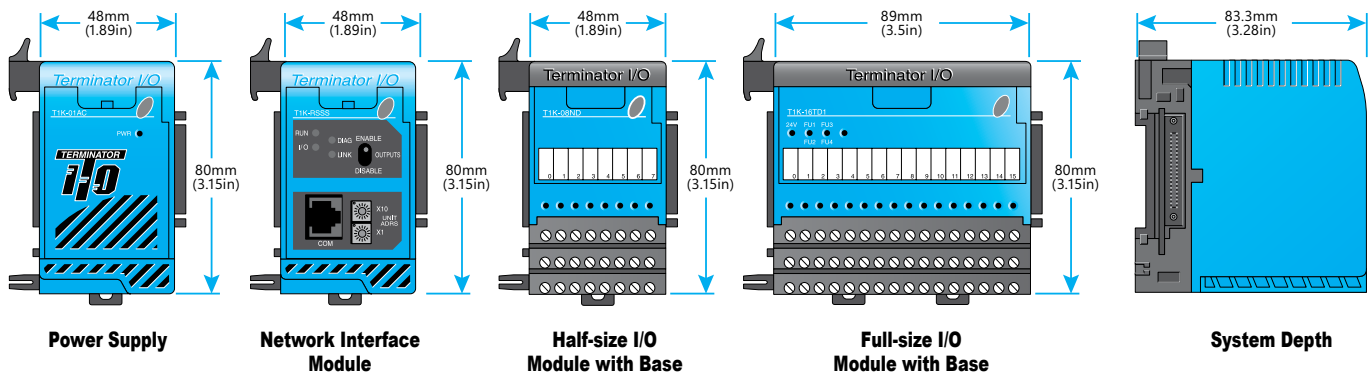


I/O Module Installation

I/O module installation



Terminator I/O modules feature separate terminal bases for easy installation.

To install I/O modules:


1. Slide the module into its terminal base (until it clicks into position)
2. Hook upper DIN rail tabs over the top of DIN rail, and press the assembly firmly onto the DIN rail.
3. Slide the module along the DIN rail until it engages with the adjacent module.

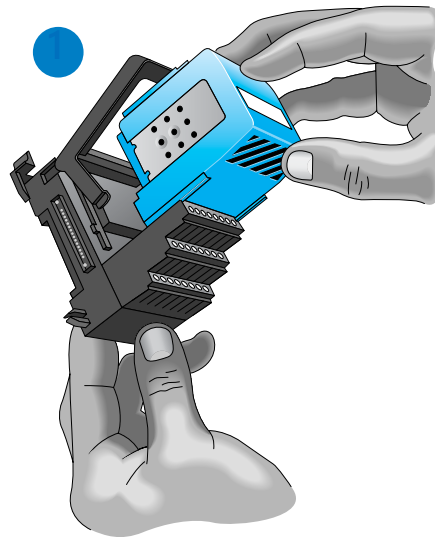

DN-ASB1 angled mounting bracket





Great for mounting in upper locations





Great for mounting in lower locations

Optional angled support bracket raises and tilts the mounting rail for easier access and wiring. Use with 35mm DIN rail. See the Connection Systems in this catalog for details.

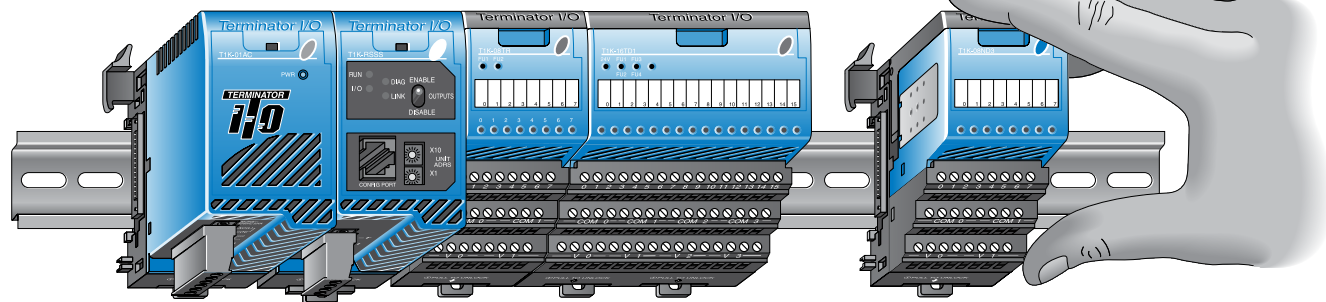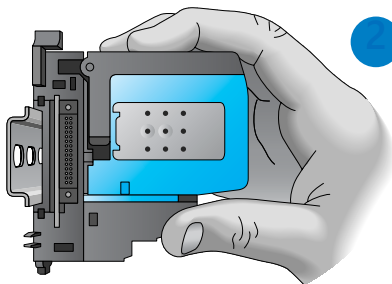

Removing I/O modules is a snap

Grip the locking handle, as shown, and pull gently to eject the I/O module from its base. The module will slide out for easy replacement. This procedure does not apply to network interface modules or power supplies, which have integral bases.

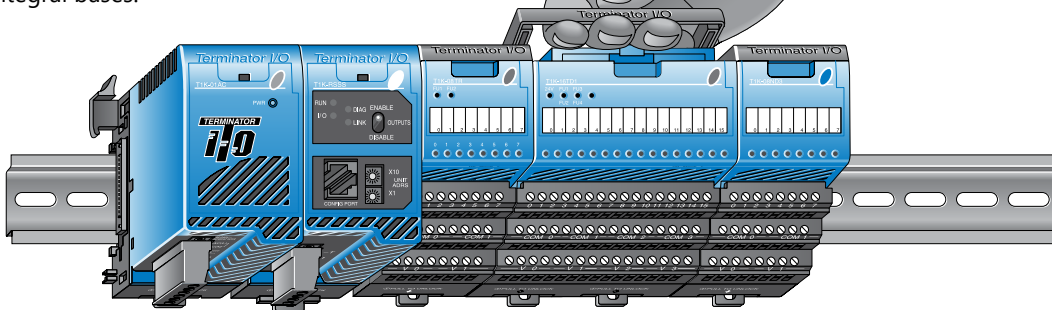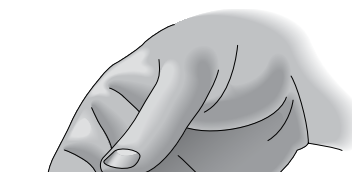


Hot-swappable I/O modules

You can remove I/O modules under power, but exercise caution while doing so. Do not touch the terminals with your hands or any conductive material. Always remove power when possible.

Power Supplies and Power Requirements

Power supplies

The Terminator I/O product line offers two power supply options: AC or DC. The power supplies are always positioned to the left of the modules to which they supply power. Consult the system configuration examples and the power budgeting example for more information on positioning power supplies.



Power supply specifications

Power Supply Specifications		T1K-01AC \$183.00	T1K-01DC \$210.00
Input Voltage Range		110/220 VAC	12/24 VDC
Input Frequency		50 / 60 Hz	N/A
Maximum Power		50 VA	30W
Max. Inrush Current		20A	10A
Insulation Resistance		> 10 MΩ @ 500 VDC	
Voltage Withstand		1 min. @ 1500 VAC between primary, secondary and field ground	
5VDC PWR	Voltage	5.25 VDC	5.25 VDC
	Current Rating	2000 mA max (see current option note below)	2000 mA max
	Ripple	5% max.	5% max.
24VDC PWR	Voltage	24 VDC	N/A
	Current Rating	300 mA max. (see current option note below)	N/A
	Ripple	10% max.	N/A
Fuse	1 (primary), not replaceable		
Replacement Terminal Block (Phoenix Contact)	MVSTBW 2.5/4-ST- 5.08 BK	MVSTBW 2.5/6-ST- 5.08 BK	
Note: 500mA @ 24VDC can be achieved by lowering the 5VDC from 2000mA to 1500mA.			

Power requirements

Module	5VDC	24VDC	Module	5VDC	24VDC	Module	5VDC	24VDC
Interface Modules			DC Output Modules			Analog Input Modules		
T1H-EBC100	300	0	T1H-08TDS	200	0	T1F-08AD-1	75	50*
T1K-DEVNETS	250	45	T1K-08TD1	100	200*	T1F-08AD-2	75	50*
T1K-MODBUS	300	0	T1K-16TD1	200	400*	T1F-16AD-1	75	50*
DC Input Modules			T1K-08TD2-1	200	0	T1F-16AD-2	75	50*
T1K-08ND3	35	0	T1K-16TD2-1	200	0	T1F-16RTD	150	0
T1K-16ND3	70	0	AC Output Modules			T1F-14THM	60	70*
AC Input Modules			AC Output Modules			Analog Output Modules		
T1K-08NA-1	35	0	T1K-08TA	250	0	T1F-08DA-1	75	150*
T1K-16NA-1	70	0	T1K-16TA	450	0	T1F-08DA-2	75	150*
			T1K-08TAS	300	0	T1F-16DA-1	75	150*
			Relay Output Modules			T1F-16DA-2	75	150*
			T1K-08TR	350	0	Combination Analog Modules		
			T1K-16TR	700	0	T1F-8AD4DA-1	75	60*
			T1K-08TRS	400	0	T1F-8AD4DA-2	75	70*
			Specialty Modules					
			T1H-CTRIO	400	0			
			* Use either internal or external source for 24VDC			* Use either internal or external source for 24VDC		


Calculating the power budget

To calculate the power budget, read the available power (current rating) from the Power Supply Specifications table and subtract the power consumed by each module to the right of the power supply. Do not include modules to the right of an additional power supply.

Power Budget Example		
Module	5 VDC	24 VDC
T1K-01AC	+2000 mA	+300 mA
T1H-EBC100	-300 mA	-0 mA
T1K-16ND3	-70 mA	-0 mA
T1K-16TD2	-200 mA	-0 mA
T1F-08AD-1	-75 mA	-50 mA
Remaining	+1355 mA	+250 mA

Adding additional power supplies

Each power supply furnishes power only to the network interface and I/O modules to its right. Inserting a second power supply closes the power loop for the power supply to the left, while also powering the modules to its right. Perform a power budget calculation for each power supply in the system.

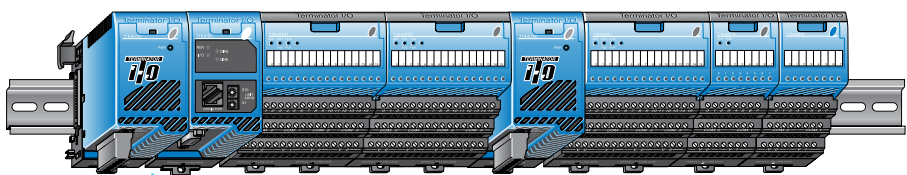

This power supply powers the network interface module and the next two I/O modules

This power supply powers these three I/O modules

Expansion I/O Configurations

Expansion cables


<u>T1K-10CBL</u>	\$162.00
<u>T1K-10CBL-1*</u>	\$211.00

Right side to left side expansion cable

The T1K-10CBL(-1) connects the right side of an I/O base to the left side of the next I/O base. A maximum of two T1K-10CBL(-1) cables can be used per expansion system.




*Note: The (-1) versions of the expansion cables pass 24 VDC through on an isolated wire. (All cables pass the 5 VDC base power.) Any local expansion DC input module configured for "internal power" (current sourcing) must either have a power supply preceding it on the same base or, have a (-1) version cable pass 24 VDC from a power supply on the preceding base.

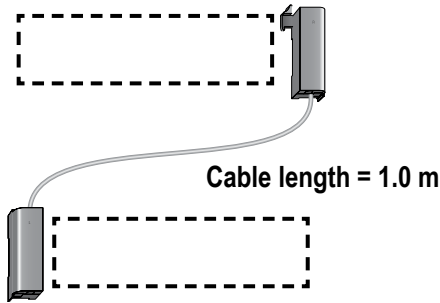

Using two T1K-10CBL expansion cables

In the system below, power supplies can be used anywhere.

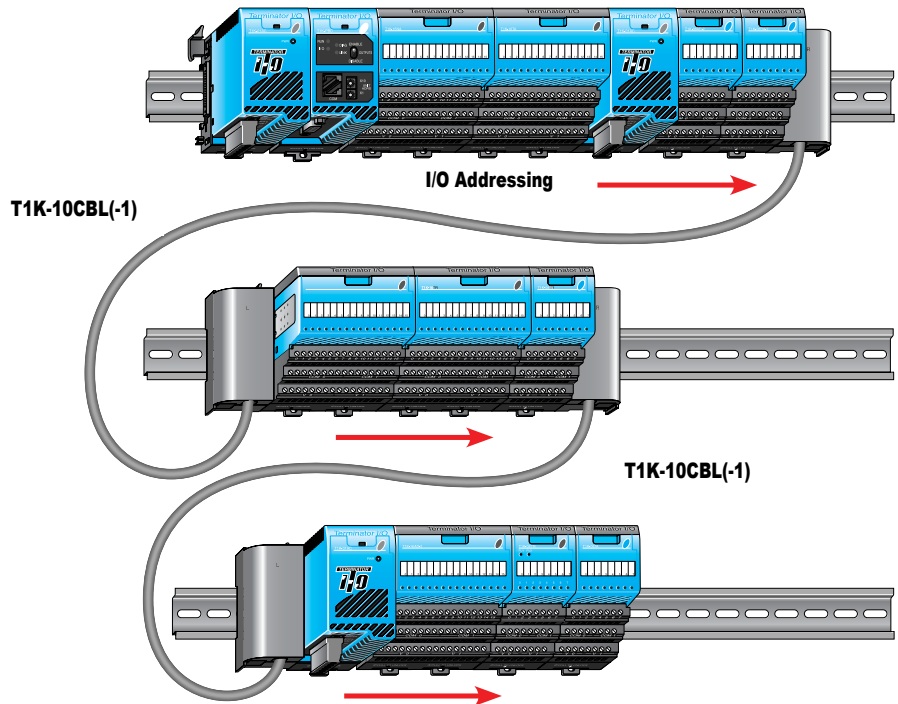

Field Device Wiring and Power Options

Terminal base specifications

Terminator I/O terminal bases are available in screw clamp and spring clamp versions for both half-size and full-size modules. Hot stamp silk screen labeling is used for numbering I/O points, commons, and all power terminals.

Terminal Base Specifications		
Terminal Type	Screw type	Spring clamp
Recommended Torque	1.77–3.54 lb-in (0.2–0.4 N·m)	N/A
Wire Gauge	Solid: 25–12 AWG	Solid: 25–14 AWG
	Stranded: 26–12 AWG	Stranded: 26–14 AWG


Field device wiring options

Power your DC input devices from the integrated 24 VDC power supply bus. [T1K-08ND3](#) and [T1K-16ND3](#) DC input modules include jumpers for selecting the internal 24 VDC power supply available for 2- and 3-wire field devices. Clearly labeled triple stack terminals make it easy to wire 2- and 3-wire devices ensuring clean wiring with only one wire per termination.

External user supplied 24 VDC power, or auxiliary 24 VDC terminals from [T1K-01AC](#), can be easily applied directly to one end of the terminal rows and jumpered across each base in the system.


This is a convenient solution for powering analog I/O and discrete DC output devices whose modules do not have direct access to the internal bussed 24 VDC. If current consumption increases, simply add additional [T1K-01AC](#) power supplies into the system.

T1K-08B \$163.00




Screw clamp, half-size

T1K-08B-1 \$176.00




Spring clamp, half-size

T1K-16B \$199.00




Screw clamp, full-size


T1K-16B-1 \$209.00



Spring clamp, full-size

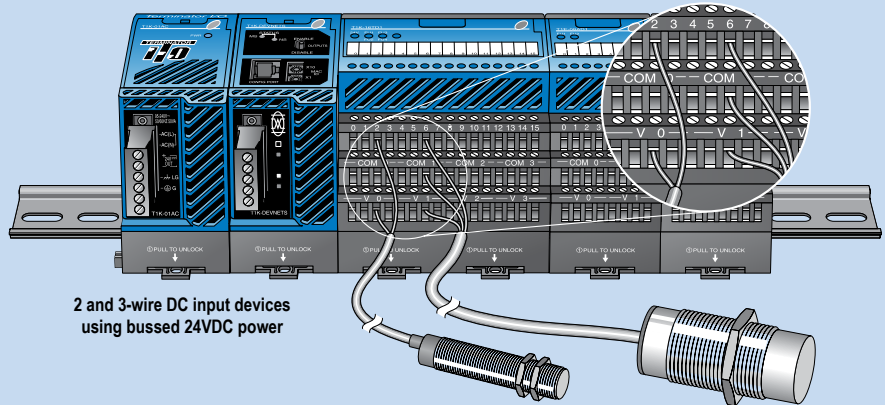

2 and 3-wire DC input devices using bussed 24VDC power

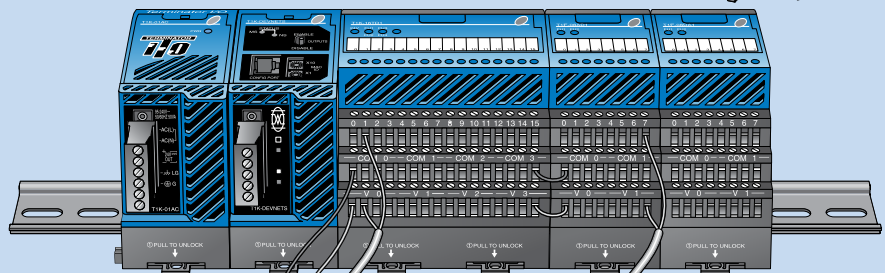

Use externally supplied 24VDC power or 24VDC auxiliary power from [T1K-01AC](#)

Do not jumper modules together to create a 24VDC bus when using the "hot swap" feature. See Note below.

Hot-swap feature

The hot-swap feature allows Terminator I/O modules to be replaced while system power is on. Be careful not to touch the terminals with your hands or other conductive material to avoid the risk of personal injury or equipment damage. Always remove power if it is equally convenient to do so.

Note: Before hot-swapping analog or

DC output modules in a Terminator I/O system, make sure that each of the analog and DC output module's 24 VDC and 0 VDC base terminals are wired directly to the external power supply individually. If the external 24 VDC and 0 VDC is jumpered from base to base in a daisy chain fashion, and an analog or DC output

module is removed from its base, the risk of disconnecting the external 24 VDC and 0 VDC to the subsequent I/O modules exists.