

BX-DM1-36ER-D

BRX MPU with Do-more! DM1 technology
 24 VDC required, serial port, microSD slot, Discrete Input: 20-point, sink / source, Discrete Output: 16-point, relay.

I/O Terminal Blocks sold separately.
 (See Terminal Block Connection Options table).

Document Name	Edition/Revision	Date
BX-DM1-36ER-D	1st Ed. RevE	9/8/2021

Copyright 2021, AutomationDirect.com Incorporated/All Rights Reserved Worldwide.

General Specifications	
Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 85°C (-4° to 185°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Enclosure Type	Open Equipment
Agency Approvals	UL61010-2 - UL File # E185989 Canada and USA CE Compliant EN61131-2*
Noise Immunity	NEMA ICS3-304
EU Directive	See the "EU Directive" topic in the Help File
Weight	458g (16.2 oz)

*Meets EMC and Safety requirements. See the D.O.C. for details.

Power Supply Specifications	
Nominal Voltage Range*	12-24 VDC
Input Voltage Range (Tolerance)*	10-36 VDC
Maximum Input Voltage Ripple	<± 10%
Maximum Input Power	30W
Cold Start Inrush Current	5A, 2ms
Maximum Inrush Current (Hot Start)	5A, 2ms
Internal Input Protection	Reverse Polarity Protection and Undervoltage
Heat Dissipation	22.7W Max
Voltage Withstand (dielectric)	1500VAC Power Inputs to Ground applied for 1 minute

*Class 2 or LPS Power Supply required.

CPU Specifications	
Program Memory Type	FLASH memory
User Data Memory Type	Battery Backed RAM, User configurable
Pluggable Option Module	RS-232, RS-485, Ethernet 10/100 BASE-T (1Mbps throughput max), USB 2.0 Type B
Expansion Modules	4 expansion modules max
Real Time Clock Accuracy	±2.6s per day typical at 25°C ±8s per day max at 60°C
Programming Software	Do-more Designer – Ver. 2.0 or higher
Programming Cable Options	BX-PGM-CBL
Custom Label Window Size	0.75" x 2.25" (19mm x 57.2mm)

Terminal Block Connection Options	
BX-RTB36	Terminal Block Kit, 90-degree screw type, fits all BRX 36-point PLCs. Kit includes (12) 5-pin 5mm terminal blocks.
BX-RTB36-1	Terminal Block Kit, 180-degree spring clamp type, fits all BRX 36-point PLCs. Kit includes (12) 5-pin 5mm terminal blocks.
ZL-BX-CBL15	ZIPLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 0.5 meter (1.6 ft.) length, 4 required.
ZL-BX-CBL15-1	ZIPLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 1 meter (3.3 ft.) length, 4 required.
ZL-BX-CBL15-2	ZIPLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 1 meter (3.3 ft.) length, 4 required.
ZL-BX-CBL15-1P	ZIPLink PLC I/O cable, 15-position terminal block to pigtail connection, 24AWG. 1 meter (3.3 ft.) length, 4 required.
ZL-BX-CBL15-2P	ZIPLink PLC I/O cable, 15-position terminal block to pigtail connection, 24AWG. 2 meter (6.6 ft.) length, 4 required.
ZL-RTB20	ZIPLink Two-Level Feedthrough Module. 20 pole, 35mm DIN mount, 4 required.
ZL-RTB20-1	ZIPLink Three-Level Feedthrough Module. 20 pole, 35mm DIN mount, 4 required.

Built-in RS-232/485 Port Specifications	
Port Name	RS-232/RS-485 Serial Port
Description*	Non-isolated serial port that can communicate via RS-232 or RS-485 (software selectable). Includes ESD protection and built-in surge protection.
Supported Protocols	Do-more Protocol (Default) Modbus RTU (Master & Slave) K-Sequence (Slave) ASCII (In & Out)
Data Rates	1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200
Default Settings	RS-232, 115200 bps, No Parity, 8 Data Bits, 1 Stop Bit, Station #1
Port Type	3-pin terminal strip 3.5mm pitch
Port Status LED	Green LED is illuminated when active for TXD and RXD
RS-485 Station Addresses	1-247
Cable Recommendations	RS-232 use L19772-XXX from AutomationDirect.com RS-485 use L19827-XXX from AutomationDirect.com
Replacement Connector	ADC Part # BX-RTB03S


Pinout	RS232	RS485
	1	GND
2	RX	D-
3	TX	D+

Removable connector included.


* NOTE: When using RS-485, a terminator resistor is built-in and software selectable.

CPU Mode Switch Functions	
RUN position	CPU is forced into RUN Mode if no errors are encountered.
TERM position	RUN, PROGRAM and DEBUG modes are available. In this position, the mode of operation can be changed through the Do-more Designer Software.
STOP position	CPU is forced into STOP Mode.

Dimensional Information

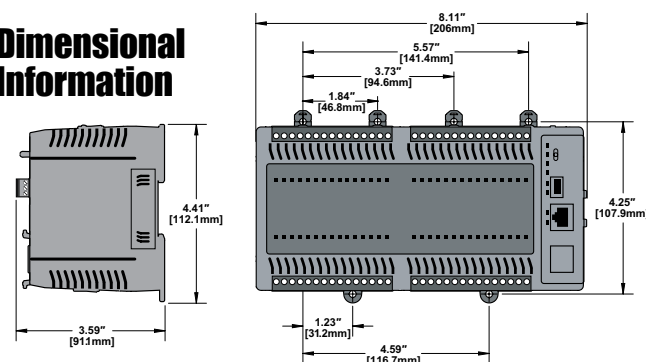

Mounting Restrictions

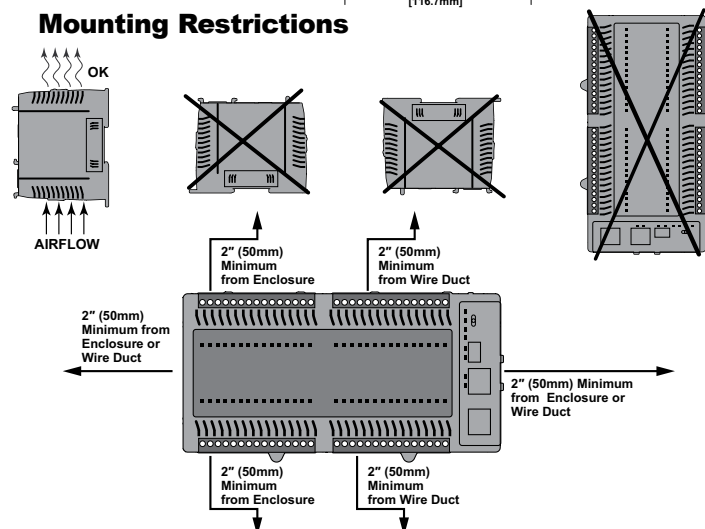

Terminal Block Connector Specifications			
Part Number	BX-RTB03S	BX-RTB36	BX-RTB36-1
Connector Type	Screw Type-90°	Screw Type-90°	Spring Clamp Type-180°
Wire Exit	180°	180°	180°
Pitch	3.5mm	5.0mm	5.0mm
Screw Size	M2	M2.5	N/A
Recommended Screw torque	<1.77 lb-in (0.2 N·m)	< 3.98 lb-in (0.45 N·m)	N/A
Screwdriver Blade Width	2.5mm	3.5mm	3.5mm
Wire Gauge (Single Wire)	28-16 AWG	28-12 AWG	28-14 AWG
Wire Gauge (Dual Wire)	28-16 AWG	28-16 AWG	28-16 AWG (Dual Wire Ferrule Required)
Wire Strip Length	0.24in (6mm)	0.3in (7.5mm)	0.37in (9.5mm)
Equiv. Dinkle part #	EC350V-03P-BK	5ESDV-05P-BK	5ESDSR-05P-BK

CPU Status Indicators		
Indicator	Status	Description
PWR	OFF	Base Power OFF
	Green	Base Power ON
	Yellow	Low Battery
RUN	OFF	CPU is in STOP Mode
	Green	CPU is in RUN Mode
	Yellow	Forces are Active
MEM	OFF	No ROM Activity, No SD Card
	Yellow	ROM Activity (Flash or SD Card)
	Green	SD Card Installed and Mounted
ERR	Red	SD Card Installed and Not Mounted
	OFF	CPU is functioning normally
	Red	CPU Fatal Hardware Error or Software Watchdog Error

Do-more BRX Manual available at
www.automationdirect.com/pn/doc/manual/BX-DM1-36ER-D




IMPORTANT!



Hot-Swapping Information

Note: This device cannot be Hot Swapped.

Terminal and Front Panel Layout

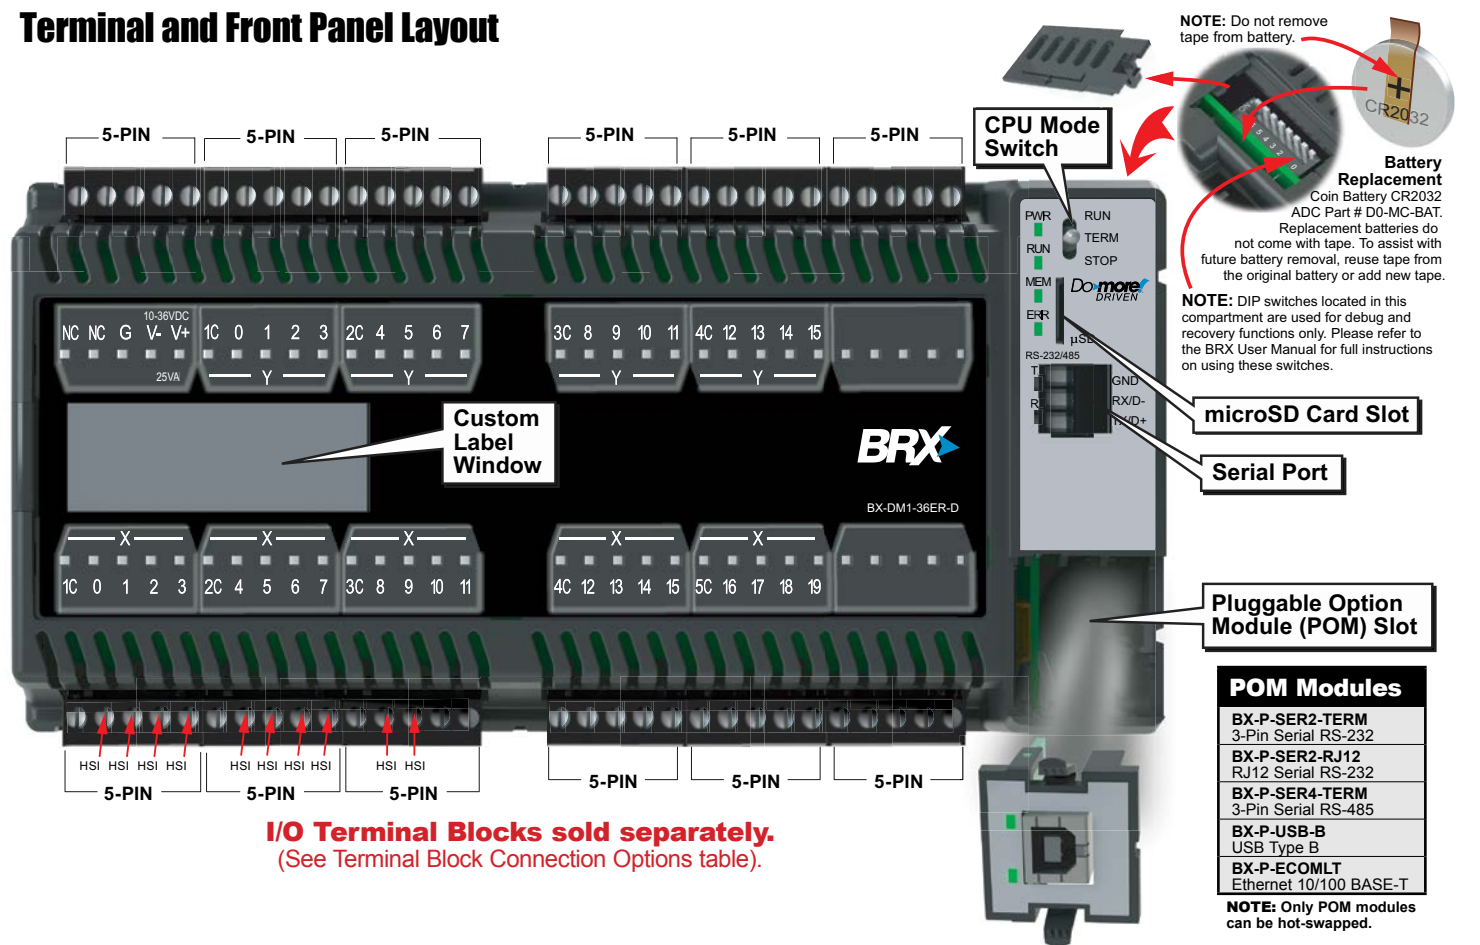




I/O Terminal Blocks sold separately.
(See Terminal Block Connection Options table).

POM Modules	
BX-P-SER2-TERM	3-Pin Serial RS-232
BX-P-SER2-RJ12	RJ12 Serial RS-232
BX-P-SER4-TERM	3-Pin Serial RS-485
BX-P-USB-B	USB Type B
BX-P-ECOMLT	Ethernet 10/100 BASE-T


NOTE: Only POM modules can be hot-swapped.

I/O Wiring


Discrete Input Wiring

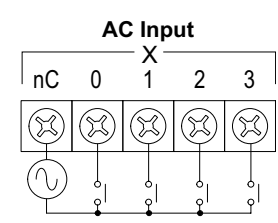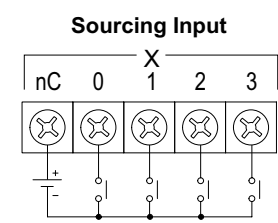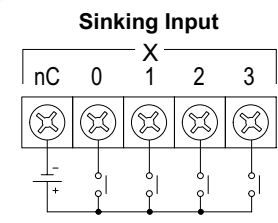

Discrete Output Wiring

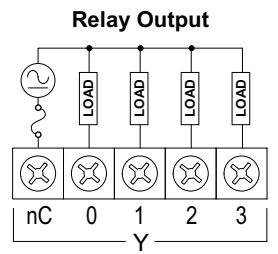

Supply Power Wiring

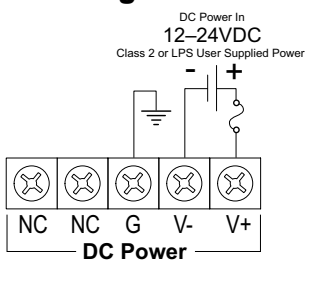

Discrete Input Specifications

Input Type	Sink/Source
Total Inputs per Module	20 Total – 10 High Speed (X0..X9)* 10 Standard (X10..X19) *All inputs may be used as standard inputs
Commons	5 (4 points/common) Isolated
Nominal Voltage Rating	12-24 VAC/DC
Input Voltage Range	9-30 VAC/DC
Maximum Voltage	30 VAC/DC
DC Frequency	0-250kHz - High Speed
Minimum Pulse Width	0.5 µs - High Speed
AC Frequency	47-63 Hz (0-240Hz filter must be set in software for AC operation)
Input Impedance	3kΩ @ 24VDC
Input Current (typical)	6mA @ 24 VAC/DC
Maximum Input Current	12mA @ 30 VAC/DC
Maximum OFF Current	2.0 mA
ON Voltage Level	> 9.0 VAC/VDC
OFF Voltage Level	< 2.0 VAC/VDC
Status Indicators	Logic Side, Green

Discrete Output Specifications

Output Type	Relay Form A (SPST)
Total Outputs per Module	16 Relay
Commons	4 (4 points/common) Isolated
Maximum current per common	8A
Nominal Voltage Ratings	12-48 VDC, 24-240 VAC
Operating Voltage Range	5-60 VDC, 5-264 VAC
Maximum Voltage	60VDC, 264VAC
Minimum Output Current	0.1mA @ 24VAC/DC
Maximum Output Current	2A
Maximum Leakage Current	1µA (DC), 300µA (AC) due to RC snubber
Maximum Switching Frequency	10Hz
Status Indicators	Logic Side, Green

High Speed Input (HSI) Functions

Input Function	Inputs Required ¹		10/ 10E	18/ 18E	36/ 36E
High-Speed Counting	1	Up counters	Up to (3)		
	1	Down counters			
	2	Up/Down counters			
Position Scaling	2	Pulse/Direction (Bidirectional) counters			
	2	Quadrature (A and B) counters			
Frequency Measurement	2	Quadrature (A and B) counters			
	3	Quadrature (A and B with Z) counters			
Interval Measurement	1	Single Input (Edge) timers			
	2	Dual Input (Dual Edge) timers			
Duration Measurement	1	Single Input (Edge) timers			
Table-Driven Output(s) ²		Programmable limit switches			
		Preset tables			
Interrupt(s)	4	Input interrupts	Up to (4)		
	0	Timer interrupts			
	0	Match register interrupts			

1. Standard inputs may be used with high-speed functions, but at lower response frequencies of approximately 120Hz.
2. Table Driven Output(s) are triggered by an Axis Position or a high-speed counter/timer accumulator value. It requires the selection of 1 discrete output. (see HSO Note 1 below)