


VARIMETER Voltage Relay RL 9836


Translation
of the original instructions

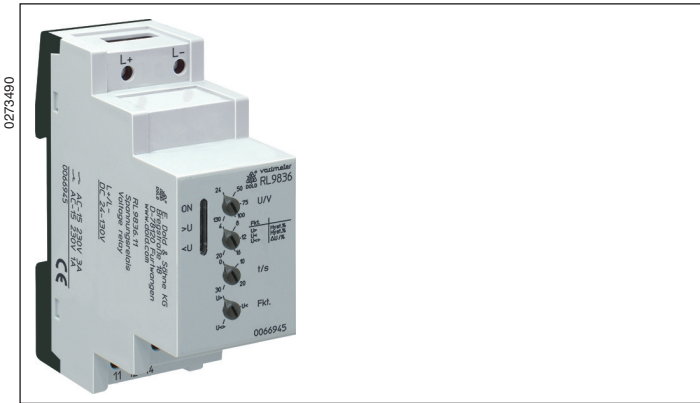

Product Description

The measuring relay RL 9836 of the VARIMETER series monitors overvoltage, undervoltage and voltage range in DC voltage systems. The measurement is very simple and without extensive wiring as there is no auxiliary power supply necessary. The monitoring functions are easily selectable using a single turn switch without complex menu structure. The early detection of up-coming break downs and preventive maintenance avoid expensive damages. As user you profit from the reliability and availability of your plant.

Circuit Diagram

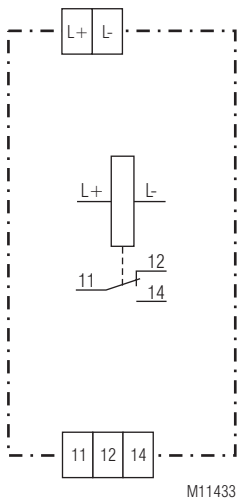

M11433

Connection Terminals

Terminal designation	Signal description
L +	Positiv voltage measuring input
L -	Negative voltage measuring input
11, 12, 14	Changeover contact (outputrelay)

Your Advantages

- Preventive maintenance
- For better productivity
- High repeat accuracy
- Wide measuring voltage range
- Easy setting

Features

- According to IEC/EN 60255-1
- For DC monitoring
- Detection of
 - Overvoltage
 - Undervoltage
 - Voltage range excess in single-phase AC voltage systems
- No separate auxiliary voltage necessary
- Output: 1 changeover contact
- De-energized on trip
- Adjustable switching voltage
- Adjustable hysteresis for reset
- Adjustable switching delay
- Fast fault detection
- Width: 35 mm

Approvals and Markings



Application

- For monitoring direct current voltage supply systems to detect undervoltage, overvoltage
- Switch over to emergency supply after fault detection

Function

When monitoring overvoltage, undervoltage and voltage range, the exceeding of the setting values above or below the thresholds is indicated by flashing of the voltage indicating LED. After the time delay the voltage indicating is continuously on and the relay de-energises. If the voltage returns to normal value, the LED goes immediately off and the output relay energises.


The output relay is de-energized on trip.

In the voltage range monitoring mode the nominal voltage range $U \pm \Delta U$ is adjustable. An alarm is evoked in case the voltage leaves this monitoring range. The hysteresis for switching back into good condition is half the value set by the potentiometer ΔU .


Indicator

Green LED „ON“:	On, when supply connected
Red LED „>U“:	On, when overvoltage
Red LED „<U“:	On, when undervoltage

Function Diagrams

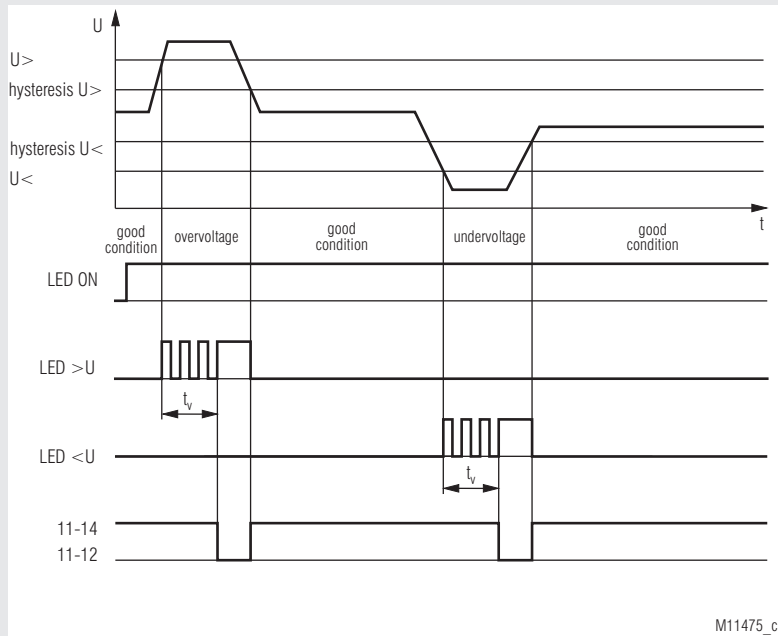

Monitoring function: overvoltage / undervoltage; rotary switch: „U>“ / „U<“

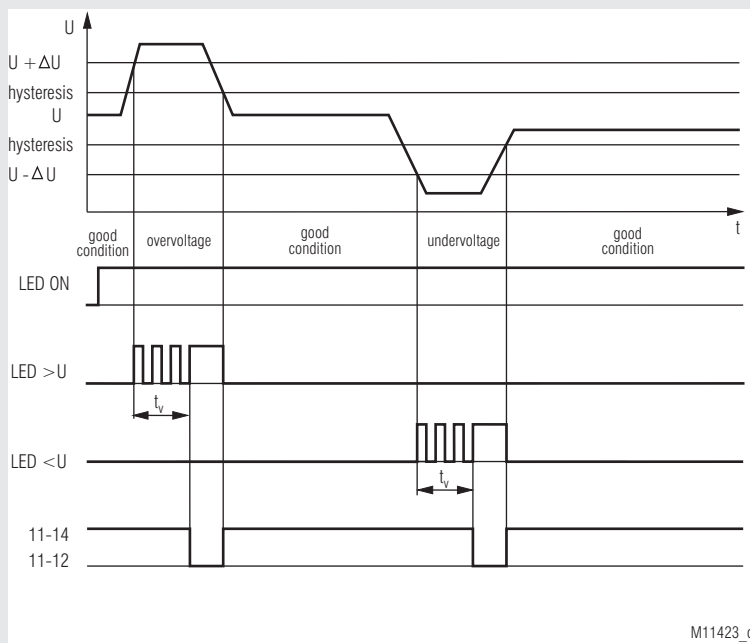

Monitoring function: voltage range; rotary switch: „U<>“

Notes

The following monitoring functions are selectable using the 3-step function switch:

Function select	Monitoring function
U>	Overvoltage
U<	Undervoltage
U<>	Voltage range

Technical Data

Input

Operating voltage U_b : DC 24 ... 130 V; DC 50 ... 250 V
Voltage rated operating U_e : DC 28 ... 118 V; DC 59 ... 227 V
Nominal consumption: Approx. 2 W

Output

Contacts: 1 changeover contact
Contact material: AgNi
Switching voltage: AC/DC 250 V
Thermal current I_{th} : 5 A
Switching capacity
 To AC 15
 NO contact: 3 A / AC 230 V IEC/EN 60947-5-1
 NC contact: 1 A / AC 230 V IEC/EN 60947-5-1
 To DC1: 5 A / DC 30 V IEC/EN 60947-4-1
 0.3 A / DC 250 V IEC/EN 60947-4-1
Electrical life
 To AC 15 at 1 A, AC 230 V: Typ. 3×10^5 switching cycles
Short circuit strength IEC/EN 60947-5-1
 Max. fuse rating: 5 A gG / gL
Mechanical life: $> 30 \times 10^6$ switching cycles

Measuring circuit

Measuring voltage: Infinite adjustable
 DC 24 ... 130 V; DC 50 ... 250 V
Hysteresis: Infinite adjustable 4 ... 20 %
Switching delay t_d : Infinite adjustable
 instantaneous, 2 ... 30 s
Repeat accuracy: ± 2 %
Temperature influence: ± 1 %
Attention:
The combination of adjusted switching voltage U and hysteresis ΔU must be within the measuring range

General Data

Operating mode: Continuous operation
Temperature range
 Operation: -20 ... +55 °C
 Storage: -25 ... +60 °C
 Relative air humidity: 93 % at 40 °C
Altitude: < 2000 m
Clearance and creepage distances
 Rated impuls voltage/
 Pollution degree: 4 kV / 2 IEC 60664-1
EMC
 Electrostatic discharge (ESD): 8 kV (air) IEC/EN 61000-4-2
 HF irradiation
 80 MHz ... 1 GHz: 12 V / m IEC/EN 61000-4-3
 1 GHz ... 2,7 GHz: 10 V / m IEC/EN 61000-4-3
 Fast transients: 2 kV IEC/EN 61000-4-4
 Surge
 Between
 wires for power supply: 2 kV IEC/EN 61000-4-5
 Between wire and ground: 4 kV IEC/EN 61000-4-5
 HF wire guided: 10 V IEC/EN 61000-4-6
 Interference suppression: Limit value class B EN 55011
Degree of protection:
 Housing: IP 40 IEC/EN 60529
 Terminals: IP 20 IEC/EN 60529
Enclosure: Thermoplastic with V0 behaviour
 acc. to UL subject 94

Technical Data

Vibration resistance: Amplitude 0.35 mm
 Class I IEC/EN 60255-21
 20 / 055 / 04 IEC/EN 60068-1
Terminal designation: EN 50005
Wire connection: DIN 46228-1/-2/-3/-4
Fixed screw terminals
 Cross section: 0.2 ... 4 mm² (AWG 24 - 12) solid or
 0.2 ... 2.5 mm² (AWG 24 - 12)
 stranded wire with and without ferrules
 Stripping length: 7 mm
Fixing torque: 0.6 Nm EN 60999-1
Wire fixing: Captive slotted screw / M2.5
Mounting: DIN rail IEC/EN 60715
Nettogewicht: Approx. 105 g

Dimensions

Width x height x depth: 35 x 90 x 71 mm

UL-Data

ANSI/UL 60947-1, 5th Edition
 ANSI/UL 60947-5-1, 3rd Edition

CAN/CSA-C22.2 No. 60947-1-13, 2nd Edition
 CAN/CSA-C22.2 No. 60947-5-1-14, 1st Edition

Switching capacity: Pilot duty B300
 5A 240Vac Resistive, G.P.
 5A 30Vdc Resistive or G.P.
 5A 250Vac G.P.

Wire connection: 60°C / 75°C copper conductors only
 AWG 24 - 12 Sol/Str Torque 0.6 Nm



Technical data that is not stated in the UL-Data, can be found in the technical data section

Standard Type


RL 9836.11/61 DC 50 ... 250 V 4 ... 20 % 0 ... 30 s
 Article number: 0066430
 • Output: 1 Wechsler
 • Operating voltage: DC 50 ... 250 V
 • Hysteresis: 4 ... 20 %
 • Switching delay: 0 ... 30 s
 • Width: 35 mm

Ordering example

RL 9836 .11 /00 /61 DC 50 ... 250 V 4 ... 20 % 0 ... 30 s

Switching delay
 Hysteresis
 Operating voltage
 DC 50 ... 250 V
 DC 24 ... 130 V
 UL approval
 Operation mode/Outputs
 0: De-Energized on trip
 1: Energized on trip
 Contacts
 Type

Connection Example

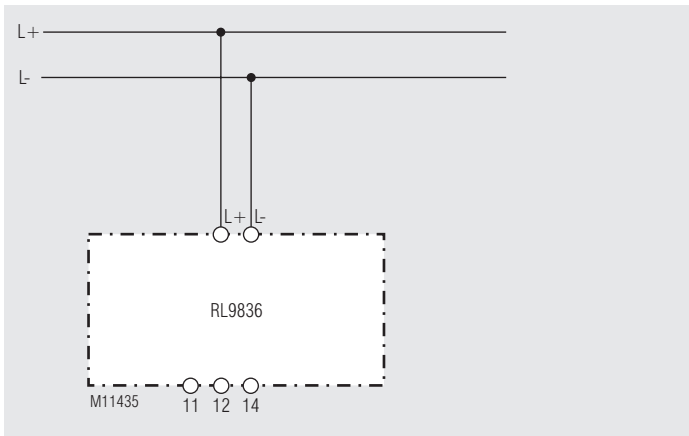

Single-phase connection