


CLICK PLC Family Overview

CLICK PLUS PLC Units


CLICK PLUS PLC Units												
PLC	Number of Option Slots	Communication Ports						MicroSD Slot	Battery Backup	Run-Time Edit	Price	
		USB	Ethernet (Port 1)	RS-232 (Port 2)	RS-485 (Port 3)	Bluetooth	WLAN					
C2-01CPU	1	Yes (MicroB)	Yes (10/100)	Yes	None	None	None	None	Yes	Yes	\$97.00	
C2-01CPU-2	2										\$136.00	
C2-02CPU	1		None	None	None	Yes (external antenna required)	Yes (external antenna required)	None			\$151.00	
C2-02CPU-2	2										\$193.00	
C2-03CPU	1		Yes (10/100)	Yes	Yes							\$205.00
C2-03CPU-2	2											\$255.00



C2-01CPU



C2-01CPU-2



C2-02CPU



C2-02CPU-2




C2-03CPU



C2-03CPU-2

CLICK PLC Family Overview


CLICK PLUS Option Slot Modules

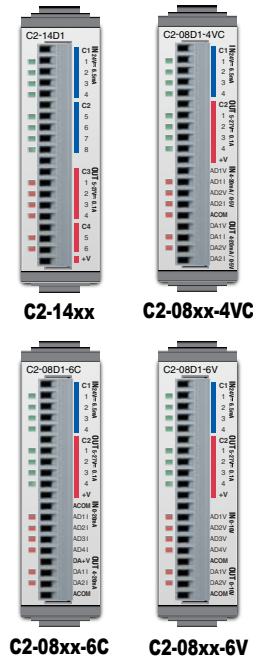

CLICK PLUS Option Slot I/O Modules					
Part Number	Discrete Input Types	Discrete Output Types	Analog Input Types	Analog Output Types	Price
C2-14D1	8 DC (sink/source) 8 points high-speed**	6 DC (sink) 3 points high-speed**	None	None	\$58.00
C2-14D2		6 DC (source) 3 points high-speed**			\$58.00
C2-14DR		6 relay			\$70.00
C2-14AR					\$70.00
C2-14TTL	8 TTL (sink/source) 8 points high-speed**	6 TTL (source) 3 points high-speed**			\$65.00
C2-08D1-4VC*	4 DC (sink/source) 4 points high-speed**	4 DC (sink) 2 points high-speed**	2 channel; voltage (0–5 VDC) / current (4–20 mA); selectable separately per channel, 12-bit	2 channel; voltage (0–5 VDC) / current (4–20 mA); selectable separately per channel, 12-bit	\$90.00
C2-08D2-4VC*		4 DC (source) 2 points high-speed**			\$90.00
C2-08DR-4VC*		4 relay			\$103.00
C2-08AR-4VC*	4 AC				\$103.00
C2-08D1-6C	4 DC (sink/source) 4 points high-speed**	4 DC (sink) 2 points high-speed**	4 channel; current (0–20 mA), 12-bit	2 channel; current (4–20 mA), 12-bit	\$90.00
C2-08D2-6C		4 DC (source) 2 points high-speed**			\$90.00
C2-08DR-6C		4 relay			\$103.00
C2-08AR-6C					4 AC
C2-08D1-6V	4 DC (sink/source) 4 points high-speed**	4 DC (sink) 2 points high-speed**	4 channel; voltage (0–10 VDC), 12-bit	2 channel; voltage (0–10 VDC), 12-bit	\$90.00
C2-08D2-6V		4 DC (source) 2 points high-speed**			\$90.00
C2-08DR-6V		4 relay			\$103.00
C2-08AR-6V					4 AC

* -4VC Option Slot modules require that you select analog I/O type (voltage or current) in the CLICK programming software.



** High-speed Inputs and Outputs are only available when the Option Slot I/O Module is installed in Slot 0.

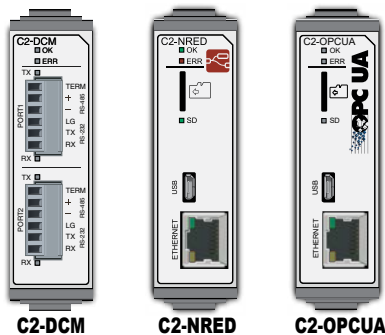

CLICK PLUS Option Slot Intelligent Modules		
Part Number	Description	Price
C2-DCM	CLICK PLUS communication module, Modbus RTU and ASCII, 2 ports, (2) RS-232/RS-485 (6-pin terminal) port(s). For use with all CLICK PLUS PLCs. (2) C2-6TB terminal blocks included.	\$118.00
C2-NRED	CLICK PLUS Node-RED module, Node-RED and JavaScript, microSD card slot, (1) microB-USB and (1) Ethernet 10/100Base-T (RJ45) port(s). For use with all CLICK PLUS PLCs.	\$235.00
C2-OPCUA	CLICK PLUS communication module, OPC-UA Server and SNTP Client, 1 port, (1) microB-USB and (1) Ethernet 10/100Base-T (RJ45) port(s). For use with all CLICK PLUS PLCs.	\$195.00

CLICK PLUS PLC Specifications

PLC Unit Specifications (continued)

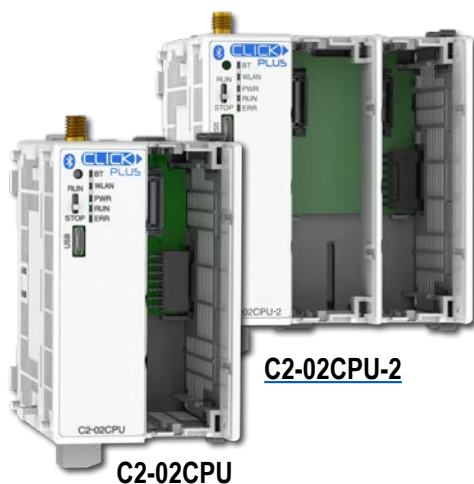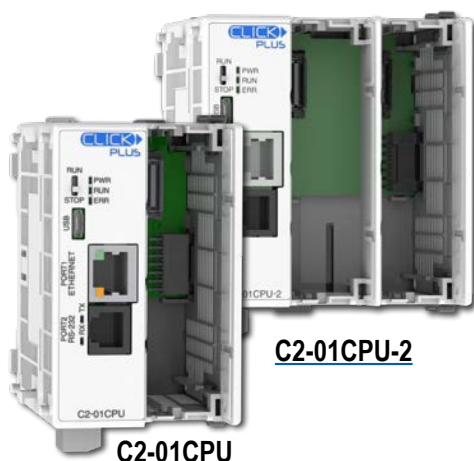

CLICK PLUS PLC Unit Specifications				
		C2-01CPU C2-01CPU-2	C2-02CPU C2-02CPU-2	C2-03CPU C2-03CPU-2
Control Method		Stored Program/Cyclic execution method		
I/O Numbering System		Fixed in Decimal		
Ladder Memory (steps)		8000		
Total Data Memory (words)		8000		
Contact Execution (boolean)		< 0.2 μ s		
Typical Scan (1k boolean)		< 1ms		
RLL Ladder Style Programming		Yes		
Run Time Edits		Yes		
Scan		Variable / fixed		
PLC Mode Switch		1 (RUN/STOP)		
FLASH Memory		Standard on PLC		
Protocol	Modbus RTU (master/slave)	Yes	No	Yes
	ASCII (in/out)	Yes	No	Yes
	Modbus TCP (client server)	Yes	Yes	Yes
	EtherNet/IP Implicit and Explicit (adapter server)	Yes	No	Yes*
MQTT		Publisher: 4 publishers, 3 blocks each Subscriber: 10 blocks		
Data Logging		N/A	N/A	Time, date, 16 addresses
CLICK Programming Software		Yes (Windows)		
Number of Instructions Available		21		
Control Relays		2000		
System Control Relays		1000		
Timers		500		
Counters		250		
Interrupt		Yes (external: 8 / timed: 4)		
Subroutines		Yes		
For/Next Loops		Yes		
Math (Integer and Hex)		Yes		
Drum Sequencer Instruction		Yes		
Internal Diagnostics		Yes		
Password Security		Yes		
System Error Log		Yes		
User Error Log		No		
Memory Backup		Super capacitor + battery		
Battery Backup		Yes (battery part #D0-MC-BAT)		
Calendar/Clock		Yes		

* EtherNet/IP available on the Ethernet RJ45 port only. Not available over Wi-Fi.

CLICK PLUS PLC Specifications

PLC Unit Specifications (continued)

CLICK PLUS PLC Unit Specifications							
		C2-01CPU	C2-01CPU-2	C2-02CPU	C2-02CPU-2	C2-03CPU	C2-03CPU-2
I/O Slot	Internal I/O	N/A (optional)					
	Option Slot Support	Yes, 1	Yes, 2	Yes, 1	Yes, 2	Yes, 1	Yes, 2
	Expansion I/O	Yes (max. 8 modules)					
Com. Ports	USB Port (programming)	Yes (device) (For programming and providing 5VDC power, microB USB)					
	Ethernet (RJ45)	Yes (10/100)		No		Yes (10/100)	
	Serial Port RS-232 (RJ12)	Yes		No		Yes	
	Serial Port RS-485 (terminal block)	No				Yes	
	WLAN	No		Yes (RP-SMA connection for optional external antenna, shared)			
	Bluetooth	No					
Status Indicators	WLAN Status LED	None		1			
	Bluetooth Status LED	None		1			
	CPU Status LED	3 (PWR/RUN/ERR)					
	Ethernet Status LED	2 (LINK/ACT 10/100)		None		2 (LINK/ACT 10/100)	
	Serial Status LED	2 (TX/RX)		None		2 (TX/RX)	
	SD Card Status LED	None				1	
Other	MicroSD Card Slot (SDHC-compatible)	No				Yes	
Power	Nominal Input Voltage	24VDC (4-pin terminal block)					
	Operating Voltage Range	24VDC, Class 2 or SELV (Safety Extra-Low Voltage) or Limited Energy Circuit power supply					
	Input Voltage Range	20.0–28.0 VDC					
	Maximum Inrush Current	30A @ 1ms					
	Power Consumption*	20W	22W	20W	22W	20W	22W
	Acceptable External Power Drop	Max 10ms (AC power failure with C0-00AC or C0-01AC)					
	Current Required	110mA	120mA	105mA	115mA	130mA	140mA
	Fuse	None					
	External Fuse Recommended	No					
	Polarity Protection	Power input is reverse polarity protected					
	USB Supply	5VDC (via USB programming port)					
Communication Port & Terminal Block Replacement		N/A		N/A		AutomationDirect p/n C0-3TB	
24VDC Power Terminal Block Replacement		AutomationDirect p/n C0-4TB					
Antenna Requirements		N/A		2.4 GHz antenna, RP-SMA connector (AutomationDirect p/n SE-ANT250 or SE-ANT210)			
Drawing Link		PDF	PDF	PDF	PDF	PDF	PDF
Weight		3.5 oz [99g]	4.0 oz [114g]	3.3 oz [94g]	3.8 oz [109g]	4.0 oz [114g]	4.6 oz [129g]

* Power consumption shown is the maximum power consumption with the maximum number of I/O modules attached.

CLICK PLUS PLC Specifications

CLICK PLUS PLC Hardware/Software Compatibility

The table below shows the minimum software and hardware versions required for the CLICK PLUS PLCs and Option Slot Modules. The CLICK PLUS PLC can also utilize the CLICK Stackable I/O Modules, as any software and hardware version compatible with CLICK PLUS is also compatible with the CLICK Stackable I/O Modules.

CLICK PLUS PLC Features Software Compatibility								
		Minimum CLICK Software Version						
Device Type	Part Number	Hardware	High-Speed Inputs*	High-Speed Outputs*	EtherNet/IP	DHCP, DNS	SNTP	PID, MQTT
CLICK PLUS CPU	C2-01CPU	v3.00	v3.00	v3.30	v3.00	v3.00	v3.00	v3.00
	C2-02CPU				N/A			
	C2-03CPU				v3.00			
	C2-01CPU-2	v3.20	v3.20		v3.20	v3.20	v3.20	v3.20
	C2-02CPU-2				N/A			
	C2-03CPU-2				v3.20			
Option Slot I/O Modules	C2-14D1	v3.00	v3.00	v3.30	N/A	N/A	N/A	N/A
	C2-14D2			N/A				
	C2-14DR							
	C2-14AR							
	C2-14TTL	v3.70	v3.70	v3.70				
	C2-08D1-4VC	v3.00	v3.00	v3.30				
	C2-08D2-4VC			N/A				
	C2-08DR-4VC							
	C2-08AR-4VC							
	C2-08D1-6C	v3.00	v3.00	v3.30				
	C2-08D2-6C			N/A				
	C2-08DR-6C							
	C2-08AR-6C							
	C2-08D1-6V	v3.00	v3.00	v3.30				
	C2-08D2-6V			N/A				
	C2-08DR-6V							
	C2-08AR-6V							
Option Slot Intelligent Modules	C2-DCM	v3.20	N/A	N/A	N/A	N/A	N/A	N/A
	C2-NRED	v3.70				v3.70	v3.70	
	C2-OPCUA					N/A		

* High-speed Inputs and Outputs are only available when the Option Slot I/O Module is installed in Slot 0.

CLICK PLC Family Overview


What you'll need

Of course, what you'll need for your system depends on your particular application, but this overview shows you what you'll need for a simple system.

1. Select your **CLICK** or **CLICK PLUS** PLC unit.



2. If using a **CLICK PLUS** PLC, select an Option Slot Module if desired.



3. If you need additional I/O, select from 24 different types of Stackable I/O modules.



4. Select a 24VDC power supply.



or



5. Download the **FREE CLICK** programming software. support.automationdirect.com/products/clickplcs.html



6. Download the **FREE CLICK** mobile app. The **CLICK** mobile app is available for **iOS** and **Android**. It can connect to your **C2-02CPU** or **C2-03CPU** over **Bluetooth** to provision the PLC onto a **Wi-Fi** network. (PLC requires an external antenna)



CLICK PLC Family Overview

What you'll need (continued)

7. Select your PC-to-PLC programming cable.

If your PC has a USB port, use cable [EA-MG-PGM-CBL](#) to connect to the PLC port. If your PC has a 9-pin serial communications port, use programming cable [D2-DSCBL](#). If your PC has an Ethernet port, use [C5E-STPYL-C3](#) (crossover) or [C5E-STPYL-S3](#) (straight through) Ethernet cable. If your PC is on a network with a wireless access point, you can connect using one of our Wi-Fi antennas.

[USB-CBL-AMICB6](#)



**USB A to USB microB
Programming Cable Assembly
(CLICK PLUS Only)**

**[C5E-STPYL-C3](#) (crossover)
[C5E-STPYL-S3](#) (straight through)**



For Ethernet PLC Unit

or

**[SE-ANT250](#)
Wi-Fi/Bluetooth Dome Antenna
([C2-02CPU](#) & [C2-03CPU](#) only)**



or

**[SE-ANT210](#)
Wi-Fi/Bluetooth Whip Antenna
([C2-02CPU](#) & [C2-03CPU](#) only)
(nonmetal enclosure only)**



[D2-DSCBL](#)



**(PC requires RS-232 port
to use this cable)**

or

[EA-MG-PGM-CBL](#)



Connects to PC USB Port

8. Select tools, wire, and provide power.

**Screwdriver
[TW-SD-MSL-2](#)**



**Wire Strippers
[DN-WS](#)**



Hookup Wire




CLICK PLUS Provisioning Mobile App

Connect to your CLICK PLUS PLC with our FREE Provisioning Mobile App!

The CLICK PLUS Provisioning App connects your mobile device to a CLICK PLUS PLC via Bluetooth and offers a quick plug and play way to provision the CLICK PLUS PLC to connect to a wireless LAN.

The mobile app is available for free from either the iOS App Store or the Google Play Store. Just search for the app in your app store (CLICK PLUS Provisioning, published by Automationdirect.com).

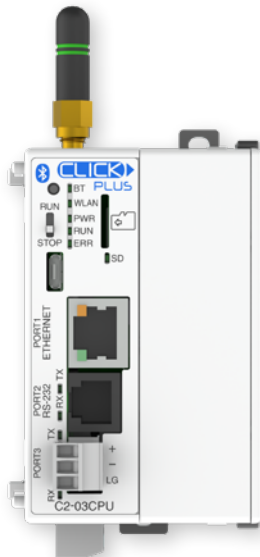


CLICK Remote PLC Mobile App

Monitor or set designated values, track PLC errors, and check project info over Wi-Fi or Bluetooth with our FREE Remote PLC Mobile App!

The Remote PLC app provides real time monitoring and control for Ethernet- or Bluetooth-enabled CLICK and CLICK PLUS PLCs. It offers a quick method of connecting to a PLC to view and edit values in the PLC registers, as well as check the PLC project information, including the Error logs.

- **Multiple level user accounts** allow authorized users to view and edit Monitor Windows based on their permission levels setup in the project file.
- **Custom Monitor windows** can be created and stored to the PLC using the CLICK Programming software version 3.60 or later. Monitor Window access can be based on the user permissions.
- **Monitor and edit** designated discrete and numeric values within the PLC. Timer/counter values can easily be viewed and edited.
- **Track PLC status**, such as PLC error logs, scan times (min and max), and project file information.

The mobile app is available for free from either the iOS App Store or the Google Play Store. Just search for the app in your app store (Remote PLC, published by Automationdirect.com).

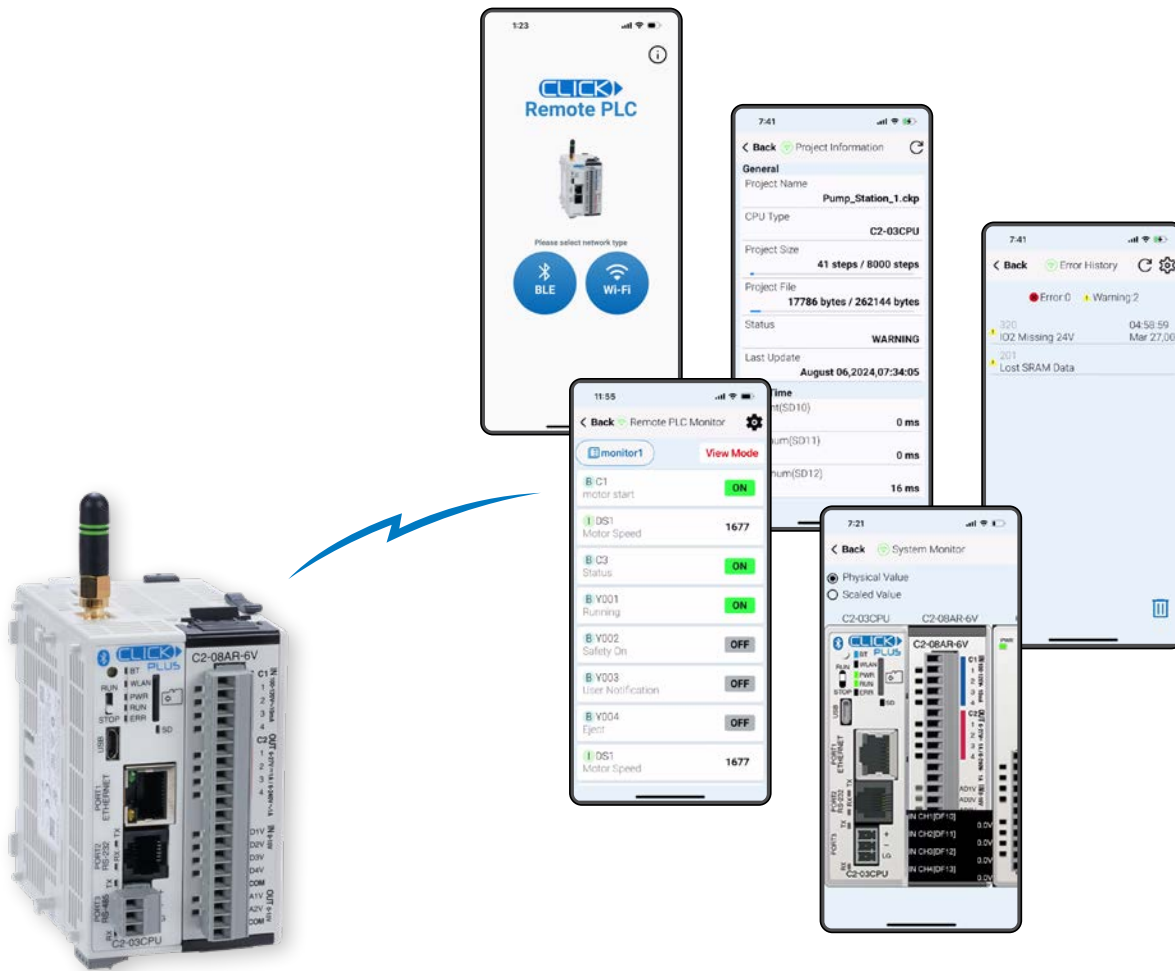

Power Supplies

Power Supplies

The CLICK PLC family offers two 24VDC power supplies. They are identical except for the output current.

It is not mandatory to use one of these CLICK power supplies for the CLICK/CLICK PLUS PLC system. You can use any other 24VDC power supply that AutomationDirect.com offers, including the PSP24-DC12-1 12 to 24 VDC converter shown below.

CO-00AC Power Supply

Limited auxiliary AC power supply allows you to power the 24VDC CLICK C0 and C2 series PLCs with 100–240 VAC supply power. The 0.5 A DC power supply is capable of controlling the PLC plus a limited configuration based on the power budget of each I/O module. The CO-00AC is a low-cost solution for applications requiring only minimal I/O and power consumption. This power supply will not support a fully-populated CLICK PLC system with all possible I/O module combinations.

CO-01AC Power Supply

Expanded auxiliary AC power supply allows you to power the 24VDC CLICK C0 and C2 series PLCs with 100–240 VAC supply power. The 1.3 A DC power supply is capable of supporting a fully-populated CLICK PLC system with all possible I/O module combinations, with no concerns for exceeding the power budget.


PSP24-DC12-1 DC-DC Converter

With this DC-DC converter you can operate the CLICK/CLICK PLUS PLC with 12VDC input power.

CO-00AC



CO-01AC

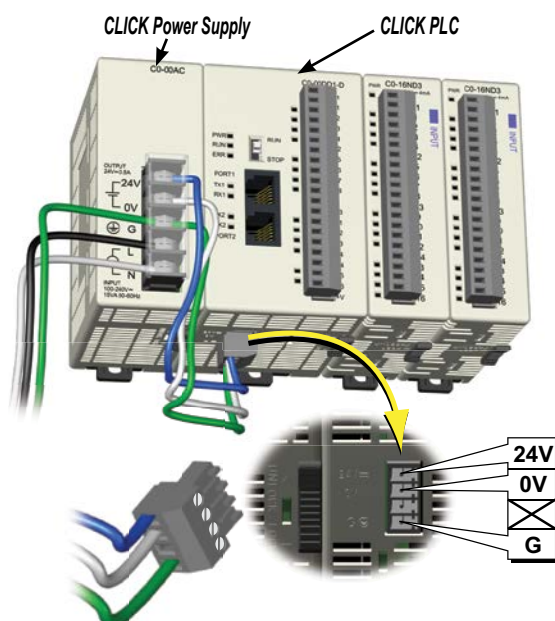

24VDC power is supplied to the PLC unit through wiring connected from the power supply output to the 4-pin 24VDC input connector located on the bottom of the PLC unit.



PSP24-DC12-1

CLICK 24VDC Power Supply Ratings

Part Number	Output Current	Price
CO-00AC	0.5 A	\$51.00
CO-01AC	1.3 A	\$63.00

Power Supply Input Specifications

Part Number	CO-00AC	CO-01AC
Input Voltage Range	85–264 VAC	
Input Frequency	47–63 Hz	
Input Current (typical)	0.3 A @ 100VAC, 0.2 A @ 200VAC	0.9 A @ 100VAC, 0.6 A @ 200VAC
Inrush Current	30A	
Efficiency	80% typical	

Power Supply Output Specs

Part Number	CO-00AC	CO-01AC
Output Voltage Range	23–25 VDC	
Output Current	0.5 A	1.3 A
Ripple	200mV p-p max (0–55°C)	
Ripple Noise	300mV p-p max (0–55°C)	
Over Current Protection	@ 0.65 A (automatic recovery)	@ 1.6 A (automatic recovery)
Over Voltage Protection	@ 27.6 V (clamped by Zener diode)	
Start-up Time	1000ms max at rated input and load	
Hold-up Time	10ms minimum at 85VAC, I=max	

Power Supply General Specs

Part Number	CO-00AC	CO-01AC
Ambient Operating Temperature	32–131°F [0–55°C]	
Storage Temperature	–4–158°F [–20–70°C]	
Humidity	30–95%, non-condensing	
Vibration Resistance	JIS C60068-2-6, sine wave vibration	
Shock Resistance	JIS C60068-2-27	
Voltage Withstand	1500VAC, 5mA cutoff current	
Input-Output	1500VAC, 5mA cutoff current	
Input-Ground	500VAC, 5mA cutoff current	
Output-Ground	500VAC, 5mA cutoff current	
Insulation Resistance	10MΩ minimum, 500VDC	
Input-Output	10MΩ minimum, 500VDC	
Input-Ground	5MΩ minimum, 500VDC	
Output-Ground	5MΩ minimum, 500VDC	
Noise Immunity	FCC Class A, EN55022:1998 Class A	
Input/Output Interface	5P terminal block, Fujicon UF2362AX series or equivalent	
Agency Approvals	UL508, UL1604, EN61010-1 (IEC 1010-1), CAN/CSA E60079-15:02, JIS C0025	
Drawing Link	PDF	PDF
Weight	5.3 oz [150g]	6.0 oz [170g]

PSP24-DC12-1 DC-DC Converter Specs

Input Voltage Range	9.5–18 VDC
Input Power (no load)	1.0 W max.
Startup Voltage	8.4 VDC
Undervoltage Shutdown	7.6 VDC
Output Voltage Range	24–28 VDC (adjustable)
Output Current	1.0 A
Short Circuit Protection	Current limited at 110% typical
Drawing Link	PDF
Weight	7.5 oz [213g]

Power Budgeting

Power Budgeting

There are two factors to consider when determining the power required to operate a CLICK PLC system. The first is the power required by the PLC and internal logic-side power provided through the PLC. This includes the CPU's own I/O, any connected I/O modules that are powered through the PLC expansion port, plus any device, such as a **C-more** Micro-Graphic panel, that is powered through one of the communications ports.

The second area is the power required by all externally-connected I/O devices. This should be viewed as the field-side power required. The field-side power is dependent on the voltage used for a particular input or output device as it relates to the wired I/O point and to the calculated load rating of the connected device.

It is strongly recommended that the power source for the logic side be separate from the power source for the field side to help eliminate possible electrical noise.

Power budgeting requires the calculation of the total current the 24VDC power source needs to provide to CLICK's logic side. A separate calculation is required to determine the total current required for all devices operating from the field side of the PLC system.

Refer to the Power Budgeting example shown on the following page. The table shows required current for a CLICK PLUS PLC, two I/O modules, and a **C-more** Micro. Use the total amperage values to select a suitable power supply.



CLICK 24VDC Power Supply
C0-00AC or C0-01AC



Other 24VDC Power Supply
Example: PSP24-060S

Power Consumption for CLICK and CLICK PLUS PLC Units

PLC Current Consumption (mA)		
Part Number	Power Budget 24VDC (Logic Side)	External 24VDC (Field Side)
Basic PLC Units		
C0-00DD1-D	120	60
C0-00DD2-D	120	0
C0-00DR-D		
C0-00AR-D		
Standard PLC Units		
C0-01DD1-D	140	60
C0-01DD2-D	140	0
C0-01DR-D		
C0-01AR-D		
Analog PLC Units		
C0-02DD1-D	140	60
C0-02DD2-D	140	0
C0-02DR-D		
Ethernet Basic PLC Units		
C0-10DD1E-D	120	60
C0-10DD2E-D	120	0
C0-10DRE-D		
C0-10ARE-D		
Ethernet Standard PLC Units		
C0-11DD1E-D	140	60
C0-11DD2E-D	140	0
C0-11DRE-D		
C0-11ARE-D		

PLC Current Consumption (mA)		
Part Number	Power Budget 24VDC (Logic Side)	External 24VDC (Field Side)
Ethernet Analog PLC Units		
<u>C0-12DD1E-D</u>	140	60
<u>C0-12DD2E-D</u>		0
<u>C0-12DRE-D</u>	160	
<u>C0-12ARE-D</u>		
<u>C0-12DD1E-1-D</u>	140	60
<u>C0-12DD2E-1-D</u>		160
<u>C0-12DRE-1-D</u>	0	
<u>C0-12ARE-1-D</u>		
<u>C0-12DD1E-2-D</u>	140	60
<u>C0-12DD2E-2-D</u>		160
<u>C0-12DRE-2-D</u>	0	
<u>C0-12ARE-2-D</u>		
CLICK PLUS PLCs		
<u>C2-01CPU</u>	110	0
<u>C2-01CPU-2</u>	120	
<u>C2-02CPU</u>	105	
<u>C2-02CPU-2</u>	115	
<u>C2-03CPU</u>	130	
<u>C2-03CPU-2</u>	140	

Power Consumption for CLICK PLUS Option Slot Modules



CLICK PLUS Option Slot Modules Current Consumption (mA)		
Part Number	Power Budget 24VDC (Logic Side)	External 24VDC (Field Side)
Option Slot I/O Modules		
C2-14D1	50	60
C2-14D2	50	0
C2-14DR	75	0
C2-14AR	75	0
C2-14TTL	220	0
C2-08D1-4VC	80	60
C2-08D2-4VC	80	0
C2-08DR-4VC	100	0
C2-08AR-4VC	100	0
C2-08D1-6C	80	60
C2-08D2-6C	80	0
C2-08DR-6C	100	0
C2-08AR-6C	100	0
C2-08D1-6V	80	60
C2-08D2-6V	80	0
C2-08DR-6V	100	0
C2-08AR-6V	100	0
Option Slot Intelligent Modules		
C2-DCM	60	0
C2-NRED	125	0
C2-OPCUA	125	0

Power Budgeting

Power Consumption for CLICK Stackable I/O Modules

I/O Module Current Consumption (mA)		
Part Number	Power Budget 24VDC (logic side)	External 24VDC (field side)
Discrete Input Modules		
C0-08SIM	50	0
C0-08ND3	30	0
C0-08ND3-1	30	0
C0-16ND3	40	0
C0-08NE3	30	0
C0-16NE3	40	0
C0-08NA	30	0
Discrete Output Modules		
C0-08TD1	50	15
C0-08TD2	50	0
C0-16TD1	80	100
C0-16TD2	80	0
C0-08TA	80	0
C0-04TRS	100	0
C0-04TRS-10	120	0
C0-08TR	100	0
C0-08TR-3	90	0

I/O Module Current Consumption (continued) (mA)		
Part Number	Power Budget 24VDC (logic side)	External 24VDC (field side)
Discrete Combo I/O Modules		
C0-16CDD1	80	50
C0-16CDD2	80	0
C0-08CDR	80	0
Analog Input Modules		
C0-04AD-1	20	65
C0-04AD-2	23	65
C0-04POT	30	0
C0-04RTD	25	0
C0-04THM	25	0
Analog Output Modules		
C0-04DA-1	20	145
C0-04DA-2	20	85
Analog Combo I/O Modules		
C0-4AD2DA-1	25	75
C0-4AD2DA-2	20	65
C-more Micro-Graphic Panel		
Monochrome only	90	0

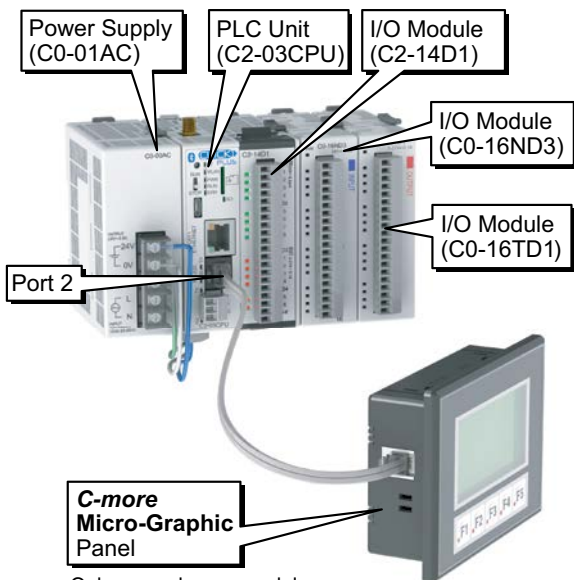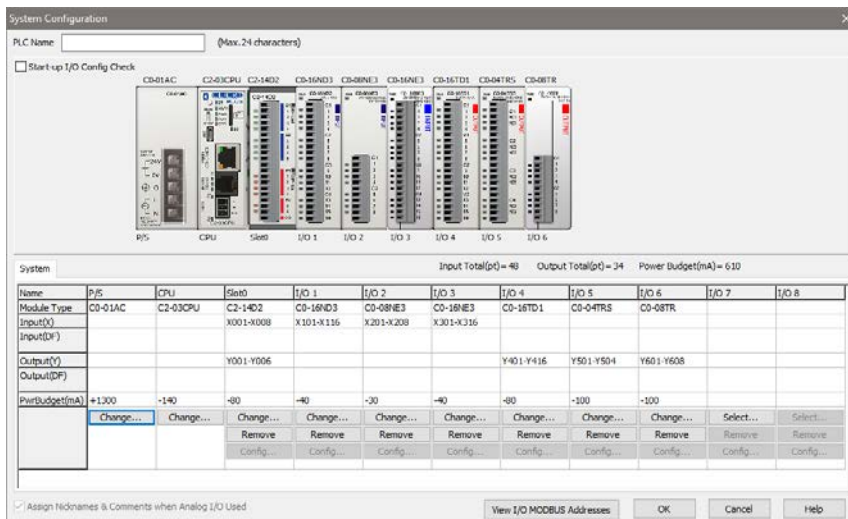

Only monochrome models can be powered from port 2.

Power Budgeting Example

Current Consumption (mA) Example		
Part Number	Power Budget 24VDC (logic side)	External 24VDC (field side)
C2-03CPU	130	0
C2-14D1	50	60
C0-16ND3	40	0
C0-16TD1	80	100
C-more Micro	90	0
Total:	390	160 *

* Add in calculated load of connected I/O devices.

Accessories

C2-USER-M \$0.00

CLICK PLUS PLC Hardware User Manual

Manual covers all CLICK PLUS PLC and I/O module installation and wiring, specifications, error codes and troubleshooting guide. The CLICK PLUS PLC Hardware User Manual can be downloaded free at the AutomationDirect Web site; www.AutomationDirect.com



C0-USER-M \$0.00

CLICK PLC Hardware User Manual

Manual covers all CLICK PLC and I/O module installation and wiring, specifications, error codes and troubleshooting guide. The CLICK PLC Hardware User Manual can be downloaded free at the AutomationDirect Web site; www.AutomationDirect.com



C0-PGMSW \$12.00

Programming Software USB

The programming software can be downloaded free at the AutomationDirect Web site, or the USB can be purchased from the AutomationDirect online Web store. www.AutomationDirect.com



EA-MG-PGM-CBL \$60.00

PC to Panel Programming Cable Assembly for C-more Micro-Graphic Panels and CLICK/CLICK PLUS PLCs

The 6-ft cable assembly connects a personal computer to any **C-more** Micro-Graphic panel, CLICK PLC, or select CLICK PLUS PLC for setup and programming.

Note: This cable assembly uses the PC's USB port and converts the signals to serial transmissions. The USB port supplies 5VDC to the Micro-Graphic panel for configuration operations.

Assembly includes standard USB A-type connector to B-type connector cable, custom converter, and an RS232C cable with an RJ12 modular connector on each end.



USB-CBL-AMICB6 \$5.75

USB A to USB microB Programming Cable Assembly (CLICK PLUS Only)

Programming cable, USB A to USB microB, 6ft (1.83 m) length. For use with CLICK PLUS PLCs and most USB devices. The USB port supplies 5VDC to the CLICK PLUS CPU for programming.



D2-DSCBL \$41.50

Programming Cable for CLICK/CLICK PLUS and DirectLOGIC PLCs

12ft. (3.66 m) RS232 shielded PC programming cable for CLICK, select CLICK PLUS PLCs, DL05, DL06, DL105, DL205, D3-350, D4-450, D4-454, and Do-more H2 and T1H series CPUs. 9-pin D-shell female connector to an RJ12 6P6C connector.



Note: If your PC has a USB port but does not have a serial port, you must use programming cable [EA-MG-PGM-CBL](#) to connect to CLICK PLCs. For CLICK PLUS PLCs, you may also use [USB-CBL-AMICB6](#)

C0-3TB \$10.00

Spare 3-Pole Terminal Block


Replacement 3-pole terminal block for the 3-wire RS-485 Port 3 on CLICK Standard and Analog PLCs as well as the CLICK PLUS [C2-03CPU](#). Sold in packs of 2.



C0-4TB \$10.00

Spare 24VDC Power Terminal Block


Replacement terminal block for the 24VDC supply power to the PLC. Sold in packs of 2.



C0-8TB \$16.50

Spare 8-Point I/O Terminal Block

Replacement terminal block for the 8-point I/O modules. Sold in packs of 2.



C0-8TB-1 \$19.50

Spare 13-Point I/O Terminal Block


Replacement terminal block for the 8-point I/O relay modules. Sold in packs of 2.



C0-16TB \$23.00

Spare 16-Point I/O Terminal Block

Replacement terminal block for the 16-point I/O modules and PLC built-in I/O. Sold in packs of 2.



C2-6TB \$16.50

Spare 6-pt Terminal Block

Replacement terminal block for the C2-DCM serial ports. Sold in packs of 2.



Accessories

SE-ANT250 \$37.00

Wi-Fi/Bluetooth Dome Antenna


2.4 GHz antenna, IP67, panel mount, 9.8 ft (3m) cable length, for external mounting when CLICK PLUS PLC is installed in a metallic enclosure.



C2-FILL \$8.50

CPU Option Slot Cover

Snap-on cover for CLICK PLUS CPU Option Slot in applications without an Option Slot module present.



MSD-SLC16G \$100.00

16GB microSD card, industrial grade, 3D NAND Flash (with SLC Mode), 85°C [185°F] max operating temp.



SE-ANT210 \$10.50

Wi-Fi/Bluetooth Whip Antenna

Whip/straight 2.4 GHz antenna, IP65, connector mount. Not recommended for installation in a metallic enclosure.



D2-BAT-1 \$6.50

Replacement CR2354 battery for Standard, Analog, Ethernet Standard and Ethernet Analog PLC units.



TW-SD-MSL-2 \$4.00

Insulated Slotted Screwdriver

0.4 x 2.5 x 80 mm slotted screwdriver for terminal blocks.



DN-EB35MN \$31.50

DINector End Bracket



D0-MC-BAT \$3.00

Replacement CR2032 battery for CLICK PLUS PLC units.



DN-WS \$77.00

Wire Stripper



C-more and C-more Micro Graphic Operator Interfaces



ZIPLink Wiring Systems



Ethernet Cables

Pre-terminated Cat5e Ethernet patch cables with RJ45 connectors provide dependable communication in industrial applications. These cables are available in various lengths and support transmission speeds of 10/100/1000 Mbps.

