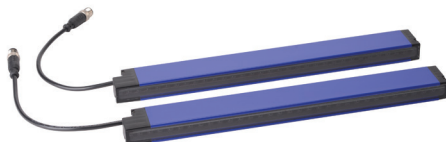


# Light Grids CX Series

## Sender/Receiver Pair - Object Detection CX0 Models

- Total crossbeam through all the optics
- 160 and 320mm detection heights
- Beam resolution 5mm and 10mm
- Operating distance up to 6m
- Digital PNP output
- N.O./N.C. configurable
- Adjustment by teach-in with 2 levels of adjustment
- Three-year warranty
- Mounting hardware included



**Sender/Receiver Pair Light Grids - CX0 Models Selection Chart**

| Part Number                            | Price    | Beam Resolution   | Detection Height   | Operating Distance            | Output                      | Input Voltage | Smallest Detectable Object |                     | Maximum Response Time | Connection   | Weight kg [lbs] |
|--|----------|-------------------|--------------------|-------------------------------|-----------------------------|---------------|----------------------------|---------------------|-----------------------|--|-----------------|
|  |          |                   |                    |                               |                             |               | (Fine Teach)               | (Gross Teach)       |                       |  |                 |
| <a href="#"><u>CX0E1RP-05-016V</u></a> | \$333.00 | 5mm<br>[0.09 in]  | 160mm<br>[6.3 in]  | 0.3 - 3m<br>[0.98 - 9.84 ft]  | PNP; N.O./N.C. configurable | 16.8-30 VDC   | 1.5 mm<br>[0.05 in]        | 2.5 mm<br>[0.09 in] | 11ms                  | (1) 4-pin and<br>(1) 5-pin<br>M12 quick-disconnect<br>Length:<br>8.6 in<br>[220mm] | 0.5<br>[1.1]    |
| <a href="#"><u>CX0E1RP-10-016V</u></a> | \$245.00 | 10mm<br>[0.39 in] | 160mm<br>[6.3 in]  | 0.5 - 6m<br>[1.64 - 19.68 ft] | PNP; N.O./N.C. configurable |               | 2.5 mm<br>[0.09 in]        | 4mm<br>[0.15 in]    | 5.3 ms                |  | 0.5<br>[1.1]    |
| <a href="#"><u>CX0E1RP-10-032V</u></a> | \$416.00 | 10mm<br>[0.39 in] | 320mm<br>[12.6 in] | 1 - 6m<br>[3.28 - 19.68 ft]   | PNP; N.O./N.C. configurable |               | 2.5 mm<br>[0.09 in]        | 4mm<br>[0.15 in]    | 6.6 ms                |  | 1<br>[2.2]      |

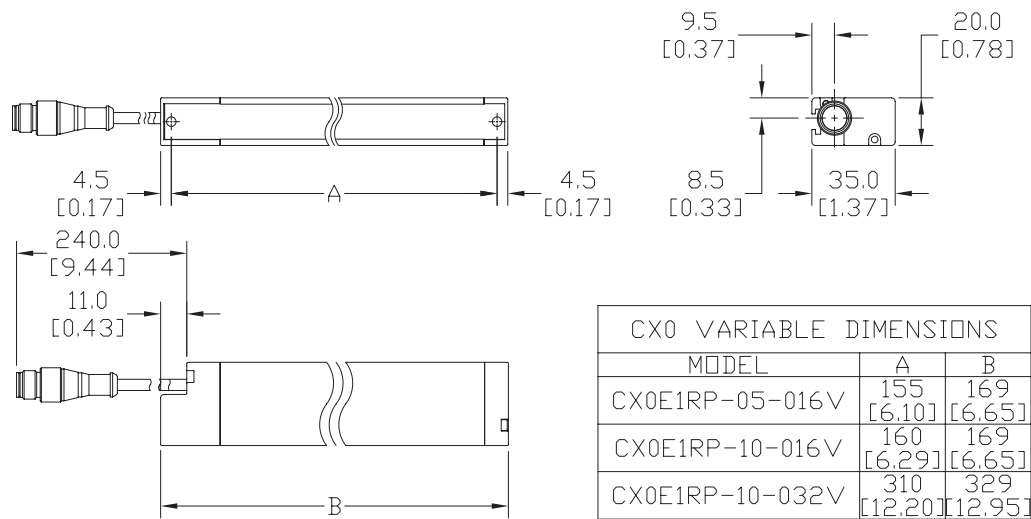
Purchase cable separately.

# Light Grids CX Series

## Light Grids - CX0 Models

### Dimensions

mm [inches]


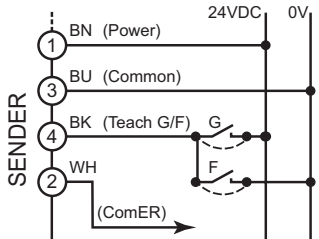


See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete Engineering drawings.


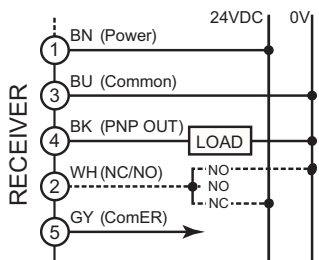
# Light Grids CX Series

## Light Grids - CX0 Models

### Connections

| Sender with Teach-In CX0 Models   |   |           |       |           |   |
|---|---|-----------|-------|-----------|---|
| M12, 4-Pole Male Connector  | Wiring  | Connector |       |           |   |
|  |  | Pin       | Color | Signal    | Description   |
|   |   | 1         | BN    | 24VDC     | Power supply input from 16.8 to 30V   |
|   |   | 2         | WH    | ComER     | Connect to same signal of the receiver, maximum cable length: 20m   |
|   |   | 3         | BU    | 0V        | Supply voltage reference, this pin must be tied together to the common of the receiver, maximum cable length: 20m |
|   |   | 4         | BK    | Teach G/F | Teach-in input: GROSS at 24VDC; FINE at 0V  |

NOTE: Pin 2 (ComER) must be connected to Pin 5 (ComER) of the receiver.

| Receiver with Output PNP and Teach-In Function CX0 Models                           |  |           |             |           |   |
|---|--|-----------|-------------|-----------|---|
| M12, 5-Pole Male Connector  | Wiring   | Connector |             |           |   |
|  |  | Pin       | Color       | Signal    | Description   |
|   |  | 1         | BN          | 24VDC     | Power supply input from 16.8 to 30V   |
|   |  | 2         | WH          | N.C./N.O. | Open or 0VDC: Set output normally open, Dark operate<br>+24VDC: Set output normally closed, Light operate       |
|   |  | 3         | BL          | 0VDC      | Supply voltage reference. This pin must be tied together to the common of the sender, maximum cable length: 20m |
|   |  | 4         | BK          | PNP Out   | Apply a load connected to the common, maximum current 100mA.  |
|   |  | 5         | GY or GN/YL | ComER     | Connect to the same signal of the sender, maximum cable length: 20m   |

NOTE: Pin 5 (ComER) must be connected to Pin 2 (ComER) of the sender.

# Light Grids CX Series

## Sender/Receiver Pair - Measuring CX2 Models

- Parallel beams and floating crossbeams with variable amplitude
- Synchronization by cable
- Beam resolution 5mm and 10mm
- Detection height up to 960mm
- Maximum operating distance up to 6m
- Digital outputs PNP ; analog current output (4 to 20mA) or analog voltage output (0 to 10V)
- Blanking function
- Three-year warranty



Sender/Receiver Pair Light Grids CX2 Models Selection Chart

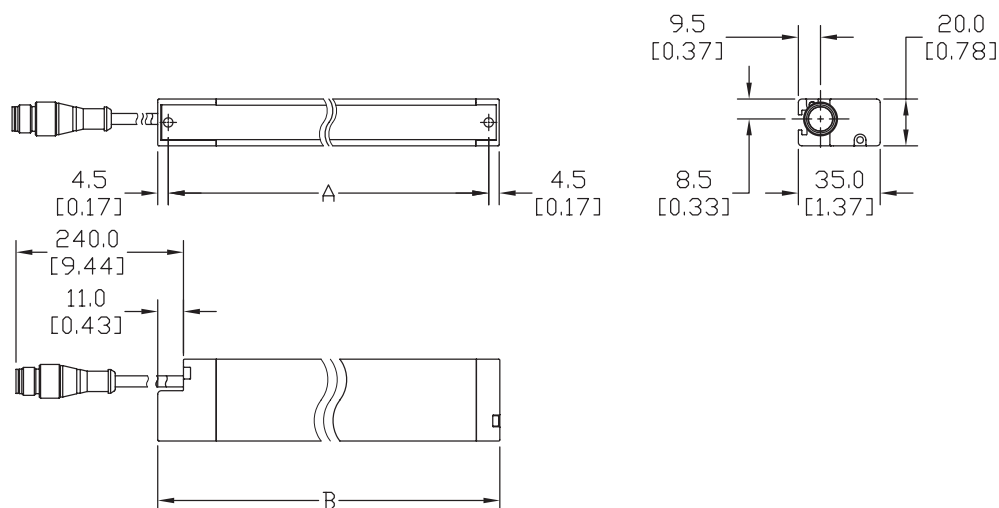
| Part Number                     | Price    | Beam Resolution   | Detection Height     | Operating Distance            | Output  | Input Voltage | Smallest Detectable Object |               | Maximum Response Time | Connection   | Weight kg [lb]       |  |
|---------------------------------|----------|-------------------|----------------------|-------------------------------|---|---------------|----------------------------|---------------|-----------------------|--|----------------------|--|
|                                 |          |                   |                      |                               |   |               | (Fine Teach)               | (Gross Teach) |                       |  |                      |  |
| <a href="#">CX2E0RF-05-016V</a> | \$333.00 | 5mm<br>[0.09 in]  | 160mm<br>[6.3 in]    | 0.1 - 3m                      | PNP; N.O./N.C.<br>configurable;<br>0-10 VDC<br>analog out | 16.8-30 VDC   | 1.5 mm                     | 2.5 mm        | 14.8 ms               | (1) 4-pin and<br>(1) 8-pin<br>M12 quick-<br>disconnect<br>Length:<br>9.4 in<br>[240mm] | 1.1 kg<br>[2.43 lb]  |  |
| <a href="#">CX2E0RF-05-032V</a> | \$600.00 |                   | 320mm<br>[12.6 in]   |                               |   |               | 4mm                        | 5mm           | 27.6 ms               |  | 2.2 kg<br>[4.85 lb]  |  |
| <a href="#">CX2E0RF-05-048V</a> | \$854.00 |                   | 480mm<br>[18.90 in ] |                               |   |               |                            |               | 40.4 ms               |  | 3.5 kg<br>[7.72 lb]  |  |
| <a href="#">CX2E0RD-05-016V</a> | \$333.00 |                   | 160mm<br>[6.3 in]    |                               | PNP; N.O./N.C.<br>configurable;<br>4-20mA<br>analog out   |               | 1.5 mm                     | 2.5 mm        | 14.8 ms               |  | 1.1 kg<br>[2.43 lb]  |  |
| <a href="#">CX2E0RD-05-032V</a> | \$600.00 |                   | 320mm<br>[12.6 in]   |                               |   |               | 4mm                        | 5mm           | 27.6 ms               |  | 2.2 kg<br>[4.85 lb]  |  |
| <a href="#">CX2E0RD-05-048V</a> | \$854.00 |                   | 480mm<br>[18.90 in ] |                               |   |               |                            |               | 40.4 ms               |  | 3.5 kg<br>[7.72 lb]  |  |
| <a href="#">CX2E0RF-10-016V</a> | \$313.00 | 10mm<br>[0.39 in] | 160mm<br>[6.3 in]    | 0.3 - 6m<br>[0.98 - 19.68 ft] | PNP; N.O./N.C.<br>configurable;<br>0-10 VDC<br>analog out |               | 2.5 mm                     | 4mm           | 8.4 ms                |  | 1.1 kg<br>[2.43 lb]  |  |
| <a href="#">CX2E0RF-10-032V</a> | \$441.00 |                   | 320mm<br>[12.6 in]   |                               |   |               |                            |               | 14.8 ms               |  | 2.2 kg<br>[4.85 lb]  |  |
| <a href="#">CX2E0RF-10-048V</a> | \$600.00 |                   | 480mm<br>[18.90 in ] |                               |   |               | 8mm                        | 10mm          | 21.2 ms               |  | 3.5 kg<br>[7.72 lb]  |  |
| <a href="#">CX2E0RF-10-064V</a> | \$706.00 |                   | 640mm<br>[25.20 in]  |                               |   |               |                            |               | 27.6 ms               |  | 4.5 kg<br>[9.90 lb]  |  |
| <a href="#">CX2E0RF-10-080V</a> | \$859.00 |                   | 800mm<br>[31.50 in]  |                               |   |               |                            |               | 34ms                  |  | 5.7 kg<br>[12.57 lb] |  |
| <a href="#">CX2E0RF-10-096V</a> | \$970.00 |                   | 960mm<br>[37.79 in]  |                               |   |               |                            |               | 40.4 ms               |  | 6.6 kg<br>[14.55 lb] |  |
| <a href="#">CX2E0RD-10-016V</a> | \$313.00 |                   | 160mm<br>[6.3 in]    |                               | PNP; N.O./N.C.<br>configurable;<br>4-20mA<br>analog out   |               | 2.5 mm                     | 4mm           | 8.4 ms                |  | 1.1 kg<br>[2.43 lb]  |  |
| <a href="#">CX2E0RD-10-032V</a> | \$441.00 |                   | 320mm<br>[12.6 in]   |                               |   |               |                            |               | 14.8 ms               |  | 2.2 kg<br>[4.85 lb]  |  |
| <a href="#">CX2E0RD-10-048V</a> | \$600.00 |                   | 480mm<br>[18.90 in ] |                               |   |               | 8mm                        | 10mm          | 21.2 ms               |  | 3.5 kg<br>[7.72 lb]  |  |
| <a href="#">CX2E0RD-10-064V</a> | \$706.00 |                   | 640mm<br>[25.20 in]  |                               |   |               |                            |               | 27.6 ms               |  | 4.5 kg<br>[9.90 lb]  |  |
| <a href="#">CX2E0RD-10-080V</a> | \$859.00 |                   | 800mm<br>[31.50 in]  |                               |   |               |                            |               | 34ms                  |  | 5.7 kg<br>[12.57 lb] |  |
| <a href="#">CX2E0RD-10-096V</a> | \$970.00 |                   | 960mm<br>[37.79 in]  |                               |   |               |                            |               | 40.4 ms               |  | 6.6 kg<br>[14.55 lb] |  |

Purchase cable separately.

# Light Grids CX Series

## Dimensions

mm [inches]



| CX2 VARIABLE DIMENSIONS |                |                |
|-------------------------|----------------|----------------|
| MODEL                   | A              | B              |
| CX2E0RF-05-016V         | 160<br>[6.29]  | 169<br>[6.65]  |
| CX2E0RF-05-032V         | 320<br>[12.59] | 329<br>[12.95] |
| CX2E0RF-05-048V         | 480<br>[18.89] | 489<br>[19.25] |
| CX2E0RF-10-016V         | 160<br>[6.29]  | 169<br>[6.65]  |
| CX2E0RF-10-032V         | 320<br>[12.59] | 329<br>[12.95] |
| CX2E0RF-10-048V         | 480<br>[18.89] | 489<br>[19.25] |
| CX2E0RF-10-064V         | 640<br>[25.19] | 649<br>[25.55] |
| CX2E0RF-10-080V         | 800<br>[31.49] | 809<br>[31.85] |
| CX2E0RF-10-096V         | 960<br>[37.79] | 969<br>[38.14] |


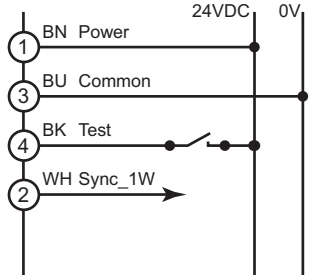
| MODEL           | A              | B              |
|-----------------|----------------|----------------|
| CX2E0RD-05-016V | 160<br>[6.29]  | 169<br>[6.65]  |
| CX2E0RD-05-032V | 320<br>[12.59] | 329<br>[12.95] |
| CX2E0RD-05-048V | 480<br>[18.89] | 489<br>[19.25] |
| CX2E0RD-10-016V | 160<br>[6.29]  | 169<br>[6.65]  |
| CX2E0RD-10-032V | 320<br>[12.59] | 329<br>[12.95] |
| CX2E0RD-10-048V | 480<br>[18.89] | 489<br>[19.25] |
| CX2E0RD-10-064V | 640<br>[25.19] | 649<br>[25.55] |
| CX2E0RD-10-080V | 800<br>[31.49] | 809<br>[31.85] |
| CX2E0RD-10-096V | 960<br>[37.79] | 969<br>[38.14] |

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete Engineering drawings.


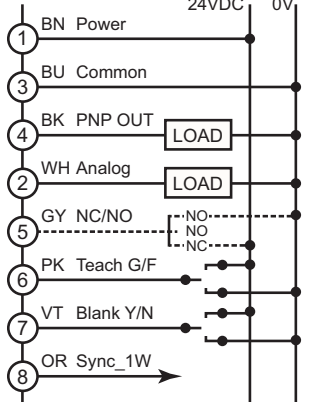
# Light Grids CX Series

## Light Grids - CX2 Models

### Connections

| Sender with Input Test CX2 Models   |   |           |       |         |   |
|---|---|-----------|-------|---------|---|
| M12, 4-Pole Male Connector  | Wiring  | Connector |       |         |   |
|   |   | Pin       | Color | Signal  | Description   |
|  |  | 1         | BN    | 24VDC   | Power supply input from 16.8 to 30V   |
|   |   | 2         | WH    | Sync_1W | Connect to same signal of the receiver, maximum cable length: 20m   |
|   |   | 3         | BU    | 0V      | Supply voltage reference, this pin must be tied together to the common of the receiver, maximum cable length: 20m |
|   |   | 4         | BK    | Test    | Test input: if it is connected to the positive it interrupts the emission   |

NOTE: Pin 2 (Sync 1W) must be connected to Pin 8 (Sync 1W on the receiver), otherwise the yellow LED of the sender and receiver are flashing highlighting an error.

| Receiver with Output PNP and Teach-In Function CX2 Models                           |   |           |       |           |  |
|---|---|-----------|-------|-----------|--|
| M12, 8-Pole Male Connector  | Wiring  | Connector |       |           |  |
|   |   | Pin       | Color | Signal    | Description  |
|  |  | 1         | BN    | 24VDC     | Power supply input from 16.8 to 30V  |
|   |   | 2         | WH    | Analog    | Analog Voltage Output 0-10V, or 4-20mA, depending on model   |
|   |   | 3         | BU    | 0V        | Supply voltage reference. This pin must be tied together the common of the sender, maximum cable length: 20m |
|   |   | 4         | BK    | PNP Out   | Apply a load connected to the common, maximum current 100mA  |
|   |   | 5         | GY    | N.C./N.O. | Open or 0VDC: Outputs proportional to optics in Dark<br>+24VDC: Outputs proportional to optics in Light      |
|   |   | 6         | PK    | Teach G/F | Teach-in input: GROSS at 24VDC; FINE at 0V   |
|   |   | 7         | VT    | Blank Y/N | BLANKING at Power-ON<br>Activation (at positive) - Deactivation (at common)                                  |
|   |   | 8         | OR    | Sync_1W   | Connect to the same signal of the sender, maximum cable length: 20m  |

NOTE: Pin 8 (Sync 1W) must be connected to Pin 2 (Sync\_1W on the sender), otherwise the yellow LED of the receiver and sender are flashing highlighting an error.

# Light Grids CX Series Specifications

| Light Grids CX Series Specifications       |  |  |
|--|--|--|
| Model                                      | CX0  | CX2  |
| Type                                       | Through-Beam   |  |
| Sensing Distance                           | 0.3 - 3m (5mm beam resolution)<br>0.5 - 6m (10mm beam resolution 160mm detection height)<br>1 - 6m (10mm beam resolution 320mm detection height) | 0.1 - 3m (5mm beam resolution)<br>0.3 - 6m (10mm beam resolution)  |
| Detection Height<br>Beam Resolution 5mm    | 160mm  | 160mm; 320mm; 480mm  |
| Number of Beams<br>Beam Resolution 5mm     | 32   | 33 (160mm); 65 (320mm); 97 (480mm)   |
| Detection Height<br>Beam Resolution 10mm   | 160mm; 320mm   | 160mm; 320mm; 480mm; 640mm; 800mm; 960mm   |
| Number of Beams<br>Beam Resolution 10mm    | 17 (160mm); 32 (320mm)   | 17 (160mm); 33 (320mm); 49 (480mm); 65 (640mm);<br>81 (800mm); 97 (960mm)  |
| Emission                                   | IR 850nm (5mm beam resolution); 880nm (10mm beam resolution)   |  |
| Sensitivity                                | Teach  |  |
| Time Teach-in Process (s)                  | 15s max  | = 0.5°N° beams   |
| Time Blanking (s)                          | NA   | = 1° N° beams  |
| Output Type                                | PNP  | PNP + 0 – 10V analog V or PNP + 4 – 20mA analog A  |
| Operating Voltage                          | 16.8 – 30 VDC  |  |
| No-load Supply Current                     | Sender: 120mA (@ 24V) max<br>Receiver: 90mA (@ 24V) max  | Sender: 200mA (@ 24V) max<br>Receiver: 200mA (@ 24V) max   |
| Operating (Load) Current                   | 100mA  |  |
| Off-state (Leakage) Current                | 10µA   | 10µA   |
| Voltage Drop                               | ≤ 1.5V   |  |
| Switching Frequency                        | 280Hz max (17 beams)<br>83Hz max (32 beams)  | 59.5 Hz (17 beams)<br>33.7 Hz (33 beams)<br>23.5 Hz (49 beams)<br>18.1 Hz (65 beams)<br>14.7 Hz (81 beams)<br>12.3 Hz (97 beams) |
| Ripple                                     | ≤ 10%  |  |
| Time Delay Before Availability (tv)        | 200ms  |  |
| Short-Circuit Protection                   | Yes  |  |
| Operating Temperature                      | -10 to 55 °C [14 to 131 °F]  |  |
| Protection Degree (DIN 40050)              | IP67   |  |
| Sender LED Indicators - Switching Status   | Refer to manual  |  |
| Receiver LED Indicators - Switching Status | Refer to manual  |  |
| Housing Material                           | Painted aluminum   |  |
| Lens Material                              | PC (Polycarbonate)   |  |
| Shock/Vibration                            | Acc. to IEC 60947-5-2  |  |
| Tightening Torque                          | NA   |  |
| Weight                                     | 0.48 kg [1.05 lb]  | 2.6 kg [5.73 lb]   |
| Agency Approval                            | UL Listed E187310, CE  |  |

To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.

# Light Grids CX Series Accessories

| Light Grids Mounting Brackets CX Series |         |   |
|---|---------|---|
| Part Number                             | Price   | Description   |
| <a href="#">ST151</a>                   | \$8.25  | Mounting bracket, replacement, right-angle, zinc plated steel. Package of 2. For use with CX light grids.                           |
| <a href="#">ST4VS</a>                   | \$21.50 | Mounting bracket, right-angle, zinc plated steel, anti-vibration mount. Package of 4. For use with 160mm height CX light grids.     |
| <a href="#">ST8VS</a>                   | \$27.50 | Mounting bracket, right-angle, zinc plated steel, anti-vibration mount. Package of 8. For use with 320-960mm height CX light grids. |



[ST151](#)



[ST4VS](#)



[ST8VS](#)