

# Analog Current Input Modules

## F2-04AD-1 4-Channel 4-20mA Analog In \$360.00

This module can be powered by either a 12VDC or 24VDC power supply, and is a direct replacement for F2-04AD-1L modules.



<b>Number of Channels</b>	4, single ended (1 common)
<b>Input Ranges</b>	4 to 20 mA current
<b>Resolution</b>	12-bit (1 in 4096)
<b>Active Low-pass Filtering</b>	-3 dB at 120Hz, 2 poles (-12dB per octave)
<b>Input Impedance</b>	250Ω ±0.1%, 1/2 W current input
<b>Absolute Maximum Ratings</b>	-40mA to +40mA, current input
<b>Converter Type</b>	Successive approximation
<b>Conversion Time (PLC Update Rate)</b>	4 channels per scan maximum (D2-262 CPU)
<b>Linearity Error (End to End)</b>	±1 count (0.025% of full scale) maximum
<b>Input Stability</b>	±1 count
<b>Full Scale Calibration Error (offset error not included)</b>	±12 counts max., @ 20mA current input
<b>Offset Calibration Error</b>	±7 counts max., @ 4mA current input
<b>Step Response</b>	4.9 ms to 95% of F.S. change

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.



<b>Maximum Inaccuracy</b>	±.5% @ 77°F (25°C) ±.65% 32° to 140°F (0° to 60°C)
<b>Accuracy vs. Temperature</b>	±50 ppm/°C maximum full scale (including max. offset change)
<b>Recommended Fuse</b>	0.032 A, Series 217 fast-acting, current inputs
<b>Digital Input Points Required</b>	16 (X) input points (12 binary data bits, 2 channel ID bits, 2 diagnostic bits)
<b>Base Power Required 5 VDC</b>	100mA
<b>External Power Supply</b>	5mA maximum, +10 to +30 VDC
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

Note 1: Shields should be grounded at the signal source

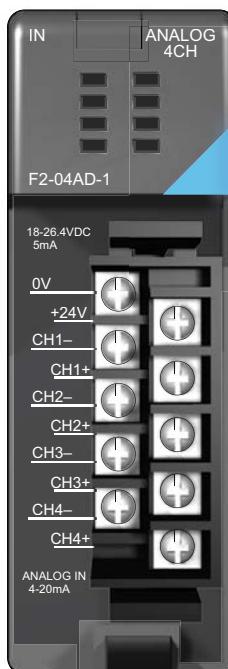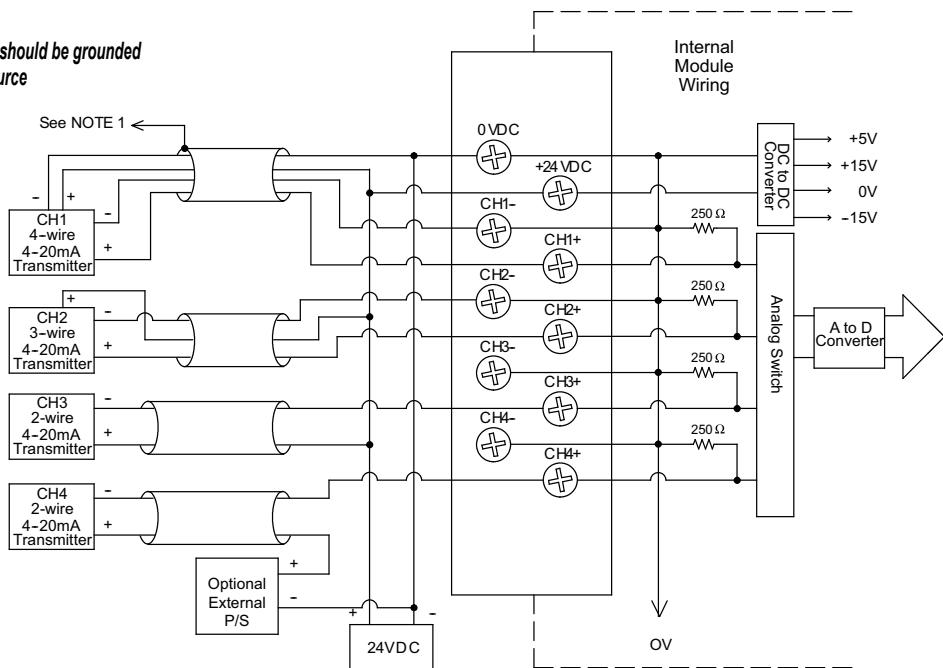

More than one external power supply can be used provided all the power supply commons are connected. A Series 217, 0.032 A, fast-acting fuse is recommended for 4-20 mA current loops. If the power supply common of an external power supply is not connected to 0VDC on the module, then the output of the external transmitter must be isolated. To avoid "ground loop" errors, recommended 4-20 mA transmitter types are:

2 or 3 wire: Isolation between input signal and power supply.

4 wire: Isolation between input signal, power supply, and 4-20 mA output

# Analog Current Input Modules

## F2-08AD-1 8-Channel 4-20mA Analog In \$442.00



<b>Number of Channels</b>	8, single ended (1 common)
<b>Input Ranges</b>	4 to 20 mA current
<b>Resolution</b>	12 bit (1 in 4096)
<b>Low-pass Filtering</b>	-3dB at 200Hz, (-6dB per octave)
<b>Input Impedance</b>	250Ω ±0.1%, 1/2 W current input
<b>Absolute Maximum Ratings</b>	-45mA to +45mA
<b>Converter Type</b>	Successive approximation
<b>Conversion Time (PLC Update Rate)</b>	8 channels per scan maximum (D2-250-1 and D2-262 CPUs)
<b>Linearity Error (End to End)</b>	±1 count (0.025% of full scale) maximum
<b>Input Stability</b>	±1 count
<b>Full Scale Calibration Error (offset error not included)</b>	±5 counts max., @ 20mA current input
<b>Offset Calibration Error</b>	±2 counts max., @ 4mA current input
<b>Step Response</b>	1ms to 95% of F.S. change

<b>Maximum Inaccuracy</b>	±.1% @ 77°F (25°C) ±.25% 32° to 140°F (0° to 60°C)
<b>Accuracy vs. Temperature</b>	±50 ppm/°C maximum full scale (including max. offset change of two counts)
<b>Recommended Fuse</b>	0.032A, Series 217 fast-acting, current inputs
<b>Digital Input Points Required</b>	16 (X) input points (12 binary data bits, 3 channel ID bits, 1 broken transmitter bit)
<b>Base Power Required 5VDC</b>	100mA
<b>External Power Supply</b>	5mA maximum, +10 to +30 VDC
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; <a href="#">D2-8IOCON</a>

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.



Note 1: Shields should be grounded at the signal source.

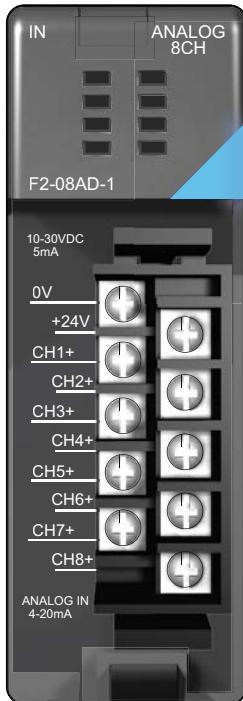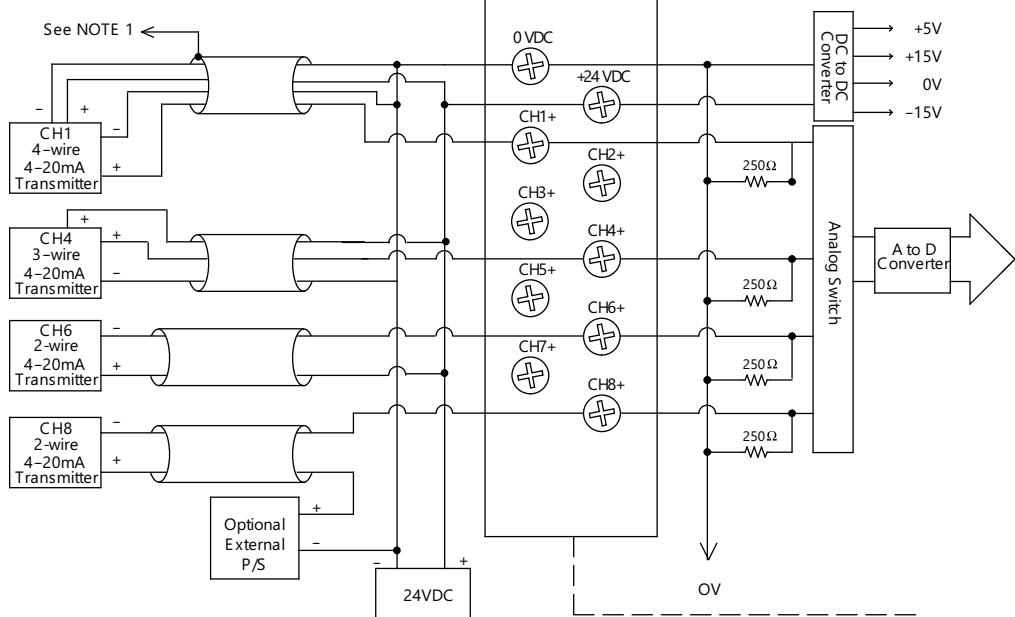

More than one external power supply can be used provided all the power supply commons are connected. A Series 217, 0.032 A, fast-acting fuse is recommended for 4-20 mA current loops. If the power supply common of an external power supply is not connected to 0 VDC on the module, then the output of the external transmitter must be isolated. To avoid "ground loop" errors, recommended 4-20 mA transmitter types are:

2 or 3 wire: Isolation between input signal and power supply.

4 wire: Isolation between input signal, power supply, and 4-20 mA output

# Analog Voltage Input Modules

## F2-04AD-2 4-Channel Voltage Analog In \$393.00

This module can be powered by either a 12VDC or 24VDC power supply, and is a direct replacement for F2-04AD-2L modules.

<b>Number of Channels</b>	4, single ended (1 common)
<b>Input Ranges</b>	0 to 5 V, 0 to 10 V, ±5V, ±10V
<b>Resolution</b>	12 bit (1 in 4096)
<b>Active Low-pass Filtering</b>	-3dB at 80Hz, 2 poles (-12dB per octave)
<b>Input Impedance</b>	>20MΩ
<b>Absolute Maximum Ratings</b>	-75 to +75 VDC
<b>Converter Type</b>	Successive approximation
<b>Conversion Time (PLC Update Rate)</b>	4 channels per scan maximum (D2-262 CPU)
<b>Linearity Error (End to End)</b>	±1 count (0.025% of full scale) maximum ±2 counts maximum (bi-polar)
<b>Input Stability</b>	±1 count
<b>Full Scale Calibration Error (offset error not included)</b>	±3 counts maximum
<b>Offset Calibration Error</b>	±1 count maximum (0V input)
<b>Step Response</b>	8.2 ms to 95% of F.S change

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.




<b>Maximum Inaccuracy</b>	± 0.1% @ 77°F (25°C) ± 0.3% 32° to 140°F (0° to 60°C)
<b>Accuracy vs Temperature</b>	± 50 ppm/°C full scale calibration change (including maximum offset change )
<b>Digital Input Points Required</b>	16(x) input points (12 binary data bits, 2 channel ID bits)
<b>Base Power Required 5VDC</b>	110mA
<b>External Power Supply</b>	5mA maximum, +10 to +30 VDC
<b>Operating Temperature</b>	32° to 140°F (0 to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

Note 1: Shields should be grounded at the signal source.

Note 2: Unused inputs should be jumpered together (i.e. CH4- to CH4+).

Note 3: More than one external power supply can be used provided the commons are connected together.

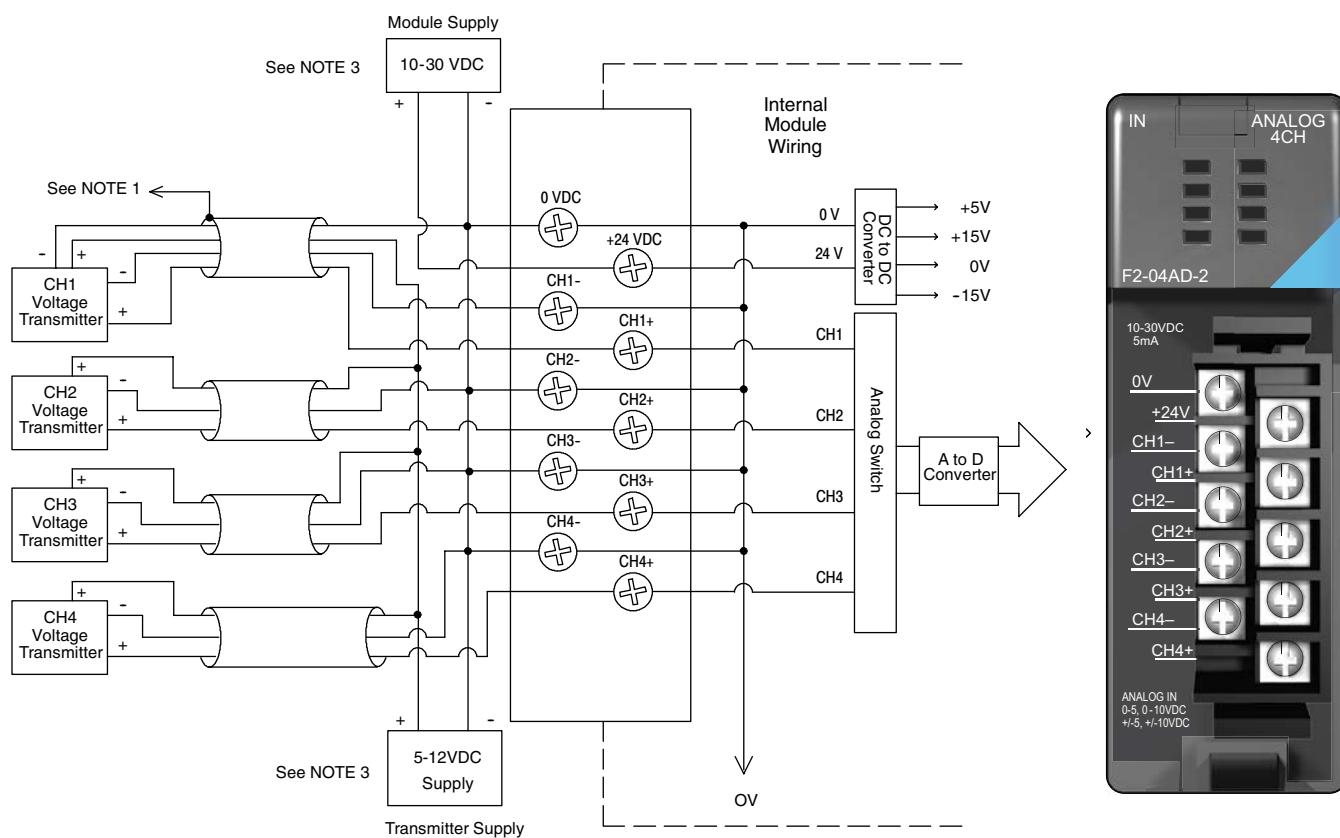

# Analog Voltage Input Modules

## F2-08AD-2 8-Channel Voltage Analog In \$469.00

<b>Number of Channels</b>	8, single ended (1 common)
<b>Input Ranges</b>	0 to 5 V, 0 to 10V, ±5V, ±10VDC
<b>Resolution</b>	12 bit (1 in 4095) uni-polar 13 bit (-4095 to 4095) bi-polar
<b>Active Low-pass Filtering</b>	-3dB at 200Hz, (-6dB per octave)
<b>Input Impedance</b>	>20MΩ
<b>Absolute Maximum Ratings</b>	-75 to +75 VDC
<b>Converter Type</b>	Successive approximation
<b>Conversion Time (PLC Update Rate)</b>	8 channels per scan maximum (D2-262 CPU)
<b>Linearity Error (End to End)</b>	±1 count (0.025% of full scale) maximum
<b>Input Stability</b>	±1 count
<b>Full Scale Calibration Error (offset error not included)</b>	±3 counts maximum
<b>Offset Calibration Error</b>	±1 count maximum (0V input)
<b>Step Response</b>	1ms to 95% of F.S. change


Includes circuitry to automatically detect broken or open transmitters.

<b>Maximum Inaccuracy</b>	±.1% @ 77°F (25°C) ±.3% 32° to 140°F (0° to 60°C)
<b>Accuracy vs Temperature</b>	±50 ppm/°C maximum full scale (including max. offset change of 2 counts)
<b>Digital Input Points Required</b>	16 (X) input points, (12 binary data bits, 3 channel ID bits, 1 sign bit, 1 diagnostic bit)
<b>Base Power Required 5VDC</b>	100mA
<b>External Power Supply</b>	5mA maximum, +10 to +30 VDC
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON



See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.

### Typical user wiring

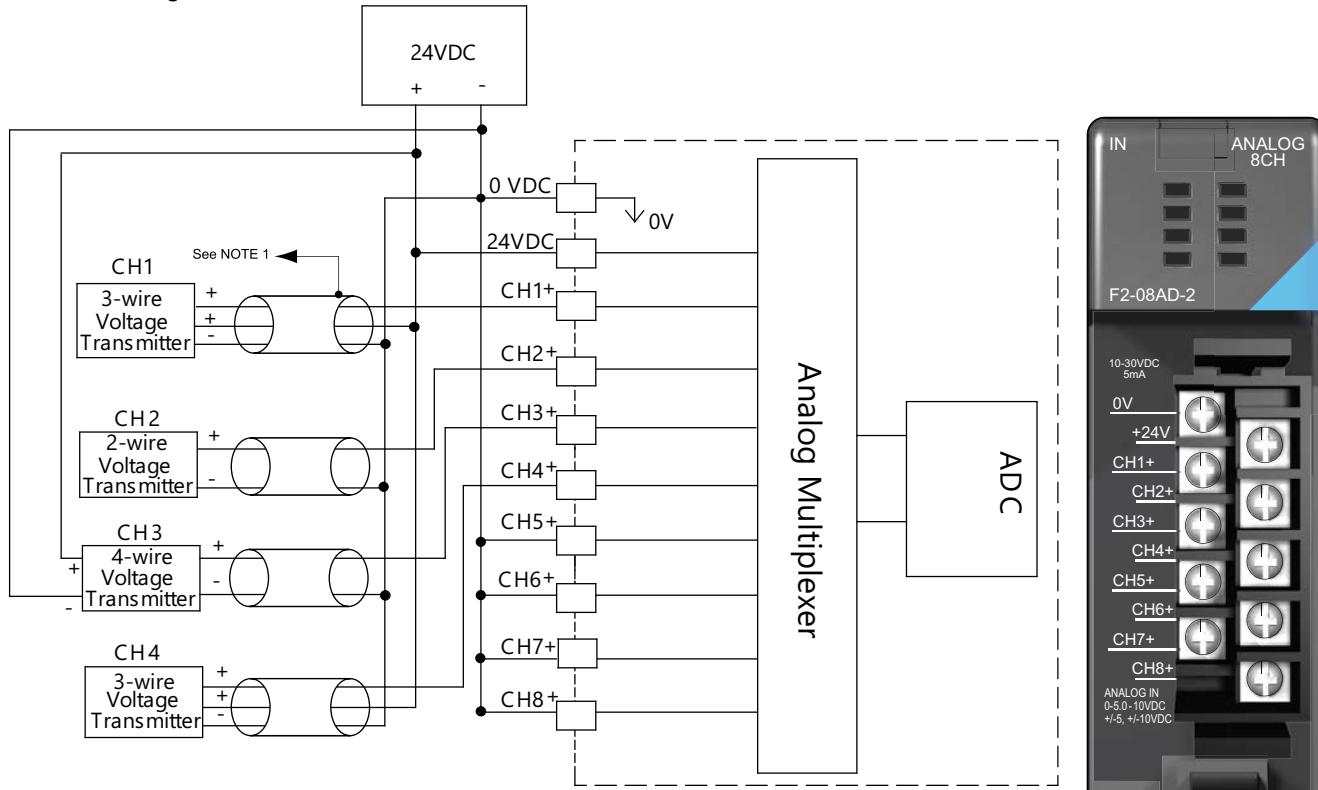

Note 1: Shields should be grounded at the signal source.

Note 2: Connect all external power supply commons.

Note 3: Connect unused channels (CH5+, CH6+, CH7+, CH8+ in this example) to 0VDC.


# Temperature Input Modules

## F2-04RTD 4-Channel RTD In \$539.00

<b>Number of Channels</b>	4
<b>Input Ranges</b>	Type Pt100: -200.0 to 850.0°C, -328 to 1562°F Type Pt1000: -200.0 to 959.0°C, -328 to 1103°F Type jPt100: -38.0 to 450.0°C, -36 to 842°F Type Cu-10Ω/Cu-25Ω: -200.0 to 260.0°C, -328 to 500°F
<b>Resolution</b>	16 bit (1 in 65535)
<b>Display Resolution</b>	±0.1°C, ±0.1°F (±3276.7)
<b>RTD Excitation Current</b>	210µA
<b>Input Type</b>	Differential
<b>Notch Filter</b>	>50dB notches at 50/60 Hz -3dB = 13.1 Hz
<b>Maximum Setting Time</b>	100ms (full-scale step input)
<b>Common Mode Range</b>	0–5 VDC
<b>Absolute Maximum Ratings</b>	Fault protected inputs to ±50VDC
<b>Sampling Rate</b>	160ms per channel

<b>Converter Type</b>	Charge Balancing
<b>Linearity Error</b>	±.05°C maximum, ±.01°C typical
<b>Maximum Inaccuracy</b>	Type Pt100, Pt1000, jPt100: ±1°C Type Cu-10Ω/Cu-25Ω: ±5°C
<b>PLC Update Rate</b>	4 channel/scan max., D2-262 CPU
<b>Digital Input Points Required</b>	32 input points (16 binary data bits, 2 channel ID bits, 4 fault bits)
<b>Base Power Required 5VDC</b>	90A
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Temperature Drift</b>	None (self-calibrating)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

### Typical user wiring

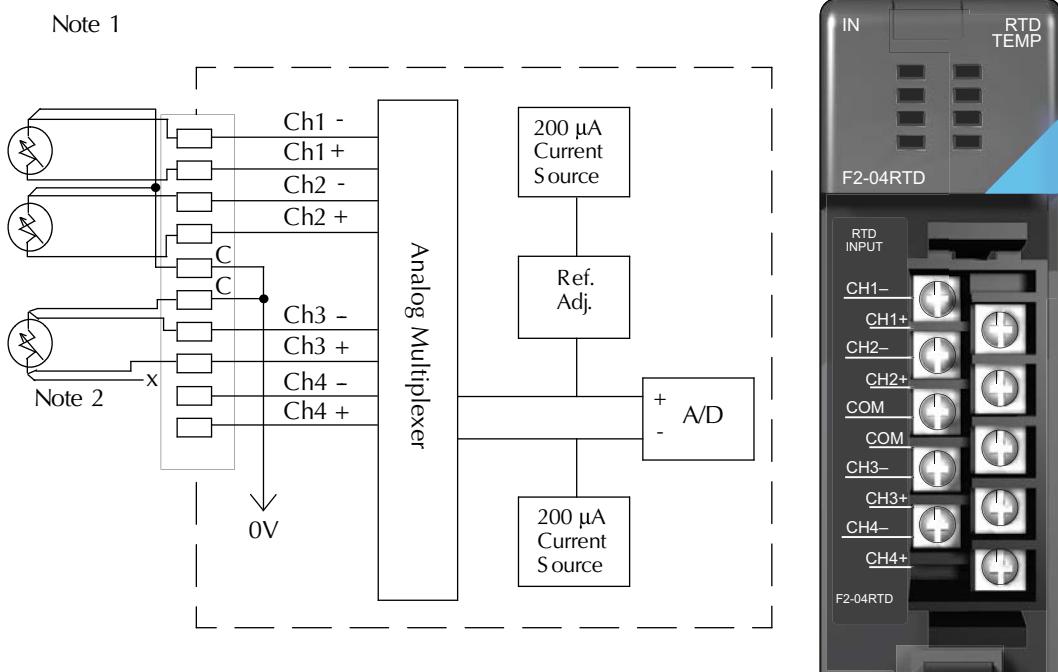

#### Notes:

1. The three wires connecting the RTD to the module must be the same type and length. Do not use the shield or drain wire for the third connection.
2. If an RTD sensor has four wires, the plus sense wire should be left unconnected as shown.
3. This module is not compatible with the ZIPLink wiring systems.

# Temperature Input Modules


## F2-04THM 4-Channel Thermocouple In \$529.00

General Specifications	
<b>Number of Channels</b>	4, differential
<b>Common Mode Range</b>	±5VDC
<b>Common Mode Rejection</b>	90dB min. @ DC, 150dB min. @ 50/60 Hz.
<b>Input Impedance</b>	1 MΩ
<b>Absolute Maximum Ratings</b>	Fault-protected inputs to ±50 VDC
<b>Accuracy vs. Temperature</b>	±5 ppm/°C maximum full scale calibration (including maximum offset change)
<b>PLC Update Rate</b>	4 channels per scan max. <u>D2-262</u> CPU
<b>Digital Input Points Required</b>	32 (X) input points (16 binary data bits, 2 channel ID bits, 4 diagnostic bits)
<b>External Power Supply</b>	60mA maximum, 18 to 26.4 VDC
<b>Base Power Required 5VDC</b>	110mA
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Non-removable



Thermocouple Specifications		
<b>Input Ranges</b>	Type J -190 to 760°C	-310 to 1400°F
	Type E -210 to 1000°C	-346 to 1832°F
	Type K -150 to 1372°C	-238 to 2502°F
	Type R 65 to 1768°C	149 to 3214°F
	Type S 65 to 1768°C	149 to 3214°F
	Type T -230 to 400°C	-382 to 752°F
	Type B 529 to 1820°C	984 to 3308°F
	Type N -70 to 1300°C	-94 to 2372°F
	Type C 65 to 2320°C	149 to 4208°F
<b>Display Resolution</b>	±0.1°C or ±0.1°F	
<b>Cold Junction Compensation</b>	Automatic	
<b>Conversion Time</b>	100ms per channel	
<b>Warm-Up Time</b>	30 minutes typically ± 1°C repeatability	
<b>Linearity Error (End to End)</b>	±.05°C maximum, ±.01°C typical	
<b>Maximum Inaccuracy</b>	±3°C (excluding thermocouple error)	
Voltage Input Specifications		
<b>Voltage Ranges</b>	0-5V, ±5V, 0-156.25 mV, ±156.25 mVDC	
<b>Resolution</b>	16-bit (1 in 65535)	
<b>Full Scale Calibration Error (Offset Error Included)</b>	±13 counts typical ±33 maximum	
<b>Offset Calibration Error</b>	±1 count maximum, @ 0V input	
<b>Linearity Error (End to End)</b>	±1 count maximum	
<b>Maximum Inaccuracy</b>	±.02% @ 25°C (77°F)	

CPU Firmware Required	
<b>CPU</b>	<b>Firmware Required</b>
<b>D2-250</b>	V1.06
<b>D2-250-1</b>	All firmware versions work
<b>D2-262</b>	Version 1.0 or later

Thermocouple input wiring diagram

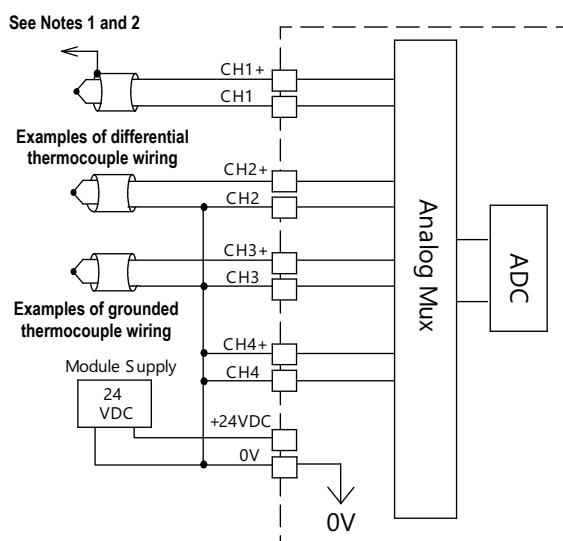

Voltage input wiring diagram

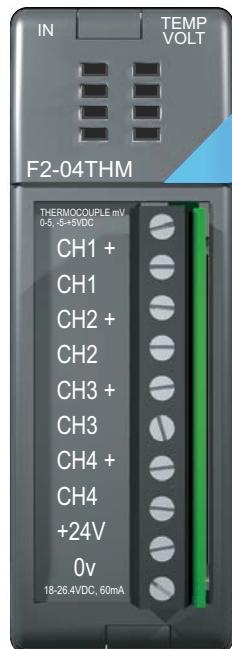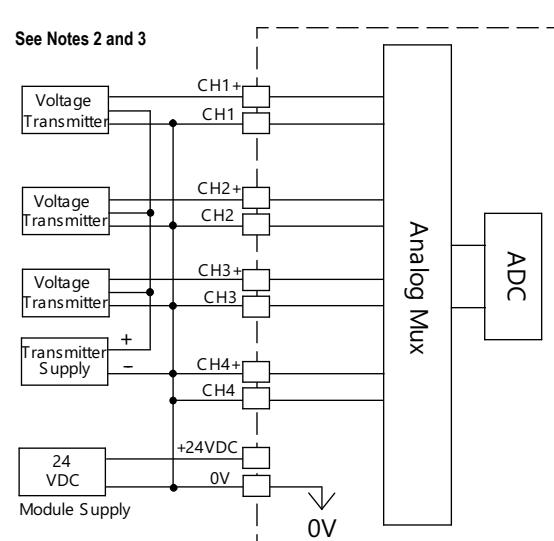**Notes:**

- 1: Terminate shields at the respective signal source.
- 2: Connect unused channels to a common terminal (0V, CH4+, CH4).
- 3: When using 0-156 mV and 5V ranges, connect (-) or (0) volts terminal to 0V to ensure common mode range acceptance.
- 4: This module is not compatible with the ZIPLink wiring system.

# Analog Current Output Modules

## F2-02DA-1 2-Channel 4-20mA Analog Output \$282.00

This module requires a 24VDC user power supply for operation.

<b>Number of Channels</b>	2
<b>Output Ranges</b>	4 to 20 mA
<b>Resolution</b>	12-bit (1 in 4096)
<b>Output Type</b>	Single ended, one common
<b>Digital Output Points Required</b>	16 (Y) output points (12 binary data bits, 2 channel ID bits)
<b>Maximum Loop Supply</b>	30VDC
<b>Peak Output Voltage</b>	40VDC (clamped by transient voltage suppressor)
<b>Load Impedance</b>	Zero $\Omega$ minimum
<b>Maximum Load/Power Supply</b>	620 $\Omega$ /18V, 910 $\Omega$ /24V, 1200 $\Omega$ / 30V
<b>PLC Update Rate</b>	2 channels per scan maximum (D2-262 CPU)
<b>Linearity Error (end to end)</b>	$\pm 1$ count ( $\pm 0.025\%$ of full scale) maximum
<b>Conversion Settling Time</b>	100 $\mu$ s maximum (full scale change)
<b>Full Scale Calibration Error (offset error included)</b>	$\pm 5$ counts max., 20mA @77°F (25°C)
<b>Offset Calibration Error</b>	$\pm 3$ counts max., 4mA @ 77°F (25°C)

See Wiring Solutions for part numbers of ZIPlink cables and connection modules compatible with this I/O module.




<b>Accuracy vs. Temperature</b>	$\pm 50$ ppm/ $^{\circ}$ C full scale calibration change (including maximum offset change of 2 counts)
<b>Maximum Inaccuracy</b>	0.1% @ 77°F (25°C) 0.3% @ 32° to 140°F (0° to 60°C)
<b>Base Power Required 5VDC</b>	40mA
<b>External Power Supply</b>	24VDC, 60mA. (add 20mA for each current loop used)
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4 to 158°F (-20 to 70°C)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

**NOTE 1:** Shields should be connected to the 0V of the module or the 0V of the R/S.


**NOTE 2:** Unused current outputs should remain open (no connections) for minimum power consumption.

### Typical user wiring

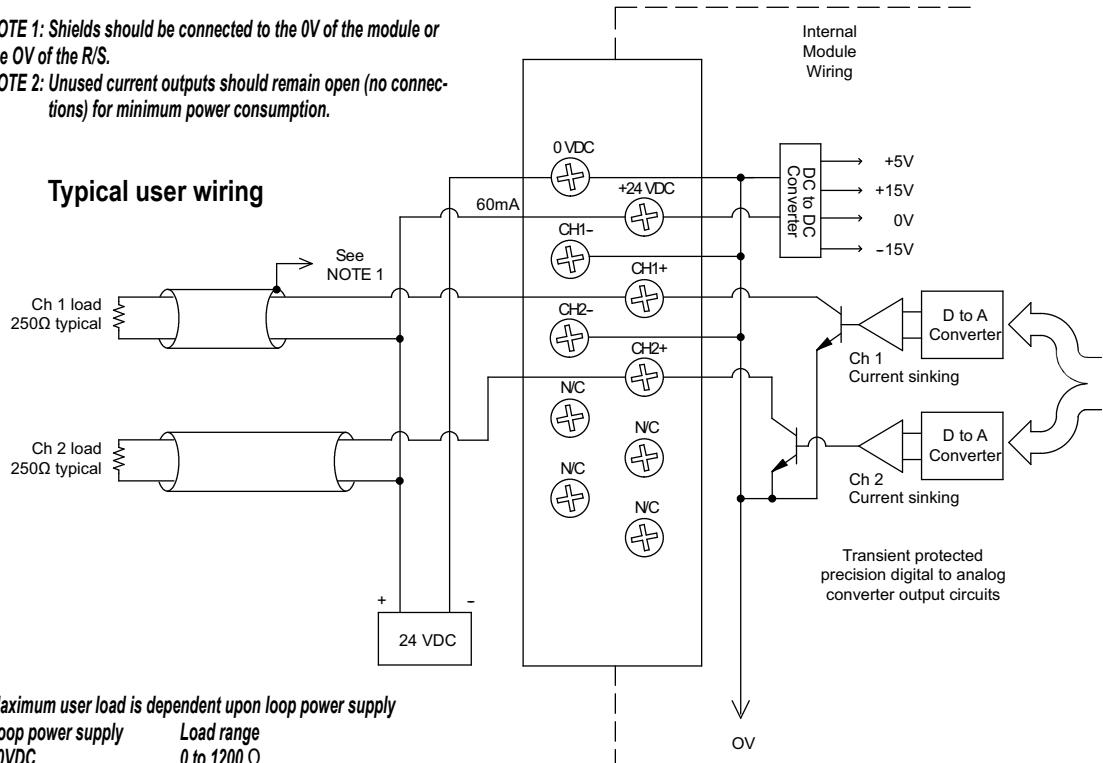

Maximum user load is dependent upon loop power supply

Loop power supply	Load range
30VDC	0 to 1200 $\Omega$
24VDC	0 to 910 $\Omega$
18VDC	0 to 620 $\Omega$

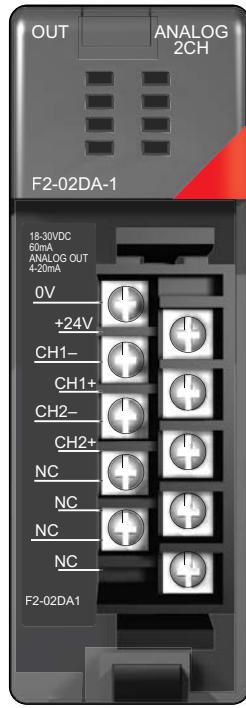

# Analog Current Output Modules

## F2-02DAS-1 2-Channel Isolated 4-20mA Analog Output \$393.00



<b>Number of Channels</b>	2, isolated
<b>Output Ranges</b>	4 to 20 mA
<b>Resolution</b>	16 bit (1 in 65536)
<b>Output Type</b>	Current sourcing
<b>Digital Output Points Required</b>	32 (Y) output points (16 binary data bits, 2 channel ID bits, 1 output enable bit)
<b>Isolation Voltage</b>	±750V continuous, channel to channel, channel to logic
<b>Base Power Required 5VDC</b>	100mA
<b>Loop Supply</b>	18-32 VDC
<b>External Power Supply</b>	18-32 VDC @ 50mA per channel
<b>Output Loop Compliance</b>	Vin - 2.5 V
<b>Max Load Impedance</b>	525Ω
<b>Maximum Load/ Power Supply</b>	375Ω/12V, 975Ω/24V, 1375Ω/32V
<b>PLC Update Rate</b>	2 channels per scan maximum (D2-262 CPU)
<b>Conversion Settling Time</b>	3ms to 0.1% of full scale

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.



<b>Linearity Error (end to end)</b>	±10 count (±0.015% of full scale) maximum
<b>Gain Calibration Error</b>	±32 counts (±0.05%)
<b>Offset Calibration Error</b>	±13 counts (±0.02%)
<b>Output Drift</b>	50 ppm/°C
<b>Maximum Inaccuracy</b>	0.07% @ 25°C (77°F) 0.18% 0 to 60°C (32° to 140°F)
<b>Operating Temperature</b>	0° to 60°C (32° to 140°F)
<b>Storage Temperature</b>	-20° to 70°C (-4° to 158°F)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

### Typical user wiring

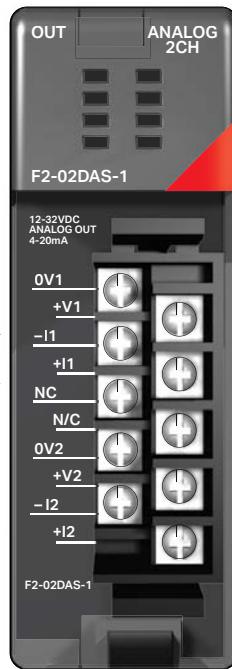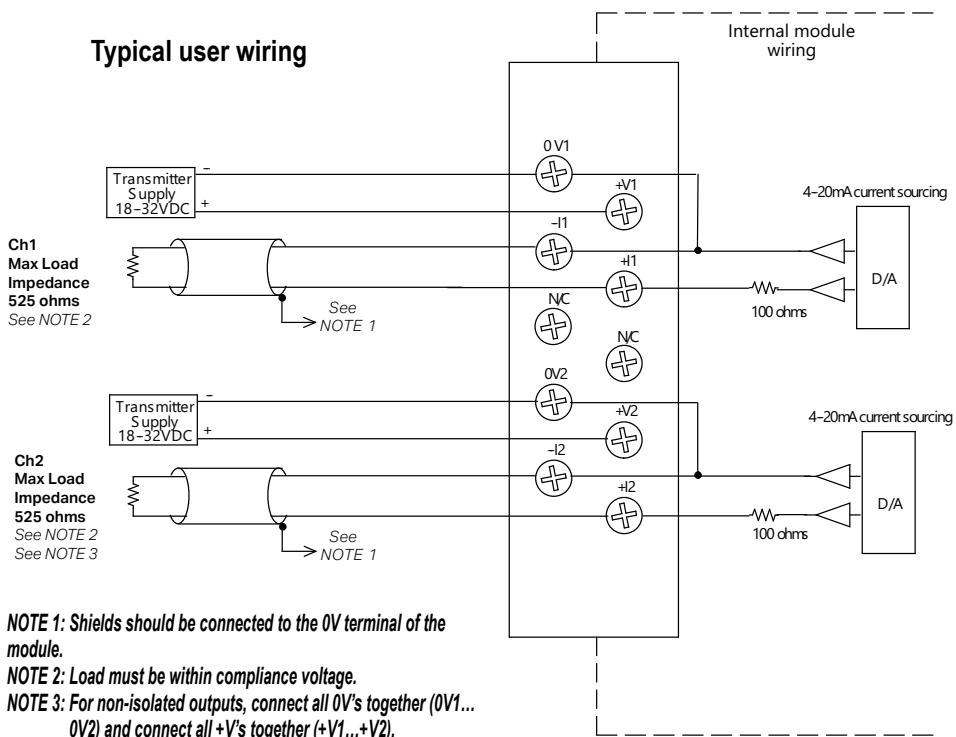

# Analog Current Output Modules

## F2-08DA-1 8-Channel 4-20mA Analog Output \$535.00


<b>Number of Channels</b>	8, single-ended
<b>Output Ranges</b>	4 to 20 mA
<b>Resolution</b>	12-bit (1 in 4096)
<b>Output Type</b>	Current sinking or current sourcing
<b>Digital Output Points Required</b>	16 (Y) output points (12 binary data bits, 3 channel ID bits, 1 output enable bit)
<b>Base Power Required 5VDC</b>	30mA
<b>Maximum Loop Voltage</b>	30VDC
<b>External Power Supply</b>	18 to 30 VDC, 50mA., class 2 (add 20mA for each current loop used)
<b>Source Load</b>	0-400 Ω @ 18-30 VDC
<b>Sink Load</b>	0-600 Ω/18V, 0-900 Ω/24V, 0-1200 Ω/30V
<b>Total Load (sink + source)</b>	600Ω/18V, 900Ω/24 V, 1200Ω/30V
<b>PLC Update Rate</b>	8 channels per scan maximum (D2-262 CPU)
<b>Conversion Settling Time</b>	400μs maximum (full scale change)

See Wiring Solutions for part numbers of  
**ZIPLink** cables and connection modules  
compatible with this I/O module.



<b>Linearity Error (end to end)</b>	±2 count ( $\pm 0.050\%$ of full scale) maximum
<b>Full Scale Calibration Error</b>	± 12 counts max. sinking @ any load ± 12 counts max. sourcing @ 125Ω load ± 18 counts max. sourcing @ 250Ω load ± 26 counts max. sourcing @ 400Ω load
<b>Offset Calibration Error</b>	± 9 counts max. sinking @ any load ± 9 counts max. sourcing @ 125Ω load ± 11 counts max. sourcing @ 250Ω load ± 13 counts max. sourcing @ 400Ω load
<b>Maximum Full Scale Inaccuracy @ 60°C</b>	0.5% sinking (any load) sinking & sourcing @ 125Ω load 0.64% sourcing @ 250Ω load 0.83% sourcing @ 400Ω load
<b>Maximum Full Scale Inaccuracy @ 25°C</b>	0.3% sinking (any load) sinking & sourcing @ 125Ω load 0.44% sourcing @ 250Ω load 0.63% sourcing @ 400Ω load
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4 to 158°F (-20 to 70°C)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-16IOCON

### Typical user wiring

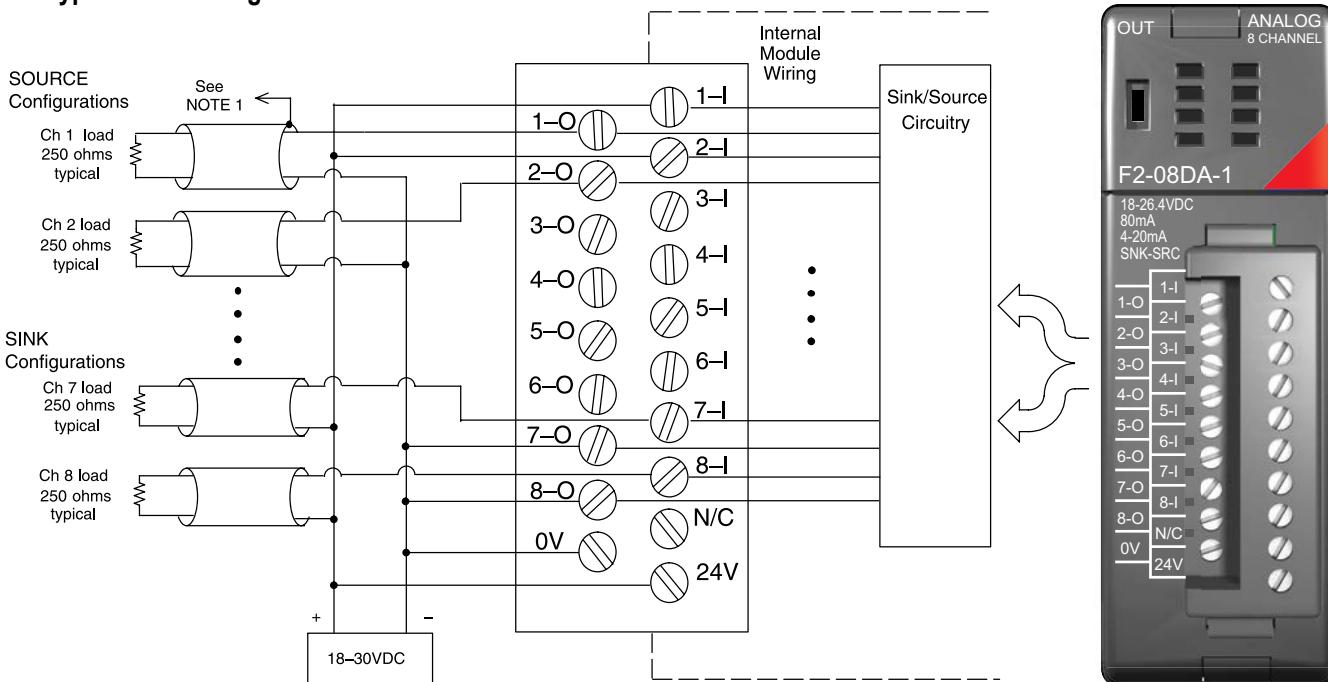

NOTE 1: Shields should be connected to the 0V of the module.

# Analog Voltage Output Modules

## F2-02DA-2 2-Channel Voltage Analog Output \$295.00

This module requires a 24VDC user power supply for operation. All other specifications are the same.


<b>Number of Channels</b>	2
<b>Output Ranges</b>	0 to 5 V, 0 to 10 V, ±5V, ±10V
<b>Resolution</b>	12-bit (1 in 4096)
<b>Output Type</b>	Single ended, 1 common
<b>Digital Output Points Required</b>	16 (Y) output points (12 binary data bits, 2 channel ID bits)
<b>Peak Output Voltage</b>	15VDC (clamped by transient voltage suppressor)
<b>Load Impedance</b>	2000Ω minimum
<b>Load Capacitance</b>	0.01 μF maximum
<b>PLC Update Rate</b>	2 channels per scan, maximum (D2-262 CPU)
<b>Linearity Error (end to end)</b>	±1 count (0.025% of full scale) maximum
<b>Conversion Settling Time</b>	5μs maximum (full scale change)
<b>Full Scale Calibration Error (offset error included)</b>	±12 counts max. unipolar @ 77°F (25°C) ±16 counts max. bipolar @ 77°F (25°C)
<b>Offset Calibration Error</b>	±3 counts max., unipolar @ 77°F (25°C) ±8 counts max., bipolar @ 77°F (25°C)

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.



<b>Accuracy vs. Temperature</b>	±50 ppm/°C full scale calibration change (including maximum offset change of 2 counts)
<b>Maximum Inaccuracy</b>	+0.3% unipolar ranges @ 77°F (25°C) ±0.45% unipolar ranges >77°F (25°C) ±0.4% bipolar ranges @ 77°F (25°C) ±0.55% bipolar ranges >77°F (25°C)
<b>Base Power Required 5VDC</b>	40mA
<b>External Power Supply</b>	24VDC, 60mA (outputs fully loaded)
<b>Operating Temperature</b>	32° to 140°F (0° to 60°C)
<b>Storage Temperature</b>	-4° to 158°F (-20° to 70°C)
<b>Relative Humidity</b>	5% to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

### Typical user wiring

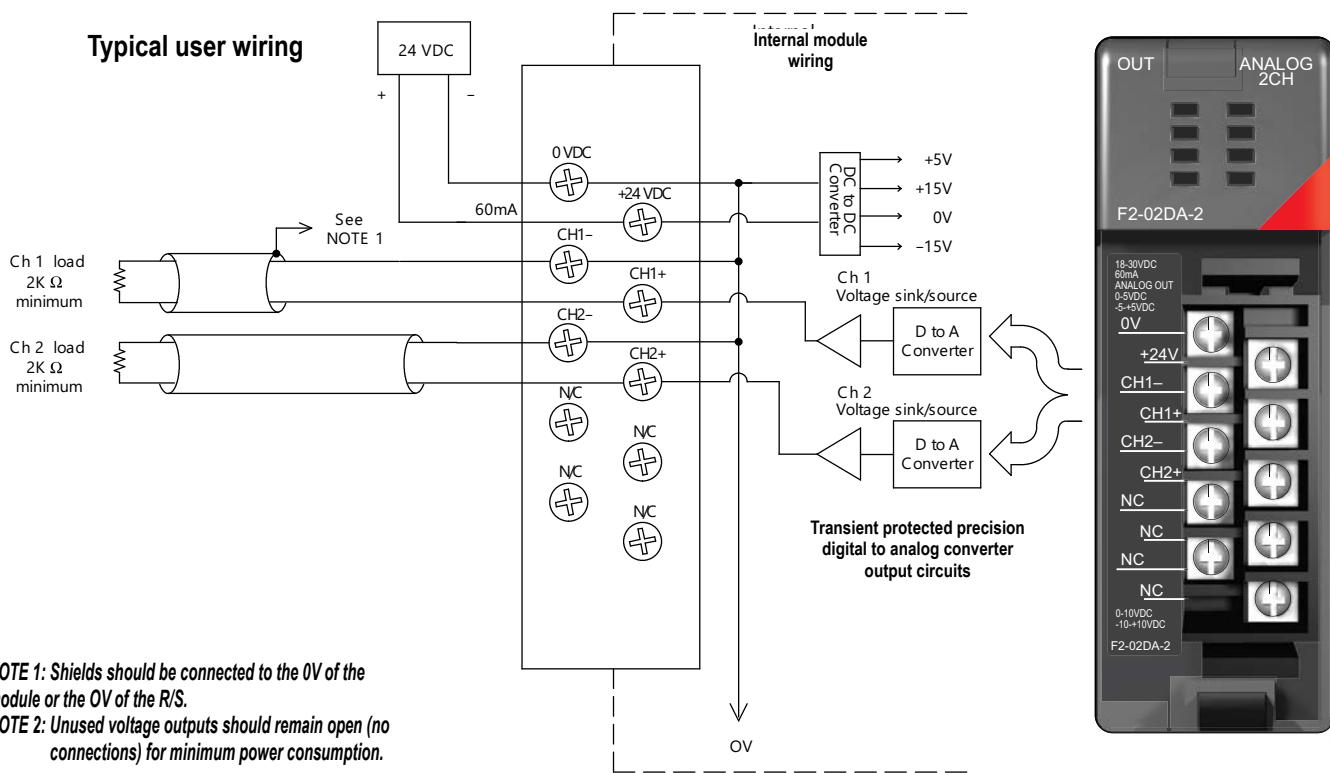

# Analog Voltage Output Modules

## F2-02DAS-2 2-Channel 0-5V, 0-10V Isolated Analog Output \$428.00



<b>Number of Channels</b>	2, isolated
<b>Output Ranges</b>	0-5 V, 0-10 V
<b>Resolution</b>	16-bit (1 in 65536)
<b>Output Type</b>	Sourced through external loop supply
<b>Digital Output Points Required</b>	32 (Y) output points (16 binary data bits, 2 channel ID bits)
<b>Isolation Voltage</b>	±750V continuous, channel to channel, channel to logic
<b>Base Power Required 5VDC</b>	60mA
<b>External Power Supply</b>	21.6-26.4 VDC @ 60mA per channel
<b>Load Impedance</b>	2kΩ min.
<b>PLC Update Rate</b>	2 channels per scan, maximum (D2-262 CPU)
<b>Conversion Settling Time</b>	3ms to 0.1% of full scale

See Wiring Solutions for part numbers of ZIPLink cables and connection modules compatible with this I/O module.



<b>Linearity Error (end to end)</b>	±10 count ( $\pm 0.015\%$ of full scale) maximum
<b>Gain Calibration Error</b>	±32 counts ( $\pm 0.05\%$ )
<b>Offset Calibration Error</b>	±13 counts ( $\pm 0.02\%$ )
<b>Output Drift</b>	50 ppm/°C
<b>Maximum Inaccuracy</b>	0.07% @ 25°C (77°F) 0.18% 0 to 60°C (32° to 140°F)
<b>Operating Temperature</b>	0° to 60°C (32° to 140°F)
<b>Storage Temperature</b>	-20° to 70°C (-4° to 158°F)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

### Typical user wiring

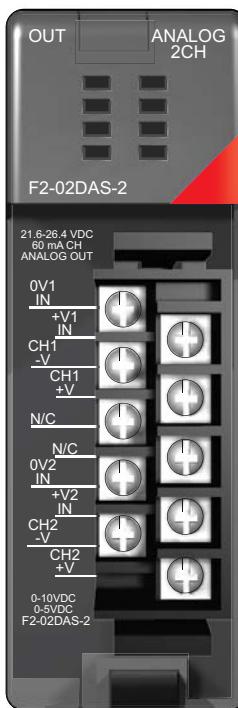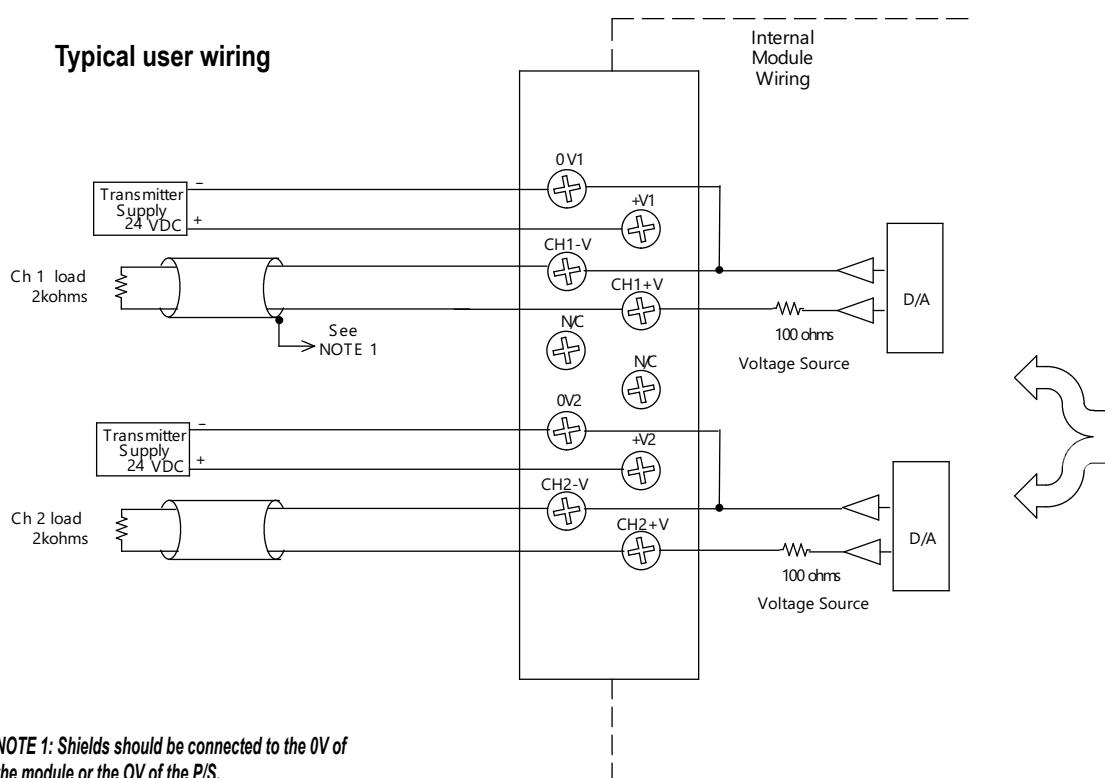

# Analog Voltage Output Modules

## F2-08DA-2 8-Channel Voltage Analog Output \$482.00


<b>Number of Channels</b>	8, single-ended, 1 common
<b>Output Ranges</b>	0 to 5V, 0 to 10V
<b>Resolution</b>	12-bit (1 in 4096)
<b>Output Type</b>	Voltage sourcing
<b>Digital Output Points Required</b>	16 (Y) output points (12 binary data bits, 3 channel ID bits, 1 output enable bit)
<b>Base Power Required 5VDC</b>	60mA
<b>External Power Supply</b>	21.6-26.4 VDC, 140mA (outputs fully loaded)
<b>Peak Output Voltage</b>	15VDC (clamped by transient voltage suppressor)
<b>Load Impedance</b>	1-10kΩ
<b>Load Capacitance</b>	0.01 μF maximum
<b>PLC Update Rate</b>	8 channels per scan maximum (D2-262 CPU)
<b>Conversion Settling Time</b>	400μs maximum (full scale change) 4.5 ms to 9ms for digital out to analog out

<b>Linearity Error (end to end)</b>	±1 count ( $\pm 0.025\%$ of full scale) maximum
<b>Full Scale Calibration Error</b>	±12 counts max. unipolar @ 25°C (77°F)
<b>Offset Calibration Error</b>	±3 counts max., unipolar @ 25°C (77°F)
<b>Accuracy vs. Temperature</b>	±57 ppm/°C full scale calibration change (including maximum offset change of 2 counts)
<b>Maximum Inaccuracy</b>	±0.3% @ 25°C (77°F) ±0.45% @ 0-60°C (32-140°F)
<b>Operating Temperature</b>	0° to 60°C (32° to 140°F)
<b>Storage Temperature</b>	-20° to 70°C (-4° to 158°F)
<b>Relative Humidity</b>	5 to 95% (non-condensing)
<b>Environmental air</b>	No corrosive gases permitted
<b>Vibration</b>	MIL STD 810C 514.2
<b>Shock</b>	MIL STD 810C 516.2
<b>Noise Immunity</b>	NEMA ICS3-304
<b>Terminal Type (included)</b>	Removable; D2-8IOCON

See Wiring Solutions for part numbers of **ZIPLink** cables and connection modules compatible with this I/O module.



### Typical user wiring

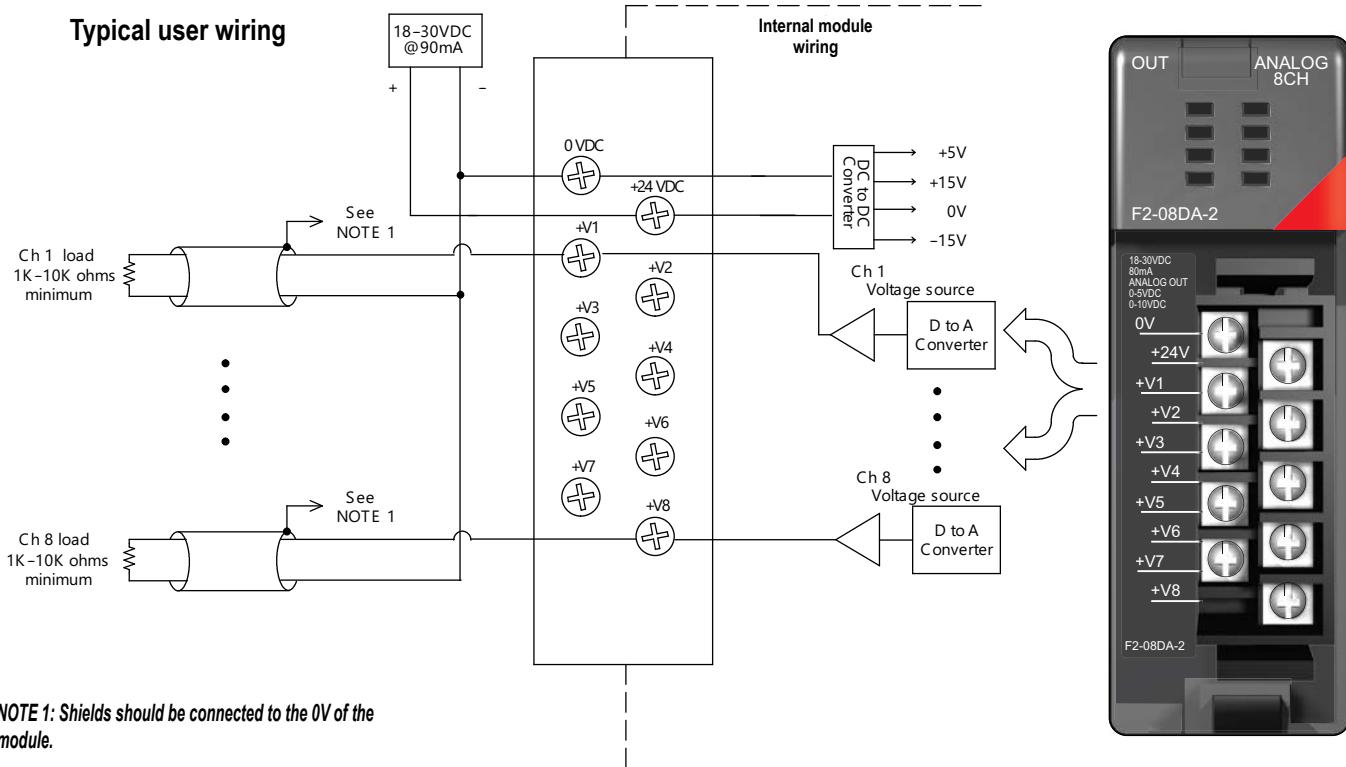

# Analog In/Out Combination Module

## F2-4AD2DA 4-Channel Analog Input 2-Channel Analog Output \$505.00

<b>Number of Input Channels</b>	4, single-ended (1 common)
<b>Number of Output Channels</b>	2, single-ended (1 common)
<b>Ranges</b>	4 to 20 mA current (current sinking)
<b>Resolution</b>	12 bit (1 in 4096)
<b>Peak Withstanding Voltage</b>	75VDC, current outputs
<b>Maximum Continuous Overload</b>	-40 to +40 mA, each current output
<b>Input Impedance</b>	250Ω, ±0.1%, 1/2 W, 25 ppm/°C current input resistance
<b>External Load Resistance</b>	0Ω minimum, current outputs
<b>Maximum Loop Supply</b>	30VDC
<b>Recommended Fuse</b>	0.032 A, series 217 fast-acting, current inputs
<b>Maximum Load/Power Supply</b>	910Ω/24V, current outputs 620Ω/18V, 1200Ω/30V
<b>Active Low-pass Filter</b>	-3dB @ 20Hz, 2 poles (-12 dB per octave)
<b>Linearity Error (best fit)</b>	±1 count (±0.025% of full scale) maximum
<b>Output Settling Time</b>	100μs maximum (full scale change)

See Wiring Solutions for part numbers of **ZIPLink** cables and connection modules compatible with this I/O module.



**Note 1:** Shields should be connected at their respective signal source.

**Note 2:** Unused channel should remain open for minimum power consumption.

**Note 3:** More than one external power supply can be used provided the power supply commons are connected.



**Note 4:** A Series 217, 0.032 A fast-acting fuse is recommended for 4-20 mA current input loops.

**Note 5:** If the power supply common of an external power supply is not connected to 0 VDC on the module, then the output of the external transmitter must be isolated. To avoid "ground loop" errors, recommended 4-20 mA transmitter types are:

2 or 3 wire: isolation between Input signal and power supply

4 wire: Isolation between input signal, power supply, and 4-20 mA output.

### Typical user wiring

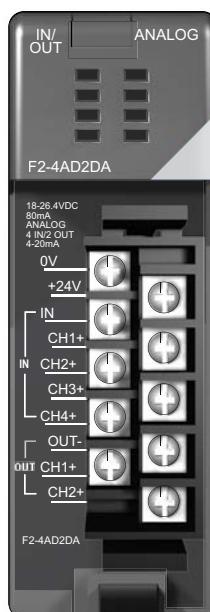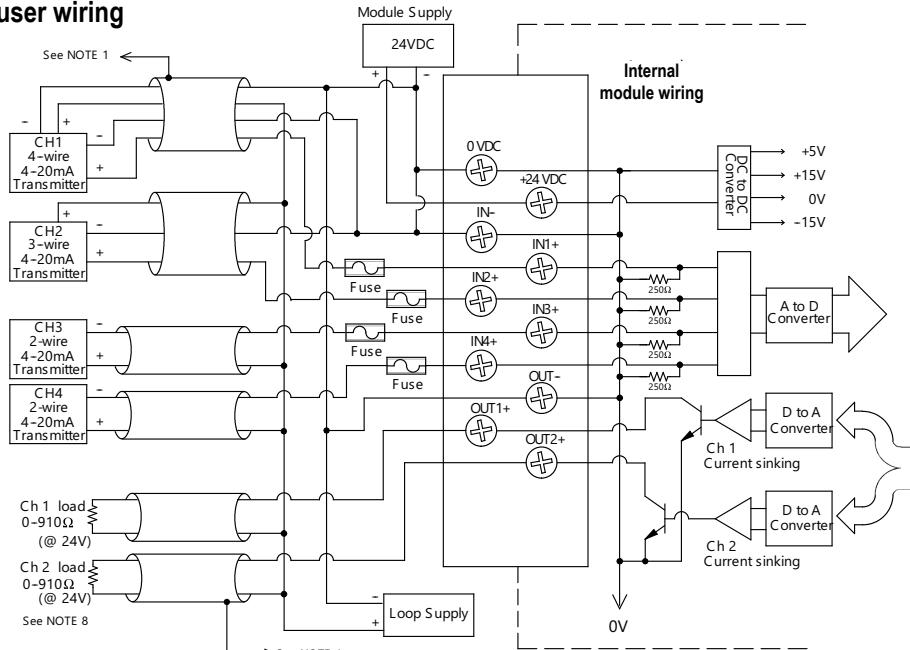


# Analog In/Out Combination Module

**Requires D2-250-1 or D2-262 CPU.**

<b>F2-8AD4DA-1 8-Channel Analog Current Input 4-Channel Analog Current Output \$634.00</b>	
<b><i>Input Channels per Module</i></b>	8, single ended (one common)
<b><i>Input Range</i></b>	0 to 20 mA
<b><i>Resolution</i></b>	12, 14, 16-bit selectable
<b><i>External DC Power Required</i></b>	100mA @ 18-26.4 VDC
<b><i>Max. Continuous Overload</i></b>	±45mA
<b><i>Input Impedance</i></b>	100Ω 0.1% 1/4 W
<b><i>Filter Characteristics</i></b>	Active low pass, -3dB @ 80Hz
<b><i>Conversion Time</i></b>	12-bit = 1.5 ms per channel 14-bit = 6ms per channel 16-bit = 25ms per channel
<b><i>Conversion Method</i></b>	Over sampling successive approximation
<b><i>Accuracy vs. Temperature</i></b>	±25 ppm / °C Max.
<b><i>Maximum Inaccuracy</i></b>	0.1% of range
<b><i>Linearity Error (End to End)</i></b>	12-bit = ±2 count max. (±0.06% of range) 14-bit = ±10 count max. (±0.06% of range) 16-bit = ±20 count max. (±0.06% of range) Monotonic with no missing codes
<b><i>Full Scale Calibration Error (not including offset error)</i></b>	±0.07% of range max.
<b><i>Offset Calibration Error</i></b>	±0.03% of range max.
<b><i>Rec. Fuse (external)</i></b>	0.032 A, Littelfuse Series 217 fast-acting
<b><i>Base Power Required 5VDC</i></b>	35mA

<b>Output Channels per Module</b>	4
<b>Output Range</b>	4 to 20 mA
<b>Resolution</b>	16-bit, 0.244 mA/bit
<b>Output Type</b>	Current sourcing at 20mA, max.
<b>Load Impedance</b>	0-750 Ω
<b>Max. Inaccuracy</b>	0.25% of range
<b>Max. Full Scale Calibration Error (not incl. offset error)</b>	±0.075% of range max.
<b>Max. Offset Calibration Error</b>	±0.1% of range max.
<b>Accuracy vs. Temperature</b>	±25 ppm/ °C max. full scale calibration change (± 0.0025% of range / °C)
<b>Max. Crosstalk at DC, 50/60Hz</b>	-70dB, 1 LSB
<b>Linearity Error (End to End)</b>	±1 count max. (±0.025% of full scale) Monotonic with no missing codes
<b>Output Stability and Repeatability</b>	±1 LSB after 10 minute warm-up typical
<b>Output Ripple</b>	0.005% of full scale
<b>Output Settling Time</b>	0.5 ms max., 5µs, min. (full scale change)
<b>Max. Continuous Overload</b>	Outputs open circuit protected
<b>Type of Output Protection</b>	Electronically current limited to 20mA or less
<b>Output Signal at Power-up and Power-down</b>	4mA
<b>Terminal Type (included)</b>	Removable; D2-16I0CON

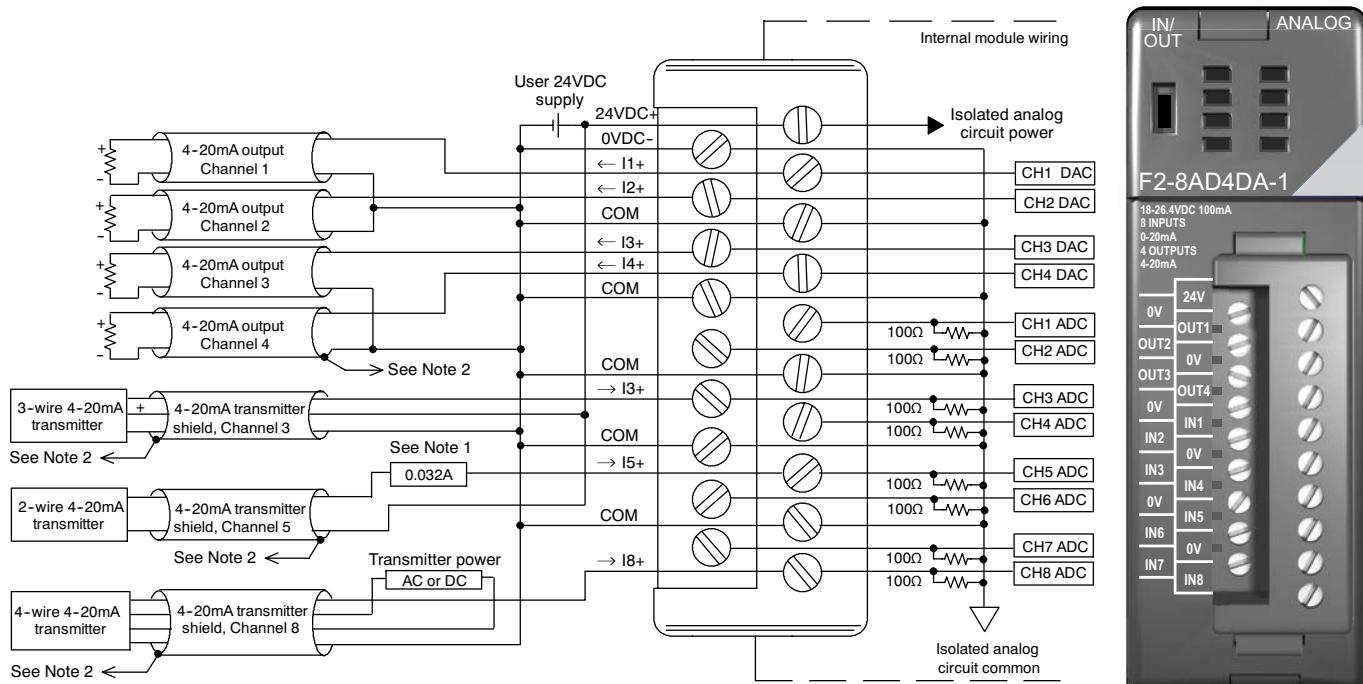

Note 1: A Littlefuse Series 217, 0.032A fast-acting fuse is recommended for all 4-20mA current loop inputs.

Note 2: Connect shields to the OV of the module; do not connect both ends of shield.


# Analog In/Out Combination Module

Requires D2-250-1 or D2-262 CPU.

## F2-8AD4DA-2 8-Channel Analog Voltage Input 4-Channel Analog Voltage Output \$626.00

<b>Input Channels per Module</b>	8, single ended (one common)
<b>Input Range</b>	0 to 10 V
<b>Resolution</b>	12, 14, 16-bit selectable
<b>External DC Power Required</b>	80mA @ 18-26.4 VDC
<b>Max. Continuous Overload</b>	±100V
<b>Input Impedance</b>	>10MΩ
<b>Filter Characteristics</b>	Active low pass, -3dB @ 80Hz
<b>Conversion Time</b>	12-bit = 1.5 ms per channel 14-bit = 6 ms per channel 16-bit = 25 ms per channel
<b>Conversion Method</b>	Over sampling successive approximation
<b>Accuracy vs. Temperature</b>	±50 ppm/°C Max.
<b>Maximim Inaccuracy</b>	0.1% of range
<b>Linearity Error (End to End)</b>	12-bit = ±1 count max. (±0.025% of range) 14-bit = ±4 count max. (±0.025% of range) 16-bit = ±16 count max. (±0.025% of range) Monotonic with no missing codes
<b>Full Scale Calibration Error (not including offset error)</b>	±0.075% of range max.
<b>Offset Calibration Error</b>	±0.025% of range max.
<b>Base Power Required 5VDC</b>	35mA

<b>Output Channels per Module</b>	4
<b>Output Range</b>	0-5 V, 0-10 V
<b>Resolution</b>	16-bit
<b>Output Type</b>	Voltage sourcing/sinking at 10mA max.
<b>Load Impedance</b>	>1000Ω
<b>Max. Inaccuracy</b>	0.15% of range
<b>Max. Full Scale Calibration Error (not incl. offset error)</b>	±0.075% of range max.
<b>Max. Offset Calibration Error</b>	±0.025% of range max.
<b>Accuracy vs. Temperature</b>	±50 ppm/°C max. full scale calibration change (± 0.005% of range /°C)
<b>Max. Crosstalk @ DC, 50/60Hz</b>	-70dB, 1 LSB
<b>Linearity Error (End to End)</b>	±1 count max. (±0.025% of full scale) Monotonic with no missing codes
<b>Output Stability and Repeatability</b>	±1 LSB after 10 minute warm-up typical
<b>Output Ripple</b>	0.005% of full scale
<b>Output Settling Time</b>	0.5 ms max., 5μs min. (full scale change)
<b>Max. Continuous Overload</b>	Outputs current limited to 15mA typical
<b>Type of Output Protection</b>	1VDC peak output voltage (clamped by transient voltage suppressor)
<b>Output Signal at Power-up and Power-down</b>	0V
<b>Terminal Type (included)</b>	Removable; <a href="#">D2-16IOCON</a>

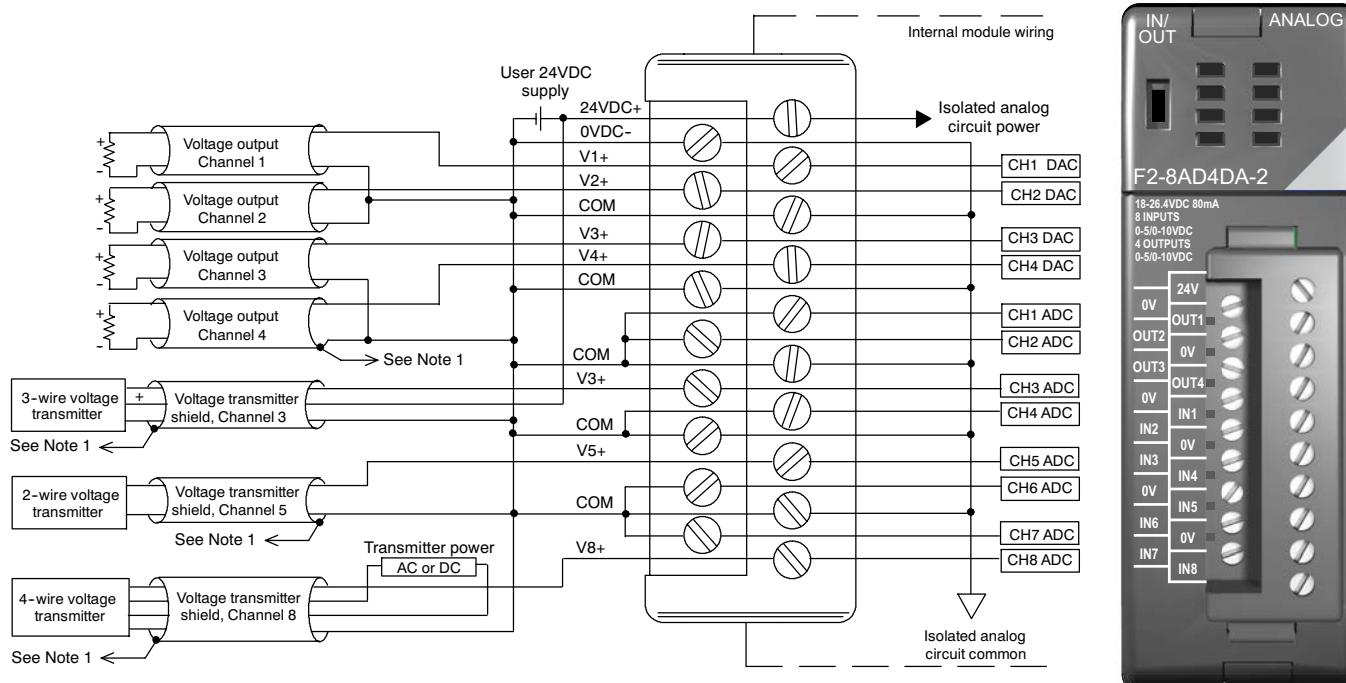

Note 1: Connect shields to the 0V of the module; do not connect both ends of shield.

# **ZIPLINK™** Wiring Solutions

## Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end.

Prewired cables keep

installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the ZIPLink System ranging from PLC I/O-to-ZIPLink Connector Modules that are ready for field

termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, as well as special relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of ZIPLink modules are provided with ZIPLink cables. See the following solutions to help determine the best ZIPLink system for your application.

### **Solution 1: Do-more, DirectLOGIC, CLICK and Productivity Series I/O Modules to ZIPLink Connector Modules**

When looking for quick and easy I/O-to-field termination, a ZIPLink connector module used in conjunction with a prewired ZIPLink cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

Using the PLC I/O Modules to ZIPLink Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC
2. Select a ZIPLink Module
3. Select a corresponding ZIPLink Cable.



### **Solution 2: Do-more, DirectLOGIC, CLICK and Productivity Series I/O Modules to 3rd Party Devices**

When wanting to connect I/O to another device within proximity of the I/O modules, no extra terminal blocks are necessary when using the ZIPLink Pigtail Cables. ZIPLink Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module
2. Select a ZIPLink Pigtail Cable that is compatible with your 3rd party device.



### **Solution 3: GS Series and DuraPulse Drives Communication Cables**

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a ZIPLink communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications
2. Select a ZIPLink cable and other associated hardware.



# **ZIPLINK™** Wiring Solutions

## **Solution 4: Serial Communications Cables**

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, and Productivity CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

1. Locate your connector type
2. Select a cable.



## **Solution 5: Specialty ZIPLink Modules**

For additional application solutions, ZIPLink modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub, RJ12 and RJ45 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the ZIPLink Specialty Modules selector table located in this section,

1. Locate the type of application
2. Select a ZIPLink module.



## **Solution 6: ZIPLink Connector Modules to 3rd Party Devices**

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible ZIPLink Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

1. Select module type
2. Select the number of pins
3. Select cable.





# PLC I/O Modules to ZIPLink Connector Modules – Do-more!/DL205

Do-more / DL205 PLC Input Module ZIPLink Selector				
PLC	ZIPLink			
Input Module	# of Terms	Component	Module Part No.	Cable Part No. †
D2-08ND3	10	Feedthrough	ZL-RTB20 (-1)	ZL-D2-CBL10 *
D2-16ND3-2	19	Feedthrough	ZL-D2-CBL19	ZL-D2-CBL19-1
		Sensor	ZL-LTB16-24-1	ZL-D2-CBL19-2
D2-32ND3 <sup>1</sup>	40	Feedthrough	ZL-RTB40 (-1)	180 deg conn: ZL-D24-CBL40
		Sensor	ZL-LTB32-24-1	ZL-D24-CBL40-1 ZL-D24-CBL40-2
D2-32ND3-2 <sup>1</sup>	40	Feedthrough	ZL-RTB40(-1)	45 deg conn: ZL-D24-CBL40-X
		Sensor	ZL-LTB32-24-1	ZL-D24-CBL40-1X ZL-D24-CBL40-2X
D2-08NA-1	10	Feedthrough	ZL-RTB20 (-1)	ZL-D2-CBL10
D2-08NA-2	10		ZL-RTB20 (-1)	ZL-D2-CBL10-1 ZL-D2-CBL10-2
D2-16NA	19	Feedthrough		ZL-D2-CBL19 *

† X in the part number represents a 45° angle.

Do-more/DL205 PLC Combo In/Out Module ZIPLink Selector				
PLC	ZIPLink			
Combo Module	# of Terms	Component	Module Part No.	Cable Part No.
D2-08CDR	10	Feedthrough	ZL-RTB20 (-1)	ZL-D2-CBL10 *

Do-more/DL205 PLC Analog Module ZIPLink Selector						
PLC	ZIPLink					
Analog Module	# of Terms	Component	Module	Cable		
F2-04AD-1	10	Feedthrough	ZL-RTB20 (-1)	ZL-D2-CBL10		
F2-08AD-1				ZL-D2-CBL10-1		
F2-04AD-2				ZL-D2-CBL10-2		
F2-08AD-2				ZL-D2-CBL19		
F2-02DA-1				ZL-D2-CBL19-1		
F2-02DAS-1				ZL-D2-CBL19-2		
F2-08DA-1				ZL-D2-CBL10		
F2-02DA-2				ZL-D2-CBL10-1		
F2-02DAS-2				ZL-D2-CBL10-2		
F2-08DA-2				ZL-D2-CBL19		
F2-02DAS-2	19			ZL-D2-CBL19-1		
F2-08AD4DA-1				ZL-D2-CBL19-2		
F2-08AD4DA-2				ZL-D2-CBL10		
F2-04RTD	Matched Only	These modules are not supported by the ZIPLink wiring system				
F2-04THM	Matched Only	These modules are not supported by the ZIPLink wiring system				



Do-more/ DL205 PLC Output Module ZIPLink Selector				
PLC	ZIPLink			
Output Module	# of Terms	Component	Module Part No.	Cable Part No. †
D2-04TD1 <sup>2</sup>	10	Feedthrough	ZL-RTB20 (-1)	ZL-D2-CBL10
D2-08TD1				ZL-D2-CBL10-1
D2-08TD2				ZL-D2-CBL10-2
D2-16TD1-2				Feedthrough
				Fuse
D2-16TD2-2				Feedthrough
				Fuse
F2-16TD1P				ZL-RFU20 <sup>4</sup>
F2-16TD2P				Relay
D2-32TD1 <sup>1</sup>				Feedthrough
D2-32TD2 <sup>1</sup>	40	Feedthrough	ZL-RTB40 (-1)	ZL-RFU40 <sup>4</sup>
D2-08TA				180 deg conn: ZL-D24-CBL40
F2-08TA				ZL-D24-CBL40-1
D2-12TA				ZL-D24-CBL40-2
D2-04TRS <sup>2</sup>				45 deg conn: ZL-D24-CBL40-X
D2-08TR				ZL-D24-CBL40-1X
F2-08TRS <sup>2</sup>				ZL-D24-CBL40-2X
F2-08TR <sup>3</sup>				ZL-D2-CBL19 *
D2-12TR				ZL-D2-CBL19 *
				ZL-D2-CBL19-2

† X in the part number represents a 45° angle plug

\* Select the cable length by replacing the \* with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

1 To make a custom cable for the 32-point modules, use: Solder-style 180° connector ZL-D24-CON or Solder-style 45° connector ZL-D24-CON-X

2 Caution: The D2-04TD1, D2-04TRS, and F2-08TRS outputs are derated not to exceed module specs 2A per point and 2A per common when used with the ZIPLink wiring system.

3 The F2-08TR outputs are derated not to exceed 2A per point and 4A per common when used with the ZIPLink wiring system.

4 Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400mA per circuit.

Note: ZIPLink Connector Module specifications follow the Compatibility Matrix tables. ZIPLink Cables specifications are at the end of this ZIPLink section.



# Dimensions and Installation

Understanding the installation requirements for your DL205 system will help ensure that the DL205 products operate within their environmental and electrical limits.

## Plan for safety


This catalog should never be used as a replacement for the user manual. The user manual, D2-USER-M (downloadable online), contains important safety information that must be followed. The system installation should comply with all appropriate electrical codes and standards.

## Environmental specifications

The Environmental Specifications table at the right lists specifications that apply globally to the DL205 system (CPUs, bases, and I/O modules). Be sure that the DL205 system is operated within these environmental specifications.

## Base dimensions and mounting

Use the diagrams below to make sure the DL205 system can be installed in your application. To ensure proper airflow for cooling purposes, DL205 bases must be mounted horizontally. It is important to check these dimensions against the conditions required for your application. For example, it is recommended that approximately 3" of space is left in front PLC surface for ease of access and cable clearances. Also, check the installation guidelines for recommended cabinet clearances.

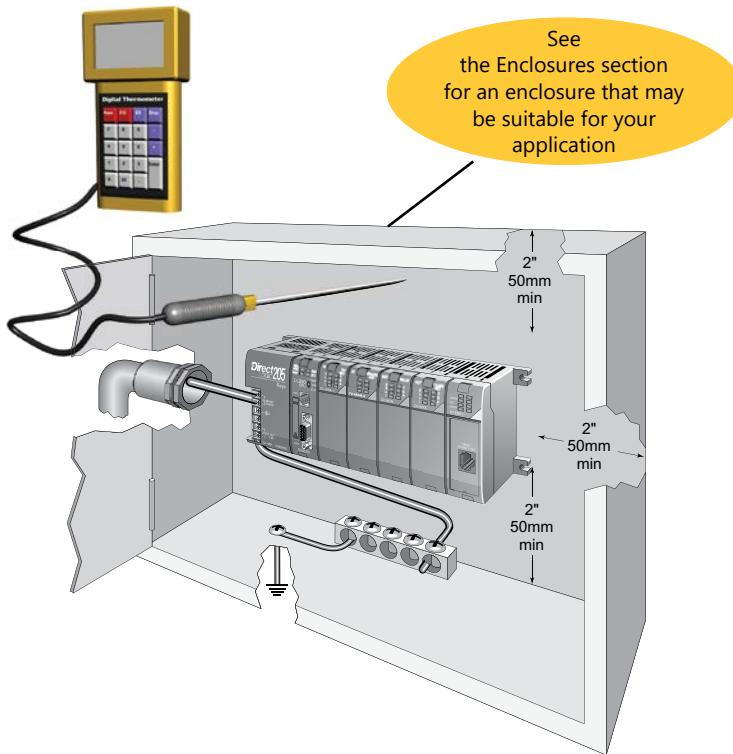

Environmental Specification	Rating
<b>Storage Temperature</b>	-4°F to 158°F (-20°C to 70°C)
<b>Ambient Operating Temperature</b>	32°F to 131°F (0°C to 55°C)
<b>Ambient Humidity</b>	30% to 95% relative humidity (non-condensing)
<b>Vibration Resistance</b>	MIL STD 810C, Method 514.2
<b>Shock Resistance</b>	MIL STD 810C, Method 516.2
<b>Noise Immunity</b>	NEMA (ICS3-304)
<b>Atmosphere</b>	No corrosive gases

Base	A	B	C	D
<b>D2-03B-1, D2-03BDC1-1</b>	6.77"	172mm	6.41"	163mm
<b>D2-04B-1, D2-04BDC1-1</b>	7.99"	203mm	7.63"	194mm
<b>D2-06B-1, D2-06BDC1-1, D2-06BDC2-1</b>	10.43"	265mm	10.07"	256mm
<b>D2-09B-1, D2-09BDC1-1, D2-09BDC2-1</b>	14.09"	358mm	13.74"	349mm
			9.48"	241mm
			10.90"	277mm
			13.14"	334mm
			14.56"	370mm

