

Koyo Digital Timers

Overview

Koyo digital timers offer flexible features at a great price. A large, easy to read display is offered in a small 1/16 DIN size. The large, bright red LED display has a 12 mm character display height which allows it to be seen easily from a distance and at an angle. In addition, set values use a green LED display to differentiate from timing values. Basic function settings are made with digital switches. Detailed settings are selected with digital keys, so operation is easy.

Features

- Tamper-proof: key protection can be set for individual keys to prevent a malfunction or tampering
- Battery-less memory retention: EEPROM is used to retain values in memory, so there is no need for battery maintenance
- Maintenance has been reduced via removable terminals. After wiring, the terminal cover provides a safe barrier for worry-free use
- Power source for a DC sensor: you can source the power for the sensor from the built-in power source which supplies 60 mA at 24 VDC
- Wide operating AC voltage range of 85-264 VAC
- Various types of time ranges: covers ten types of time ranges with times of 0.001 second to 9999 hours
- Five types of operating modes: settings of on-delay, off-delay, one-shot, accumulation and flicker
- Flush door/panel mounting
- Display of elapsed time/remaining time
- IP65 protective structure: front cover panel is made of a clear membrane, so operation with wet or dirty hands can be worry-free
- Fully CE and UL compliant



KT-V4S-D



KT-V4S-C-D

Product Selection Guide



Part Number	Description	Number of Digits	Source Voltage	Time Range	Price
<u>KT-V4S-D*</u>	Digital timer with 10 types of time ranges (see specifications). Input power is 100-240 VAC. UL and CSA approved.	4	100-240 VAC	0.001 second to 9999 hours (see table on following page)	\$132.00
<u>KT-V4S-C-D*</u>	Digital timer with 10 types of time ranges (see specifications). Input power is 12-24 VDC. UL and CSA approved		12-24 VDC		\$133.00

Accessories

Part Number	Description	Price
<u>PANEL-16</u>	Mounting clip for 1/16th DIN timers and temperature/process controllers, for door (flush) mounting. 5 clips per package	\$15.50

* Units ship with a panel mounting clip for door (flush) mounting.

Wiring Diagrams

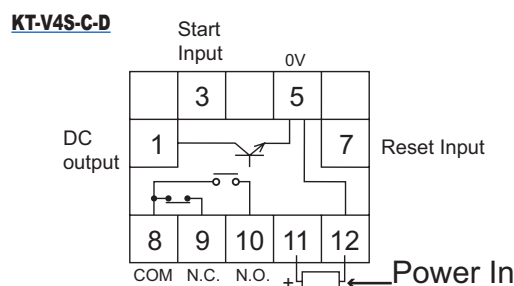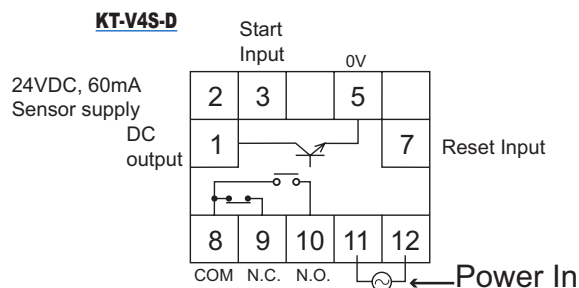


Koyo Digital Timers Specifications

General Specifications		
Part Number	KT-V4S-D KT-V4S-C-D	
Agency Approvals and Standards	UL listed, CSA listed UL recognized only with Class II power supply; CSA: EN61010-1 and EMI: EN55-11, EMS: EN50082-2. If product has DC power supply, an EMI/EMC filter must be installed on the power supply.	
Source Voltage	100-240 VAC, 50/60 Hz	
Permitted Power Fluctuation	85-264 VAC	
Power Consumption	Approx. 11 VA	
Sensor Power	24 VDC (20-28 V) 60mA (less than 10%p-p ripple noise)	
Memory Backup upon Power Failure	EEPROM writing up to 100,000 times; Memory duration: 10 years	
Ambient Temperature	-10 to 50°C [14 to 122°F]	
Storage Temperature	-20 to 70°C [-4 to 158°F] (with no icing)	
Ambient Humidity	35-85% RH non-condensing	
Withstand Voltage	2 kVAC for one minute	
Vibration Resistance	Durability: Displacement amplitude 0.5mm 10-55 Hz along three axes Operating vibration: Displacement amplitude 0.35mm 10-55 Hz along three axes	
Impact Resistance	Durability: 490 m/s ² along three axes Operating impact: 98 m/s ² along three axes	
Noise Resistance	AC power between terminals ±1.5 kV (pulse width 1μs and rise time 1ns)	DC power between terminals ±1.0 kV (pulse width 1 μs and rise time 1ns)
Protective Structure	IP65 (front panel only) when mounted in appropriate enclosure	
Weight	Approx. 150g [5.291 oz] Approx. 110g [3.88 oz]	
Terminals	Conforming wiring	0.25-1.65 mm ² 24 to 16 gauge
	Permitted Torque	0.5 N·m (0.369 ft·lb)





Performance Specifications	
Category	Timer
Operational Format	On-delay, off-delay, one-shot, accumulator, and flicker (with alarm output)
Number of Digits	4 digits
Display	Current values: red LED, character height 12mm; Preset value: green LED, character height: 7mm
Time Range	0.001s-9.999s/0.01s-99.99s/0.1s-999.9 s/1s-9999 s/1 s-99 min 59 s/1 min-9999 min/1 h-9999 h/1 min-99 h 59 min/0.1 min-999.9 min/0.1h-999.9 h
Display	Elapsed time/remaining time
Timer Precision	0.013% or ±15ms (using large values)
Input	Input logic: negative logic (no voltage input) positive logic (voltage input)
	Input resistance: positive logic 15 kΩ negative logic 3.3 kΩ (AC power)/1.8 kΩ (DC power)
	Input voltage: "L" 0-3V "H" 7-30 V
Start Input Response	Less than 15ms / 5ms / 1ms (selectable - see manual)
External Reset	Min. signal amplitude 5ms
Output	DC output: NPN open collector output/24V 100mA. Withstand voltage 35V. Residual voltage less than 1.5 V
	Relay output: 1 SPDT 220VAC 2A (resistive load). 3A @ 30VDC, minimum 10mA @ 5VDC
Output Duration (flicker)	10-9990 ms variable every 10ms
Installation	1/16 DIN flush door/panel mount

Dimensions


mm [inches]

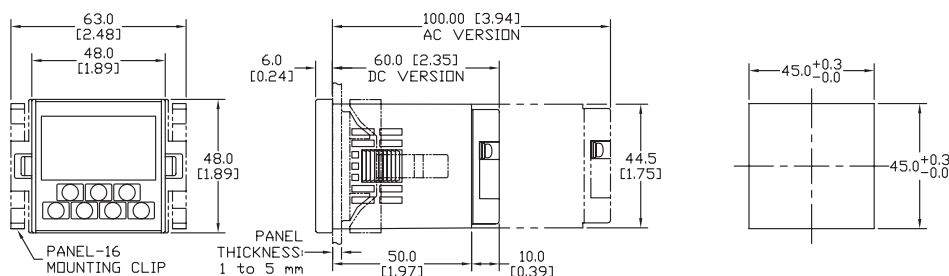

Koyo Digital Timers Timing Diagrams

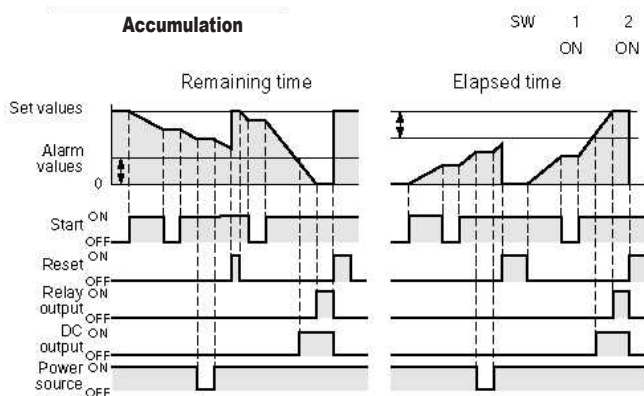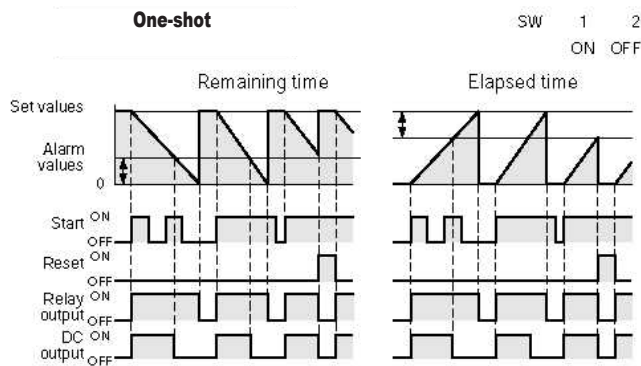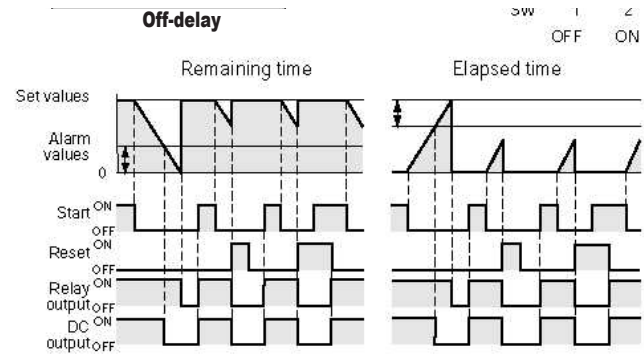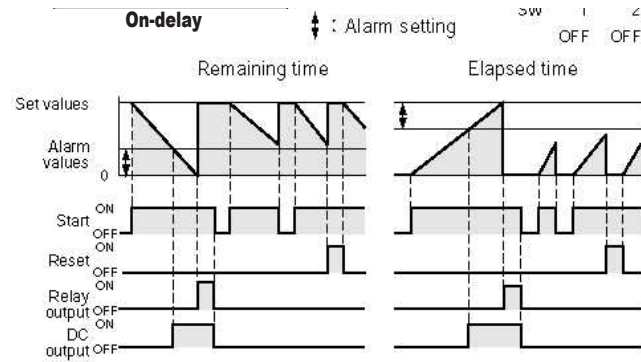

Note: Output duration is variable from 0-9990 ms. (Default: 100 ms)

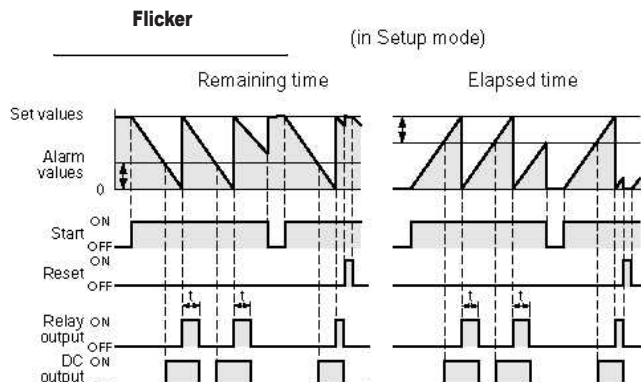

$\updownarrow$: Alarm settings

When alarm settings are 0, the DC output is the same as the output operations for a relay output.

Note: Alarm settings should be less than preset values. Using alarm settings with values that exceed preset values will result in measurement values of 0 and the alarm output (DC output) will come ON.

KOYO Digital Timers Modes of Operation

ON Delay: The rising edge of the Start signal initiates the Timer. When the Timer reaches the set point, the Relay Output turns ON. The Relay Output stays ON until the falling edge (OFF state) of the Start signal, then the Relay Output turns OFF.

OFF Delay: The falling edge of the Start signal initiates the Timer. When the timer reaches the set point, the Relay Output turns OFF. The Relay Output stays OFF until the rising edge (On state) of the Start signal turns the Relay Output ON.

One Shot: The Start signal works as a one-shot operation. The rising edge of the Start signal initiates the Timer. When the Timer starts timing, the Relay Output turns ON. Once the Timer starts, the Start signal is ignored. The Relay Output stays ON until the Timer reaches the set point, and then it turns OFF.

Accumulation: The rising edge of the Start signal initiates the Timer. The Timer operates as long as the Start signal is ON. When the Start signal turns OFF, the Timer value is held in the accumulator. When the Start signal turns ON again, the Timer continues to operate until it reaches the set point, at which time the Relay Output turns ON.

Flicker: The rising edge of the Start signal initiates the Timer. When the Timer reaches the set point, the Relay Output turns ON for a preset amount of time. The Relay Output continues to toggle ON and OFF at the preset amount of time as long as the Start signal remains ON.