# 

ZIPLink Serial Communication Cable Selector								
PLC			ZIPLink					
PLCs and Comm Modules	Port No.	Comm Port Type	Cable Connector Type	Cable Part No. (2 meter length)	D-Sub and RJ12 Feedthrough Module Part No. (optional)			
BRX MPUs	RS232	POM (RJ12)	6-pin RJ12 to RJ12 Crossover	ZL-RJ12-CBL-2	ZL-RTB-RJ12			
CLICK	1							
(Basic, Standard and Analog)	2							
CLICK Ethernet (Basic, Standard)	2							
DL05	1	RJ12						
DLUS	2							
DL06	1							
<u>DO-DCM</u>	1	_						
<u>D2-262</u>	1							
<u>D2-DCM</u>	1	25-pin D-sub, Female	25-pin Male D-sub to Female D-sub	ZL-DB25-CBL-2	ZL-RTB-DB25			
<u>D3-DCM</u>	1	25-pin D-sub, Female	25-pin Male D-sub to Female D-sub	ZL-DB25-CBL-2	ZL-RTB-DB25			
	0	15-pin D-sub, Female	15-pin Male D-sub to Female D-sub	ZL-DB15-CBL-2	ZL-RTB-DB15			
<u>D4-454</u>	1&3	25-pin D-sub, Female	25-pin Male D-sub to Female D-sub	ZL-DB25-CBL-2	ZL-RTB-DB25			
	2	RJ12	6-pin RJ12 to RJ12 Crossover	ZL-RJ12-CBL-2	ZL-RTB-RJ12			
<u>D4-DCM</u>	1	25-pin D-sub, Female	25-pin Male D-sub to Female D-sub	ZL-DB25-CBL-2	ZL-RTB-DB25			
<u>P1-540</u>		RJ12	6-pin RJ12 to RJ12 Crossover	ZL-RJ12-CBL-2	ZL-RTB-RJ12			
<u>P2-550</u>	RS232							
<u>P3-530</u>	n0202							
<u>P3-550</u>								



### Wiring Solutions using the **ZIP**Link Wiring System

**ZIP**Links eliminate the normally tedious process of wiring between devices by utilizing pre-wired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Pre-wired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the ZIPLink System ranging from PLC I/O-to-ZIPLink Connector

Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, as well as special relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for guick marking of **ZIP**Link modules are provided with **ZIP**Link cables. See the following solutions to help determine the best **ZIP**Link system for your application.

#### Solution 1: Do-more, DirectLOGIC, CLICK and Productivity Series I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a **ZIP**Link connector module used in conjunction with a prewired **ZIP**Link cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.



#### Solution 2: Do-more, DirectLOGIC, CLICK and Productivity Series I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIP**Link Pigtail Cables. **ZIP**Link Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.

Using the PLC I/O Modules to **ZIP**Link Connector

Modules selector tables located in this section,

1. Locate your I/O module/PLC

2. Select a **ZIP**Link Module

Using the I/O Modules to 3rd Party Devices selector tables located in this section,

- 1. Locate your PLC I/O module
- 2. Select a *ZIP*Link Pigtail Cable that is compatible with your 3rd party device.



#### Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

**ZIP**Link cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a **ZIP**Link communications module to guickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

- 1. Locate your Drive and type of communications
- 2. Select a **ZIP**Link cable and other associated hardware.





#### Solution 4: Serial Communications Cables

**ZIP**Link offers communications cables for use with DirectLOGIC, CLICK, and Productivity CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

- 1. Locate your connector type
- 2. Select a cable.



#### Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIP**Link modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub, RJ12 and RJ45 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIP**Link Specialty Modules selector table located in this section,

- 1. Locate the type of application
- 2. Select a **ZIP**Link module.



#### Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color coded soldered tip wires are a good solution. Used in conjunction with any compatible **ZIP**Link Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

- 1. Select module type
- 2. Select the number of pins
- 3. Select cable.






ZIPLink Specialty Modules Selector							
ZIPLink							
Module	Туре	Module Part No.	Cable Part No. (optional)				
24VDC Stand-Alone Relay	Single-Socket Relay	ZL-RLS1-24	_				
24VDC Stallu-Alolie Relay	Four Socket-Relay	<u>ZL-RLS4-24</u>					
120VAC Stand-Alone Relay	Single-Socket Relay	ZL-RLS1-120	 				
120VAC Stand-Alone Helay	Four-Socket Relay	ZL-RLS4-120					
250V AC/DC Max.	16-point, Fused Block ZL-FUSE-16		IN/A				
24VDC Transorb	8-Channel	ZL-TSD8-24					
120VAC Transorb	8-Channel	ZL-TSD8-120					
240V AC/DC Max.	40-Point Power/Common	ZL-RTB-COM					
	9-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB09	ZL-DB9-CBL-2				
D-Sub Feedthrough	15-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB15	ZL-DB15-CBL-2				
	25-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB25	ZL-DB25-CBL-2				
RJ12 Feedthrough	6-pin RJ12 to Terminal Block	ZL-RTB-RJ12	ZL-RJ12-CBL-2				
RJ45 Feedthrough	8-pin RJ45 to Terminal Block	ZL-RTB-RJ45	N/A				
	15-pin HD D-Sub to Terminal Block	ZL-CMA15					
Comm Port Adapters	15-pin HD D-Sub to Terminal Block with LED Indicators	ZL-CMA15L					
Comm Distribution	4-Port RJ12 to Terminal Block	ZL-CDM-RJ12X4					
Comm Distribution	10-Port RJ12 to Terminal Block	ZL-CDM-RJ12X10					
<i>Feedthrough Module (SureServo 1/0)</i> 50-pin to Terminal Blocks		ZL-RTB50	ZL-SVC-50CBL *				

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m



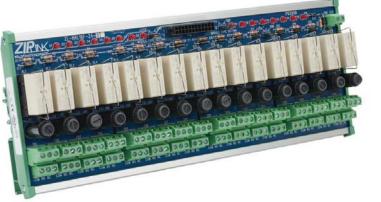



## Connector Modules to 3rd Party Devices

ZIPLink Connector Modules to 3rd Party Devices Selector							
ZIPLink							
Module	Туре	Module Part No.	Pigtail Cable Part No. (optional)				
	24-pin to Terminal Blocks	ZL-RTB20 ZL-RTB20-1	ZL-CBL24-1P ZL-CBL24-2P				
Feedthrough Connector	40-pin to Terminal Blocks	<u>ZL-RTB40</u> <u>ZL-RTB40-1</u>	<u>ZL-CBL40-1P</u> <u>ZL-CBL40-2P</u>				
	50-pin to Terminal Blocks	ZL-RTB50	ZL-CBL50-1P ZL-CBL50-2P				
Fuse	16-Fuse, 24-pin	ZL-RFU20	ZL-CBL24-1P ZL-CBL24-2P				
ruse	32-Fuse, 40-pin	ZL-RFU40	<u>ZL-CBL40-1P</u> <u>ZL-CBL40-2P</u>				
24UD0 Devered Delev	16-Relay, Sinking, 24-pin	ZL-RRL16-24-1 ZL-RRL16F-24-1 ZL-RRL16W-24-1	ZL-CBL24-1P ZL-CBL24-2P				
24VDC Powered Relay	16-Relay, Sourcing, 24-pin	ZL-RRL16-24-2 ZL-RRL16F-24-2 ZL-RRL16W-24-2	<u>ZL-CBL24-1P</u> ZL-CBL24-2P				
Sonoor Input	16-Point with LEDs	<u>ZL-LTB16-24-1</u>	ZL-CBL24-1P ZL-CBL24-2P				
Sensor Input	32-Point with LEDs	<u>ZL-LTB32-24-1</u>	ZL-CBL40-1P ZL-CBL40-2P				
<b>D-Sub Feedhrough</b> 9-pin D-Sub to Terminal Block		ZL-RTB-DB09	ZL-DB9F-CBL-2P ZL-DB9F-CBL-5P				

