



Measuring Relays

Phase Monitor Relays

Overview

RL 9877, RN 9877 Varimeter Series

RL 9877 and RN 9877 VARIMETER series measuring relays monitor overvoltage, undervoltage, voltage range, phase asymmetry and phase sequence in 3-phase or single-phase systems. The measurement is very simple and without extensive wiring as there is no auxiliary power supply necessary. The monitoring functions are easily selectable using a single turn switch without complex menu structure. The early detection of up-coming break downs and preventive maintenance avoid expensive damages. As the user, you profit from the reliability and availability of your plant.

Features

RL 9877, RN 9877

- According to IEC/EN 60255-1
- For monitoring of AC 3- and single-phase with 50 /60 Hz
- Detection of
 - Overvoltage
 - Undervoltage
 - Voltage range excess
 - Phase failure
 - Phase asymmetry
 - Missing neutral e.g. broken neutral wire
 - And phase sequence in 3-phase systems
- With or without neutral
- Without separately auxiliary voltage (internal supply from all 3 phases)
- Output: 1 changeover contact
- De-energized on trip
- Adjustable hysteresis for reset
- Adjustable switching delay
- Fast fault detection
- Width:
 - RL 9877: 35 mm
 - RN 9877: 52.5 mm

Application

- Monitoring of three-phase voltage systems to identify overvoltage and undervoltage
- Indication of phase sequence in 3-phase systems, phase failure, and voltage asymmetry
- Monitoring of voltage systems with motors
- Changeover to emergency supply after failure detection

Approvals

RL 9877, RN 9877



RL 9877



RN 9877

DOLD

Measuring Relays

Phase Monitor Relays

Phase Monitor Relays			
<i>Part Number</i>	<i>Price</i>	<i>Description</i>	<i>Drawing Link</i>
<u>RL9877-11</u>	\$120.00	DIN rail mount, 80-230 VAC input voltage, SPDT, 5A contact rating, screw terminal(s), LED indicator(s), phase reversal, phase unbalance, overvoltage, undervoltage, voltage range and neutral protection.	<u>PDF</u>
<u>RL9877-11-120</u>	\$116.00	DIN rail mount, 80-230 VAC input voltage, SPDT, 5A contact rating, screw terminal(s), LED indicator(s), phase reversal, phase loss, phase unbalance, overvoltage, undervoltage, voltage range and neutral protection.	<u>PDF</u>
<u>RN9877-0103P3W525V</u>	\$121.00	DIN rail mount, 175-575 VAC input voltage, SPDT, 5A contact rating, screw terminal(s), LED indicator(s), phase reversal, phase unbalance, overvoltage, undervoltage and voltage range protection.	<u>PDF</u>
<u>RN9877-1203P4W525V</u>	\$110.00	DIN rail mount, 175-575 VAC input voltage, SPDT, 5A contact rating, screw terminal(s), LED indicator(s), phase reversal, phase loss, phase unbalance, overvoltage, undervoltage, voltage range and neutral protection.	<u>PDF</u>
<u>RN98773P4W525V</u>	\$122.00	DIN rail mount, 175-575 VAC input voltage, SPDT, 5A contact rating, screw terminal(s), LED indicator(s), phase reversal, phase unbalance, overvoltage, undervoltage, voltage range and neutral protection.	<u>PDF</u>



Measuring Relays

Phase Monitor Relays






Technical Specifications					
Part Number	<u>RL9877-11</u>	<u>RL9877-11-120</u>	<u>RN9877-0103P3W525V</u>	<u>RN9877-1203P4W525V</u>	<u>RN98773P4W525V</u>
Input Voltage Range	3/N AC 80-230V / 45-130V 1- or 3-phase without / with neutral 3 AC 80-230V 3-phase without neutral		3/N AC 175-525V / 100-300V 1- or 3-phase without / with neutral 3 AC 175-525V 3-phase without neutral		
Phase Loss	No	Yes	No	Yes	No
Voltage Monitoring	Yes	No	Yes	No	Yes
Measuring Voltage	3/N AC 80-230V/ 45-130V	3 AC 80-230V	3/N AC 175-525V/ 100- 300V	3 AC 175-525V	
Voltage Range	0.85 UN-1.1 UN				
Phase Unbalance	Unit trips if sequence of the three phases is anything other than A-B-C				
Hysteresis	Infinite adjustable 4 ... 20 %				
Phase Asymmetry Value	Infinite adjustable 4 ... 20 %				
Life*	Electrical	To AC 15 at 1 A, AC 230V: Typ. 3 x 105 switching cycles			
	Mechanical	> 30 x 106 switching cycles			
Switching Capacity	To AC 15 NO contact: 3 A / AC 230 V IEC/EN 60947-5-1 NC contact: 1 A / AC 230 V IEC/EN 60947-5-1				
Response Times	Infinite adjustable instantaneous, 2-30 s				
Power Consumption	Approx. 7VA				
Temperature	Operation: - 4 to + 131 °F Storage: - 13 to + 140 °F Relative air humidity: 93 % at 104 °F				
Mounting	DIN rail IEC/EN 60715				
Indicator LED	Green LED ON: "On, when supply connected" Red LED U: "On, when overvoltage" Red LED <U: "On, when undervoltage" Yellow LED Asym: "Indicates a voltage asymmetry in 3-phase systems or loss of neutral" Yellow LED L1L2L3: "Indicates wrong phase sequence in 3-phase systems or loss of neutral"				
Switching delay	0-30 s				
Weight (lb)	Approx. 0.25		Approx. 0.28		
Wire Size	AWG 24-12		For terminals 11, 12, 14: AWG 24 - 12 Sol/Str terminals L1, L2, L3, N: AWG 30 - 10 Sol/Str T		
Tightening Torque	0.6 Nm	0.7 Nm	For terminals 11, 12, 14: AWG 24 - 12 Sol/Str Torque 0.6 Nm For terminals L1, L2, L3, N: AWG 30 - 10 Sol/Str Torque 0.7 Nm	For terminals 11, 12, 14: AWG 24 - 12 Sol/Str Torque 0.6 Nm For terminals L1, L2, L3, N: AWG 30 - 10 Sol/Str Torque 0.7 Nm	For terminals 11, 12, 14: AWG 24 - 12 Sol/ Str Torque 0.6 Nm For terminals L1, L2, L3, N: AWG 30 - 10 Sol/Str Torque 0.7 Nm
Approvals	cULus, CE				



Measuring Relays

Phase Monitor Relays

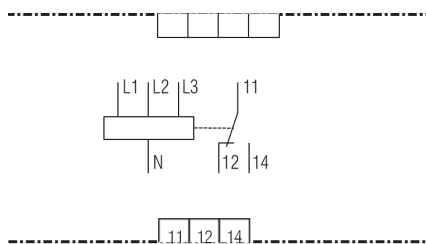
PMRRL-TL LED Indication

Table - LED Indication	
LED Status*	Indicator
Green Steady	 Normal (Relay ON)
Green Flashing	 Restart (Delay)
Red Steady	 Reversal
Red Flashing	 Loss
	 Low Volt (Undervoltage)

RN9877, RL9877 LED Indication

Table - LED Indication	
LED Status*	Indicator
Green	Normal (Relay ON)
Yellow	Voltage Asymmetry
Red	Oversvoltage/ Undersvoltage (Relay ON)
Red L1	Phase 1 failure
Red L2	Phase 2 failure
Red L3	Phase 3 failure
Yellow L123	Wrong phase sequence in 3-phase systems

Wiring Diagrams





Measuring Relays

Phase Monitor Relays

Typical Connections

