

DURAPULSE GS4 AC Drives – Introduction

| DURAPULSE GS4 AC Drives | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------------------------------|----|------|-----|-----|-----|-----|-----|----|----|------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|---|
| Motor Rating | HP | 1 | 2 | 3 | 5 | 7.5 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 75 | 100 | 125 | 150 | 175 | 215 | 250 | 300 | |
| | kW | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 | 75 | 90 | 110 | 132 | 160 | 185 | 220 | |
| 230V Single-Phase Input / 230V Three-Phase Output | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | | | | | | | | |
| 230V Three-Phase Input/Output | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | | |
| 460V Three-Phase Input/Output | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |



Overview

The DURAPULSE GS4 series of AC drives includes many of the same standard features as our GS family of drives including dynamic braking, PID, removable keypad, and RS-485 Modbus communication.

The GS4 drive expands the DURAPULSE family by adding single-phase input capability (ALL 230VAC drives can be supplied single-phase), a built-in PLC, serial BACnet, and optional EtherNet/IP and ModTCP cards. GS4 QuickStart menus simplify configuration by consolidating the most-often-used parameters into concise groups.

DURAPULSE GS4 AC drives also offer sensorless vector control for improved speed regulation. The smart keypad is designed with defaults to quickly allow you to configure the drive, set the speed, start and stop the drive, and monitor critical parameters of your application. In addition, up to four drive configurations can be stored in the keypad, and transferred to additional DURAPULSE GS4 drives of the same model. Users can also store up to 32 parameters of their choice in a custom Quick-Start menu.

DURAPULSE GS4 offers three analog inputs, two analog outputs, one frequency output, ten digital inputs, two digital outputs, two SPDT relay outputs, and two STO inputs. All of the analog and digital I/O (except the Start/Stop and STO inputs) can be configured for a wide variety of input or output functions. Three option cards expand the I/O offering with a relay output card, an AC input card, and a combo DC I/O card.

Features

- Wide Offering from 1 to 300 hp
- Single-Phase/Three-Phase 230VAC Three-Phase 460VAC
- Single-Phase UL Ratings – 230VAC input for 1 to 100 hp models (see selection tables for derated output)
- Dual Rating Design – CT/VT Ratings (Light & Heavy Duty)
- Flexible Carrier Frequency to 15khz and Output Frequency to 599Hz
- STO – Safe Torque Off (TUV Certified)
- Built-in PLC to support up to 10k steps
- Free downloadable software for Drive Configuration and PLC Programming
- Field-upgradable Firmware via USB port (Drive, Keypad, & Communication Option Cards)
- Hot-Pluggable LCD Text-Based Keypad (IP20/NEMA 1) can be remotely mounted
- Embedded Quick-Start Menus
- Local/Remote control mode selection from the Keypad or digital/comm input with Hand/Off/Auto Control
- Display Units of Measure of your choice (GPM, FPM, etc.)
- Momentary Power Loss Restarts
- 100kA Short Circuit Current Rating
- Built-In DC Choke (some models)
- Flange-Mount Capability for frame sizes A to F (1 to 215 hp)
- Conduit Box(s) for NEMA 1 (Frame sizes D0 to G)
- Expanded I/O capability – 110V Inputs, Relay Outputs, combo DC I/O card
- Analog I/O – Configurable 3 Inputs and 2 Outputs
- Auto Speed Search capability
- Multi-Motor (Motor#1,#2) Control
- Dynamic Braking – Optional Dynamic Braking Units and Comprehensive offering of Resistors
- PID Controller – Including Sleep and Wake
- Password Protection
- RTD and/or PTC Input Motor Protection
- Parameter Organization similar to GS3 – GS3 Operational (External User PLC) control will work with minimal changes required.
- Calendar function allows a user to program the PLC with ON/OFF control in chronological order, daylight savings time, etc.
- Modularized design eases maintenance and expansion, including quick replacement of fans
- High speed communication interfaces with MODBUS RTU and BACnet protocols built in, with optional communication cards: MODBUS

TCP, EtherNet/IP

- Circuit boards have conformal coating for improved environmental tolerance
- Excellent heat-sink design; able to operate at 50°C ambient temperature
- Fire Mode – Run fire mode during emergencies to have uninterrupted smoke removal and system pressure
- Multi-pump control: fixed quantity, fixed displacement, and fixed time-circulating control; able to control up to 8 pumps (Optional multi-control relay output card is required.)
- Two-year warranty
- CE, TUV, UL, cUL

Accessories

- AC line reactors
- EMI filters
- RF filter
- Braking resistors
- Braking units (for models 20hp and above)
- Fuses
- Conduit boxes
- Flange-Mount Kits
- Replacement cooling fans
- Replacement keypad (and remote-mount bezel kit)
- I/O Option Cards
- EtherNet/IP comm card
- Modbus TCP comm card
- Four and eight-port RS-485 multi-drop termination boards
- GSoft2 drive configuration software
- GSLogic PLC programming software
- USB-485M – USB to RS-485 PC adapter (see "Communications Products" chapter for detailed information)
- Detailed descriptions and specifications for GS accessories are available in the "GS/DURAPulse Accessories" section.

Typical Applications

- Conveyors
- Compressors
- Material handling
- Extruding
- Grinding
- Shop tools
- Fans
- Pumps
- HVAC
- Mixing

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating

| Selecting the Proper Drive Rating | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------|------------|-----------------------------------|---|-----|----|------|-----|----|------|----|----|------|----|----|
| Determine Motor Voltage and Full-Load Amperage (FLA) | | | | | | | | | | | | | | | | |
| Motor voltage and FLA are located on the nameplate of the motor. NOTE: FLA of motors that have been rewound may be higher than stated. | | | | | | | | | | | | | | | | |
| Determine Motor Overload Requirements | | | | | | | | | | | | | | | | |
| Many applications experience temporary overload conditions due to starting requirements or impact loading. Most AC drives are designed to operate at 150% overload for 60 seconds. If the application requires an overload greater than 150% or longer than 60 seconds, the AC drive must be oversized. NOTE: Applications that require replacement of existing motor starters with AC drives may require up to 600% overload. | | | | | | | | | | | | | | | | |
| Determine Application Type: Constant Torque or Variable Torque | | | | | | | | | | | | | | | | |
| This torque requirement has a direct effect on which drive to select. Variable Torque applications are generally easier to start; typically fans and pumps. Most other applications outside fans and pumps fall into the Constant Torque category (machine control, conveyors, etc.). If you are unsure of the application, assume Constant Torque. The specification, derating, and selection tables (beginning pg.tGSX-101) are generally segregated by Constant Torque and Variable Torque. | | | | | | | | | | | | | | | | |
| Installation Altitude | | | | | | | | | | | | | | | | |
| AC drives rely on air flow for cooling. As the altitude increases, the air becomes less dense, and this drop in air density decreases the cooling properties of the air. Therefore, the AC drive must be oversized to compensate for the decrease in cooling. GS4 drives are designed to operate at 100% capacity at altitudes up to 1000 meters. NOTE: For use above 1000m, the AC drive must be derated as described below. | | | | | | | | | | | | | | | | |
| Derate Output Current Based on Altitude Above 1000 Meters | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • If the AC drive is installed at an altitude of 0–1000m, follow normal operation restrictions. • If installed at an altitude of 1000–3000m, decrease 1% of the rated current or lower 0.5°C of temperature for every 100m increase in altitude. • Maximum altitude for Corner Grounded is 2000m. | | | | | | | | | | | | | | | | |
| <p>GS4 Derating for Altitude</p> <p>Rating (%) at Standard Ambient Temperature* T_a at Rating = 100%</p> <table border="1" style="margin: 10px auto;"> <caption>GS4 Derating Data</caption> <thead> <tr> <th>Altitude (m)</th> <th>Rating (%)</th> <th>Standard Ambient Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> <td>50</td> </tr> <tr> <td>1000</td> <td>100</td> <td>50</td> </tr> <tr> <td>2000</td> <td>90</td> <td>45</td> </tr> <tr> <td>3000</td> <td>80</td> <td>40</td> </tr> </tbody> </table> <p>*Standard Ambient Temperature = 50°C for UL Open Type / IP20 *Standard Ambient Temperature = 40°C for UL Type 1 / IP 20 & UL Open Type / IP20 Side-by-Side</p> | | Altitude (m) | Rating (%) | Standard Ambient Temperature (°C) | 0 | 100 | 50 | 1000 | 100 | 50 | 2000 | 90 | 45 | 3000 | 80 | 40 |
| Altitude (m) | Rating (%) | Standard Ambient Temperature (°C) | | | | | | | | | | | | | | |
| 0 | 100 | 50 | | | | | | | | | | | | | | |
| 1000 | 100 | 50 | | | | | | | | | | | | | | |
| 2000 | 90 | 45 | | | | | | | | | | | | | | |
| 3000 | 80 | 40 | | | | | | | | | | | | | | |
| (continued next page) | | | | | | | | | | | | | | | | |

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating (continued from previous page)

Determine Maximum Enclosure Internal Temperature

AC drives generate a significant amount of heat and can cause the internal temperature of an enclosure to exceed the rating of the GS4 drive, even when the ambient temperature is less than 104°F (40°C). Enclosure ventilation and/or cooling may be required to reduce maximum internal temperature to 104°F (40°C) or less. Ambient temperature measurements/calculations should be made for the maximum expected temperature. When permissible, flange mounting the AC drive (mounting with the drive heatsink in open ambient air) can greatly reduce heating in the enclosure.

NOTE: For use above 104°F (40°C), the AC drive must be derated as described below.


Derate Output Current Based on Temperature Above 104°F (40°C) or 122°F (50°C)

Drive Derating by Temperature and Protection Level

| Protection Level * | Derating |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UL Type I / IP20 | When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +40°C. When ambient temperature exceeds 40°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C. |
| UL Open Type ** / IP00/IP20 | When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +50°C. When ambient temperature exceeds 50°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C. |

* For more information about environmental ratings, refer to the "Operating Temperature and Protection Level" table (pg.tGSX-117).

** Open Type temperature ratings apply to GS4 frame sizes A-C with top covers removed, and frame sizes D0-G without conduit boxes (pg.tGSX-117).

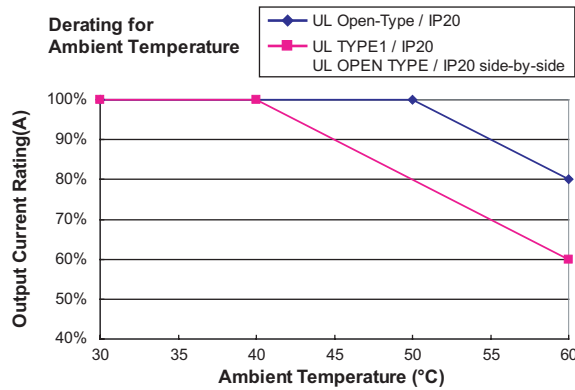

(continued next page)

DURAPULSE GS4 AC Drives – Selection

| Selecting the Proper Drive Rating (continued from previous page) | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Derate Output Current Based on Carrier Frequency (if necessary) | |
| Carrier Frequency Effects | |
| <p>AC Drives rectify the incoming 50 or 60Hz line power resulting in DC power at 0Hz. The resulting DC power is then pulse-width modulated and supplied to the motor by the drive's power electronics. IGBTs invert the DC power, simulating a sine wave at the desired frequency (that's what allows variable speed in AC induction motors). The speed at which the IGBTs are turned ON and OFF is called Carrier Frequency. In GS4 drives, the Carrier Frequency can range from 2kHz to 15kHz. Though Carrier Frequency can be adjusted, there are trade-offs between High Carrier Frequencies and Low Carrier Frequencies.</p> | |
| Benefits of Higher Carrier Frequencies: | |
| <ul style="list-style-type: none"> • Better efficiency (lower harmonic losses) in the motor • Lower audible noise | |
| Benefits of Lower Carrier Frequencies: | |
| <ul style="list-style-type: none"> • Better efficiency in the drive • Lower EMI (electrical noise) • Reduced reflective wave peak voltage <p>As a general rule, the Carrier Frequency should be set as low as possible without creating unacceptable audible noise in the motor. Smaller systems can have higher Carrier Frequencies, but larger drives (>20 or 30hp) should not have Carrier Frequencies set higher than 6kHz. Heavy Duty applications typically run around 2–4 kHz.</p> | |
| <p>The following Variable Torque (VT) and Constant Torque (CT) derating curves are for drives with 3-phase input power. The 230VAC, CT curves also apply equally whether the drive is supplied with 3-phase or 1-phase input power.</p> | |
| 230V Variable Torque Carrier Frequency Derating | |
| <p>For 230V Variable Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side</p> | <p>For 230V Variable Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side</p> |
| | |
| 460V Variable Torque Carrier Frequency Derating | |
| <p>For 460V Variable Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side</p> | <p>For 460V Variable Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side</p> |
| | |
| <i>(continued next page)</i> | |

DURAPULSE GS4 AC Drives – Selection

| Selecting the Proper Drive Rating (continued from previous page) | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 230V Constant Torque Carrier Frequency Derating | |
| For 230V Constant Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side | For 230V Constant Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side |
| <p> — GS4-21P0 – GS4-2015 - - GS4-2020 – GS4-2050 ··· GS4-2060 – GS4-2100 </p> | <p> — GS4-21P0 – GS4-2015 - - GS4-2020 – GS4-2050 ··· GS4-2060 – GS4-2100 </p> |
| 460V Constant Torque Carrier Frequency Derating | |
| For 460V Constant Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side | For 460V Constant Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side |
| <p> — GS4-41P0 – GS4-4020 - - GS4-4025 – GS4-4075 ··· GS4-4100 – GS4-4300 </p> | <p> — GS4-41P0 – GS4-4020 - - GS4-4025 – GS4-4075 ··· GS4-4100 – GS4-4300 </p> |

DURApULSE GS4 AC Drives – Selection Specs

GS4 Drive Model Selection Tables

| 230V Class GS4 Specifications – Constant & Variable Torque Frame Sizes A, B (1hp–15hp) | | | | | | | | | | |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|-----------------------------------------------------|--------------------|------------|------------|-----------|------------|-----------|------------|
| Model Name | | | | GS4-21P0 | GS4-22P0 | GS4-23P0 | GS4-25P0 | GS4-27P5 | GS4-2010 | GS4-2015 |
| Price | | | | \$525.00 | \$578.00 | \$653.00 | \$739.00 | \$835.00 | \$932.00 | \$1,125.00 |
| Frame Size | | | | A | | | | B | | |
| Output Rating | Constant Torque (CT) | Max Motor Output (1-phase / 3-phase) | hp | 0.5 / 1 | 0.75 / 2 | 1 / 3 | 2 / 5 | 3 / 7.5 | 3 / 10 | 5 / 15 |
| | | | kW | 0.37 / 0.75 | 0.55 / 1.5 | 0.75 / 2.2 | 1.5 / 3.7 | 2.2 / 5.5 | 2.2 / 7.5 | 3.7 / 11 |
| | | Rated Output Capacity (1-phase / 3-phase) | kVA | 1.0 / 1.9 | 1.3 / 2.8 | 2.0 / 4.0 | 3.2 / 6.4 | 4.4 / 9.6 | 4.4 / 12 | 6.8 / 19 |
| | | Rated Output Current (1-phase / 3-phase) | A | 2.4 / 4.8 | 3.2 / 7.1 | 5 / 10 | 8 / 16 | 11 / 24 | 11 / 31 | 17 / 47 |
| | | Carrier Frequency | kHz | 2 to 6 | | | | | | |
| | Variable Torque (VT) | Max Motor Output | hp | 1 | 2 | 3 | 5 | 7.5 | 10 | 15 |
| | | | kW | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 |
| | | Rated Output Capacity | kVA | 2.0 | 3.2 | 4.4 | 6.8 | 10 | 13 | 20 |
| | | Rated Output Current | A | 5 | 8 | 11 | 17 | 25 | 33 | 49 |
| | | Carrier Frequency | kHz | 2 to 15 | | | | | | |
| Input Rating * | CT | Rated Input Current * | A | 6.4 / 6.1 | 9.7 / 11 | 15 / 15 | 20 / 18.5 | 26 / 26 | 26 / 34 | 40 / 50 |
| | VT | (1-phase / 3-phase) | | 6.4 | 12 | 16 | 20 | 28 | 36 | 52 |
| | Rated Voltage/Frequency | | 1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz | | | | | | | |
| | Operating Voltage Range | | 170–265 VAC | | | | | | | |
| | Frequency Tolerance | | 47–63 Hz | | | | | | | |
| | Short Circuit Withstand (SCCR) (A, rms symmetrical) | | 100kA | | | | | | | |
| IE2 Efficiency - Relative Power Loss | | | | 3.1% | 2.8% | 2.5% | 2.1% | 2.3% | 2.1% | 2.2% |
| Weight (kg [lb]) | | | | 2.6 [5.7] | | | | 5.4 [11.9] | | |
| Watt Loss @ 100% I (W) ** | | | | 61 | 88 | 115 | 159 | 264 | 335 | 529 |
| Cooling Method | | | | natural convection | fan | | | | | |
| Dynamic Braking | | | | built in | | | | | | |
| DC Choke | | | | optional | | | | | | |
| EMI Filter | | | | optional | | | | | | |

* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-174) for input fusing information.

** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).

DURAPULSE GS4 AC Drives – Selection Specifications

| 230V Class GS4 Specifications – Constant & Variable Torque Frame Sizes C–E (7.5 hp–100hp) | | | | | | | | | | | |
|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------|-----------------|-----------------|-----------------|-------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Model Name | | | | GS4-2020 | GS4-2025 | GS4-2030 | GS4-2040 | GS4-2050 | GS4-2060 | GS4-2075 | GS4-2100 |
| Price | | | | \$1,586.00 | \$1,723.00 | \$1,953.00 | \$3,449.00 | \$3,961.00 | \$5,282.00 | \$5,932.00 | \$6,913.00 |
| Frame Size | | | | C | | | D | | E | | |
| Output Rating | Constant Torque (CT) | Max Motor Output (1-phase / 3-phase) | hp | 7.5/20 | 10/25 | 10/30 | 10/40 | 10/50 | 15/60 | 20/75 | 25/100 |
| | | | kW | 5.5/15 | 7.5/18.5 | 7.5/22 | 7.5/30 | 7.5/37 | 11/45 | 15/55 | 18.5/75 |
| | | Rated Output Capacity (1-phase / 3-phase) | kVA | 10/25 | 13/28 | 13/34 | 13/45 | 13/55 | 20/68 | 26/81 | 30/96 |
| | | Rated Output Current (1-phase / 3-phase) | A | 25/62 | 33/71 | 33/86 | 33/114 | 33/139 | 49/171 | 65/204 | 75/242 |
| | | Carrier Frequency | kHz | 2 to 6 | | | | | | | |
| | Variable Torque (VT) | Max Motor Output | hp | 20 | 25 | 30 | 40 | 50 | 60 | 75 | 100 |
| | | | kW | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 | 75 |
| | | Rated Output Capacity | kVA | 26 | 30 | 36 | 48 | 58 | 72 | 86 | 102 |
| | | Rated Output Current | A | 65 | 75 | 90 | 120 | 146 | 180 | 215 | 255 |
| | | Carrier Frequency | kHz | 2 to 10 | | | 2 to 6 | | | | |
| Input Rating * | CT | Rated Input Current * (1-phase / 3-phase) | A | 58/68 | 76/78 | 76/95 | 63/118 | 63/136 | 94/162 | 124/196 | 143/233 |
| | VT | | | 72 | 83 | 99 | 124 | 143 | 171 | 206 | 245 |
| | Rated Voltage/Frequency | | 1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz | | | | | | | | |
| | Operating Voltage Range | | 170–265 VAC | | | | | | | | |
| | Frequency Tolerance | | 47–63 Hz | | | | | | | | |
| | Short Circuit Withstand (SCCR) (A, rms symmetrical) | | 100kA | | | | | | | | |
| IE2 Efficiency - Relative Power Loss | | | | 2.3% | 2.4% | 2.3% | 1.9% | 2.1% | 1.9% | 1.9% | 2.7% |
| Weight (kg [lb]) | | | | 9.8 [21.6] | | | 38.5 [84.9] | | 64.8 [143] | | |
| Watt Loss @ 100% I (W) ** | | | | 616 | 733 | 865 | 1099 | 1311 | 1518 | 1709 | 2139 |
| Cooling Method | | | | fan | | | | | | | |
| Dynamic Braking | | | | built in | | | optional Dynamic Braking Unit (DBU) | | | | |
| DC Choke | | | | optional | | | built in | | | | |
| EMI Filter | | | | optional | | | | | | | |

* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-174) for input fusing information.

** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).

DURAPULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes A, B (1hp–20hp) | | | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------|---------------------------------------------|--------------------|----------|----------|----------|----------|------------|------------|------------|--|
| Model Name | | | | GS4-41P0 | GS4-42P0 | GS4-43P0 | GS4-45P0 | GS4-47P5 | GS4-40T0 | GS4-40T5 | GS4-40T0 | |
| Price | | | | \$535.00 | \$578.00 | \$643.00 | \$750.00 | \$835.00 | \$920.00 | \$1,095.00 | \$1,388.00 | |
| Frame Size | | | | A | | | | | B | | | |
| Output Rating | Constant Torque (CT) | Max Motor Output | hp | 1 | 2 | 3 | 5 | 7.5 | 10 | 15 | 20 | |
| | | | kW | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 | |
| | | Rated Output Capacity | kVA | 2.3 | 3.0 | 4.5 | 6.5 | 8.8 | 14 | 18 | 24 | |
| | | Rated Output Current | A | 2.9 | 3.8 | 5.7 | 8.1 | 11 | 17 | 23 | 30 | |
| | | Carrier Frequency | kHz | 2 to 6 | | | | | | | | |
| | Variable Torque (VT) | Max Motor Output | hp | 1 | 2 | 3 | 5 | 7.5 | 10 | 15 | 20 | |
| | | | kW | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 | |
| | | Rated Output Capacity | kVA | 2.4 | 3.2 | 4.8 | 7.2 | 9.6 | 14 | 19 | 25 | |
| Rated Output Current | | A | 3 | 4 | 6 | 9 | 12 | 18 | 24 | 32 | | |
| | Carrier Frequency | kHz | 2 to 15 | | | | | | | | | |
| Input Rating * | CT | Rated Input Current | A | 4.1 | 5.6 | 8.3 | 13 | 16 | 19 | 25 | 33 | |
| | VT | | A | 4.3 | 5.9 | 8.7 | 14 | 17 | 20 | 26 | 35 | |
| | | Rated Voltage/Frequency | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz | | | | | | | | | |
| | | Operating Voltage Range | 323–528 VAC | | | | | | | | | |
| | | Frequency Tolerance | 47–63 Hz | | | | | | | | | |
| | | Short Circuit Withstand (SCCR) (A, rms symmetrical) | 100kA | | | | | | | | | |
| IE2 Efficiency - Relative Power Loss | | | | 2.6% | 2.3% | 2.2% | 2.0% | 1.9% | 2.1% | 2.0% | 1.8% | |
| Weight (kg [lb]) | | | | 2.6 [5.7] | | | | | 5.4 [11.9] | | | |
| Watt Loss @ 100% I (W) ** | | | | 59 | 74 | 104 | 141 | 180 | 292 | 380 | 518 | |
| Cooling Method | | | | natural convection | | fan | | | | | | |
| Dynamic Braking | | | | built in | | | | | | | | |
| DC Choke | | | | optional | | | | | | | | |
| EMI Filter | | | | optional | | | | | | | | |
| <p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-174) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).</p> | | | | | | | | | | | | |

DURAPULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes C, D0, D (25hp–100hp) | | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|---------|---------------------------------------------|------------|------------|-------------------------------------|------------|-------------|------------|
| Model Name | | | | GS4-4025 | GS4-4030 | GS4-4040 | GS4-4050 | GS4-4060 | GS4-4075 | GS4-4100 |
| Price | | | | \$1,674.00 | \$1,914.00 | \$2,406.00 | \$2,907.00 | \$3,400.00 | \$3,942.00 | \$5,400.00 |
| Frame Size | | | | C | | | D0 | | D | |
| Output Rating | Constant Torque (CT) | Max Motor Output | hp | 25 | 30 | 40 | 50 | 60 | 75 | 100 |
| | | | kW | 18.5 | 22 | 30 | 37 | 45 | 55 | 75 |
| | | Rated Output Capacity | kVA | 29 | 34 | 45 | 55 | 69 | 84 | 114 |
| | | Rated Output Current | A | 36 | 43 | 57 | 69 | 86 | 105 | 143 |
| | | Carrier Frequency | kHz | 2 to 6 | | | | | | |
| | Variable Torque (VT) | Max Motor Output | hp | 25 | 30 | 40 | 50 | 60 | 75 | 100 |
| | | | kW | 18.5 | 22 | 30 | 37 | 45 | 55 | 75 |
| | | Rated Output Capacity | kVA | 30 | 36 | 48 | 58 | 73 | 88 | 120 |
| Rated Output Current | | A | 38 | 45 | 60 | 73 | 91 | 110 | 150 | |
| | Carrier Frequency | kHz | 2 to 10 | | | | | | | |
| Input Rating * | CT | Rated Input Current | A | 38 | 45 | 60 | 70 | 96 | 108 | 149 |
| | VT | | A | 40 | 47 | 63 | 74 | 101 | 114 | 157 |
| | Rated Voltage/Frequency | | | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz | | | | | | |
| | Operating Voltage Range | | | 323–528 VAC | | | | | | |
| | Frequency Tolerance | | | 47–63 Hz | | | | | | |
| | Short Circuit Withstand (SCCR) (A, rms symmetrical) | | | 100kA | | | | | | |
| IE2 Efficiency - Relative Power Loss | | | | 1.6% | 1.6% | 1.6% | 1.6% | 1.6% | 1.4% | 1.3% |
| Weight (kg [lb]) | | | | 9.8 [21.6] | | | 27.0 [59.5] | | 38.5 [84.9] | |
| Watt Loss @ 100% I (W) ** | | | | 507 | 635 | 866 | 993 | 1147 | 1413 | 1742 |
| Cooling Method | | | | fan | | | | | | |
| Dynamic Braking | | | | built in | | | optional Dynamic Braking Unit (DBU) | | | |
| DC Choke | | | | optional | | | built in | | | |
| EMI Filter | | | | optional | | | | | | |
| <p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-174) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).</p> | | | | | | | | | | |

DURAPULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes E, F, G (125hp–300hp) | | | | | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|---------------------------------------------|------------|------------|------------|-------------|-------------|-------------|
| Model Name | | | | GS4-4125 | GS4-4150 | GS4-4175 | GS4-4200 | GS4-4250 | GS4-4300 |
| Price | | | | \$7,389.00 | \$8,315.00 | \$9,902.00 | \$11,338.00 | \$15,529.00 | \$18,129.00 |
| Frame Size | | | | E | | F | | G | |
| Output Rating | Constant Torque (CT) | Max Motor Output | hp | 125 | 150 | 175 | 215 | 250 | 300 |
| | | | kW | 90 | 110 | 132 | 160 | 185 | 220 |
| | | Rated Output Capacity | kVA | 136 | 167 | 197 | 235 | 280 | 348 |
| | | Rated Output Current | A | 171 | 209 | 247 | 295 | 352 | 437 |
| | | Carrier Frequency | kHz | 2 to 6 | | | | | |
| | Variable Torque (VT) | Max Motor Output | hp | 125 | 150 | 175 | 215 | 250 | 300 |
| | | | kW | 90 | 110 | 132 | 160 | 185 | 220 |
| | | Rated Output Capacity | kVA | 143 | 175 | 207 | 247 | 295 | 367 |
| | | Rated Output Current | A | 180 | 220 | 260 | 310 | 370 | 460 |
| | | Carrier Frequency | kHz | 2 to 9 | | | | | |
| Input Rating * | CT | Rated Input Current | A | 159 | 197 | 228 | 285 | 361 | 380 |
| | VT | | A | 167 | 207 | 240 | 300 | 380 | 400 |
| | Rated Voltage/Frequency | | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz | | | | | | |
| | Operating Voltage Range | | 323–528 VAC | | | | | | |
| | Frequency Tolerance | | 47–63 Hz | | | | | | |
| | Short Circuit Withstand (SCCR) (A, rms symmetrical) | | 100kA | | | | | | |
| IE2 Efficiency - Relative Power Loss | | | | 1.2% | 1.2% | 1.3% | 1.3% | 1.4% | 1.5% |
| Weight (kg [lb]) | | | | 64.8 [143] | | 86.5 [191] | | 134 [295] | |
| Watt Loss @ 100% I (W) ** | | | | 2092 | 2599 | 3081 | 3783 | 4589 | 5772 |
| Cooling Method | | | | fan | | | | | |
| Dynamic Braking | | | | optional | | | | | |
| DC Choke | | | | built in | | | | | |
| EMI Filter | | | | optional | | | | | |
| <p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-174) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F; frame G is not capable of flange mounting).</p> | | | | | | | | | |

DURAPULSE GS4 AC Drives – General Specifications


| GS4 General Specifications (Applicable to All Models) | | |
|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Control Characteristics | Control Method | 1: V/F (V/Hz control); 2: SVC (sensorless vector control) |
| | Starting Torque | Up to 120% Variable Torque (VT) or 150% Constant Torque (CT) for one minute |
| | V/F Curve | 4 point adjustable V/Hz curve and square curve |
| | Speed Response Ability | 5Hz |
| | Torque Limit | VT: 170% output current CT: 180% output current |
| | Torque Accuracy | ±5% |
| | Max Output Frequency (Hz) | 230V series: 599.00 Hz (75hp & above: 400.00 Hz) 460V series: 599.00 Hz (125hp & above: 400.00 Hz) |
| | Output Frequency Accuracy | Digital command: ±0.01%, -10°C to +40°C Analog command: ±0.1%, 25±10°C |
| | Output Frequency Resolution | Digital command: 0.01Hz Analog command: (0.03) x (max output frequency) / 60Hz [±11 bit] |
| | Overload Tolerance | VT duty: rated output current is 120% for 60 seconds CT duty: rated output current is 150% for 60 seconds |
| | Frequency Setting Signal | +10V to -10V, 0 to 10V, 4–20mA, 0–20mA |
| | Accel/Decel Time | 0.00–600.00 / 0.0–6000.0 seconds |
| | Main Control Function | Fault restart; Parameter copy; Dwell; BACnet communication; Momentary power loss ride-through; Speed search; Over-torque detection; Torque limit; 16-step speed (max); Accel/Decel time switch; S-curve accel/decel; 3-wire sequence; Auto-Tuning (rotational, stationary); Frequency upper/lower limit settings; Cooling fan on/off switch; Slip compensation; Torque compensation; JOG frequency; MODBUS communication (RS-485 RJ45, max 115.2 kbps); DC injection braking at start/stop; Smart stall; PID control (with sleep function); Energy saving control; Optional ModbusTCP or EtherNet/IP communication/control |
| Fan Control | 230V model GS4-2020 and above: PMW control 230V model GS4-2015 and below: ON/OFF switch control 460V model GS4-4025 and above: PMW control 460V model GS4-4020 and below: ON/OFF switch control | |
| Protection Characteristics | Motor Protection | Electronic thermal relay protection |
| | Over-current Protection | For drive model 230V and 460V: Over-current protection for 240% rated current Current clamp: VT duty 170–175%; CT duty 180–185% |
| | Over-voltage Protection | 230V: drive will stop when DC-BUS voltage exceeds 410V 460V: drive will stop when DC-BUS voltage exceeds 820V |
| | Over-temperature Protection | Built-in temperature sensor |
| | Stall Prevention | Independent stall prevention during acceleration, deceleration, and running |
| | Restart After Instantaneous Power Failure | Up to 20 seconds (parameter settable) |
| | Ground Leakage Current Protection | Leakage current is higher than 50% of rated current of the AC motor drive |
| | Hi-Pot Test | UL508C; EN 61800-5-1 |
| Conformal Coating | IEC-60721-3-3 | |
| Agency Approvals | CE, Reach, RoHS, TUV, cULus; (Accessories are CE; Agency approvals other than CE do not apply to accessory conduit box kits, fan kits, flange mount kits, and braking resistors.) <i>To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.</i> | |

DURAPULSE GS4 AC Drives – Optional GS4-Specific Internal Accessories List

Accessories Available for GS4 AC Drives Only

| GS4 AC Drives Software and Accessories Internal or Attached to GS4 Drive | | | | | | | | | | |
|--------------------------------------------------------------------------|------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------------|--------------------------------|-----------------------------|----------------------------------------------------------------------|-----------------------------|
| Model Number | Frame Size | GS4 Drive Software | GS4 PLC Software | Drive Keypad* | Keypad Mounting Bezel | I/O Modules | Communication Modules | Conduit Boxes | Cooling Fans* | Flange Mount Kits |
| | | pg.tGSX-110 | pg.tGSX-111 | pg.tGSX-112 | pg.tGSX-112 | pg.tGSX-108 | pg.tGSX-109 | pg.tGSX-115 | 230V pg.tGSX-113 460V pg.tGSX-114 | pg.tGSX-116 |
| GS4-21P0 | A | | | | | | | n/a | n/a | GS4-FMKIT-A |
| GS4-22P0 | | | | | | | | | | GS4-FMKIT-1 |
| GS4-23P0 | | | | | | | | | GS4-FAN-AM | GS4-FMKIT-A |
| GS4-25P0 | | | | | | | | | | GS4-FMKIT-A |
| GS4-27P5 | B | | | | | | | n/a | GS4-FAN-BM1 GS4-FAN-BB | GS4-FMKIT-B |
| GS4-2010 | | | | | | | | | GS4-FAN-BM2 GS4-FAN-BB | |
| GS4-2015 | | | | | | | | | | |
| GS4-2020 | C | | | | | | | n/a | GS4-FAN-CM GS4-FAN-CB1 | GS4-FMKIT-C |
| GS4-2025 | | | | | | | | | | |
| GS4-2030 | D** | | | | | | | GS4-CBX-D | GS4-FAN-DM GS4-FAN-DB | n/a |
| GS4-2040 | | | | | | | | | | |
| GS4-2050 | E** | | | | | | | GS4-CBX-E | GS4-FAN-EM1 GS4-FAN-EB | n/a |
| GS4-2060 | | | | | | | | | GS4-FAN-EM2 GS4-FAN-EB | |
| GS4-2075 | | | | | | | | | | |
| GS4-2100 | A | GSOFT2 | GSLOGIC | GS4-KPD | GS4-BZL | GS4-06CDD GS4-06NA GS4-06TR | GS4-CM-ENETIP GS4-CM-MODTCP | n/a | n/a | GS4-FMKIT-A |
| GS4-41P0 | | | | | | | | | | GS4-FMKIT-1 |
| GS4-42P0 | | | | | | | | | | GS4-FMKIT-A |
| GS4-43P0 | | | | | | | | | | |
| GS4-45P0 | | | | | | | | | | |
| GS4-47P5 | | | | | | | | | | |
| GS4-4010 | B | | | | | | | n/a | GS4-FAN-BM1 GS4-FAN-BB | GS4-FMKIT-B |
| GS4-4015 | | | | | | | | | GS4-FAN-BM2 GS4-FAN-BB | |
| GS4-4020 | C | | | | | | | n/a | GS4-FAN-CM GS4-FAN-CB2 | GS4-FMKIT-C |
| GS4-4025 | | | | | | | | | | |
| GS4-4030 | | | | | | | | | | |
| GS4-4040 | D0** | | | | | | | GS4-CBX-D0 | GS4-FAN-D0M GS4-FAN-DB | n/a |
| GS4-4050 | | | | | | | | | | |
| GS4-4060 | D** | | | | | | | GS4-CBX-D | GS4-FAN-DM GS4-FAN-DB | n/a |
| GS4-4075 | | | | | | | | | | |
| GS4-4100 | E** | | | | | | | GS4-CBX-E | GS4-FAN-EM2 GS4-FAN-DB | n/a |
| GS4-4125 | | | | | | | | | | |
| GS4-4150 | F** | | | | | | | GS4-CBX-F | GS4-FAN-FM GS4-FAN-FB | n/a |
| GS4-4175 | | | | | | | | | | |
| GS4-4200 | G | | | | | | | GS4-CBX-G | GS4-FAN-GM | n/a |
| GS4-4250 | | | | | | | | | | |
| GS4-4300 | | | | | | | | | | |

* Keypads and Cooling Fans are pre-installed and included with the GS4 Drives.
They are field-replaceable and available for purchase separately as spare or replacement parts.
** GS4 drives in D0, D, E and F frames can be flanged mounted and do not require a flange mount kit.

 Note: Refer to the page numbers shown above for more complete information about the accessory products.

GS4-Specific Optional Accessories – Input/Output Expansion Cards

Accessories Applicable Only to GS4 AC Drives


Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Input/Output Expansion Cards

Optional I/O cards allow additional inputs and outputs to be added to the GS4 internal I/O. (Only one I/O card can be installed at a time.)

| GS4 DURAPULSE Drives Input/Output Expansion Cards | | | | | | | |
|---------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|-----------|
| Part Number | Price | Description | Terminals | Specifications | Wire Size | Placement* | GS Drive |
| GS4-06CDD* | \$33.50 | DURAPULSE combination discrete I/O module, selectable sinking or sourcing 24VDC input, 24VDC output, 4-point input, 2-point output, 1 input common(s), 1 output common(s), 50mA resistive output current. | COM | (1) Common for Input Terminals | 20~24 AWG | slot #3 | GS4 – all |
| | | | DI10–DI13 | (4) Discrete Inputs; selectable sinking or sourcing Internal power available: 24VDC ±5% 200mA, 5W External power: 24VDC (30V max, 19V min), 30W ON: activation 6.5mA @ ≥ 9VDC OFF: leakage 10µA ≤ 3VDC | | | |
| | | | DO10–DO11 | (2) Discrete Outputs (photocoupler) Duty-cycle: 50% Max. output frequency: 100Hz Max. current: 50mA resistive Max. voltage: 48VDC | | | |
| | | | DOC | (1) Common for Output Terminals | | | |
| GS4-06NA* | \$36.00 | DURAPULSE discrete input module, sinking 120VAC input, 6-point input, 1 input common(s). | ACN | (1) AC power common for Input Terminal (Neutral) | 20~24 AWG | slot #3 | GS4 – all |
| | | | DI10–DI15 | (6) Discrete Inputs; sinking Input voltage: 100–130 VAC Input frequency: 47–63 Hz Input impedance: 27kΩ Terminal response time: ON: 10ms OFF: 20ms | | | |
| GS4-06TR* | \$55.00 | DURAPULSE relay output module, Form A (SPST-NO) relays, 6-point output, 6 output common(s), 3 Amps resistive output current, 1.2 Amps inductive output current, 250VAC/30VDC input. | R10–R15 | (6) separate commons for each relay | 20~26 AWG | slot #3 | GS4 – all |
| | | | RO10–RO15 | (6) normally open relay output Resistive load: 5A(NO) / 250VAC 5A(NO) / 30VDC Inductive load (COSØ 0.4) 2A(NO) / 250VAC | | | |

* GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot. I/O cards are designed for slot #3, and will not fit in any other slot.

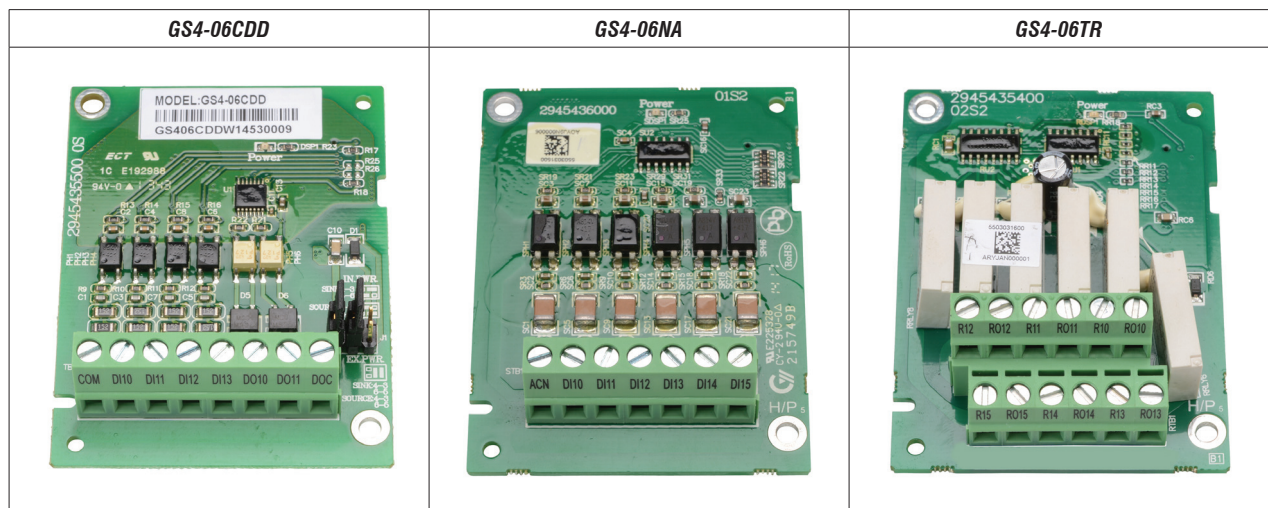

GS4-Specific Optional Accessories – Communication Interface Cards

Accessories Applicable Only to GS4 AC Drives


Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Communication Cards

Communication interface cards provide EtherNet/IP™ or ModbusTCP communication capability. Only one communication card can be installed at a time.

| GS4 DURAPULSE Drives Communication Interface Cards | | | | | |
|----------------------------------------------------|----------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------|
| Part Number | Price | Description | Specifications | Placement* | GS Drive |
| GS4-CM-ENETIP* | \$110.00 | DURAPULSE communication card, EtherNet/IP | Interface: EtherNet/IP RJ45 with MDI/MDIX auto-detect Number of ports: 1 (16 connections max) Transmission method: IEEE 802.3, IEEE 802.3u Transmission cable: Category 5e shielding 100MHz Transmission speed: 10/100 Mbps Auto-Detect Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP, EtherNet/IP Power supply voltage: 5VDC (supplied by the GS4 AC drive) Insulation voltage: 500VDC Power consumption: 0.8W Weight: 25g Noise immunity ESD (IEC 61800-5-1, IEC 61000-4-2) EFT (IEC 61800-5-1, IEC 61000-4-4) Surge Test (IEC 61800-5-1, IEC 61000-4-5) Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6) Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity) Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity) Vibration / Shock immunity: IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27 Ethernet timeout functionality for EtherNet/IP connections GS4-CM-ENETIP supports 4 EtherNet/IP connections and also supports 4 ModTCP connections. These ModTCP connections cannot start/stop or change command frequency in the drive, but can be used to monitor the drive and change Parameters. Ethernet timeout functionality <u>for ModTCP connections</u> is <u>not</u> supported on the EtherNet/IP card. | slot #1 | GS4 – all |
| GS4-CM-MODTCP* | \$97.00 | DURAPULSE communication card, ModbusTCP | Interface: Ethernet RJ45 with MDI/MDIX auto-detect Number of ports: 1 (4 connections max) Transmission method: IEEE 802.3, IEEE 802.3u Transmission cable: Category 5e shielding 100MHz Transmission speed: 10/100 Mbps Auto-Detect Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP Power supply voltage: 5VDC (supplied by the GS4 AC drive) Insulation voltage: 500VDC Power consumption: 0.8W Weight: 25g Noise immunity ESD (IEC 61800-5-1, IEC 61000-4-2) EFT (IEC 61800-5-1, IEC 61000-4-4) Surge Test (IEC 61800-5-1, IEC 61000-4-5) Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6) Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity) Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity) Vibration / Shock immunity: IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27 Ethernet Timeout functionality for ModTCP connections | slot #1 | GS4 – all |

* GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot. Communication interface cards are designed for slot #1, and will not fit in any other slot.

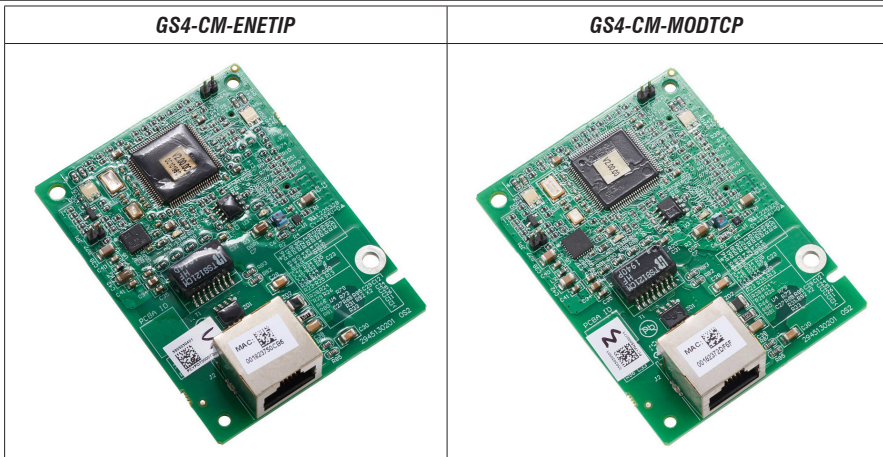

DuraPulse Accessories – Software

GSoft2 Drive Configuration Software

GSoft2 Drive Configuration Software

Available for *FREE* Download

| DURAPULSE Drives GSOFT2 Drive Configuration Software | | | |
|---------------------------------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| Part Number | Price* | Description | For GS Drive |
| GSOFT2 | \$10.50 | GSOFT2 Windows configuration software, USB or free download. For use with DURApulse GS4, GS10, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter. | GS4 – all GS10 – all GS20(X) – all GS30 – all |
| USB-485M | \$60.00 | PC adapter, USB A to RS-485 (RJ45/RJ12). | GS4/GS10 |
| USB-CBL-AB3 | \$12.00 | Programming cable, USB A to USB B, 3ft cable length. | GS4 – all (for Drive FW only) GS20(X) – all GS30 – all |
| * GSOFT2 can be downloaded for <u>free</u> or purchased on USB from AutomationDirect.com (search for GSOFT2). | | | |

GSOFT2 Drive Configuration Software

GSoft2 is the configuration software for the Automation DuraPulse family of drives. It is designed to allow you to connect a personal computer to the drive, and perform a variety of functions.

GSoft2 includes an integral help file with software instructions. GSoft2 can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSoft2).

Functions

- Create new drive configurations
- Upload/download drive configurations
- Edit drive configurations
- Archive/store multiple drive configurations on your PC
- Trend drive operation parameters (not available with GS10)
- Tune the drive PID loop
- View real time key operating parameters
- Real-time trending
- Start/Stop drive and switch directions, provided drive is set up for remote operation
- View drive faults

Computer System Requirements

GSoft2 will run on Windows PCs that meet the following requirements:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, 11
- Edge or Chrome (for HTML help support)
- 32 Mb of available memory
- 10 Mb hard drive space
- Available USB port
- USB to RS485 adapter needed for GS4 and GS10 models



GS4/GS20(X)/GS30 Accessories – Software GSLogic PLC Programming Software

Optional Accessory Software Applicable Only to AC Drive Series:

- GS4
- GS20(X)
- GS30

GSLOGIC Drive Configuration Software

Available for *FREE* Download

| GS4/GS20(X)/GS30 DURAPULSE Drives GSLogic PLC Programming Software | | | |
|--------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Part Number | Price* | Description | For GS Drive |
| GSLOGIC | \$10.50 | GSLOGIC Windows logic software, USB or free download. For use with DURApulse GS4, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter. | GS4 - all GS20(X) – all GS30 – all |
| USB-485M | \$60.00 | PC adapter, USB A to RS-485 (RJ45/RJ12). | GS4 – all |
| USB-CBL-AB3 | \$12.00 | Programming cable, USB A to USB B, 3ft cable length. | GS20(X) – all GS30 – all |

* GSLOGIC can be downloaded for **free** or purchased on USB from AutomationDirect.com (search for GSLOGIC).

PLC Summary

The GS4, GS20(X), and GS30 drives include a built-in PLC. Programmed in ladder logic, the PLC provides a comprehensive set of instructions and 2,000 (GS20(X)), 5,000 (GS30), or 10,000 (GS4) steps of programming capacity. GSLogic PLC software includes a Help File which contains the detailed information needed to use the PLC.

The PLC functionality is included with every GS4, GS20(X), and GS30 drive, and can be accessed over communications by external PLCs (via serial Modbus), or by the drive itself (using built-in PLC instructions). The PLC is perfectly suited for applications where digital and analog I/O requirements are small. For applications with complex PLC programming or large I/O requirements, please consider Click, Productivity, or Do-More/BRX. All of these PLCs can be easily integrated with the GS drive family or PLC. The GS4-KPD keypad is capable of storing multiple PLC programs.

There are two methods for communicating from the PLC to the drive. The first method is to use the WPR and RPR instructions available in the PLC's library. These two instructions can read from or write to any AC drive parameter in the same physical drive. The second method is to use Modbus RTU. The PLC is a Serial Modbus slave only. A Modbus RTU master can communicate with the PLC via serial only; optional communication cards cannot address the PLC. If communication cards (EtherNet/IP or Modbus TCP) are the desired method of communication, the drive includes PLC Buffers parameters that can be used. Simply write the needed information from the PLC into the drive's PLC buffer parameters using the WPR instruction. The Modbus TCP or EtherNet/IP cards can then read the VFD parameters.

GSLogic Introduction

GSLogic is the drive PLC programming software for the AutomationDirect GS4, GS20(X), and GS30 family of drives. It is designed to enable you to perform a variety of drive PLC programming functions. Windows editing functions like cut, copy, paste, multiple windows, etc., are supported. GSLogic also provides for register editing, settings, file reading, saving, online monitoring settings, and other convenience functions, such as:


- Upload/download drive PLC program files to the onboard PLC
- Create new drive PLC programs
- Edit drive PLC programs
- Archive/store multiple drive PLC programs on your PC or the GS4-KPD drive keypad
- Control drive PID loops (FPID instructions)
- View in real time all drive PLC registers
- Print drive PLC program files

GSLogic includes an integral help file that includes software instructions, how to use GSLogic, and how to use the GS drive PLC.

GSLogic System Requirements

GSLogic is a Windows-based programming software environment. Please check the following requirements when choosing your PC configuration:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, **11**
- 300MB free hard-disk space
- USB Port required for project transfer to drive
- USB-485M serial adapter required for GS4 models

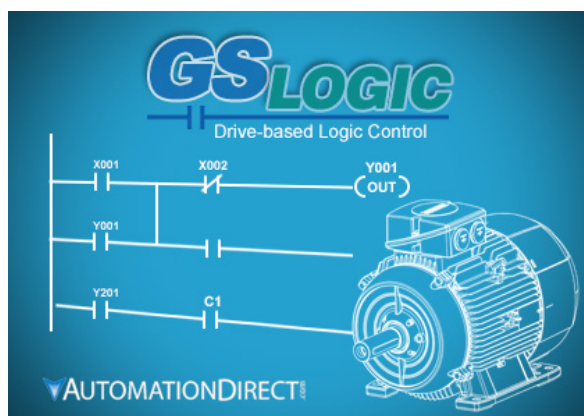

DuraPulse Optional Accessories – Advanced LCD Keypad

Advanced Keypad



NOTE: The keypad described below is included with the GS4 AC Drive, and is also available for purchase separately as a spare/replacement component for GS4, or an optional upgrade for GS10/GS20(X)/GS30.

Keypad Panel-Mounting Kit

NOTE: The keypad panel-mounting kit described below is an optional accessory that is NOT included with the GS10/GS20(X)/GS30 AC drive.

| GSx Series DURAPULSE Drives Keypad and Keypad Panel-Mounting Kit | | | |
|------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Part Number | Price | Description | For GS Drive |
| GS4-KPD* | \$107.00 | Spare or replacement keypad for GS4 AC drives; optional advanced keypad for GS20(X) drives; includes RJ45 connector; great for maintenance or back-up programs. | GS4 – all GS10 – all GS20(X) – all GS30 – all |
| GS4-BZL** | \$29.50 | Keypad Panel-Mounting Kit for remote surface mounting or embedded mounting of the AC drive removable keypad; hardware included. Use a standard Cat5e RJ45 patch cable (not included) to connect a remote-mounted keypad to the drive. Max cable length for remote-mounted keypad = 5m. | GS4 – all GS10 – all GS20(X) – all GS30 – all |

* A keypad is included with each GS4 AC Drive; additional keypads are available for spare/replacement components.
 ** The keypad mounting kit is an optional accessory that is NOT included with the GS4 AC drive; for mounting the keypad remotely from the drive.
 Note: Keypad firmware can only be upgraded when connected to a GS4 drive.

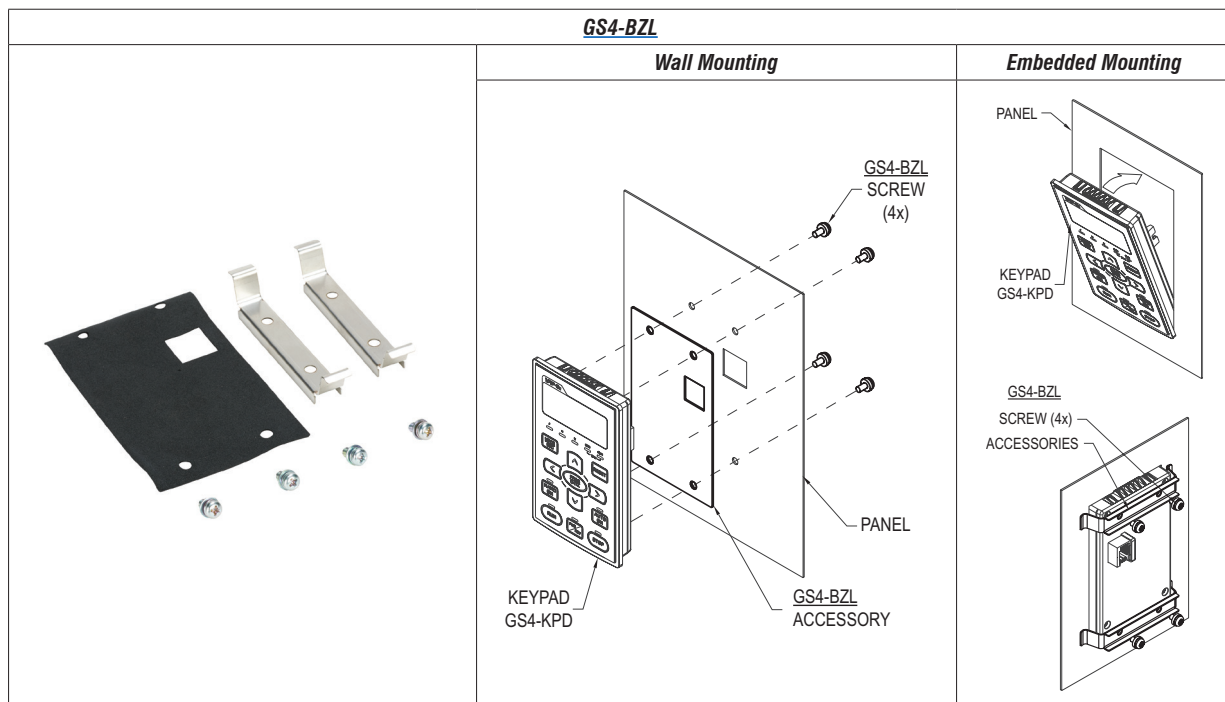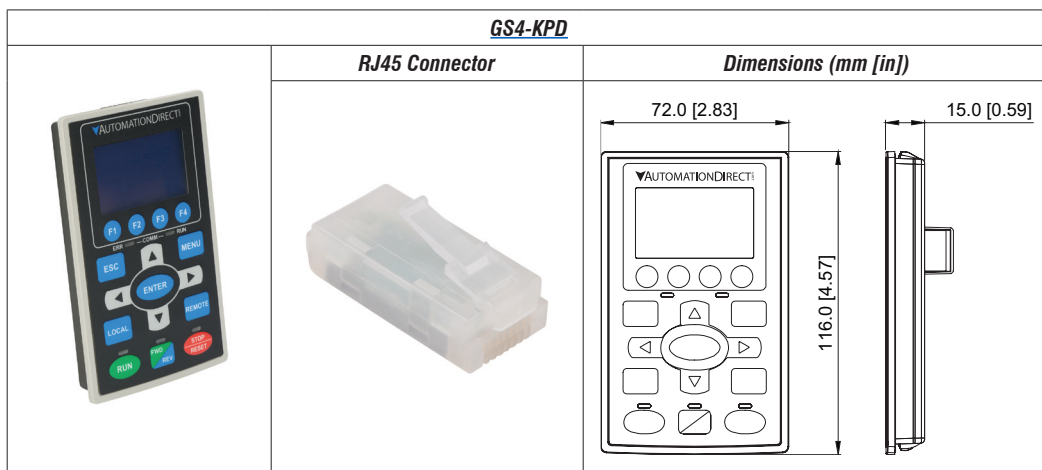

GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Cooling Fans for 230V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

| GS4 230V Models – (GS4-2xxx) – Fan Selection Table | | | | | | | | |
|----------------------------------------------------|------------------------------------|----------|-------------------------------------------------------------------------------------|---------------------|------------------------|---------|----------------------|------------|
| Drive Model | Fan Model * | | | Description | Size | Voltage | Amps / Fan | Fans / Kit |
| | Part # | Price | Photo | | | | | |
| GS4-22P0 GS4-23P0 GS4-25P0 | <u>GS4-FAN-AM</u> | \$28.00 |  | Frame A main | 40mm | 24 | 0.15 | 1 |
| GS4-27P5 | <u>GS4-FAN-BM1</u> | \$34.50 |  | Frame B main | 80mm | 24 | 0.33 | 1 |
| | <u>GS4-FAN-BB</u> | \$27.00 |  | Frame B board level | 40mm | 24 | 0.18 | 1 |
| GS4-2010 GS4-2015 | <u>GS4-FAN-BM2</u> | \$52.00 |  | Frame B main | 80mm | 24 | 0.51 | 1 |
| | <u>GS4-FAN-BB</u> | \$27.00 |  | Frame B board level | 40mm | 24 | 0.18 | 1 |
| GS4-2020 GS4-2025 GS4-2030 | <u>GS4-FAN-CM</u> | \$49.00 |  | Frame C main | 92mm | 24 | 0.75 | 1 |
| | <u>GS4-FAN-CB1</u> | \$28.00 |  | Frame C board level | 40mm | 24 | 0.18 | 1 |
| GS4-2040 GS4-2050 | <u>GS4-FAN-DM</u> | \$174.00 |  | Frame D main | 92mm | 24 | 0.75 | 2 |
| | <u>GS4-FAN-DB</u> | \$58.00 |  | Frame D board level | 70mm | 24 | 0.33 | 1 |
| GS4-2060 GS4-2075 | <u>GS4-FAN-EM1</u> | \$239.00 |  | Frame E main | 120mm | 24 | 1.08 | 2 |
| | <u>GS4-FAN-EB</u> | \$119.00 |  | Frame E board level | 120mm | 24 | 0.76 | 1 |
| GS4-2100 | <u>GS4-FAN-EM2</u> | \$303.00 |  | Frame E main | 92mm 120mm 120mm | 24 | 0.75 1.08 1.08 | 3 |
| | <u>GS4-FAN-EB</u> | \$119.00 |  | Frame E board level | 120mm | 24 | 0.76 | 1 |

* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.


GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Cooling Fans for 460V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

| GS4 460V Models – (GS4-4xxx) – Fan Selection Table | | | | | | | | |
|----------------------------------------------------|--------------------|----------|-------------------------------------------------------------------------------------|---------------------|------------------------|---------|----------------------|------------|
| Drive Model | Fan Model * | | | Description | Size | Voltage | Amps / Fan | Fans / Kit |
| | Part # | Price | Photo | | | | | |
| GS4-43P0 GS4-45P0 GS4-47P5 | GS4-FAN-AM | \$28.00 |  | Frame A main | 40mm | 24 | 0.15 | 1 |
| GS4-4010 | GS4-FAN-BM1 | \$34.50 |  | Frame B main | 80mm | 24 | 0.33 | 1 |
| | GS4-FAN-BB | \$27.00 |  | Frame B board level | 40mm | 24 | 0.18 | 1 |
| GS4-4015 GS4-4020 | GS4-FAN-BM2 | \$52.00 |  | Frame B main | 80mm | 24 | 0.51 | 1 |
| | GS4-FAN-BB | \$27.00 |  | Frame B board level | 40mm | 24 | 0.18 | 1 |
| GS4-4025 GS4-4030 GS4-4040 | GS4-FAN-CM | \$49.00 |  | Frame C main | 92mm | 24 | 0.75 | 1 |
| | GS4-FAN-CB2 | \$34.50 |  | Frame C board level | 40mm | 12 | 0.60 | 1 |
| GS4-4050 GS4-4060 | GS4-FAN-DM0 | \$98.00 |  | Frame D0 main | 80mm | 24 | 0.75 | 2 |
| | GS4-FAN-DB | \$58.00 |  | Frame D board level | 70mm | 24 | 0.33 | 1 |
| GS4-4075 GS4-4100 | GS4-FAN-DM | \$174.00 |  | Frame D main | 92mm | 24 | 0.75 | 2 |
| | GS4-FAN-DB | \$58.00 |  | Frame D board level | 70mm | 24 | 0.33 | 1 |
| GS4-4125 GS4-4150 | GS4-FAN-EM2 | \$303.00 |  | Frame E main | 92mm 120mm 120mm | 24 | 0.75 1.08 1.08 | 3 |
| | GS4-FAN-EB | \$119.00 |  | Frame E board level | 120mm | 24 | 0.76 | 1 |
| GS4-4175 GS4-4200 | GS4-FAN-FM | \$431.00 |  | Frame F main | 92mm | 24 | 0.76 | 4 |
| | GS4-FAN-FB | \$126.00 |  | Frame F board level | 120mm | 24 | 1.08 | 1 |
| GS4-4250 GS4-4300 | GS4-FAN-GM | \$902.00 |  | Frame G main | 250mm | 48 | 2.2 | 2 |

* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.

GS4-Specific Optional Accessories – Conduit Boxes






Accessories Applicable Only to GS4 AC Drives

Please refer to the “GS/DURApulse AC Drives – Accessories” section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Conduit Boxes

Optional Conduit Box Kits can be ordered separately. These kits bolt onto the bottom of the applicable GS4 drive to provide a convenient connection point for conduit entry, allowing the GS4 to maintain a IP20/NEMA 1 environmental protection rating; especially useful for GS4 drives mounted outside of an electrical control panel.

Note: GS4 Frames A through C have integral conduit box space built into the drive. No separate conduit boxes are necessary or available.

| GS4 Frame Sizes D0–G – Conduit Box Selection Table | | | | | |
|--------------------------------------------------------------|--------|-----------------------------------|----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Drive | | Conduit Box ** | | | Description |
| Model | Frame* | Part # | Price | Photo | |
| GS4-4060, GS4-4050 | D0 | <u>GS4-CBX-D0</u> | \$163.00 |  | NEMA 1 conduit box kit for use with GS4 frame size D0 AC drive; mounting hardware included |
| GS4-2040, GS4-2050; GS4-4075, GS4-4100 | D | <u>GS4-CBX-D</u> | \$163.00 |  | NEMA 1 conduit box kit for use with GS4 frame size D AC drive; mounting hardware included |
| GS4-2060, GS4-2075, GS4-2100; GS4-4125, GS4-4150 | E | <u>GS4-CBX-E</u> | \$188.00 |  | NEMA 1 conduit box kit for use with GS4 frame size E AC drive; mounting hardware included |
| GS4-4150, GS4-4200 | F | <u>GS4-CBX-F</u> | \$271.00 |  | NEMA 1 conduit box kit for use with GS4 frame size F AC drive; mounting hardware included |
| GS4-4250, GS4-4300 | G | <u>GS4-CBX-G</u> | \$513.00 |  | NEMA 1 conduit box kit for use with GS4 frame size G AC drive; mounting hardware included |





* GS4 Frame Sizes A through C have integral conduit box space built into the drive; separate conduit boxes are not necessary nor available.
 ** Conduit Box Kits include mounting hardware; box base, box cover, bushings, and screws.
 Conduit box dimensions are shown with the AC drive dimensions, as mounted on the drive.

GS4-Specific Optional Accessories – Flange Mounting Kits


Flange Mounting Kits

Optional GS4 drive flange mounting kits allow the heat sinks on the back of select GS4 drives to be positioned through the back of the control enclosure. Since a majority of the heat generated by the GS4 drive will be outside the enclosure, heat load will be reduced and a smaller enclosure may possibly be used. These flange mounting kits are applicable to GS4 drive frame sizes A through C.

NOTE: GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required (see cutout dimensions below).
Frame size G cannot be flange-mounted.

| GS4 Frame Sizes A–C – Flange Mounting Kit Selection Table | | | | | |
|----------------------------------------------------------------------|--------|---------------------------|---------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Drive | | Flange Mounting Kit ** | | | Description |
| Model | Frame* | Part # | Price | Photo | |
| GS4-22P0 GS4-23P0 GS4-43P0 | A | <u>GS4-FMKIT-1</u> | \$74.00 |  | GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; adapter plate and mounting hardware included |
| GS4-21P0 GS4-25P0 GS4-41P0 GS4-42P0 GS4-45P0 GS4-47P5 | A | <u>GS4-FMKIT-A</u> | \$62.00 |  | GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; mounting hardware included |
| GS4-27P5 GS4-2010 GS4-2015 GS4-4010 GS4-4015 GS4-4020 | B | <u>GS4-FMKIT-B</u> | \$70.00 |  | GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame B drives; mounting hardware included |
| GS4-2020 GS4-2025 GS4-2030 GS4-4025 GS4-4030 GS4-4040 | C | <u>GS4-FMKIT-C</u> | \$79.00 |  | GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame C drives; mounting hardware included |

* See panel cutout dimensions below for GS4 Frames A, B, C.
 * GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required. See Appendix A of the GS4 User Manual for panel cut-out dimensions for frames D0, E, F.
 * Frame size G cannot be flange-mounted.

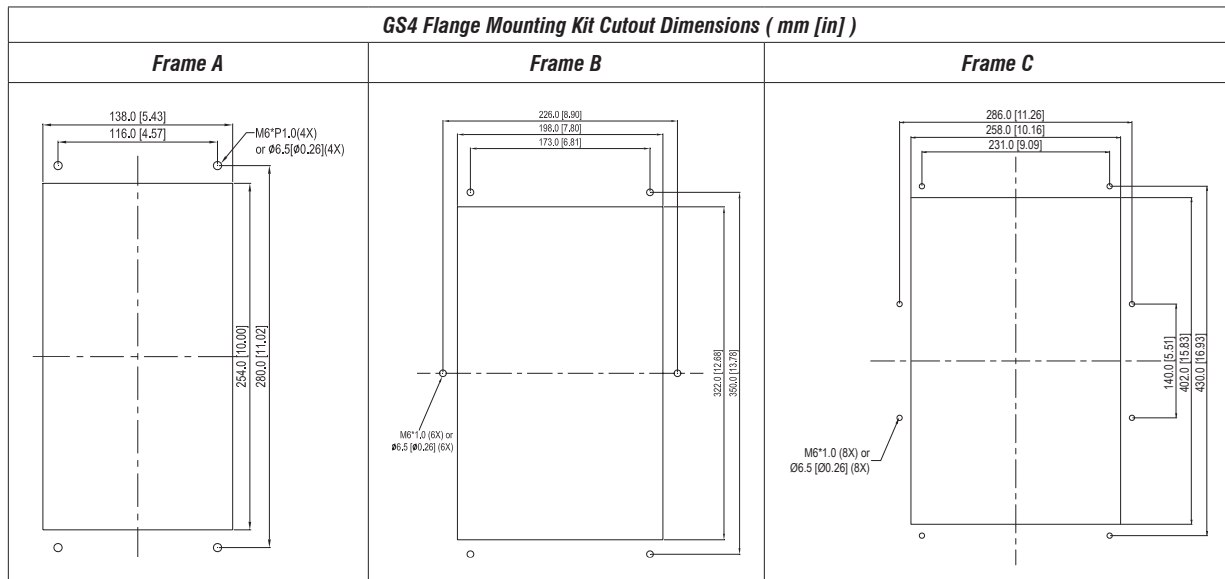

DURAPULSE GS4 AC Drives Specifications – Installation

Understanding the installation requirements for your DURAPULSE AC drive will help to ensure that it operates within its environmental and electrical limits.

Note: Never use only this catalog for installation instructions or operation of equipment; refer to the User Manual, GS4_UMW.

| Environmental Conditions for GS4 AC Drives | | | |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------|
| Condition | Operation | Storage | Transportation |
| Installation Location | IEC60364-1/IEC60664-1 Pollution degree 2, Indoor use only | n/a | n/a |
| Ambient Temperature | see separate Operating Temperature table below | | |
| Relative Humidity | Max 90%, non-condensing, non-frozen | Max 95%, non-condensing, non-frozen | |
| Air Pressure | 86 to 106 kPa | | 70 to 106 kPa |
| Pollution Level | IEC721-3-3, no concentrate | | |
| | Class 3C2; Class 3S2 | Class 2C2; Class 2S2 | Class 1C2; Class 1S2 |
| Altitude | 0–1000m (see separate derating section for altitudes of 1000–3000m) | n/a | n/a |
| Package Drop | n/a | ISTA procedure 1A (according to weight) IEC60068-2-31 | |
| Vibration | 1.0mm, peak to peak value range from 2Hz to 13.2Hz; 0.7G–1.0G range from 13.2Hz to 55Hz; 1.0G range from 55Hz to 512Hz. Comply with IEC 60068-2-6 | | |
| Impact | IEC/EN 60068-2-27 | | |
| Installation Orientation | <div style="text-align: center;"> <p>Max allowed offset angle $\pm 10^\circ$ (from vertical installation position)</p> </div> | | |

| Operating Temperature and Protection Level | | | | | |
|--------------------------------------------|------------------------------------|-------------------------|------------------------|---------------------------------------------------------------------------------------------|---------------------|
| Frame Size | Top cover | Conduit Box | Protection Level | Operating Temperature | |
| A–C | 230V: 1.0–30 hp 460V: 1.0–40 hp | With top cover removed | Standard conduit plate | IP20 / UL Open Type | -10–50°C [14–122°F] |
| | | With top cover in place | | IP20 / UL Type1 / NEMA 1 | -10–40°C [14–104°F] |
| D0–G | 230V: >30hp 460V: >40hp | N/A | With conduit box | IP20 / UL Type1 / NEMA 1 | -10–40°C [14–104°F] |
| | 230V: >30hp 460V: >40hp | N/A | Without conduit box | IP00 / IP20 / UL Open Type * Only the circled area is IP00. Other parts are IP20. | -10–50°C [14–122°F] |

* Only the exposed terminal blocks are IP00; the other components are IP20



WARNING: AC DRIVES GENERATE A LARGE AMOUNT OF HEAT WHICH MAY DAMAGE THE AC DRIVE. AUXILIARY COOLING METHODS MAY BE REQUIRED TO AVOID EXCEEDING MAXIMUM OPERATING TEMPERATURE. WHEN POSSIBLE, CONSIDER FLANGE MOUNTING TO LOWER ENCLOSURE TEMPERATURES.



WARNING: MAXIMUM AMBIENT TEMPERATURES MUST NOT EXCEED 50°C (122°F), OR 40°C (104°F), FOR ALL GS4 MODELS.

DURAPULSE GS4 AC Drives Specifications – Air Flow and Power (Heat) Dissipation

| GS4 AC Drives Air Flow and Power (Heat) Dissipation | | | | | | | | | |
|-----------------------------------------------------|----------------------------------------|----------|-------|----------------------------------------------|----------|-------|----------------------------------------|----------|-------|
| Model Number | Airflow Rate ¹⁾ for Cooling | | | | | | Power (Heat) Dissipation ²⁾ | | |
| | Flow Rate ¹⁾ (cfm) | | | Flow Rate ¹⁾ (m ³ /hr) | | | Power Dissipation ²⁾ (Watt) | | |
| | External | Internal | Total | External | Internal | Total | External (Heat sink) | Internal | Total |
| GS4-21P0 | – | – | – | – | – | – | 33 | 27 | 60 |
| GS4-22P0 | 14 | – | 14 | 24 | – | 24 | 56 | 31 | 87 |
| GS4-23P0 | 14 | – | 14 | 24 | – | 24 | 79 | 36 | 115 |
| GS4-25P0 | 10 | – | 10 | 17 | – | 17 | 113 | 46 | 159 |
| GS4-27P5 | 40 | 14 | 54 | 68 | 24 | 92 | 197 | 67 | 264 |
| GS4-2010 | 66 | 14 | 80 | 112 | 24 | 136 | 249 | 86 | 335 |
| GS4-2015 | 58 | 14 | 73 | 99 | 24 | 123 | 409 | 121 | 530 |
| GS4-2020 | 166 | 12 | 178 | 282 | 20 | 302 | 455 | 161 | 616 |
| GS4-2025 | 166 | 12 | 178 | 282 | 20 | 302 | 549 | 184 | 733 |
| GS4-2030 | 166 | 12 | 178 | 282 | 20 | 302 | 649 | 216 | 865 |
| GS4-2040 | 179 | 30 | 209 | 304 | 51 | 355 | 913 | 186 | 1099 |
| GS4-2050 | 179 | 30 | 209 | 304 | 51 | 355 | 1091 | 220 | 1311 |
| GS4-2060 | 228 | 73 | 301 | 387 | 124 | 511 | 1251 | 267 | 1518 |
| GS4-2075 | 228 | 73 | 301 | 387 | 124 | 511 | 1401 | 308 | 1709 |
| GS4-2100 | 246 | 73 | 319 | 418 | 124 | 542 | 1770 | 369 | 2139 |
| GS4-41P0 | – | – | – | – | – | – | 33 | 25 | 58 |
| GS4-42P0 | – | – | – | – | – | – | 45 | 29 | 74 |
| GS4-43P0 | 14 | – | 14 | 24 | – | 24 | 71 | 33 | 104 |
| GS4-45P0 | 10 | – | 10 | 17 | – | 17 | 103 | 38 | 141 |
| GS4-47P5 | 10 | – | 10 | 17 | – | 17 | 134 | 46 | 180 |
| GS4-4010 | 40 | 14 | 54 | 68 | 24 | 92 | 216 | 76 | 292 |
| GS4-4015 | 66 | 14 | 80 | 112 | 24 | 136 | 287 | 93 | 380 |
| GS4-4020 | 58 | 14 | 73 | 99 | 24 | 123 | 396 | 122 | 518 |
| GS4-4025 | 99 | 21 | 120 | 168 | 36 | 204 | 369 | 138 | 507 |
| GS4-4030 | 99 | 21 | 120 | 168 | 36 | 204 | 476 | 158 | 634 |
| GS4-4040 | 126 | 21 | 147 | 214 | 36 | 250 | 655 | 211 | 866 |
| GS4-4050 | 179 | 30 | 209 | 304 | 51 | 355 | 809 | 184 | 993 |
| GS4-4060 | 179 | 30 | 209 | 304 | 51 | 355 | 929 | 218 | 1147 |
| GS4-4075 | 179 | 30 | 209 | 304 | 51 | 355 | 1156 | 257 | 1413 |
| GS4-4100 | 186 | 30 | 216 | 316 | 51 | 367 | 1408 | 334 | 1742 |
| GS4-4125 | 257 | 73 | 330 | 437 | 124 | 561 | 1693 | 399 | 2092 |
| GS4-4150 | 223 | 73 | 296 | 379 | 124 | 503 | 2107 | 491 | 2598 |
| GS4-4175 | 224 | 112 | 336 | 381 | 190 | 571 | 2502 | 579 | 3081 |
| GS4-4200 | 289 | 112 | 401 | 491 | 190 | 681 | 3096 | 687 | 3783 |
| GS4-4250 | | | 454 | | | 771 | | | 4589 |
| GS4-4300 | | | 454 | | | 771 | | | 5772 |

The required airflow shown in chart is for installing a single GS4 drive in a confined space. When installing multiple GS4 drives, the required air volume would be the cumulative air volume for all drives in the enclosure.

Heat dissipation shown in the chart is for installing a single GS4 drive in a confined space. When installing multiple drives, the volume of heat dissipation should be the cumulative heat dissipation of all drives in the enclosure. Heat dissipation for each model is calculated by rated voltage, current and default carrier frequency.

- 1) External flow rate is across the heat sink. Internal flow rate is through the chassis. Published flow rates are the result of active cooling using fans; factory-installed in the drive. Unpublished flow rates (-) are the result of passive cooling in drives without factory-installed fans.
- 2) When calculating power dissipation (Watt Loss) use the total value if the drive is foot mounted, or the internal value if the drive is flange mounted. Where only a total value is published, these models cannot be flange mounted.

| Dimensions for Minimum Clearance * (mm / in) | | | | |
|------------------------------------------------|---------------|-------------------------|---------------------|-------|
| Frame Size | Above & Below | Side to Non-Heat Source | Side to Heat Source | Front |
| A–C | 60 / 2.4 | 30 / 1.2 | 10 / 0.4 | 0 / 0 |
| D(0)–F | 100 / 4.0 | 50 / 2.0 | n/a | 0 / 0 |
| G | 200 / 7.9 | 100 / 4.0 | 2 x B | 0 / 0 |

* The minimum mounting clearances stated in this table applies to GS4 drives frames A to G. Failure to follow the minimum mounting clearances may cause the fan to malfunction and cause a heat dissipation problem.


DURAPULSE GS4 AC Drives Specifications – Terminals

| Control Circuit Terminals | | | Main Circuit Terminals | |
|---------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------|
| Terminal | Description | Remarks | Terminal | Description |
| +10V | Potentiometer Power Supply | Analog frequency setting: +10VDC 20mA max output | R/L1 | Input Power – phase 1 |
| -10V | | Analog frequency setting: -10VDC 20mA max output | S/L2 | Input Power – phase 2 |
| +24V | Digital Control Signal Source | +24V±5%, 200mA max output; use with DCM | T/L3 | Input Power – phase 3 |
| AI1 | Analog Input 1 | Range: 0–10V or 0/4–20mA = 0–Max Output Frequency AI1 switch = SW3; factory setting is 0–10V Impedance: 20kΩ (SW3 = 0–10V); 250Ω (SW3 = 0/4–20mA) | U/T1, V/T2, W/T3 | AC Drive Output |
| AI2 | Analog Input 2 | Range: 0/4–20mA or 0–10V = 0–Max Output Frequency AI2 Switch = SW4; factory setting is 0–20mA Impedance: 250Ω (SW4 = 0/4–20mA); 20kΩ (SW4 = 0–10V); | +1, +2 | DC Choke Connection (frames A–C) |
| AI3 | Analog Input 3 | Impedance: 20kΩ Range: -10VDC to +10 VDC = 0–Max Output Frequency <i>Note: For -10V to +10V operation, connect the pot to +10V and -10V. Keep the pot wiper connected to AI3.</i> | B1, B2 | Braking Resistor Connection (frames A–C) |
| ACM | Analog Common | Common for analog terminals | +1/DC+, -/DC- | External Dynamic Brake Unit (frames D–G) |
| AO1 | Analog Output 1 | -10 to +10V max output current 2mA; max load 5kΩ Resolution: 0–10V corresponds to max operation frequency Range: 0–10V or -10 to +10V AO1 Switch = SW1, factory setting is 0–10V | ⏏ | Ground |
| AO2 | Analog Output 2 (internal circuit same as AO1) | 0–10V max output current 2mA; max load 5kΩ 0–20mA max output current 20mA; max load 500Ω Resolution: 0–10V corresponds to max operation frequency Range: 0–10V or 0/4–20mA AO2 Switch = SW2; factory setting is 0–10V | | |
| DIC | Digital Input Common Rail | Common terminal for multi-function inputs; Can be tied to DCM (for sinking) or to +24V (for sourcing) | | |
| DI1–DI8 | Digital Inputs 1 thru 8 | ON: the activation current is 3.3mA ≥ 11VDC OFF: leakage current tolerance is 1.4mA ≤ 5VDC | | |
| DCM | Digital Signal Common | Refer to terminals FO, FWD, REV | | |
| DO1 | Digital Output 1 | The AC motor drive releases various monitor signals such as drive in operation, frequency attained, and overload indication via transistor (open collector). Range: 5–48 VDC. Use with DOC. | | |
| DO2 | Digital Output 2 (internal circuit same as DO1) | Multi-function Output 2 (photocoupler). Range: 5–48 VDC. Use with DOC. | | |
| DOC | Digital Output Common | Max 5–48 VDC, 50mA (user supplied) | | |
| +24V | STO Control Signal Source | | | |
| ECM | EStop Common | | | |
| SCM1 | STO Input 1 Common | Safe Torque Off function. | | |
| SCM2 | STO Input 2 Common | Refer to Appendix E: Safe Torque Off for more details. | | |
| STO1 | STO Input 1 | | | |
| STO2 | STO Input 2 | | | |
| FO | Digital Frequency Output | High-speed pulse output. Use with DCM. Digital Frequency Out = Drive Output Frequency [Hz] × P3.38 [Frequency Output Multiplier]. Duty-cycle: 50% ±1% Min load impedance: 1kΩ/100pf Max current: 30mA Max voltage: 30VDC | | |
| FWD | Forward Command | Use with DCM. ON = forward running OFF = deceleration to stop | | |
| R1 | R1 Relay Common | Resistive Load: 3A(N.O.) / 3A(N.C.); 250VAC 5A(N.O.) / 3A(N.C.); 30VDC Inductive Load (COS 0.4): 1.2A(N.O.) / 1.2A(N.C.); 250VAC These terminals are to output monitoring signals, such as drive in operation, frequency attained, or overload indication. Note: R1 and R2 have N.O. and N.C. contacts. | | |
| R1C | R1 Relay N.C. | | | |
| R1O | R1 Relay N.O. | | | |
| R2 | R2 Relay Common | | | |
| R2C | R2 Relay N.C. | | | |
| R2O | R2 Relay N.O. | | | |
| REV | Reverse Command | Use with DCM. ON = reverse running OFF = deceleration to stop | | |
| RJ45-1 | RJ45 Port 1 (RS-485) | Pins 1,2,7,8: Reserved Pins 3,6: SGND | | |
| RJ45-2 | RJ45 Port 2 (RS-485) | Pin 4: SG- Pin 5: SG+ (RJ45-1 and RJ45-2 are connected internally to ports SG+ and SG- below) | | |
| SG+, SG-, SGND | Modbus RS-485 (SG+ and SG- are connected internally to the two RJ45 ports above) | | | |
| ⏏ | Digital Control Ground | | | |

DURAPULSE GS4 AC Drives – Basic Wiring Diagram

Power Wiring Diagram: GS4 230V Models – Single-Phase


Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)
Note: We specify DC chokes, but we do not stock them.

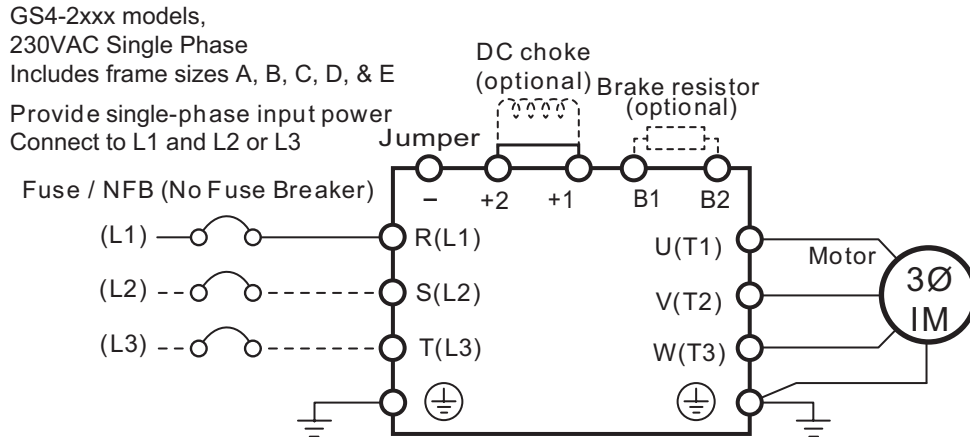

Connect 230VAC, Single-Phase power to any two of the R, S, or T terminals


Power Wiring Diagram: GS4 Frame Size A, B, C Models – Three-Phase

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)
Note: We specify DC chokes, but we do not stock them.

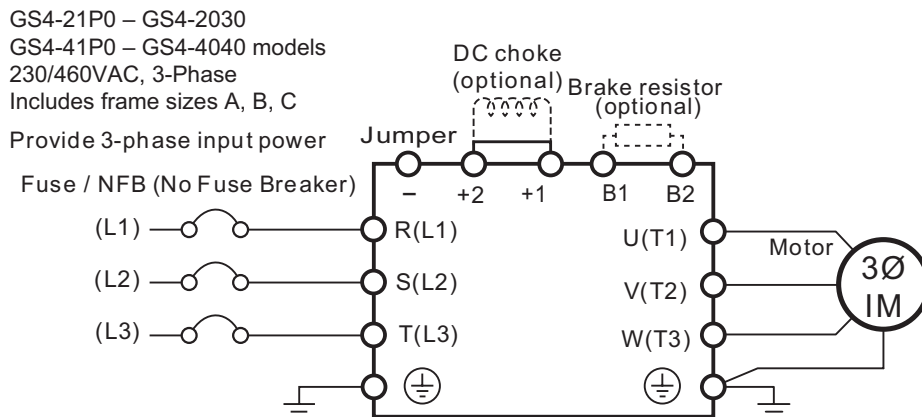

Power Wiring Diagram: GS4 Frame Size D0, D, E, F Models – Three-Phase

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

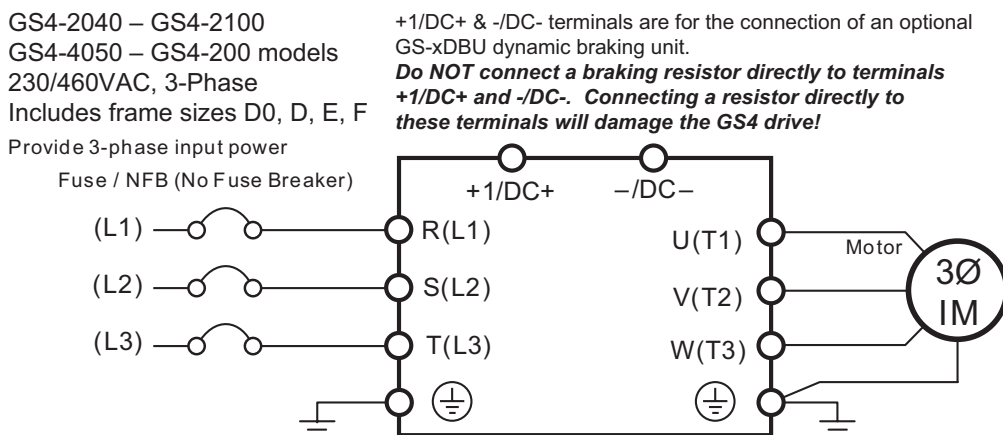

DURAPULSE GS4 AC Drives – Basic Wiring Diagram

Power Wiring Diagram: GS4 Frame Size G Models – Three-Phase


Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

GS4-4250 &
GS4-4300 models
460VAC, 3-Phase

Provide 3-phase input power

+1/DC+ & -/DC- terminals are for the connection of an optional GS-xDBU dynamic braking unit.

Do NOT connect a braking resistor directly to terminals +1/DC+ and -/DC-. Connecting a resistor directly to these terminals will damage the GS4 drive!

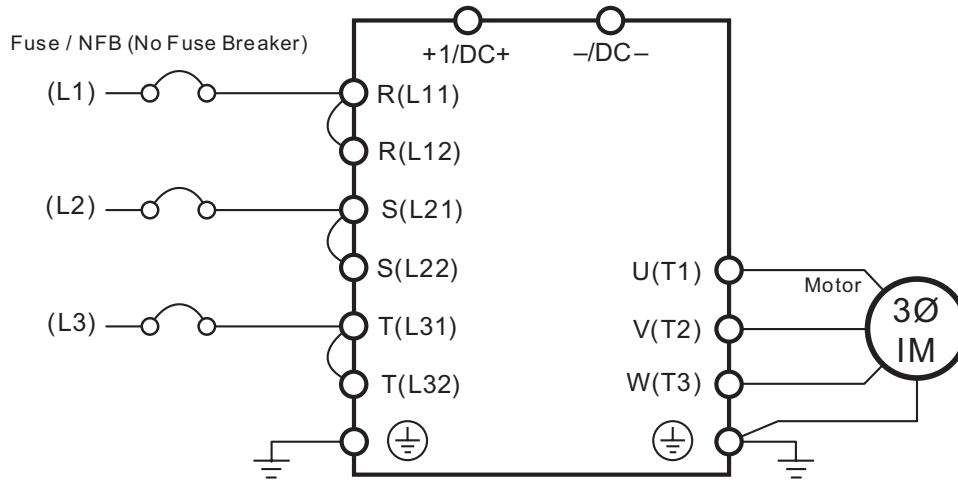

DURAPULSE GS4 AC Drives – Basic Wiring Diagram


Control Wiring Diagram: Full I/O with Sinking Inputs (field devices are sourcing)



Note: Users must connect wiring according to the circuit diagram shown below.



WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.

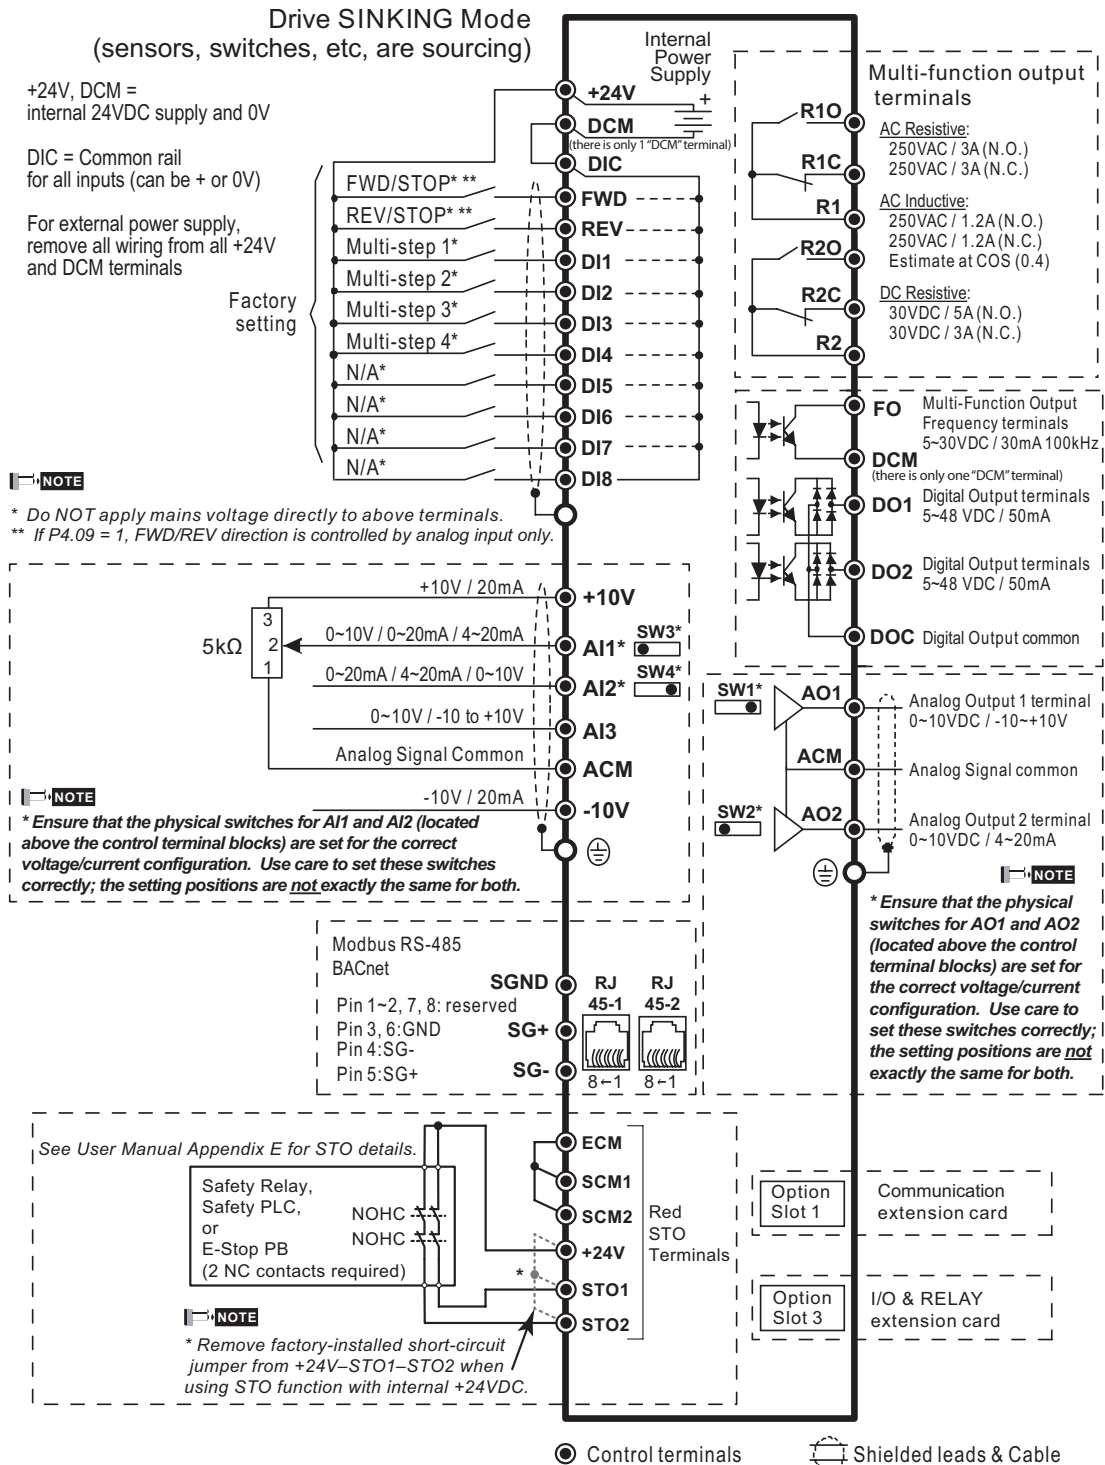

● Control terminals

⊗ Shielded leads & Cable

DURAPULSE GS4 AC Drives – Basic Wiring Diagram


Control Wiring Diagram: Full I/O with Sourcing Inputs (field devices are sinking)



Note: Users must connect wiring according to the circuit diagram shown below.



WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.

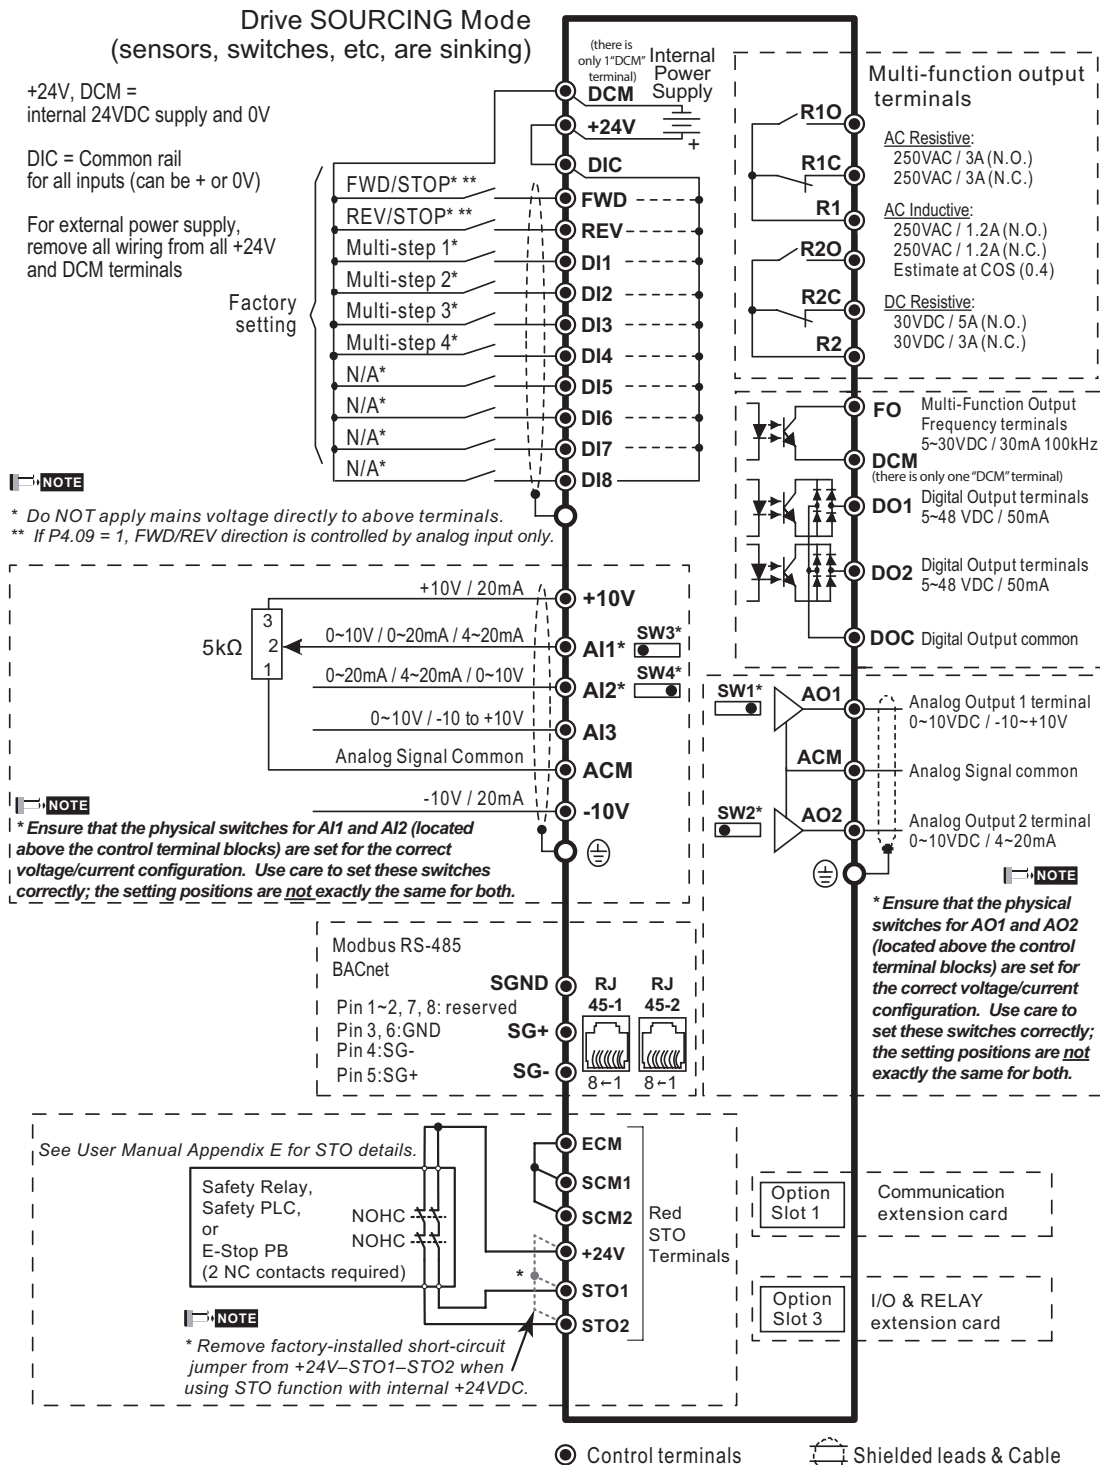

DURAPULSE GS4 AC Drives – Dimensions

GS4 DURAPULSE Frame Sizes by Drive Model


| GS4 DURAPULSE Frame Sizes by Drive Model | | | | | | | | | | | | |
|------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| A | | B | | C | | DO | D | | E | | F | G |
| 230V | 460V | 230V | 460V | 230V | 460V | 460V | 230V | 460V | 230V | 460V | 460V | 460V |
| GS4-21P0 | GS4-41P0 | GS4-27P5 | GS4-4010 | GS4-2020 | GS4-4025 | GS4-4050 | GS4-2040 | GS4-4075 | GS4-2060 | GS4-4125 | GS4-4175 | GS4-4250 |
| GS4-22P0 | GS4-42P0 | GS4-2010 | GS4-4015 | GS4-2025 | GS4-4030 | GS4-4060 | GS4-2050 | GS4-4100 | GS4-2075 | GS4-4150 | GS4-4200 | GS4-4300 |
| GS4-23P0 | GS4-43P0 | GS4-2015 | GS4-4020 | GS4-2030 | GS4-4040 | - | - | - | GS4-2100 | - | - | - |
| GS4-25P0 | GS4-45P0 | - | - | - | - | - | - | - | - | - | - | - |
| - | GS4-47P5 | - | - | - | - | - | - | - | - | - | - | - |

Dimensions – GS4 AC Drives

Units = (mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size A

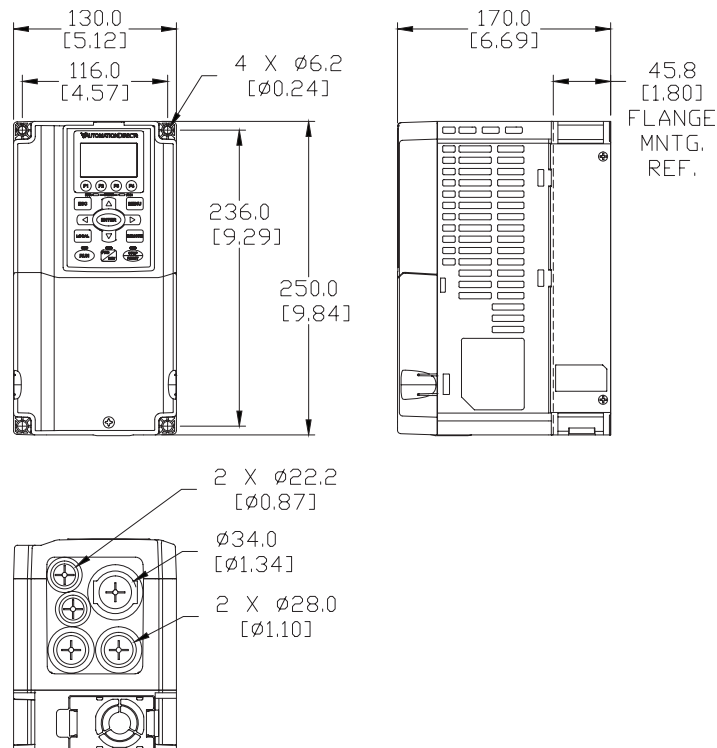


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size B

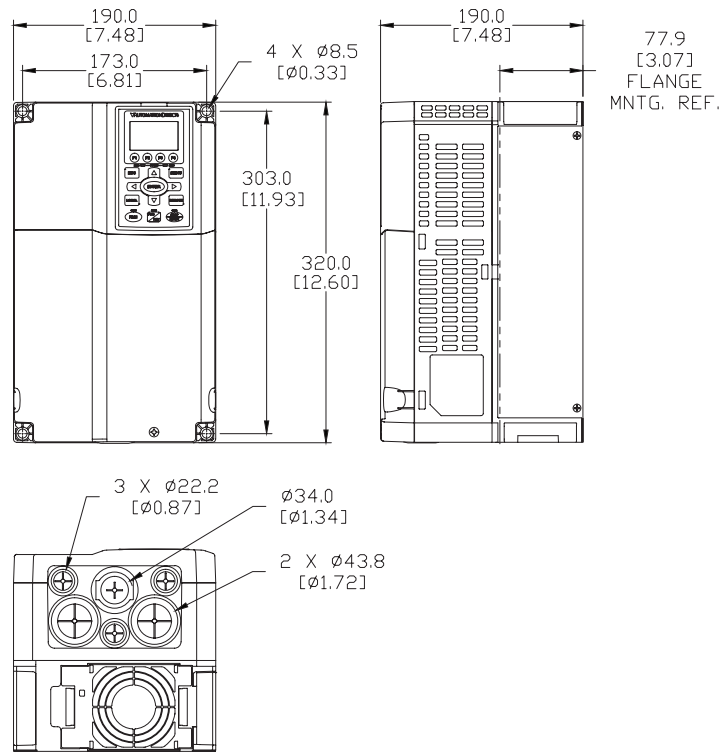

Dimensions – Frame Size C

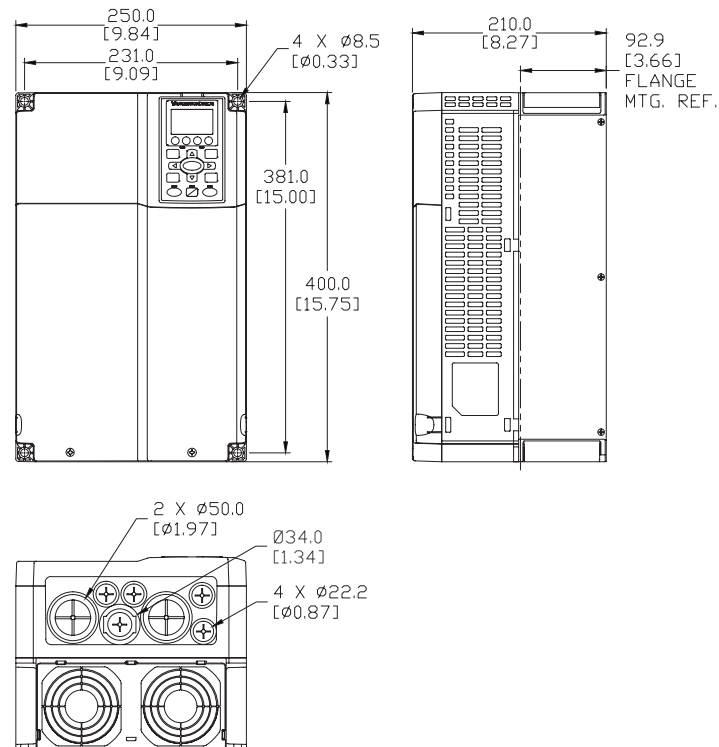


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size D0

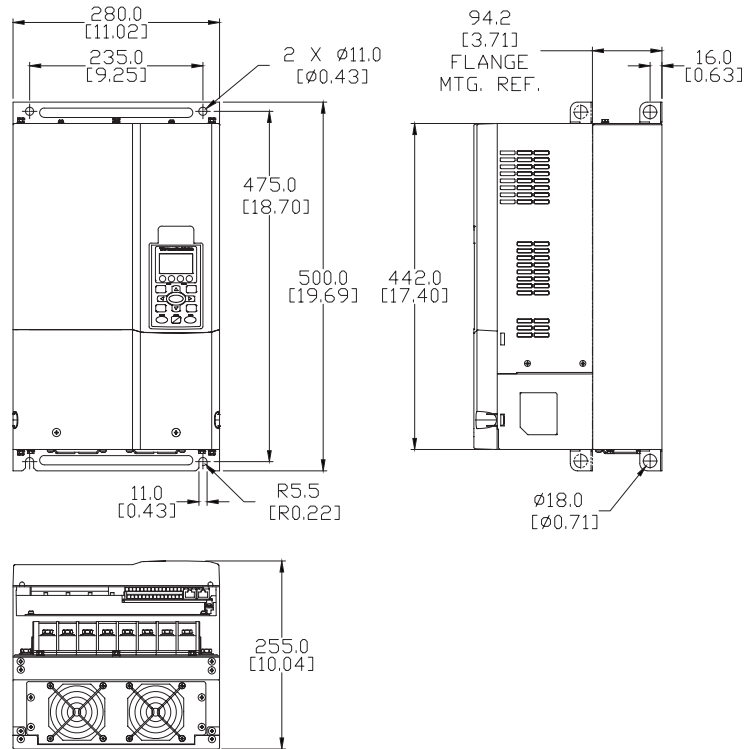

Dimensions – Frame Size D0 with Conduit Box

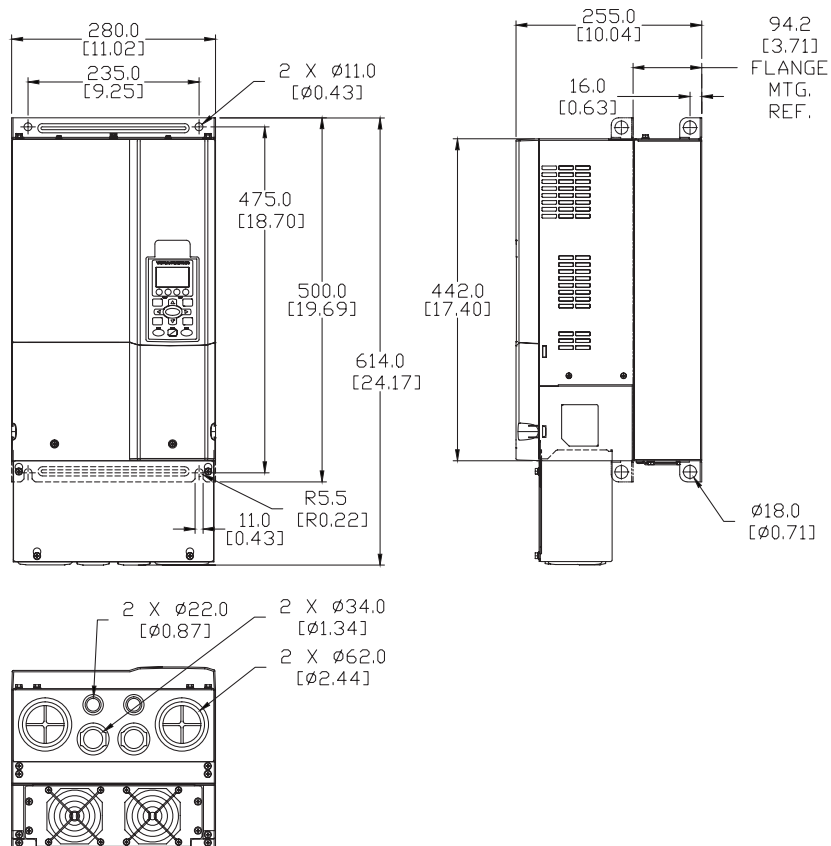


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size D

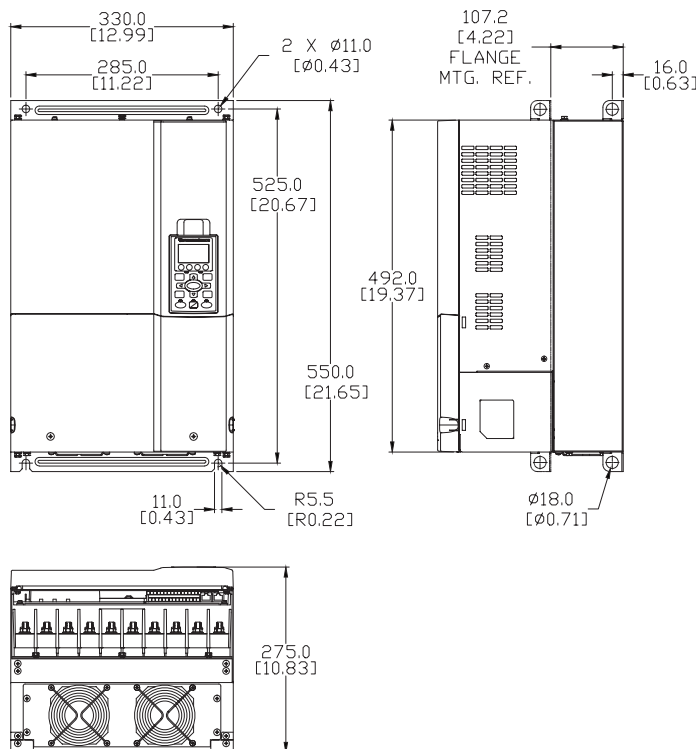

Dimensions – Frame Size D with Conduit Box

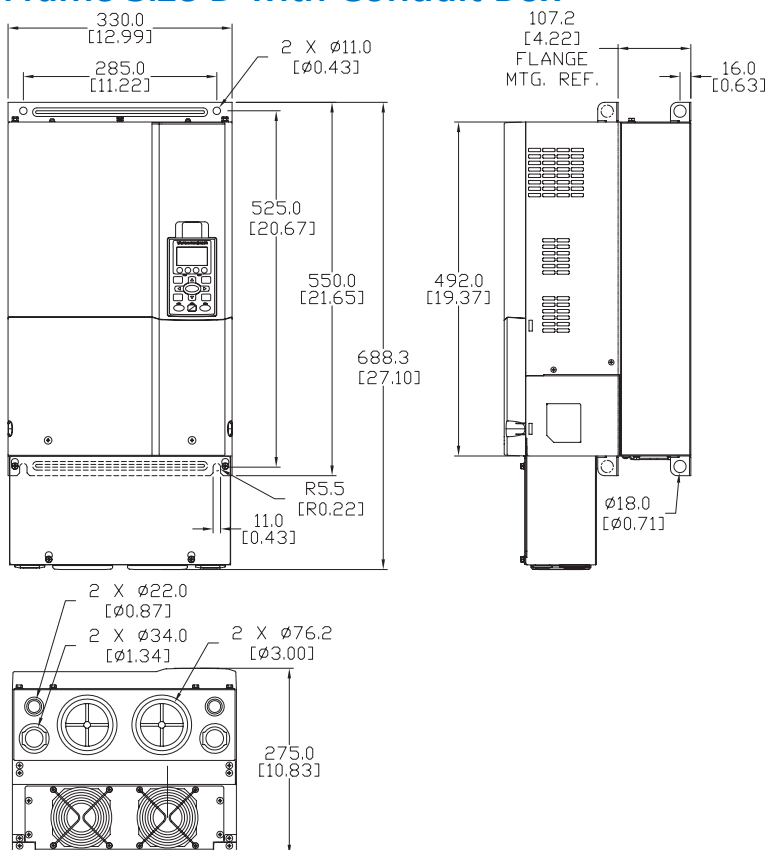


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size E

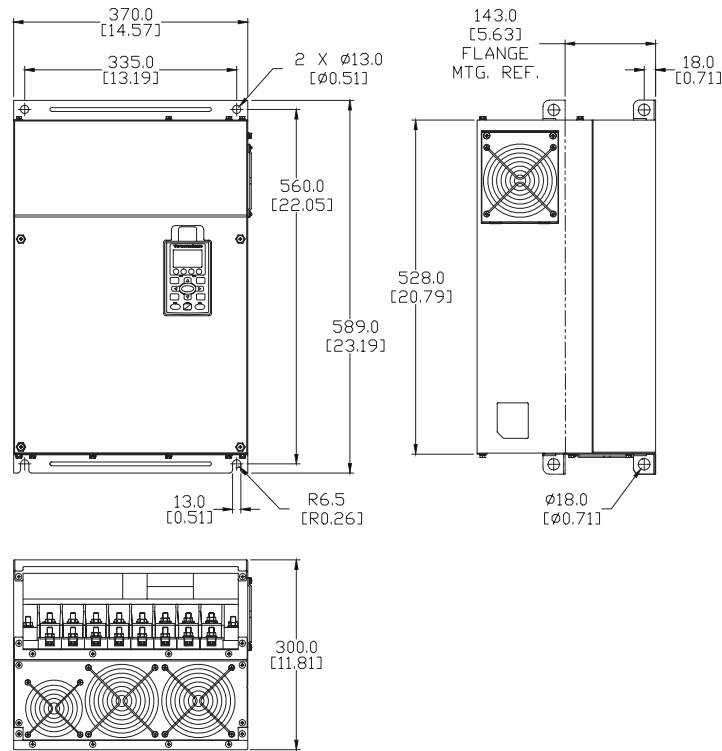

Dimensions – Frame Size E with Conduit Box

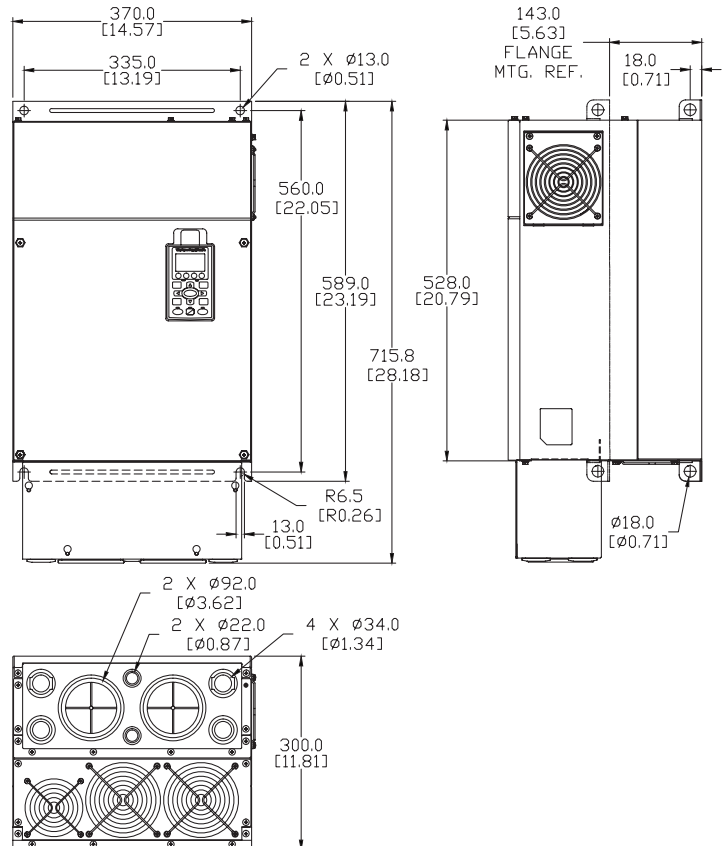


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size F

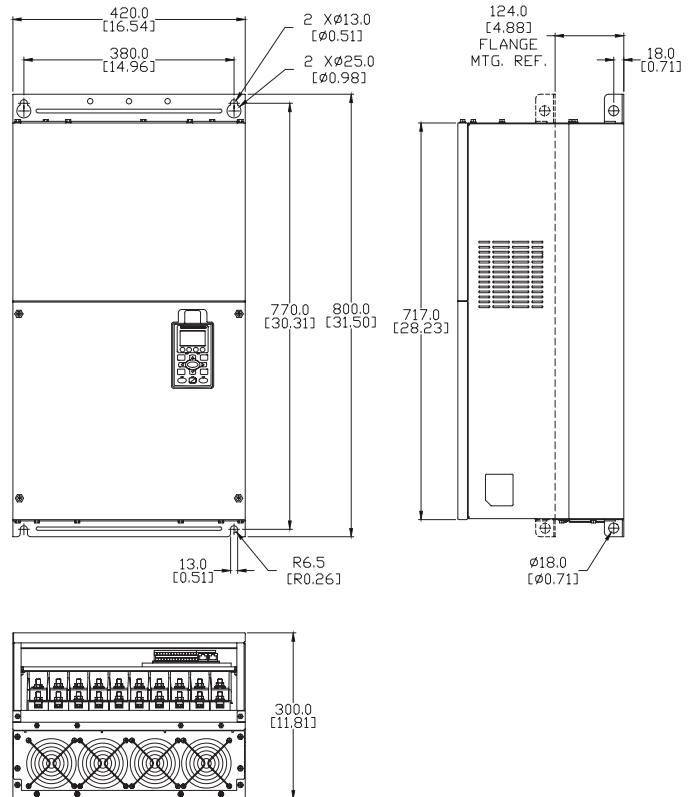

Dimensions – Frame Size F with Conduit Box

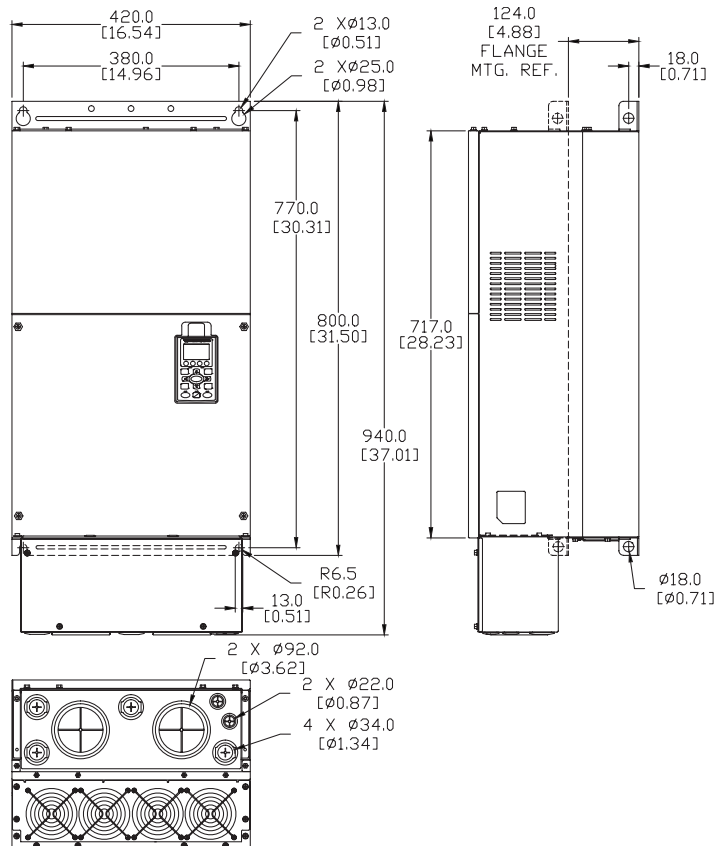


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size G

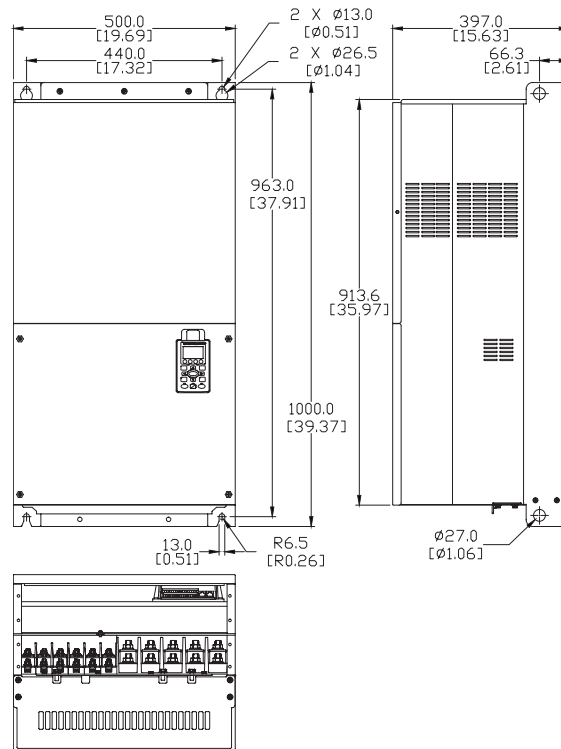


Dimensions – Frame Size G with Conduit Box

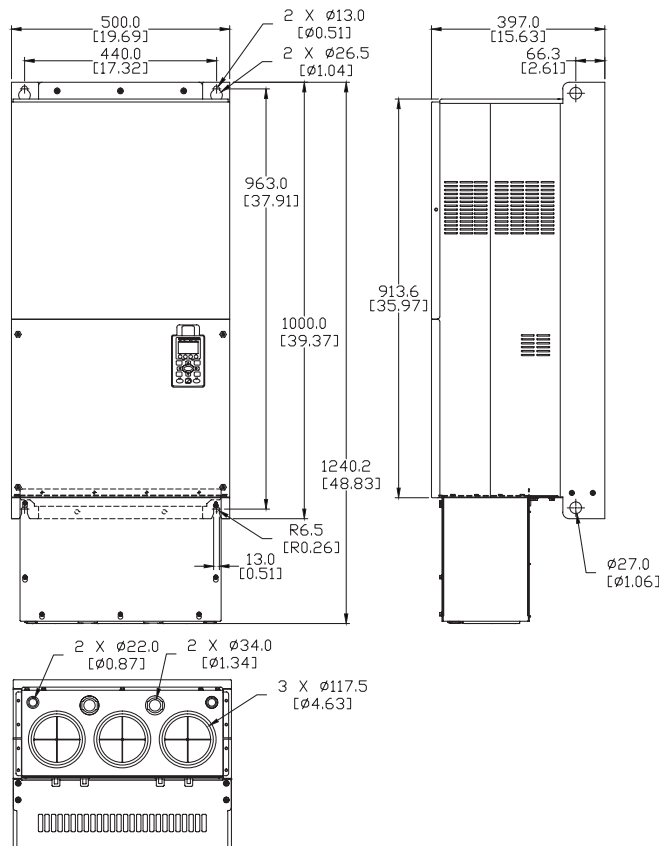

AC Drives Optional Accessories – Overview

Drive Accessories

(not all accessories are applicable for every drive model)

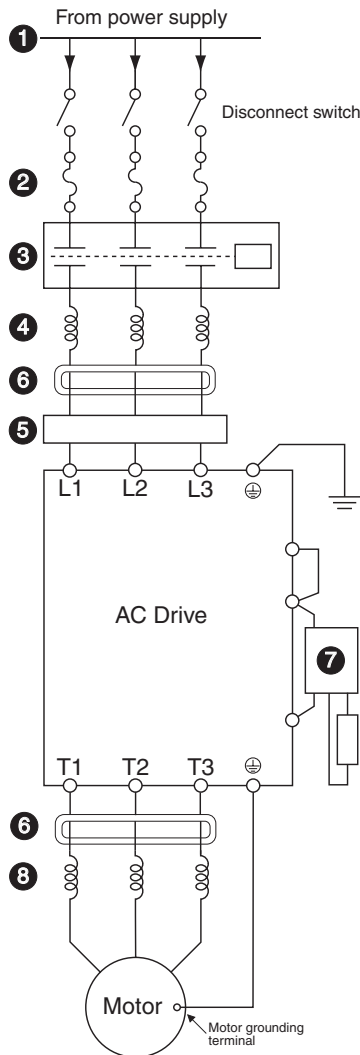

1 Power Supply

Please follow the specific power supply requirements as detailed in the specific drive manual.

2 Fuses

Input fuses protect the AC drive from excessive input current due to line surges, short circuits, and ground faults. They are recommended for all installations and may be required for UL-listed installations.

3 Contactor (Optional)

Do not use a contactor or disconnect switch for run/stop control of the AC drive and motor. This will reduce the operating life cycle of the AC drive. Cycling a power circuit switching device while the AC drive is in run mode should be done only in emergency situations.

4 Input Line Reactor (Optional)

See the Line Reactors section at www.automationdirect.com for more information.

Input line reactors protect the AC drive from transient overvoltage conditions, typically caused by utility capacitor switching. The input line reactor also reduces the harmonics associated with AC drives. Input line reactors are recommended for all installations.

5 EMI filter (Optional)

See the EMI Filters section at www.automationdirect.com for more information.

Input EMI filters reduce electromagnetic interference or noise on the input side of the AC drive. They are required for CE compliance and recommended for installations prone to or sensitive to electromagnetic interference.

6 RF filter (Optional)

RF filters reduce the radio frequency interference or noise on the input or output side of the inverter.

7 Braking Unit and/or Braking Resistor (Optional)

Dynamic braking allows the AC drive to produce additional braking (stopping) torque. AC drives can typically produce between 15% & 20% braking torque without the addition of any external components. The addition of optional braking may be required for applications that require rapid deceleration or high inertia loads.

8 Output Load Reactor or Voltage Time (dV/dT) Filter (Optional)

Output line reactors protect the motor insulation against AC drive short circuits and IGBT reflective wave damage, and also "smooth" the motor current waveform, allowing the motor to run cooler. They are **recommended for operating "noninverter-duty" motors and when the length of wiring between the AC drive and motor is less than 100 feet.**

Voltage Time filters provide enhanced protection for motors with distances up to 1,000 feet.

Voltage Time filters provide even more protection against wave reflection and reduce common mode noise. They are recommended when the length of wiring between the AC drive and motor is from 100 feet up to 1,000 feet.

See www.automationdirect.com for specific product offerings.

GS4 DURApulse Drives Accessories – Line-Side Reactors

Line-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 1Ø, 50/60 Hz (<i>Constant</i> Torque; reactor installed <i>Line</i> Side) | | | | | | | | | |
|------------------------------------------------------------------------------------------|----------------------|---------------------------|-----------------------|-----------------|--------------|--------------|--------------|------------|------------------|
| GS4 Model | Derated Output (hp)* | CT: 1Ø Input Amps (rms)** | Saturation Amps (rms) | Inductance (mH) | | Max Motor kW | LR Model | Rated Amps | LR 3% Inductance |
| | | | | 3% Impedance | 5% Impedance | | | | |
| GS4-21P0 | 0.5 | 4.2 | 7.6 | 2.506 | 4.176 | 0.37 | LR2-20P5-1PH | 4.9 | 3.74 |
| GS4-22P0 | 0.75 | 5.6 | 10.1 | 1.879 | 3.132 | 0.25 | LR-21P0-1PH | 8 | 2.29 |
| GS4-23P0 | 1 | 8.7 | 15.7 | 1.210 | 2.016 | 0.25 | LR-21P0-1PH | 8 | 2.29 |
| GS4-25P0 | 2 | 14 | 25 | 0.752 | 1.253 | 0.37 | LR-22P0-1PH | 12.0 | 1.53 |
| GS4-27P5 | 3 | 19 | 34 | 0.554 | 0.923 | 0.75 | LR-23P0-1PH | 17.0 | 1.08 |
| GS4-2010 | 3 | 19 | 34 | 0.554 | 0.923 | 0.75 | LR-23P0-1PH | 17.0 | 1.08 |
| GS4-2015 | 5 | 30 | 54 | 0.351 | 0.585 | 3.7 | LR-2010 | 30.8 | 0.342 |
| GS4-2020 | 7.5 | 43 | 77 | 0.245 | 0.408 | 5.5 | LR-2015 | 46.2 | 0.220 |
| GS4-2025 | 10 | 57 | 103 | 0.184 | 0.307 | 7.5 | LR-2020 | 59.4 | 0.172 |
| GS4-2030 | 10 | 57 | 103 | 0.184 | 0.307 | 7.5 | LR-2020 | 59.4 | 0.172 |
| GS4-2040 | 10 | 57 | 103 | 0.184 | 0.307 | 7.5 | LR-2020 | 59.4 | 0.172 |
| GS4-2050 | 10 | 57 | 103 | 0.184 | 0.307 | 7.5 | LR-2020 | 59.4 | 0.172 |
| GS4-2060 | 15 | 85 | 153 | 0.124 | 0.206 | 11 | LR-2025 | 74.8 | 0.138 |
| GS4-2075 | 20 | 113 | 203 | 0.093 | 0.155 | 15 | LR-2040 | 114 | 0.0886 |
| GS4-2100 | 25 | 130 | 234 | 0.081 | 0.135 | 18.5 | LR-2050 | 143 | 0.0699 |

* Drive output HP is derated when supplied single phase.
 ** Amperage ratings expressed in the column CT: 1Ph Input Amps (rms) are with a line reactor installed on the line side of the drive.

GS4 DURApulse Drives Accessories – Load-Side Reactors

Load-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 1Ø, 50/60 Hz (<i>Constant</i> Torque; reactor installed <i>Load</i> Side) | | | | | | | | | |
|------------------------------------------------------------------------------------------|------|---------------------------|-----------------------|-----------------|--------------|--------------|----------|------------|------------------|
| GS4 Model | HP | CT: 3Ø Output Amps (rms)* | Saturation Amps (rms) | Inductance (mH) | | Max Motor kW | LR Model | Rated Amps | LR 3% Inductance |
| | | | | 3% Impedance | 5% Impedance | | | | |
| GS4-21P0 | 0.5 | 2.4 | 4.3 | 2.893 | 4.822 | 0.37 | LR-20P5 | 2.4 | 4.2 |
| GS4-22P0 | 0.75 | 3.2 | 5.8 | 2.170 | 3.617 | 0.55 | LR-21P0 | 4.6 | 2.46 |
| GS4-23P0 | 1 | 5.0 | 9.0 | 1.397 | 2.328 | 0.75 | LR-21P0 | 4.6 | 2.46 |
| GS4-25P0 | 2 | 8 | 14 | 0.868 | 1.447 | 1.5 | LR-23P0 | 10.6 | 0.97 |
| GS4-27P5 | 3 | 11 | 20 | 0.640 | 1.066 | 2.2 | LR-23P0 | 10.6 | 0.97 |
| GS4-2010 | 3 | 11 | 20 | 0.640 | 1.066 | 2.2 | LR-23P0 | 10.6 | 0.97 |
| GS4-2015 | 5 | 17 | 31 | 0.405 | 0.675 | 3.7 | LR-25P0 | 16.7 | 0.626 |
| GS4-2020 | 7.5 | 25 | 45 | 0.283 | 0.471 | 5.5 | LR-27P5 | 24.2 | 0.434 |
| GS4-2025 | 10 | 33 | 59 | 0.213 | 0.354 | 7.5 | LR-2010 | 30.8 | 0.342 |
| GS4-2030 | 10 | 33 | 59 | 0.213 | 0.354 | 7.5 | LR-2010 | 30.8 | 0.342 |
| GS4-2040 | 10 | 33 | 59 | 0.213 | 0.354 | 7.5 | LR-2010 | 30.8 | 0.342 |
| GS4-2050 | 10 | 33 | 59 | 0.213 | 0.354 | 7.5 | LR-2010 | 30.8 | 0.342 |
| GS4-2060 | 15 | 49 | 88 | 0.143 | 0.238 | 11 | LR-2015 | 46.2 | 0.22 |
| GS4-2075 | 20 | 65 | 117 | 0.108 | 0.179 | 15 | LR-2020 | 59.4 | 0.172 |
| GS4-2100 | 25 | 75 | 135 | 0.093 | 0.156 | 18.5 | LR-2025 | 74.8 | 0.138 |

* Amperage ratings are 3-phase output reactor ratings when the drive is supplied with a single-phase input.

GS4 DURAPULSE Drives Accessories – Line/Load Reactors

Line/Load Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side) | | | | | | | | | |
|-------------------------------------------------------------------------------------------------|-----|--------------------------|-----------------------|-----------------|--------------|--------------|--------------------------|------------|------------------|
| GS4 Model | hp | VT: 3Ø Output Amps (rms) | Saturation Amps (rms) | Inductance (mH) | | Max Motor kW | LR Model* | Rated Amps | LR 3% Inductance |
| | | | | 3% Impedance | 5% Impedance | | | | |
| GS4-21P0 | 1 | 5 | 8.7 | 2.536 | 4.226 | 0.75 | LR-21P0 | 4.6 | 2.46 |
| GS4-22P0 | 2 | 8 | 12.8 | 1.585 | 2.641 | 1.5 | LR-23P0* | 10.6 | 0.97 |
| GS4-23P0 | 3 | 11 | 18 | 1.152 | 1.921 | 2.2 | LR-23P0 | 10.6 | 0.97 |
| GS4-25P0 | 5 | 17 | 29 | 0.746 | 1.244 | 3.7 | LR-25P0 | 16.7 | 0.626 |
| GS4-27P5 | 7.5 | 25 | 43 | 0.507 | 0.845 | 5.5 | LR-27P5 | 24.2 | 0.434 |
| GS4-2010 | 10 | 33 | 56 | 0.320 | 0.534 | 7.5 | LR-2010 | 30.8 | 0.342 |
| GS4-2015 | 15 | 49 | 85 | 0.216 | 0.359 | 11 | LR-2015 | 46.2 | 0.22 |
| GS4-2020 | 20 | 65 | 112 | 0.163 | 0.271 | 15 | LR-2020 | 59.4 | 0.172 |
| GS4-2025 | 25 | 75 | 128 | 0.169 | 0.282 | 18.5 | LR-2025 | 74.8 | 0.138 |
| GS4-2030 | 30 | 90 | 155 | 0.141 | 0.236 | 22 | LR-2040* | 114 | 0.0886 |
| GS4-2040 | 40 | 120 | 205 | 0.106 | 0.176 | 30 | LR-2040 | 114 | 0.0886 |
| GS4-2050 | 50 | 146 | 250 | 0.087 | 0.146 | 37 | LR-2050 | 143 | 0.0699 |
| GS4-2060 | 60 | 180 | 308 | 0.070 | 0.117 | 45 | not available* | 169 | 0.0624 |
| GS4-2075 | 75 | 215 | 367 | 0.059 | 0.098 | 55 | | 211 | 0.0487 |
| GS4-2100 | 100 | 255 | 436 | 0.049 | 0.082 | 75 | | 273 | 0.0364 |

* Some GS4 drive and reactor combinations do not fit the typical "pattern" of having similar part numbers, due to some GS4 models having higher outputs than previous GS DURApulse drives.

| Supply: 460V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side) | | | | | | | | | |
|-------------------------------------------------------------------------------------------------|-----|--------------------------|-----------------------|-----------------|--------------|--------------|-------------------------|------------|------------------|
| GS4 Model | hp | VT: 3Ø Output Amps (rms) | Saturation Amps (rms) | Inductance (mH) | | Max Motor kW | LR Model | Rated Amps | LR 3% Inductance |
| | | | | 3% Impedance | 5% Impedance | | | | |
| GS4-41P0 | 1 | 3 | 5.2 | 8.102 | 13.503 | 0.75 | LR-41P0 | 2.1 | 8.927 |
| GS4-42P0 | 2 | 4 | 6.8 | 6.077 | 10.128 | 1.5 | LR-42P0 | 3.4 | 5.790 |
| GS4-43P0 | 3 | 6 | 10.3 | 4.050 | 6.751 | 2.2 | LR-43P0 | 4.8 | 4.270 |
| GS4-45P0 | 5 | 9 | 14.6 | 2.700 | 4.500 | 3.7 | LR-45P0 | 7.6 | 2.770 |
| GS4-47P5 | 7.5 | 12 | 20 | 2.025 | 3.375 | 5.5 | LR-47P5 | 11 | 1.680 |
| GS4-4010 | 10 | 18 | 31 | 1.174 | 1.957 | 7.5 | LR-4010 | 14 | 1.290 |
| GS4-4015 | 15 | 24 | 41 | 0.881 | 1.468 | 11 | LR-4015 | 21 | 0.912 |
| GS4-4020 | 20 | 32 | 54 | 0.660 | 1.101 | 15 | LR-4020 | 27 | 0.694 |
| GS4-4025 | 25 | 38 | 65 | 0.639 | 1.066 | 18.5 | LR-4025 | 34 | 0.569 |
| GS4-4030 | 30 | 45 | 77 | 0.541 | 0.901 | 22 | LR-4030 | 40 | 0.469 |
| GS4-4040 | 40 | 60 | 103 | 0.405 | 0.675 | 30 | LR-4040 | 52 | 0.387 |
| GS4-4050 | 50 | 73 | 124 | 0.334 | 0.556 | 37 | LR-4050 | 65 | 0.295 |
| GS4-4060 | 60 | 91 | 155 | 0.267 | 0.445 | 45 | LR-4060 | 77 | 0.227 |
| GS4-4075 | 75 | 110 | 189 | 0.221 | 0.368 | 55 | LR-4075 | 96 | 0.196 |
| GS4-4100 | 100 | 150 | 257 | 0.162 | 0.270 | 75 | LR-4100 | 124 | 0.152 |
| GS4-4125 | 125 | 180 | 308 | 0.135 | 0.224 | 90 | LR-4125 | 156 | 0.117 |
| GS4-4150 | 150 | 220 | 376 | 0.110 | 0.184 | 110 | LR-4150 | 180 | 0.103 |
| GS4-4175 | 175 | 260 | 445 | 0.098 | 0.163 | 132 | LR-4200 | 240 | 0.0839 |
| GS4-4200 | 215 | 310 | 531 | 0.078 | 0.130 | 160 | LR-4250 | 302 | 0.0654 |
| GS4-4250 | 250 | 370 | 634 | 0.066 | 0.109 | 185 | LR-4250 | 302 | 0.0654 |
| GS4-4300 | 300 | 460 | 787 | 0.054 | 0.090 | 220 | LR-4300 | 361 | 0.0565 |

GS/DURAPULSE Drives Accessories – Line/Load Reactors

Line/Load Reactors for GS/DURAPULSE AC Drives – Additional Specifications

| Line Reactors – LR Series – Additional Specifications | | | | | | | |
|-------------------------------------------------------|------------|-----------------|---------------------------------------------|-------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------------|
| Part Number | Price | Product Weight | Wire Range | Terminal Torque | Temperature Range | | Environment |
| | | | | | Operating | Storage | |
| LR-20P5 | Retired | 4.0 lb [1.8 kg] | #12–#18 AWG | 10 lb·in | -40 – 104 °F [-40 – 40 °C] | -40 – 149 °F [-40 – 65 °C] | NEMA: open IP00 no corrosive gases |
| LR-21P0-1PH | \$78.00 | 2.8 lb [1.3 kg] | #12–#18 AWG | 10 lb·in | | | |
| LR-22P0-1PH | \$86.00 | 4.3 lb [2.0 kg] | #12–#18 AWG | 20 lb·in | | | |
| LR-23P0-1PH | Retired | 4.3 lb [2.0 kg] | #12–#18 AWG | 20 lb·in | | | |
| LR-23P0 | Retired | 4.0 lb [1.8 kg] | #12–#18 AWG | 10 lb·in | | | |
| LR-25P0 | \$194.00 | 8.0 lb [3.6 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-27P5 | \$206.00 | 8.0 lb [3.6 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-2010 | \$242.00 | 12 lb [5.4 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-2015 | \$285.00 | 12 lb [5.4 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-2020 | \$312.00 | 12 lb [5.4 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-2025 | \$460.00 | 15 lb [6.8 kg] | #18–#4 AWG | #18–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in | | | |
| LR-2030 | \$490.00 | 33 lb [15 kg] | 2/0 – #6AWG (AL or CU) | 120 | | | |
| LR-2040 | \$574.00 | 33 lb [15 kg] | 2/0 – #6AWG (AL or CU) | 120 | | | |
| LR-2050 | \$670.00 | 36 lb [16 kg] | 250kcmil – #6AWG (AL or CU) | 275 | | | |
| LR-4010 | Retired | 4.0 lb [1.8 kg] | #12–#18 AWG | 10 lb·in | | | |
| LR-4015 | \$237.00 | 8.0 lb [3.6 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-4020 | \$276.00 | 8.0 lb [3.6 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-4025 | \$290.00 | 10 lb [4.5 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-4030 | \$347.00 | 10 lb [4.5 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-4040 | \$382.00 | 15 lb [6.8 kg] | #18–#4 AWG | 20 lb·in | | | |
| LR-4050 | \$448.00 | 25 lb [11 kg] | #22–#4 AWG | #22–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in | | | |
| LR-4060 | \$462.00 | | | | | | |
| LR-4075 | \$700.00 | 33 lb [15 kg] | 2/0 – #6AWG (AL or CU) | 120 lb·in | | | |
| LR-4100 | \$840.00 | 46 lb [21 kg] | 250kcmil – #6AWG (AL or CU) | 275 lb·in | | | |
| LR-4125 | \$962.00 | 46 lb [21 kg] | 250kcmil – #6AWG (AL or CU) | 275 lb·in | | | |
| LR-4150 | \$1,114.00 | 46 lb [21 kg] | 250kcmil – #6AWG (AL or CU) | 275 lb·in | | | |
| LR-4200 | \$1,238.00 | 74 lb [34 kg] | (1) 600kcmil – #4 AWG (2) 250kcmil – 1/0 | 500 lb·in | | | |
| LR-4250 | \$1,403.00 | 74 lb [34 kg] | (2)* 350kcmil – #4 AWG (AL or CU) | 275 lb·in | | | |
| LR-4300 | \$1,546.00 | 74 lb [34 kg] | (2)* 350kcmil – #4 AWG (AL or CU) | 275 lb·in | | | |
| LR-5010 | Retired | 4.0 lb [1.8 kg] | #12–#18 AWG | 10 lb·in | | | |

* LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.

GS4 DURAPULSE Drives Accessories – Dynamic Braking Component Selection

Dynamic Braking Components

Use the table below to find the appropriate braking resistor and braking unit (if applicable) for your GS4 series AC drive. For more information and installation instructions, please see the GS4 User Manual. All listed resistors are available for purchase at www.automationdirect.com.

| GS4 AC Drive Braking Component Selection | | | | | | | | | | | | | | | | | |
|------------------------------------------|------------------|-------------|-----------------------------------|-----------------------------|--------------|------------|---------------------------------------|----------|----------------|---------------------|-------------------------------------|----------------|----------------|----------------|-------------------------|-----------|------|
| Drive Voltage | Motor Power (hp) | Drive Model | Drive Brake Capacity - Max Torque | | Braking Unit | | 125% Braking Torque @ 10% Duty Cycle* | | | | | | | | | | |
| | | | Min Resistor Value (Ω) | Max Total Brake Current (A) | Quantity | Part # GS- | Open Type Braking Resistor | | | | NEMA1 Resistors with Thermal Switch | | | | | | |
| | | | | | | | Part # | Quantity | Wiring Diagram | Brake Torque (kg-m) | Total Brake Current (A) | Part # | Qty. | Wiring Diagram | Total Brake Current (A) | | |
| 230V | 1 | GS4-21P0 | 63.3 | 6 | - | n/a | GS-BR-080W200 | 1 | A | | 0.5 | 1.9 | BR-N1-240W150 | 1 | A | 2.6 | |
| | 2 | GS4-22P0 | 47.5 | 8 | | | GS-BR-200W091 | 1 | | 1.0 | 4.2 | BR-N1-280W50 | 1 | 7.8 | | | |
| | 3 | GS4-23P0 | 38.0 | 10 | | | GS-BR-300W070 | 1 | | 1.5 | 5.4 | BR-N1-800W25 | 1 | 15.6 | | | |
| | 5 | GS4-25P0 | 19.0 | 20 | | | GS-BR-400W040 | 1 | | 2.5 | 9.5 | BR-N1-800W18P0 | 1 | 21.7 | | | |
| | 7.5 | GS4-27P5 | 14.6 | 26 | | | GS-BR-1K0W020 | 1 | | 3.7 | 19 | BR-N1-1K1W15P0 | 1 | 26.0 | | | |
| | 10 | GS4-2010 | 14.6 | 26 | | | GS-BR-1K5W013 | 1 | | 5.1 | | BR-N1-1K5W14P0 | 1 | 27.9 | | | |
| | 15 | GS4-2015 | 12.6 | 28 | | | GS-BR-1K0W4P3 | 2 | | B | 10.2 | 44 | BR-N1-2K2W08P6 | 1 | | F | 45.3 |
| | 20 | GS4-2020 | 8.3 | 46 | | | GS-BR-1K0W4P3 | 2 | | | 12.2 | | | | | | |
| | 25 | GS4-2025 | 8.3 | 46 | | | GS-BR-1K5W3P3 | 2 | | | 14.9 | | 58 | BR-N1-3K0W05P8 | | | |
| | 30 | GS4-2030 | 5.8 | 66 | | | Not offered | | | | BR-N1-1K6W10P0 | 2 (1/DBU) | 116* | 79* | | | |
| | 40 | GS4-2040 | 4.8* | 80* | | | 2 | 1DBU | Not offered | | | | | BR-N1-2K2W06P8 | | 2 (1/DBU) | |
| | 50 | GS4-2050 | 3.2* | 120* | | | 2 | 2DBU | Not offered | | | | | BR-N1-3K6W06P8 | | 2 (1/DBU) | |
| | 60 | GS4-2060 | 3.2* | 120* | | | 2 | 2DBU | Not offered | | | | | BR-N1-2K2W06P8 | | 3 (1/DBU) | |
| | 75 | GS4-2075 | 2.1* | 180* | | | 3 | 2DBU | Not offered | | | | | BR-N1-2K2W06P8 | | 4 (1/DBU) | |
| | 100 | GS4-2100 | 1.6* | 240* | | | 4 | 2DBU | Not offered | | | | | | | | |
| 460V | 1 | GS4-41P0 | 190 | 4 | - | n/a | GS-BR-080W750 | 1 | A | | 0.5 | 1 | BR-N1-240W200 | 1 | A | 4.0 | |
| | 2 | GS4-42P0 | 126.7 | 6 | | | GS-BR-200W360 | 1 | | 1 | 2.1 | BR-N1-240W150 | 1 | 5.3 | | | |
| | 3 | GS4-43P0 | 108.6 | 7 | | | GS-BR-300W250 | 1 | | 1.5 | 3 | BR-N1-500W200 | 1 | 4.0 | | | |
| | 5 | GS4-45P0 | 84.4 | 9 | | | GS-BR-400W150 | 1 | | 2.5 | 5.1 | BR-N1-500W130 | 1 | 6.1 | | | |
| | 7.5 | GS4-47P5 | 54.3 | 14 | | | GS-BR-1K0W075 | 1 | | 3.7 | 10.2 | BR-N1-720W85 | 1 | 9.3 | | | |
| | 10 | GS4-4010 | 47.5 | 16 | | | GS-BR-1K0W075 | 1 | | 5.1 | | BR-N1-1K2W50 | 1 | 15.8 | | | |
| | 15 | GS4-4015 | 42.2 | 18 | | | GS-BR-1K5W043 | 1 | | 7.5 | 17.6 | BR-N1-1K5W40 | 1 | 19.8 | | | |
| | 20 | GS4-4020 | 26.2 | 29 | | | GS-BR-1K0W016 | 2 | | B | 10.2 | 24 | BR-N1-1K7W30 | 1 | | 26.3 | |
| | 25 | GS4-4025 | 23.0 | 33 | | | GS-BR-1K5W013 | 2 | | | 12.2 | | BR-N1-2K3W26 | 1 | | 30.4 | |
| | 30 | GS4-4030 | 23.0 | 33 | | | GS-BR-1K5W013 | 2 | | | 14.9 | | 29 | BR-N1-2K8W25 | | 1 | 31.6 |
| | 40 | GS4-4040 | 14.1 | 54 | | | GS-BR-1K0W016 | 4 | D | 20.3 | 47.5 | BR-N1-4K0W16P0 | 1 | 49.4 | | | |
| | 50 | GS4-4050 | 12.7* | 60* | | | Not offered | | | | BR-N1-4K7W14P7 | 1 | F | 53.7 | | | |
| | 60 | GS4-4060 | 12.7* | 60* | | | Not offered | | | | BR-N1-6K9W13P6 | 1 | | 58.1 | | | |
| | 75 | GS4-4075 | 9.5* | 80* | | | Not offered | | | | BR-N1-3K6W20 | 2 (1/DBU) | | 39.5* | | | |
| | 100 | GS4-4100 | 6.3* | 120* | | | Not offered | | | | BR-N1-4K7W14P7 | 2 (1/DBU) | | 53.7* | | | |
| | 125 | GS4-4125 | 6.3* | 120* | | | Not offered | | | | BR-N1-6K9W13P6 | 2 (1/DBU) | | 58.1* | | | |
| | 150 | GS4-4150 | 6.0* | 126* | | | Not offered | | | | BR-N1-13K0W06P4 | 1 | | 123.4 | | | |
| | 175 | GS4-4175 | 4.0* | 190* | | | Not offered | | | | | 1 | | 213.5 | | | |
| | 200 | GS4-4200 | 4.0* | 190* | | | Not offered | | | | BR-N1-18K0W03P7 | 1 | | | | | |
| | 250 | GS4-4250 | 3.4* | 225* | | | Not offered | | | | | 1 | | | | 210.8 | |
| | 300 | GS4-4300 | 3.0* | 252* | | | Not offered | | | | BR-N1-13K0W06P4 | 2 (1/DBU) | | 123.4* | | | |

* These values are per individual DBU, as seen between DBU terminals B1 and B2.

** 10% Duty Cycle with maximum ON (braking) time of 10 seconds.

GSxx DURAPULSE Drives Accessories – Dynamic Braking Component Selection

Brake Wiring

Use your drive's Braking Component Selection table to determine the appropriate brake resistor model and configuration for your drive. Refer to the diagrams below for examples on how to wire each possible configuration

Diagram A (Drive + 1 Resistor or NEMA1 Resistor):

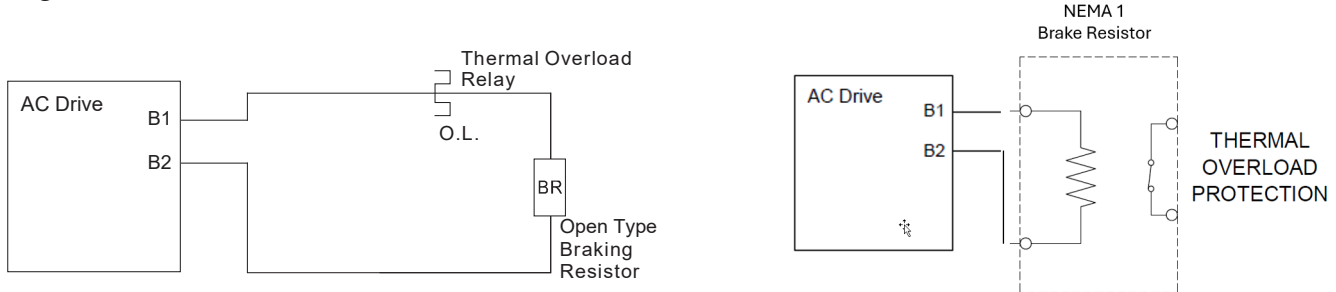


Diagram B (Drive + 2 Series Resistors):

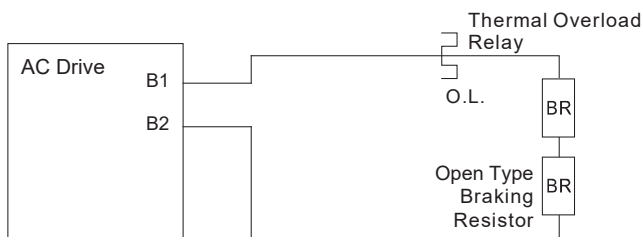


Diagram C (Drive + 2 Parallel Resistors):


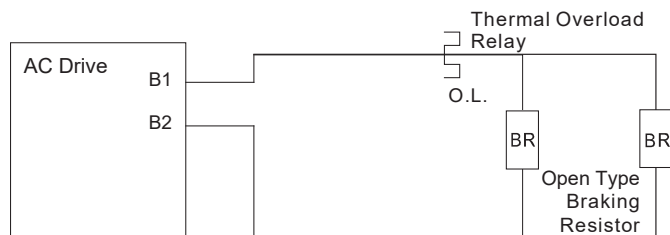


Diagram D (drive + 2 Series and 2 Parallel Resistors):

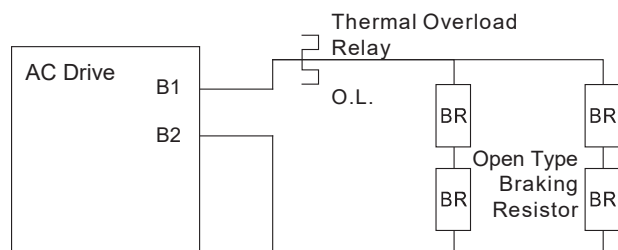

GSxx DURAPULSE Drives Accessories – Dynamic Braking Component Selection

Brake Wiring, *continued*

Diagram E (Drive + 1 DBU with 1 NEMA1 Resistor):


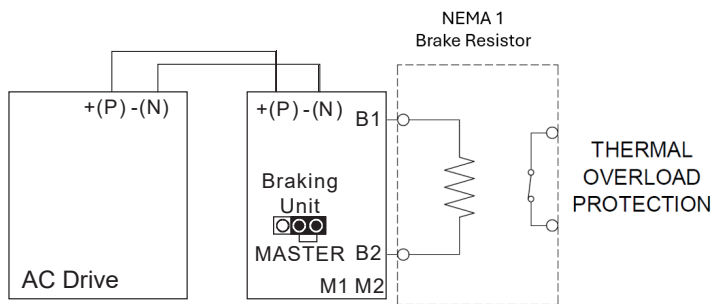


Diagram F (Drive + DBUs with 1 Resistor or NEMA1 Resistor per DBU):

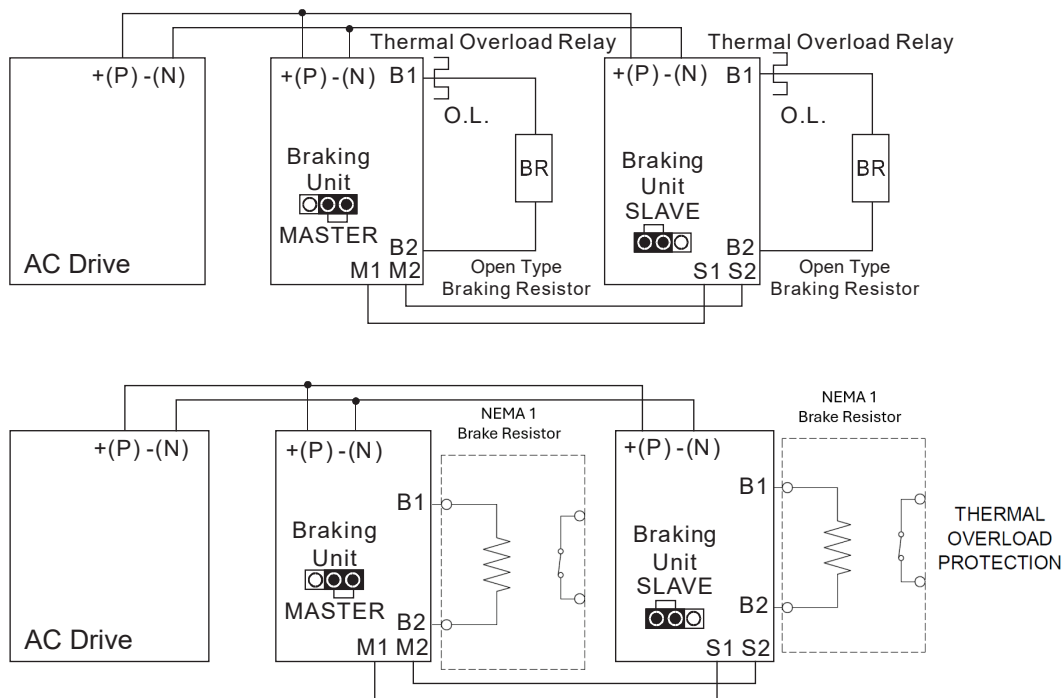

GS/DURAPULSE Drives Accessories – Braking Unit Specifications for GS4 & GS30 DURAPULSE AC Drives

Braking Units for DURApulse AC Drives

Overview

Braking units are applied to absorb the motor regeneration energy when the three-phase induction motor stops by deceleration.

GS-xDBU braking units, used with GS series braking resistors, provide optimum braking performance.



Note: Braking units are available ONLY for DURApulse drives.



WARNING: TO AVOID INJURY OR MECHANICAL DAMAGE, PLEASE REFER TO USER MANUAL GS-DB_UMP BEFORE WIRING.



| Dynamic Braking Unit Specifications – for GS4 & GS30 DURAPULSE AC Drives | | | | | | | | |
|--------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------|------------|---------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------|-----|
| Braking Unit Part Number | GS-1DBU | GS-2DBU | GS-3DBU | GS-4DBU | GS-5DBU | GS-6DBU | GS-7DBU | |
| Price | \$269.00 | \$269.00 | \$364.00 | \$364.00 | \$1,517.00 | \$1,578.00 | \$1,732.00 | |
| Nominal Voltage (VAC) | 230 | | | 460 | | | | |
| Max Motor Capacity (hp/[kW]) | 20 [15] | 30 [22] | 40 [30] | 60 [45] | 150 [110] | 200 [160] | 250 [185] | |
| Output Rating | Max Discharge Current (A) @ 10% Duty Cycle* | 40 | 60 | 40 | 60 | 126 | 225 | |
| | Continuous Discharge Current (A) | 15 | 20 | 15 | 18 | 45 | 100 | |
| | Braking Startup Voltage (VDC) | 330/345/360/ 380/400/415 ±3V | | 600/690/720/ 760/800/830 ±6V | | 618/642/667/690/ 725/750 ±6V | | |
| | Maximum On-Time (s) | 10 | | | | | | |
| | Input DC Voltage (VDC) | 200–400 | | 400–800 | | 400–750 | | |
| Min Equivalent Resistor for Each Braking Unit (Ω) | 10 | 6.8 | 20 | 13.6 | 6 | 4 | 3.4 | |
| Protection | Power CHARGE Lamp/LED | Comes ON until DC bus voltage (+P – -N) drops below 50VDC | | | | Comes ON when DC bus voltage (DC+ – DC-) rises above 300VDC. Goes OFF when DC bus voltage (DC+ – DC-) drops below 100VDC. | | |
| | Braking ACT Lamp/LED | ON during braking | | | | | | |
| | Fault ERR Lamp | ON if a fault has occurred | | | | | n/a | |
| | Overcurrent Level LED (A) | n/a | | | | 190 | 290 | 340 |
| | Overheat LED | n/a | | | | Comes ON > 176°F [80°C]; Goes OFF < 149°F [65°C] | | |
| | Heat Sink Overheat Temperature | 203°F [95°C] | | | | n/a | | |
| Alarm Output Relay Contact | 5A @ 120VAC/28VDC (RA,RB,RC) | | | | 3A @ 250VAC/28VDC (RA,RC) | | | |
| Environment | Installation Location | indoor (no corrosive gases; no metallic dust) | | | | | | |
| | Operating Temperature | 14°F to 122 °F [-10 to +50 °C] | | | | | | |
| | Storage Temperature | -4 to +140 °F [-20 to +60 °C] | | | | | | |
| | Humidity | less than 90% RH, non-condensing | | | | | | |
| | Vibration | 9.8 m/s ² [1G] under 20Hz ; 2m/s ² [0.2G] at 20–50 Hz | | | | | | |
| Mechanical Configuration | IP50 wall-mount enclosed | | | | IP10 wall-mount enclosed | | | |


* 10% Duty Cycle with maximum ON (braking) time of 10 seconds

GS/DURAPULSE Drives Accessories – Braking Unit Basic Wiring for GS4 & GS30 DURAPULSE AC Drives

Basic Dynamic Braking Wiring Diagram for GS4 & GS30 DURAPULSE AC Drives



Note: Smaller-capacity DURApulse AC Drives can connect directly to braking resistors, and do not require Dynamic Braking Units for braking. Other applications require multiple Resistors and/or multiple Dynamic Braking Units. Refer to “Dynamic Braking Component Selection” to determine which braking components are required for your application(s), and to the DURApulse Drives Dynamic Braking User Manual for complete wiring diagrams.

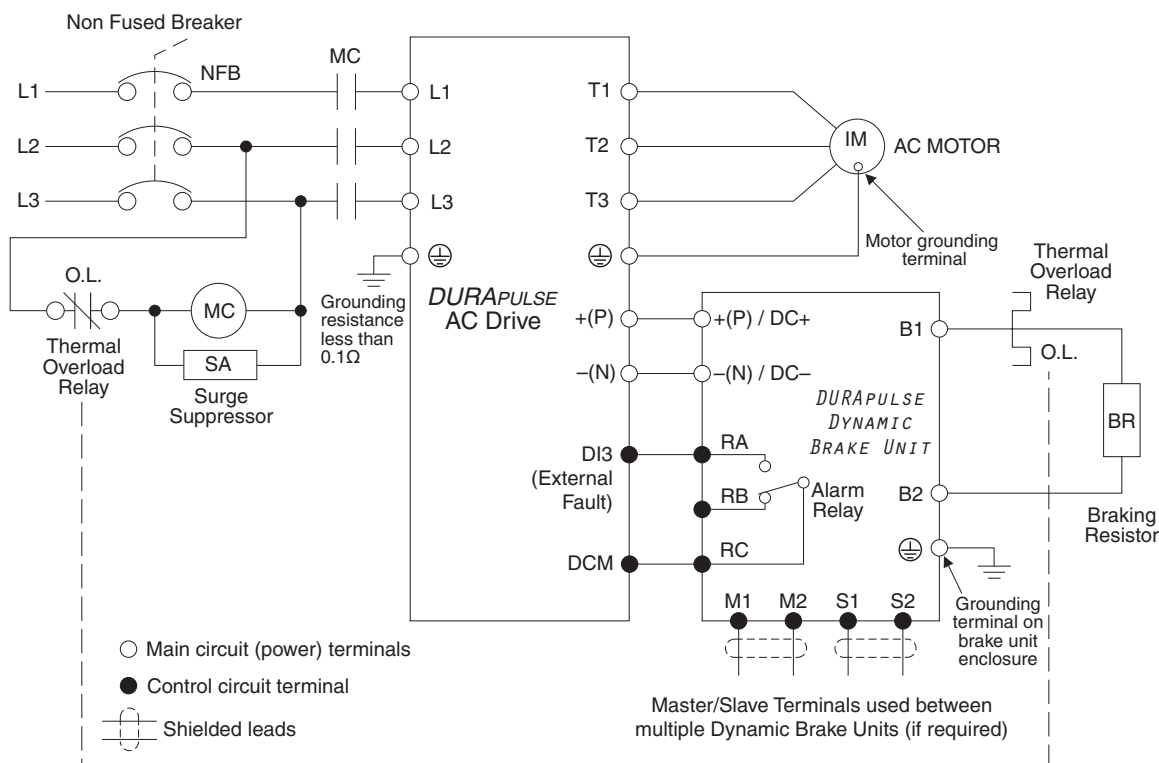


GS/DURAPULSE Drives Accessories – Braking Unit Dimensions for GS4 & GS30 DURAPULSE AC Drives


Braking Unit Dimensions (Dimensions = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

A) DBU ≤ 100hp (GS-1DBU, GS-2DBU, GS-3DBU, GS-4DBU)

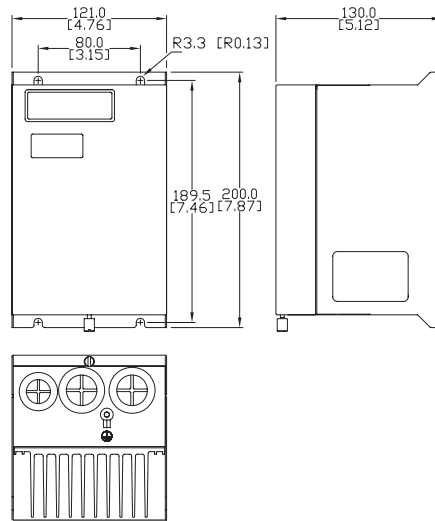

B) DBU > 100hp (GS-5DBU, GS-6DBU, GS-7DBU)

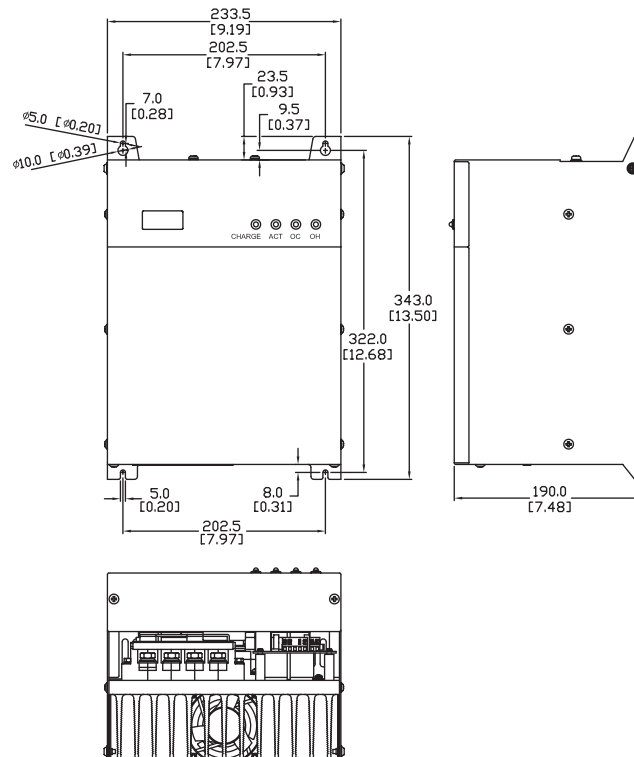

GS4 DURAPULSE Accessories – EMI Filters Selection

Selection (GS4)

The optional EMI Filters listed here are available for use with the GS4 drive. Selection of these accessories is application-specific and may improve drive performance. Additional information regarding filter installation and operation is available in the AutomationDirect white paper, "Applied EMI/RFI Techniques," downloadable from AutomationDirect.com.

| EMI Filters Selection for GS4 AC Drives | | | | | |
|-----------------------------------------|---------------------|---------------------------------------------|-----------------------|--------------------------|------------------|
| Model* | Description | EMI Filter ** | Max Power kW [max/ph] | Max Torque kg-cm [lb-in] | SCCR Rating (kA) |
| GS4-21P0 | 230V 1ph/3ph 1.0 hp | KMF325A | 20.8 [6] | 17.7 [2] | 5 |
| GS4-22P0 | 230V 1ph/3ph 2.0 hp | | | | |
| GS4-23P0 | 230V 1ph/3ph 3.0 hp | | | | |
| GS4-25P0 | 230V 1ph/3ph 5.0 hp | | | | |
| GS4-27P5 | 230V 1ph/3ph 7.5 hp | KMF370A | 58.1 [16.8] | 44.2 [5] | 5 |
| GS4-2010 | 230V 1ph/3ph 10hp | | | | |
| GS4-2015 | 230V 1ph/3ph 15hp | | | | |
| GS4-4025 | 460V 3ph 25hp | | | | |
| GS4-4030 | 460V 3ph 30hp | | | | |
| GS4-4040 | 460V 3ph 40hp | | | | |
| GS4-2020 | 230V 3ph 20hp | KMF3100A | 83 [24] | 44.2 [5] | 10 |
| GS4-2025 | 230V 3ph 25hp | | | | |
| GS4-2030 | 230V 3ph 30hp | | | | |
| GS4-41P0 | 460V 3ph 1.0 hp | KMF318A | 14.9 [4.3] | 17.7 [2] | 5 |
| GS4-42P0 | 460V 3ph 2.0 hp | | | | |
| GS4-43P0 | 460V 3ph 3.0 hp | | | | |
| GS4-45P0 | 460V 3ph 5.0 hp | | | | |
| GS4-47P5 | 460V 3ph 7.5 hp | | | | |
| GS4-4010 | 460V 3ph 10hp | | | | |
| GS4-4015 | 460V 3ph 15hp | KMF350A | 41.5 [12] | 44.2 [5] | 10 |
| GS4-4020 | 460V 3ph 20hp | | | | |
| GS4-4050 | 460V 3ph 50hp | MIF375 | 62.3 [18] | 53.1 [6] | 10 |
| GS4-2040 | 230V 3ph 40hp | MIF3150 | 124.6 [36] | 177 [20] | 10 |
| GS4-2050 | 230V 3ph 50hp | | | | |
| GS4-4060 | 460V 3ph 60hp | | | | |
| GS4-4075 | 460V 3ph 75hp | | | | |
| GS4-4100 | 460V 3ph 100hp | | | | |
| GS4-2060 | 230V 3ph 60hp | | | | |
| GS4-2075 | 230V 3ph 75hp | MIF3400B | 332.2 [96] | 265.5 [30] | 30 |
| GS4-2100 | 230V 3ph 100hp | | | | |
| GS4-4125 | 460V 3ph 125hp | | | | |
| GS4-4150 | 460V 3ph 150hp | | | | |
| GS4-4175 | 460V 3ph 175hp | | | | |
| GS4-4200 | 460V 3ph 200hp | | | | |
| GS4-4250 | 460V 3ph 250hp | MIF3800 & Qty. 3 TOR254 | 664.3 [192] | 265.5 [30] | 30 |
| GS4-4300 | 460V 3ph 300hp | | | | |

* EMI filter selections for GS4-2xxx models are the same whether that particular model is supplied 1-Phase or 3-Phase 230VAC.

** Part numbers are Roxburgh EMI Filters available from AutomationDirect at the web link embedded with each part number listed above.

GS4 DURAPULSE Accessories – Fusing

Fuse Selection for GS4 AC Drives

The fuses shown in the table below are available from [AutomationDirect](http://AutomationDirect.com). Further information, including dimensional information, is available at AutomationDirect.com.

| Fuse Specification Chart GS4 DURAPULSE Drives | | | | | | | | | | | | | | |
|-----------------------------------------------|-----------------------------|-------------|-------|----------|----------------|------------------------|--------------------------------------|--------------------------------------------------|-------------|-------|----------|----------------|------------------------|------------------------|
| Drive Model | For Three-Phase Input Power | | | | | | For Single-Phase Input Power | | | | | | | |
| | HP | Input Power | | | Input Fuse *** | | | HP | Input Power | | | Input Fuse *** | | |
| | | Ø | Volts | GS4 Amps | Fuse Amps | Fast Acting Class T | Edison Class J* | | Ø | Volts | GS4 Amps | Fuse Amps | Fast Acting Class T | Edison Class J* |
| GS4-21P0 | 1 | 3 | 230 | 6.4 | 10 | TJN10 | JHL10 | 0.5 | 1 | 230 | 6.4 | 10 | TJN10 | JHL10 |
| GS4-22P0 | 2 | 3 | 230 | 12 | 15 | TJN15 | JHL15 | 0.75 | 1 | 230 | 9.7 | 15 | TJN15 | JHL15 |
| GS4-23P0 | 3 | 3 | 230 | 16 | 25 | TJN25 | JHL25 | 1 | 1 | 230 | 15 | 20 | TJN20 | JHL20 |
| GS4-25P0 | 5 | 3 | 230 | 20 | 35 | TJN35 | JHL35 | 2 | 1 | 230 | 20 | 30 | TJN30 | JHL30 |
| GS4-27P5 | 7.5 | 3 | 230 | 28 | 50 | TJN50 | JHL50 | 3 | 1 | 230 | 26 | 40 | TJN40 | JHL40 |
| GS4-2010 | 10 | 3 | 230 | 36 | 70 | TJN70 | JHL70 | 3 | 1 | 230 | 26 | 40 | TJN40 | JHL40 |
| GS4-2015 | 15 | 3 | 230 | 52 | 100 | TJN100 | JHL100 | 5 | 1 | 230 | 40 | 70 | TJN70 | JHL70 |
| GS4-2020 | 20 | 3 | 230 | 72 | 125 | TJN125 | JHL125 | 7.5 | 1 | 230 | 58 | 100 | TJN100 | JHL100 |
| GS4-2025 | 25 | 3 | 230 | 83 | 150 | TJN150 | JHL150 | 10 | 1 | 230 | 76 | 125 | TJN125 | JHL125 |
| GS4-2030 | 30 | 3 | 230 | 99 | 175 | TJN175 | JHL175 | 10 | 1 | 230 | 76 | 125 | TJN125 | JHL125 |
| GS4-2040** | 40 | 3 | 230 | 124 | 175 | TJN175 | JHL175 | 10 | 1 | 230 | 63 | 90 | TJN90 | JHL90 |
| GS4-2050** | 50 | 3 | 230 | 143 | 200 | TJN200 | JHL200 | 10 | 1 | 230 | 63 | 90 | TJN90 | JHL90 |
| GS4-2060 | 60 | 3 | 230 | 171 | 250 | TJN250 | JHL250 | 15 | 1 | 230 | 94 | 150 | TJN150 | JHL150 |
| GS4-2075 | 75 | 3 | 230 | 206 | 300 | TJN300 | JHL300 | 20 | 1 | 230 | 124 | 175 | TJN175 | JHL175 |
| GS4-2100 | 100 | 3 | 230 | 245 | 350 | TJN350 | JHL350 | 25 | 1 | 230 | 143 | 200 | TJN200 | JHL200 |
| GS4-41P0 | 1 | 3 | 460 | 4.3 | 6 | TJS6 | JHL6 | single-phase input power not applicable for 460V | | | | | | |
| GS4-42P0 | 2 | 3 | 460 | 5.9 | 10 | TJS10 | JHL10 | | | | | | | |
| GS4-43P0 | 3 | 3 | 460 | 8.7 | 15 | TJS15 | JHL15 | | | | | | | |
| GS4-45P0 | 5 | 3 | 460 | 14 | 20 | TJS20 | JHL20 | | | | | | | |
| GS4-47P5 | 7.5 | 3 | 460 | 17 | 25 | TJS25 | JHL25 | | | | | | | |
| GS4-4010 | 10 | 3 | 460 | 20 | 35 | TJS35 | JHL35 | | | | | | | |
| GS4-4015 | 15 | 3 | 460 | 26 | 45 | TJS45 | JHL45 | | | | | | | |
| GS4-4020 | 20 | 3 | 460 | 35 | 60 | TJS60 | JHL60 | | | | | | | |
| GS4-4025 | 25 | 3 | 460 | 40 | 70 | TJS70 | JHL70 | | | | | | | |
| GS4-4030 | 30 | 3 | 460 | 47 | 90 | TJS90 | JHL90 | | | | | | | |
| GS4-4040** | 40 | 3 | 460 | 63 | 125 | TJS100 | JHL100 | | | | | | | |
| GS4-4050 | 50 | 3 | 460 | 74 | 100 | TJS110 | JHL110 | | | | | | | |
| GS4-4060 | 60 | 3 | 460 | 101 | 125 | TJS150 | JHL150 | | | | | | | |
| GS4-4075 | 75 | 3 | 460 | 114 | 150 | TJS150 | JHL150 | | | | | | | |
| GS4-4100 | 100 | 3 | 460 | 157 | 200 | TJS200 | JHL200 | | | | | | | |
| GS4-4125 | 125 | 3 | 460 | 167 | 250 | TJS250 | JHL250 | | | | | | | |
| GS4-4150 | 150 | 3 | 460 | 207 | 300 | TJS300 | JHL300 | | | | | | | |
| GS4-4175 | 175 | 3 | 460 | 240 | 350 | TJS350 | JHL350 | | | | | | | |
| GS4-4200 | 200 | 3 | 460 | 300 | 450 | TJS450 | JHL450 | | | | | | | |
| GS4-4250 | 250 | 3 | 460 | 380 | 500 | TJS500 | JHL500 | | | | | | | |
| – | – | | | | | | Fast Acting Current Limiting Class L | | | | | | | |
| GS4-4300 | 300 | 3 | 460 | 400 | 700 | LCU700 | | | | | | | | |

* High-speed Class J

** Includes DC choke

*** The fuses listed above are available from AutomationDirect.com. (Individual web links are associated with each part number listed above.)