

# DURAPULSE GS4 AC Drives – Introduction

| DURAPULSE GS4 AC Drives                              |    |      |     |     |     |     |     |    |    |      |    |    |    |    |    |     |     |     |     |     |
|------------------------------------------------------|----|------|-----|-----|-----|-----|-----|----|----|------|----|----|----|----|----|-----|-----|-----|-----|-----|
| Motor Rating                                         | HP | 1    | 2   | 3   | 5   | 7.5 | 10  | 15 | 20 | 25   | 30 | 40 | 50 | 60 | 75 | 100 | 125 | 150 | 175 | 215 |
|                                                      | kW | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 | 75  | 90  | 110 | 132 | 160 |
| 230V Single-Phase Input /<br>230V Three-Phase Output |    | ✓    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓  | ✓  | ✓    |    |    |    |    |    |     |     |     |     |     |
| 230V Three-Phase Input/Output                        |    | ✓    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓  | ✓  | ✓    | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   |     |     |     |     |
| 460V Three-Phase Input/Output                        |    | ✓    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓  | ✓  | ✓    | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   | ✓   | ✓   | ✓   | ✓   |



## Overview

The *DURAPULSE* GS4 series of AC drives includes many of the same standard features as our GS family of drives including dynamic braking, PID, removable keypad, and RS-485 Modbus communication.

The GS4 drive expands the *DURAPULSE* family by adding single-phase input capability (ALL 230VAC drives can be supplied single-phase), a built-in PLC, serial BACnet, and optional EtherNet/IP and ModTCP cards. GS4 QuickStart menus simplify configuration by consolidating the most-often-used parameters into concise groups.

*DURAPULSE* GS4 AC drives also offer sensorless vector control for improved speed regulation. The smart keypad is designed with defaults to quickly allow you to configure the drive, set the speed, start and stop the drive, and monitor critical parameters of your application. In addition, up to four drive configurations can be stored in the keypad, and transferred to additional *DURAPULSE* GS4 drives of the same model. Users can also store up to 32 parameters of their choice in a custom Quick-Start menu.

*DURAPULSE* GS4 offers three analog inputs, two analog outputs, one frequency output, ten digital inputs, two digital outputs, two SPDT relay outputs, and two STO inputs. All of the analog and digital I/O (except the Start/Stop and STO inputs) can be configured for a wide variety of input or output functions. Three option cards expand the I/O offering with a relay output card, an AC input card, and a combo DC I/O card.

## Features

- Wide Offering from 1 to 300 hp
- Single-Phase/Three-Phase 230VAC Three-Phase 460VAC
- Single-Phase UL Ratings – 230VAC input for 1 to 100 hp models (see selection tables for derated output)
- Dual Rating Design – CT/VT Ratings (Light & Heavy Duty)
- Flexible Carrier Frequency to 15khz and Output Frequency to 599Hz
- STO – Safe Torque Off (TUV Certified)
- Built-in PLC to support up to 10k steps
- Free downloadable software for Drive Configuration and PLC Programming
- Field-upgradable Firmware via USB port (Drive, Keypad, & Communication Option Cards)
- Hot-Pluggable LCD Text-Based Keypad (IP20/ NEMA 1) can be remotely mounted
- Embedded Quick-Start Menus
- Local/Remote control mode selection from the Keypad or digital/comm input with Hand/Off/Auto Control
- Display Units of Measure of your choice (GPM, FPM, etc.)
- Momentary Power Loss Restarts
- 100kA Short Circuit Current Rating
- Built-In DC Choke (some models)
- Flange-Mount Capability for frame sizes A to F (1 to 215 hp)
- Conduit Box(s) for NEMA 1 (Frame sizes D0 to G)
- Expanded I/O capability – 110V Inputs, Relay Outputs, combo DC I/O card
- Analog I/O – Configurable 3 Inputs and 2 Outputs
- Auto Speed Search capability
- Multi-Motor (Motor#1,#2) Control
- Dynamic Braking – Optional Dynamic Braking Units and Comprehensive offering of Resistors
- PID Controller – Including Sleep and Wake
- Password Protection
- RTD and/or PTC Input Motor Protection
- Parameter Organization similar to GS3 – GS3 Operational (External User PLC) control will work with minimal changes required.
- Calendar function allows a user to program the PLC with ON/OFF control in chronological order, daylight savings time, etc.
- Modularized design eases maintenance and expansion, including quick replacement of fans
- High speed communication interfaces with MODBUS RTU and BACnet protocols built in, with optional communication cards: MODBUS

TCP, EtherNet/IP

- Circuit boards have conformal coating for improved environmental tolerance
- Excellent heat-sink design; able to operate at 50°C ambient temperature
- Fire Mode – Run fire mode during emergencies to have uninterrupted smoke removal and system pressure
- Multi-pump control: fixed quantity, fixed displacement, and fixed time-circulating control; able to control up to 8 pumps (Optional multi-control relay output card is required.)
- Two-year warranty
- CE, TUV, UL, cUL

## Accessories

- AC line reactors
- EMI filters
- RF filter
- Braking resistors
- Braking units (for models 20hp and above)
- Fuses
- Conduit boxes
- Flange-Mount Kits
- Replacement cooling fans
- Replacement keypad (and remote-mount bezel kit)
- I/O Option Cards
- EtherNet/IP comm card
- Modbus TCP comm card
- Four and eight-port RS-485 multi-drop termination boards
- GSoft2 drive configuration software
- GSLogic PLC programming software
- USB-485M – USB to RS-485 PC adapter (see "Communications Products" chapter for detailed information)
- Detailed descriptions and specifications for GS accessories are available in the "GS/ *DURAPULSE* Accessories" section.

## Typical Applications

- Conveyors
- Compressors
- Material handling
- Extruding
- Grinding
- Shop tools
- Fans
- Pumps
- HVAC
- Mixing

# DURAPULSE GS4 AC Drives – Selection

## Selecting the Proper Drive Rating

| Selecting the Proper Drive Rating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |              |            |   |     |      |     |      |    |      |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------|------------|---|-----|------|-----|------|----|------|----|
| <b>Determine Motor Voltage and Full-Load Amperage (FLA)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |            |              |            |   |     |      |     |      |    |      |    |
| Motor voltage and FLA are located on the nameplate of the motor.<br><b>NOTE: FLA of motors that have been rewound may be higher than stated.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |              |            |   |     |      |     |      |    |      |    |
| <b>Determine Motor Overload Requirements</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |              |            |   |     |      |     |      |    |      |    |
| Many applications experience temporary overload conditions due to starting requirements or impact loading. Most AC drives are designed to operate at 150% overload for 60 seconds. If the application requires an overload greater than 150% or longer than 60 seconds, the AC drive must be oversized.<br><b>NOTE: Applications that require replacement of existing motor starters with AC drives may require up to 600% overload.</b>                                                                                                                                                                                                                                     |            |              |            |   |     |      |     |      |    |      |    |
| <b>Determine Application Type: Constant Torque or Variable Torque</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |              |            |   |     |      |     |      |    |      |    |
| This torque requirement has a direct effect on which drive to select. Variable Torque applications are generally easier to start; typically fans and pumps. Most other applications outside fans and pumps fall into the Constant Torque category (machine control, conveyors, etc.). If you are unsure of the application, assume Constant Torque. The specification, derating, and selection tables (beginning pg.tGSX-94) are generally segregated by Constant Torque and Variable Torque.                                                                                                                                                                                |            |              |            |   |     |      |     |      |    |      |    |
| <b>Installation Altitude</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |              |            |   |     |      |     |      |    |      |    |
| AC drives rely on air flow for cooling. As the altitude increases, the air becomes less dense, and this drop in air density decreases the cooling properties of the air. Therefore, the AC drive must be oversized to compensate for the decrease in cooling. GS4 drives are designed to operate at 100% capacity at altitudes up to 1000 meters.<br><b>NOTE: For use above 1000m, the AC drive must be derated as described below.</b>                                                                                                                                                                                                                                      |            |              |            |   |     |      |     |      |    |      |    |
| <b>Derate Output Current Based on Altitude Above 1000 Meters</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |              |            |   |     |      |     |      |    |      |    |
| <ul style="list-style-type: none"> <li>If the AC drive is installed at an altitude of 0–1000m, follow normal operation restrictions.</li> <li>If installed at an altitude of 1000–3000m, decrease 1% of the rated current or lower 0.5°C of temperature for every 100m increase in altitude.</li> <li>Maximum altitude for Corner Grounded is 2000m.</li> </ul>                                                                                                                                                                                                                                                                                                              |            |              |            |   |     |      |     |      |    |      |    |
| <p style="text-align: center;"><b>GS4 Derating for Altitude</b></p> <p style="text-align: center;">Rating (%) at Standard Ambient Temperature*      T<sub>a</sub> at Rating = 100%</p> <table border="1"> <caption>GS4 Derating Data</caption> <thead> <tr> <th>Altitude (m)</th> <th>Rating (%)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> </tr> <tr> <td>1000</td> <td>100</td> </tr> <tr> <td>2000</td> <td>90</td> </tr> <tr> <td>3000</td> <td>80</td> </tr> </tbody> </table> <p>*Standard Ambient Temperature = 50°C for UL Open Type / IP20<br/> *Standard Ambient Temperature = 40°C for UL Type 1 / IP 20 &amp; UL Open Type / IP20 Side-by-Side</p> |            | Altitude (m) | Rating (%) | 0 | 100 | 1000 | 100 | 2000 | 90 | 3000 | 80 |
| Altitude (m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Rating (%) |              |            |   |     |      |     |      |    |      |    |
| 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 100        |              |            |   |     |      |     |      |    |      |    |
| 1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 100        |              |            |   |     |      |     |      |    |      |    |
| 2000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 90         |              |            |   |     |      |     |      |    |      |    |
| 3000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 80         |              |            |   |     |      |     |      |    |      |    |

(continued next page)

# DURApULSE GS4 AC Drives – Selection

## Selecting the Proper Drive Rating (continued from previous page)

### Determine Maximum Enclosure Internal Temperature

AC drives generate a significant amount of heat and can cause the internal temperature of an enclosure to exceed the rating of the GS4 drive, even when the ambient temperature is less than 104°F (40°C). Enclosure ventilation and/or cooling may be required to reduce maximum internal temperature to 104°F (40°C) or less. Ambient temperature measurements/calculations should be made for the maximum expected temperature. When permissible, flange mounting the AC drive (mounting with the drive heatsink in open ambient air) can greatly reduce heating in the enclosure.

**NOTE:** For use above 104°F (40°C), the AC drive must be derated as described below.


### Derate Output Current Based on Temperature Above 104°F (40°C) or 122°F (50°C)

#### Drive Derating by Temperature and Protection Level

| Protection Level *                 | Derating                                                                                                                                                                                                                                                        |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UL Type I / IP20</b>            | When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +40°C. When ambient temperature exceeds 40°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C. |
| <b>UL Open Type ** / IP00/IP20</b> | When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +50°C. When ambient temperature exceeds 50°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C. |

\* For more information about environmental ratings, refer to the "Operating Temperature and Protection Level" table (pg.tGSX-110).

\*\* Open Type temperature ratings apply to GS4 frame sizes A-C with top covers removed, and frame sizes D0-G without conduit boxes (pg.tGSX-110).

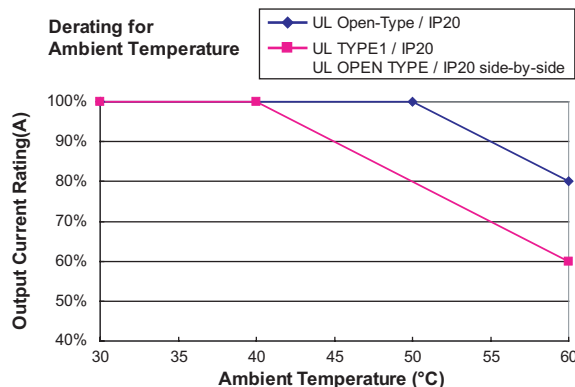

(continued next page)

# DURAPULSE GS4 AC Drives – Selection

## Selecting the Proper Drive Rating (continued from previous page)

### Derate Output Current Based on Carrier Frequency (if necessary)

#### Carrier Frequency Effects

AC Drives rectify the incoming 50 or 60Hz line power resulting in DC power at 0Hz. The resulting DC power is then pulse-width modulated and supplied to the motor by the drive's power electronics. IGBTs invert the DC power, simulating a sine wave at the desired frequency (that's what allows variable speed in AC induction motors). The speed at which the IGBTs are turned ON and OFF is called Carrier Frequency. In GS4 drives, the Carrier Frequency can range from 2kHz to 15kHz. Though Carrier Frequency can be adjusted, there are trade-offs between High Carrier Frequencies and Low Carrier Frequencies.

#### Benefits of Higher Carrier Frequencies:

- Better efficiency (lower harmonic losses) in the motor
- Lower audible noise

#### Benefits of Lower Carrier Frequencies:


- Better efficiency in the drive
- Lower EMI (electrical noise)
- Reduced reflective wave peak voltage

As a general rule, the Carrier Frequency should be set as low as possible without creating unacceptable audible noise in the motor. Smaller systems can have higher Carrier Frequencies, but larger drives (>20 or 30hp) should not have Carrier Frequencies set higher than 6kHz. Heavy Duty applications typically run around 2–4 kHz.


The following Variable Torque (VT) and Constant Torque (CT) derating curves are for drives with 3-phase input power. The 230VAC, CT curves also apply equally whether the drive is supplied with 3-phase or 1-phase input power.

#### 230V Variable Torque Carrier Frequency Derating

For 230V Variable Torque  
50°C UL Open Type  
40°C UL Type 1 or Open Type side-by-side

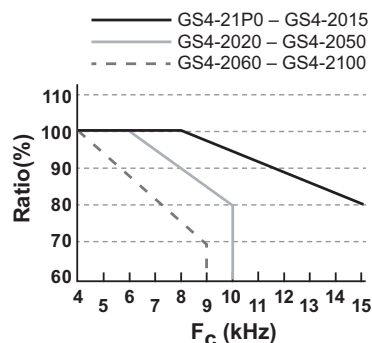


For 230V Variable Torque  
40°C UL Open Type  
30°C UL Type 1 or Open Type side-by-side

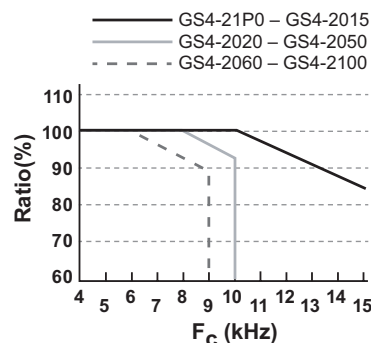


#### 460V Variable Torque Carrier Frequency Derating

For 460V Variable Torque  
50°C UL Open Type  
40°C UL Type 1 or Open Type side-by-side

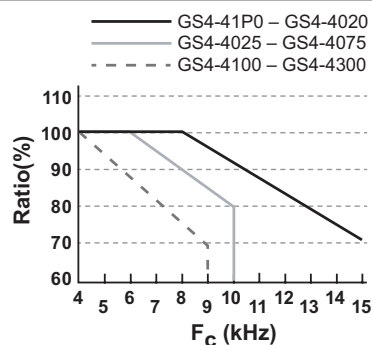

For 460V Variable Torque  
40°C UL Open Type  
30°C UL Type 1 or Open Type side-by-side

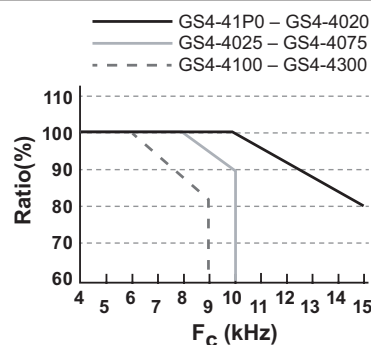


(continued next page)

# DURAPULSE GS4 AC Drives – Selection


## Selecting the Proper Drive Rating (continued from previous page)

### 230V Constant Torque Carrier Frequency Derating

For 230V Constant Torque  
50°C UL Open Type  
40°C UL Type 1 or Open Type side-by-side

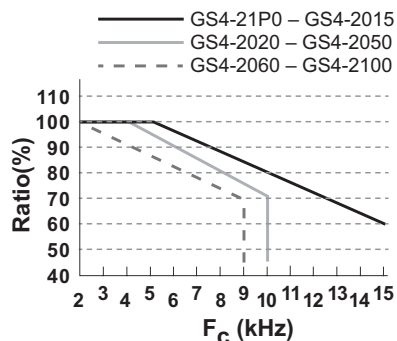


For 230V Constant Torque  
40°C UL Open Type  
30°C UL Type 1 or Open Type side-by-side

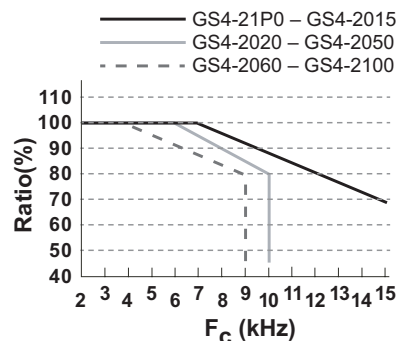


### 460V Constant Torque Carrier Frequency Derating

For 460V Constant Torque  
50°C UL Open Type  
40°C UL Type 1 or Open Type side-by-side

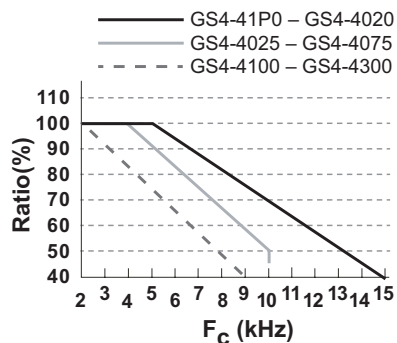

For 460V Constant Torque  
40°C UL Open Type  
30°C UL Type 1 or Open Type side-by-side

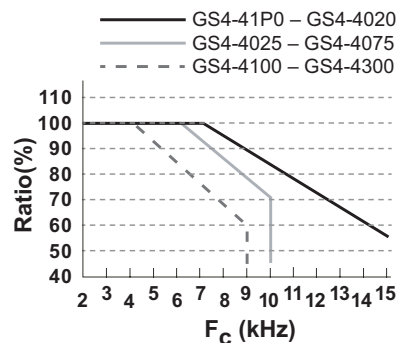

# DURApULSE GS4 AC Drives – Selection Specs

## GS4 Drive Model Selection Tables

| 230V Class GS4 Specifications – Constant & Variable Torque<br>Frame Sizes A, B (1hp–15hp)                                                                                                                                                                                                                                                                                  |                                                     |                                           |                                                     |                    |            |            |           |            |           |            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|-----------------------------------------------------|--------------------|------------|------------|-----------|------------|-----------|------------|
| Model Name                                                                                                                                                                                                                                                                                                                                                                 |                                                     |                                           |                                                     | GS4-21P0           | GS4-22P0   | GS4-23P0   | GS4-25P0  | GS4-27P5   | GS4-2010  | GS4-2015   |
| Price                                                                                                                                                                                                                                                                                                                                                                      |                                                     |                                           |                                                     | \$525.00           | \$578.00   | \$653.00   | \$739.00  | \$835.00   | \$932.00  | \$1,125.00 |
| Frame Size                                                                                                                                                                                                                                                                                                                                                                 |                                                     |                                           |                                                     | A                  |            |            |           | B          |           |            |
| Output Rating                                                                                                                                                                                                                                                                                                                                                              | Constant Torque (CT)                                | Max Motor Output (1-phase / 3-phase)      | hp                                                  | 0.5 / 1            | 0.75 / 2   | 1 / 3      | 2 / 5     | 3 / 7.5    | 3 / 10    | 5 / 15     |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     |                                           | kW                                                  | 0.37 / 0.75        | 0.55 / 1.5 | 0.75 / 2.2 | 1.5 / 3.7 | 2.2 / 5.5  | 2.2 / 7.5 | 3.7 / 11   |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Rated Output Capacity (1-phase / 3-phase) | kVA                                                 | 1.0 / 1.9          | 1.3 / 2.8  | 2.0 / 4.0  | 3.2 / 6.4 | 4.4 / 9.6  | 4.4 / 12  | 6.8 / 19   |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Rated Output Current (1-phase / 3-phase)  | A                                                   | 2.4 / 4.8          | 3.2 / 7.1  | 5 / 10     | 8 / 16    | 11 / 24    | 11 / 31   | 17 / 47    |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Carrier Frequency                         | kHz                                                 | 2 to 6             |            |            |           |            |           |            |
|                                                                                                                                                                                                                                                                                                                                                                            | Variable Torque (VT)                                | Max Motor Output                          | hp                                                  | 1                  | 2          | 3          | 5         | 7.5        | 10        | 15         |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     |                                           | kW                                                  | 0.75               | 1.5        | 2.2        | 3.7       | 5.5        | 7.5       | 11         |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Rated Output Capacity                     | kVA                                                 | 2.0                | 3.2        | 4.4        | 6.8       | 10         | 13        | 20         |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Rated Output Current                      | A                                                   | 5                  | 8          | 11         | 17        | 25         | 33        | 49         |
|                                                                                                                                                                                                                                                                                                                                                                            |                                                     | Carrier Frequency                         | kHz                                                 | 2 to 15            |            |            |           |            |           |            |
| Input Rating *                                                                                                                                                                                                                                                                                                                                                             | CT                                                  | Rated Input Current * (1-phase / 3-phase) | A                                                   | 6.4 / 6.1          | 9.7 / 11   | 15 / 15    | 20 / 18.5 | 26 / 26    | 26 / 34   | 40 / 50    |
|                                                                                                                                                                                                                                                                                                                                                                            | VT                                                  |                                           | 6.4                                                 | 12                 | 16         | 20         | 28        | 36         | 52        |            |
|                                                                                                                                                                                                                                                                                                                                                                            | Rated Voltage/Frequency                             |                                           | 1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz |                    |            |            |           |            |           |            |
|                                                                                                                                                                                                                                                                                                                                                                            | Operating Voltage Range                             |                                           | 170–265 VAC                                         |                    |            |            |           |            |           |            |
|                                                                                                                                                                                                                                                                                                                                                                            | Frequency Tolerance                                 |                                           | 47–63 Hz                                            |                    |            |            |           |            |           |            |
|                                                                                                                                                                                                                                                                                                                                                                            | Short Circuit Withstand (SCCR) (A, rms symmetrical) |                                           | 100kA                                               |                    |            |            |           |            |           |            |
|                                                                                                                                                                                                                                                                                                                                                                            | IE2 Efficiency - Relative Power Loss                |                                           | 3.1%                                                | 2.8%               | 2.5%       | 2.1%       | 2.3%      | 2.1%       | 2.2%      |            |
| Weight (kg [lb])                                                                                                                                                                                                                                                                                                                                                           |                                                     |                                           |                                                     | 2.6 [5.7]          |            |            |           | 5.4 [11.9] |           |            |
| Watt Loss @ 100% I (W) **                                                                                                                                                                                                                                                                                                                                                  |                                                     |                                           |                                                     | 61                 | 88         | 115        | 159       | 264        | 335       | 529        |
| Cooling Method                                                                                                                                                                                                                                                                                                                                                             |                                                     |                                           |                                                     | natural convection | fan        |            |           |            |           |            |
| Dynamic Braking                                                                                                                                                                                                                                                                                                                                                            |                                                     |                                           |                                                     | built in           |            |            |           |            |           |            |
| DC Choke                                                                                                                                                                                                                                                                                                                                                                   |                                                     |                                           |                                                     | optional           |            |            |           |            |           |            |
| EMI Filter                                                                                                                                                                                                                                                                                                                                                                 |                                                     |                                           |                                                     | optional           |            |            |           |            |           |            |
| * For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to “Circuit Connections – RFI Jumper” in the GS4 AC Drives User Manual, Chapter 2 ( <a href="http://www.automationdirect.com">www.automationdirect.com</a> ). Please refer to “GS4 DURApulse Accessories – Fusing” ( <a href="#">pg.tGSX-164</a> ) for input fusing information. |                                                     |                                           |                                                     |                    |            |            |           |            |           |            |
| ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).                                                                                                                                                                                                                                                                                      |                                                     |                                           |                                                     |                    |            |            |           |            |           |            |

# DURApULSE GS4 AC Drives – Selection Specifications

| 230V Class GS4 Specifications – Constant & Variable Torque<br>Frame Sizes C–E (7.5 hp–100hp)                                                                                                                                                                                                                                                             |                                                     |                                           |     |                                                     |            |            |                                     |            |            |            |            |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|-----|-----------------------------------------------------|------------|------------|-------------------------------------|------------|------------|------------|------------|--|
| Model Name                                                                                                                                                                                                                                                                                                                                               |                                                     |                                           |     | GS4-2020                                            | GS4-2025   | GS4-2030   | GS4-2040                            | GS4-2050   | GS4-2060   | GS4-2075   | GS4-2100   |  |
| Price                                                                                                                                                                                                                                                                                                                                                    |                                                     |                                           |     | \$1,586.00                                          | \$1,723.00 | \$1,953.00 | \$3,449.00                          | \$3,961.00 | \$5,282.00 | \$5,932.00 | \$6,913.00 |  |
| Frame Size                                                                                                                                                                                                                                                                                                                                               |                                                     |                                           |     | C                                                   |            |            | D                                   |            | E          |            |            |  |
| Output Rating                                                                                                                                                                                                                                                                                                                                            | Constant Torque (CT)                                | Max Motor Output (1-phase / 3-phase)      | hp  | 7.5/20                                              | 10/25      | 10/30      | 10/40                               | 10/50      | 15/60      | 20/75      | 25/100     |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     |                                           | kW  | 5.5/15                                              | 7.5/18.5   | 7.5/22     | 7.5/30                              | 7.5/37     | 11/45      | 15/55      | 18.5/75    |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Rated Output Capacity (1-phase / 3-phase) | kVA | 10/25                                               | 13/28      | 13/34      | 13/45                               | 13/55      | 20/68      | 26/81      | 30/96      |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Rated Output Current (1-phase / 3-phase)  | A   | 25/62                                               | 33/71      | 33/86      | 33/114                              | 33/139     | 49/171     | 65/204     | 75/242     |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Carrier Frequency                         | kHz | 2 to 6                                              |            |            |                                     |            |            |            |            |  |
|                                                                                                                                                                                                                                                                                                                                                          | Variable Torque (VT)                                | Max Motor Output                          | hp  | 20                                                  | 25         | 30         | 40                                  | 50         | 60         | 75         | 100        |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     |                                           | kW  | 15                                                  | 18.5       | 22         | 30                                  | 37         | 45         | 55         | 75         |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Rated Output Capacity                     | kVA | 26                                                  | 30         | 36         | 48                                  | 58         | 72         | 86         | 102        |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Rated Output Current                      | A   | 65                                                  | 75         | 90         | 120                                 | 146        | 180        | 215        | 255        |  |
|                                                                                                                                                                                                                                                                                                                                                          |                                                     | Carrier Frequency                         | kHz | 2 to 10                                             |            |            | 2 to 6                              |            |            |            |            |  |
| Input Rating *                                                                                                                                                                                                                                                                                                                                           | CT                                                  | Rated Input Current *                     | A   | 58/68                                               | 76/78      | 76/95      | 63/118                              | 63/136     | 94/162     | 124/196    | 143/233    |  |
|                                                                                                                                                                                                                                                                                                                                                          | VT                                                  | (1-phase / 3-phase)                       |     | 72                                                  | 83         | 99         | 124                                 | 143        | 171        | 206        | 245        |  |
|                                                                                                                                                                                                                                                                                                                                                          | Rated Voltage/Frequency                             |                                           |     | 1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz |            |            |                                     |            |            |            |            |  |
|                                                                                                                                                                                                                                                                                                                                                          | Operating Voltage Range                             |                                           |     | 170–265 VAC                                         |            |            |                                     |            |            |            |            |  |
|                                                                                                                                                                                                                                                                                                                                                          | Frequency Tolerance                                 |                                           |     | 47–63 Hz                                            |            |            |                                     |            |            |            |            |  |
|                                                                                                                                                                                                                                                                                                                                                          | Short Circuit Withstand (SCCR) (A, rms symmetrical) |                                           |     | 100kA                                               |            |            |                                     |            |            |            |            |  |
| IE2 Efficiency - Relative Power Loss                                                                                                                                                                                                                                                                                                                     |                                                     |                                           |     | 2.3%                                                | 2.4%       | 2.3%       | 1.9%                                | 2.1%       | 1.9%       | 1.9%       | 2.7%       |  |
| Weight (kg [lb])                                                                                                                                                                                                                                                                                                                                         |                                                     |                                           |     | 9.8 [21.6]                                          |            |            | 38.5 [84.9]                         |            | 64.8 [143] |            |            |  |
| Watt Loss @ 100% I (W) **                                                                                                                                                                                                                                                                                                                                |                                                     |                                           |     | 616                                                 | 733        | 865        | 1099                                | 1311       | 1518       | 1709       | 2139       |  |
| Cooling Method                                                                                                                                                                                                                                                                                                                                           |                                                     |                                           |     | fan                                                 |            |            |                                     |            |            |            |            |  |
| Dynamic Braking                                                                                                                                                                                                                                                                                                                                          |                                                     |                                           |     | built in                                            |            |            | optional Dynamic Braking Unit (DBU) |            |            |            |            |  |
| DC Choke                                                                                                                                                                                                                                                                                                                                                 |                                                     |                                           |     | optional                                            |            |            | built in                            |            |            |            |            |  |
| EMI Filter                                                                                                                                                                                                                                                                                                                                               |                                                     |                                           |     | optional                                            |            |            |                                     |            |            |            |            |  |
| * For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to “Circuit Connections – RFI Jumper” in the GS4 AC Drives User Manual, Chapter 2 ( <a href="http://www.automationdirect.com">www.automationdirect.com</a> ). Please refer to “GS4 DURApulse Accessories – Fusing” (pg.tGSX-164) for input fusing information. |                                                     |                                           |     |                                                     |            |            |                                     |            |            |            |            |  |
| ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).                                                                                                                                                                                                                                                                    |                                                     |                                           |     |                                                     |            |            |                                     |            |            |            |            |  |

# DURApULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque<br>Frame Sizes A, B (1hp–20hp)                                                                                                                                                                                                                                                                                                                                                               |                                                     |                       |     |                                             |          |          |          |          |            |            |            |    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|-----|---------------------------------------------|----------|----------|----------|----------|------------|------------|------------|----|
| Model Name                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                     |                       |     | GS4-41P0                                    | GS4-42P0 | GS4-43P0 | GS4-45P0 | GS4-47P5 | GS4-40T0   | GS4-40T5   | GS4-40T20  |    |
| Price                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                     |                       |     | \$535.00                                    | \$578.00 | \$643.00 | \$750.00 | \$835.00 | \$920.00   | \$1,095.00 | \$1,388.00 |    |
| Frame Size                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                     |                       |     | A                                           |          |          |          |          | B          |            |            |    |
| Output Rating                                                                                                                                                                                                                                                                                                                                                                                                                                           | Constant Torque (CT)                                | Max Motor Output      | hp  | 1                                           | 2        | 3        | 5        | 7.5      | 10         | 15         | 20         |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     |                       | kW  | 0.75                                        | 1.5      | 2.2      | 3.7      | 5.5      | 7.5        | 11         | 15         |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Rated Output Capacity |     | kVA                                         | 2.3      | 3.0      | 4.5      | 6.5      | 8.8        | 14         | 18         | 24 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Rated Output Current  |     | A                                           | 2.9      | 3.8      | 5.7      | 8.1      | 11         | 17         | 23         | 30 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Carrier Frequency     |     | kHz                                         | 2 to 6   |          |          |          |            |            |            |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Variable Torque (VT)                                | Max Motor Output      | hp  | 1                                           | 2        | 3        | 5        | 7.5      | 10         | 15         | 20         |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     |                       | kW  | 0.75                                        | 1.5      | 2.2      | 3.7      | 5.5      | 7.5        | 11         | 15         |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Rated Output Capacity |     | kVA                                         | 2.4      | 3.2      | 4.8      | 7.2      | 9.6        | 14         | 19         | 25 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Rated Output Current  |     | A                                           | 3        | 4        | 6        | 9        | 12         | 18         | 24         | 32 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     | Carrier Frequency     |     | kHz                                         | 2 to 15  |          |          |          |            |            |            |    |
| Input Rating *                                                                                                                                                                                                                                                                                                                                                                                                                                          | CT                                                  | Rated Input Current   | A   | 4.1                                         | 5.6      | 8.3      | 13       | 16       | 19         | 25         | 33         |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | VT                                                  |                       | 4.3 | 5.9                                         | 8.7      | 14       | 17       | 20       | 26         | 35         |            |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Rated Voltage/Frequency                             |                       |     | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz |          |          |          |          |            |            |            |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Operating Voltage Range                             |                       |     | 323–528 VAC                                 |          |          |          |          |            |            |            |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Frequency Tolerance                                 |                       |     | 47–63 Hz                                    |          |          |          |          |            |            |            |    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Short Circuit Withstand (SCCR) (A, rms symmetrical) |                       |     | 100kA                                       |          |          |          |          |            |            |            |    |
| IE2 Efficiency - Relative Power Loss                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                     |                       |     | 2.6%                                        | 2.3%     | 2.2%     | 2.0%     | 1.9%     | 2.1%       | 2.0%       | 1.8%       |    |
| Weight (kg [lb])                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                     |                       |     | 2.6 [5.7]                                   |          |          |          |          | 5.4 [11.9] |            |            |    |
| Watt Loss @ 100% I (W) **                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                     |                       |     | 59                                          | 74       | 104      | 141      | 180      | 292        | 380        | 518        |    |
| Cooling Method                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                     |                       |     | natural convection                          |          | fan      |          |          |            |            |            |    |
| Dynamic Braking                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     |                       |     | built in                                    |          |          |          |          |            |            |            |    |
| DC Choke                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |                       |     | optional                                    |          |          |          |          |            |            |            |    |
| EMI Filter                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                     |                       |     | optional                                    |          |          |          |          |            |            |            |    |
| * For Use With Three-Phase Motors Only.<br>If 3-phase power source is non-symmetrical, refer to “Circuit Connections – RFI Jumper” in the GS4 AC Drives User Manual, Chapter 2 ( <a href="http://www.automationdirect.com">www.automationdirect.com</a> ).<br>Please refer to “GS4 DURApulse Accessories – Fusing” (pg.tGSX-164) for input fusing information.<br>** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F). |                                                     |                       |     |                                             |          |          |          |          |            |            |            |    |

# DURAPULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque<br>Frame Sizes C, D0, D (25hp–100hp)                                                                                                                                                                                                                                                                                                                                                                           |                                                     |                       |     |                                             |            |            |                                     |            |             |            |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|-----|---------------------------------------------|------------|------------|-------------------------------------|------------|-------------|------------|--|
| Model Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |                       |     | GS4-4025                                    | GS4-4030   | GS4-4040   | GS4-4050                            | GS4-4060   | GS4-4075    | GS4-4100   |  |
| Price                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                     |                       |     | \$1,674.00                                  | \$1,914.00 | \$2,406.00 | \$2,907.00                          | \$3,400.00 | \$3,942.00  | \$5,400.00 |  |
| Frame Size                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |                       |     | C                                           |            |            | D0                                  |            | D           |            |  |
| Output Rating                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Constant Torque (CT)                                | Max Motor Output      | hp  | 25                                          | 30         | 40         | 50                                  | 60         | 75          | 100        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     |                       | kW  | 18.5                                        | 22         | 30         | 37                                  | 45         | 55          | 75         |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Rated Output Capacity | kVA | 29                                          | 34         | 45         | 55                                  | 69         | 84          | 114        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Rated Output Current  | A   | 36                                          | 43         | 57         | 69                                  | 86         | 105         | 143        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Carrier Frequency     | kHz | 2 to 6                                      |            |            |                                     |            |             |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Variable Torque (VT)                                | Max Motor Output      | hp  | 25                                          | 30         | 40         | 50                                  | 60         | 75          | 100        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     |                       | kW  | 18.5                                        | 22         | 30         | 37                                  | 45         | 55          | 75         |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Rated Output Capacity | kVA | 30                                          | 36         | 48         | 58                                  | 73         | 88          | 120        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Rated Output Current  | A   | 38                                          | 45         | 60         | 73                                  | 91         | 110         | 150        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     | Carrier Frequency     | kHz | 2 to 10                                     |            |            |                                     |            |             |            |  |
| Input Rating *                                                                                                                                                                                                                                                                                                                                                                                                                                                            | CT                                                  | Rated Input Current   | A   | 38                                          | 45         | 60         | 70                                  | 96         | 108         | 149        |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | VT                                                  |                       | 40  | 47                                          | 63         | 74         | 101                                 | 114        | 157         |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Rated Voltage/Frequency                             |                       |     | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz |            |            |                                     |            |             |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Operating Voltage Range                             |                       |     | 323–528 VAC                                 |            |            |                                     |            |             |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Frequency Tolerance                                 |                       |     | 47–63 Hz                                    |            |            |                                     |            |             |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Short Circuit Withstand (SCCR) (A, rms symmetrical) |                       |     | 100kA                                       |            |            |                                     |            |             |            |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IE2 Efficiency - Relative Power Loss                |                       |     | 1.6%                                        | 1.6%       | 1.6%       | 1.6%                                | 1.6%       | 1.4%        | 1.3%       |  |
| Weight (kg [lb])                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                     |                       |     | 9.8 [21.6]                                  |            |            | 27.0 [59.5]                         |            | 38.5 [84.9] |            |  |
| Watt Loss @ 100% I (W) **                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                     |                       |     | 507                                         | 635        | 866        | 993                                 | 1147       | 1413        | 1742       |  |
| Cooling Method                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                     |                       |     | fan                                         |            |            |                                     |            |             |            |  |
| Dynamic Braking                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                     |                       |     | built in                                    |            |            | optional Dynamic Braking Unit (DBU) |            |             |            |  |
| DC Choke                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                     |                       |     | optional                                    |            |            | built in                            |            |             |            |  |
| EMI Filter                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |                       |     | optional                                    |            |            |                                     |            |             |            |  |
| * For Use With Three-Phase Motors Only.<br>If 3-phase power source is non-symmetrical, refer to “Circuit Connections – RFI Jumper” in the GS4 AC Drives User Manual, Chapter 2 ( <a href="http://www.automationdirect.com">www.automationdirect.com</a> ).<br>Please refer to “GS4 DURApulse Accessories – Fusing” ( <a href="#">pg.tGSX-164</a> ) for input fusing information.<br>** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F). |                                                     |                       |     |                                             |            |            |                                     |            |             |            |  |

# DURApULSE GS4 AC Drives – Selection Specifications

| 460V Class GS4 Specifications – Constant & Variable Torque<br>Frame Sizes E, F, G (125hp–300hp)                                                                                                                                                                                                                                                                                  |                                                     |                       |                                             |            |            |            |             |             |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|---------------------------------------------|------------|------------|------------|-------------|-------------|-------------|
| Model Name                                                                                                                                                                                                                                                                                                                                                                       |                                                     |                       |                                             | GS4-4125   | GS4-4150   | GS4-4175   | GS4-4200    | GS4-4250    | GS4-4300    |
| Price                                                                                                                                                                                                                                                                                                                                                                            |                                                     |                       |                                             | \$7,389.00 | \$8,315.00 | \$9,902.00 | \$11,338.00 | \$15,529.00 | \$18,129.00 |
| Frame Size                                                                                                                                                                                                                                                                                                                                                                       |                                                     |                       |                                             | E          |            | F          |             | G           |             |
| Output Rating                                                                                                                                                                                                                                                                                                                                                                    | Constant Torque (CT)                                | Max Motor Output      | hp                                          | 125        | 150        | 175        | 215         | 250         | 300         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     |                       | kW                                          | 90         | 110        | 132        | 160         | 185         | 220         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Rated Output Capacity | kVA                                         | 136        | 167        | 197        | 235         | 280         | 348         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Rated Output Current  | A                                           | 171        | 209        | 247        | 295         | 352         | 437         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Carrier Frequency     | kHz                                         | 2 to 6     |            |            |             |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                  | Variable Torque (VT)                                | Max Motor Output      | hp                                          | 125        | 150        | 175        | 215         | 250         | 300         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     |                       | kW                                          | 90         | 110        | 132        | 160         | 185         | 220         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Rated Output Capacity | kVA                                         | 143        | 175        | 207        | 247         | 295         | 367         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Rated Output Current  | A                                           | 180        | 220        | 260        | 310         | 370         | 460         |
|                                                                                                                                                                                                                                                                                                                                                                                  |                                                     | Carrier Frequency     | kHz                                         | 2 to 9     |            |            |             |             |             |
| Input Rating *                                                                                                                                                                                                                                                                                                                                                                   | CT                                                  | Rated Input Current   | A                                           | 159        | 197        | 228        | 285         | 361         | 380         |
|                                                                                                                                                                                                                                                                                                                                                                                  | VT                                                  |                       | 167                                         | 207        | 240        | 300        | 380         | 400         |             |
|                                                                                                                                                                                                                                                                                                                                                                                  | Rated Voltage/Frequency                             |                       | 3-phase 380–480 VAC (-15% to +10%), 50/60Hz |            |            |            |             |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                  | Operating Voltage Range                             |                       | 323–528 VAC                                 |            |            |            |             |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                  | Frequency Tolerance                                 |                       | 47–63 Hz                                    |            |            |            |             |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                  | Short Circuit Withstand (SCCR) (A, rms symmetrical) |                       | 100kA                                       |            |            |            |             |             |             |
| IE2 Efficiency - Relative Power Loss                                                                                                                                                                                                                                                                                                                                             |                                                     |                       |                                             | 1.2%       | 1.2%       | 1.3%       | 1.3%        | 1.4%        | 1.5%        |
| Weight (kg [lb])                                                                                                                                                                                                                                                                                                                                                                 |                                                     |                       |                                             | 64.8 [143] |            | 86.5 [191] |             | 134 [295]   |             |
| Watt Loss @ 100% I (W) **                                                                                                                                                                                                                                                                                                                                                        |                                                     |                       |                                             | 2092       | 2599       | 3081       | 3783        | 4589        | 5772        |
| Cooling Method                                                                                                                                                                                                                                                                                                                                                                   |                                                     |                       |                                             | fan        |            |            |             |             |             |
| Dynamic Braking                                                                                                                                                                                                                                                                                                                                                                  |                                                     |                       |                                             | optional   |            |            |             |             |             |
| DC Choke                                                                                                                                                                                                                                                                                                                                                                         |                                                     |                       |                                             | built in   |            |            |             |             |             |
| EMI Filter                                                                                                                                                                                                                                                                                                                                                                       |                                                     |                       |                                             | optional   |            |            |             |             |             |
| * For Use With Three-Phase Motors Only.<br>If 3-phase power source is non-symmetrical, refer to “Circuit Connections – RFI Jumper” in the GS4 AC Drives User Manual, Chapter 2 ( <a href="http://www.automationdirect.com">www.automationdirect.com</a> ).<br>Please refer to “GS4 DURApulse Accessories – Fusing” ( <a href="#">pg.tGSX-164</a> ) for input fusing information. |                                                     |                       |                                             |            |            |            |             |             |             |
| ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F; frame G is not capable of flange mounting).                                                                                                                                                                                                                                                 |                                                     |                       |                                             |            |            |            |             |             |             |

# DURAPULSE GS4 AC Drives – General Specifications

| GS4 General Specifications (Applicable to All Models) |                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Control Characteristics                               | <b>Control Method</b>                                                                                                                                                                                                                                                                                                          | 1: V/F (V/Hz control); 2: SVC (sensorless vector control)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                       | <b>Starting Torque</b>                                                                                                                                                                                                                                                                                                         | Up to 120% Variable Torque (VT) or 150% Constant Torque (CT) for one minute                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                       | <b>V/F Curve</b>                                                                                                                                                                                                                                                                                                               | 4 point adjustable V/Hz curve and square curve                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                       | <b>Speed Response Ability</b>                                                                                                                                                                                                                                                                                                  | 5Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                       | <b>Torque Limit</b>                                                                                                                                                                                                                                                                                                            | VT: 170% output current<br>CT: 180% output current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                       | <b>Torque Accuracy</b>                                                                                                                                                                                                                                                                                                         | ±5%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                       | <b>Max Output Frequency (Hz)</b>                                                                                                                                                                                                                                                                                               | 230V series: 599.00 Hz (75hp & above: 400.00 Hz)<br>460V series: 599.00 Hz (125hp & above: 400.00 Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                       | <b>Output Frequency Accuracy</b>                                                                                                                                                                                                                                                                                               | Digital command: ±0.01%, -10°C to +40°C<br>Analog command: ±0.1%, 25±10°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                       | <b>Output Frequency Resolution</b>                                                                                                                                                                                                                                                                                             | Digital command: 0.01Hz<br>Analog command: (0.03) x (max output frequency) / 60Hz [±11 bit]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                       | <b>Overload Tolerance</b>                                                                                                                                                                                                                                                                                                      | VT duty: rated output current is 120% for 60 seconds<br>CT duty: rated output current is 150% for 60 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                       | <b>Frequency Setting Signal</b>                                                                                                                                                                                                                                                                                                | +10V to -10V, 0 to 10V, 4–20mA, 0–20mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                       | <b>Accel/Decel Time</b>                                                                                                                                                                                                                                                                                                        | 0.00–600.00 / 0.0–6000.0 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                                       | <b>Main Control Function</b>                                                                                                                                                                                                                                                                                                   | Fault restart; Parameter copy; Dwell; BACnet communication; Momentary power loss ride-through; Speed search; Over-torque detection; Torque limit; 16-step speed (max); Accel/Decel time switch; S-curve accel/decel; 3-wire sequence; Auto-Tuning (rotational, stationary); Frequency upper/lower limit settings; Cooling fan on/off switch; Slip compensation; Torque compensation; JOG frequency; MODBUS communication (RS-485 RJ45, max 115.2 kbps); DC injection braking at start/stop; Smart stall; PID control (with sleep function); Energy saving control; Optional ModbusTCP or EtherNet/IP communication/control |
|                                                       | <b>Fan Control</b>                                                                                                                                                                                                                                                                                                             | 230V model GS4-2020 and above: PMW control<br>230V model GS4-2015 and below: ON/OFF switch control<br>460V model GS4-4025 and above: PMW control<br>460V model GS4-4020 and below: ON/OFF switch control                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Protection Characteristics                            | <b>Motor Protection</b>                                                                                                                                                                                                                                                                                                        | Electronic thermal relay protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                       | <b>Over-current Protection</b>                                                                                                                                                                                                                                                                                                 | For drive model 230V and 460V:<br>Over-current protection for 240% rated current<br>Current clamp: VT duty 170–175%; CT duty 180–185%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                       | <b>Over-voltage Protection</b>                                                                                                                                                                                                                                                                                                 | 230V: drive will stop when DC-BUS voltage exceeds 410V<br>460V: drive will stop when DC-BUS voltage exceeds 820V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                                       | <b>Over-temperature Protection</b>                                                                                                                                                                                                                                                                                             | Built-in temperature sensor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                       | <b>Stall Prevention</b>                                                                                                                                                                                                                                                                                                        | Independent stall prevention during acceleration, deceleration, and running                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                       | <b>Restart After Instantaneous Power Failure</b>                                                                                                                                                                                                                                                                               | Up to 20 seconds (parameter settable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                       | <b>Ground Leakage Current Protection</b>                                                                                                                                                                                                                                                                                       | Leakage current is higher than 50% of rated current of the AC motor drive                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                       | <b>Hi-Pot Test</b>                                                                                                                                                                                                                                                                                                             | UL508C; EN 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Agency Approvals                                      | <b>Conformal Coating</b>                                                                                                                                                                                                                                                                                                       | IEC-60721-3-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                                       | CE, Reach, RoHS, TUV, cULus; (Accessories are CE; Agency approvals other than CE do not apply to accessory conduit box kits, fan kits, flange mount kits, and braking resistors.)<br>To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

# DURAPULSE GS4 AC Drives – Optional GS4-Specific Internal Accessories List

## Accessories Available for GS4 AC Drives Only

| GS4 AC Drives Software and Accessories Internal or Attached to GS4 Drive |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
|--------------------------------------------------------------------------|------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------------|--------------------------------|-----------------------------|----------------------------------------------------------------------|-----------------------------|
| Model Number                                                             | Frame Size | GS4 Drive Software          | GS4 PLC Software            | Drive Keypad*               | Keypad Mounting Bezel       | I/O Modules                       | Communication Modules          | Conduit Boxes               | Cooling Fans*                                                        | Flange Mount Kits           |
|                                                                          |            | <a href="#">pg.tGSX-103</a> | <a href="#">pg.tGSX-104</a> | <a href="#">pg.tGSX-105</a> | <a href="#">pg.tGSX-105</a> | <a href="#">pg.tGSX-101</a>       | <a href="#">pg.tGSX-102</a>    | <a href="#">pg.tGSX-108</a> | 230V <a href="#">pg.tGSX-106</a><br>460V <a href="#">pg.tGSX-107</a> | <a href="#">pg.tGSX-109</a> |
| <a href="#">GS4-21P0</a>                                                 | A          | GSOFT2                      | GSLOGIC                     | GS4-KPD                     | GS4-BZL                     | GS4-06CDD<br>GS4-06NA<br>GS4-06TR | GS4-CM-ENETIP<br>GS4-CM-MODTCP | n/a                         | n/a                                                                  | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-22P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             | <a href="#">GS4-FAN-AM</a>                                           | <a href="#">GS4-FMKIT-1</a> |
| <a href="#">GS4-23P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-25P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-27P5</a>                                                 | B          |                             |                             |                             |                             |                                   |                                | n/a                         | <a href="#">GS4-FAN-BM1</a><br><a href="#">GS4-FAN-BB</a>            | <a href="#">GS4-FMKIT-B</a> |
| <a href="#">GS4-2010</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             | <a href="#">GS4-FAN-BM2</a><br><a href="#">GS4-FAN-BB</a>            |                             |
| <a href="#">GS4-2015</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-2020</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-2025</a>                                                 | C          |                             |                             |                             |                             |                                   |                                | n/a                         | <a href="#">GS4-FAN-CM</a><br><a href="#">GS4-FAN-CB1</a>            | <a href="#">GS4-FMKIT-C</a> |
| <a href="#">GS4-2030</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-2040</a>                                                 | D**        |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-D</a>   | <a href="#">GS4-FAN-DM</a><br><a href="#">GS4-FAN-DB</a>             | n/a                         |
| <a href="#">GS4-2050</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-2060</a>                                                 | E**        |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-E</a>   | <a href="#">GS4-FAN-EM1</a><br><a href="#">GS4-FAN-EB</a>            | n/a                         |
| <a href="#">GS4-2075</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             | <a href="#">GS4-FAN-EM2</a><br><a href="#">GS4-FAN-EB</a>            |                             |
| <a href="#">GS4-2100</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-41P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-42P0</a>                                                 | A          |                             |                             |                             |                             |                                   |                                | n/a                         | n/a                                                                  | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-43P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             | <a href="#">GS4-FAN-AM</a>                                           | <a href="#">GS4-FMKIT-1</a> |
| <a href="#">GS4-45P0</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-47P5</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      | <a href="#">GS4-FMKIT-A</a> |
| <a href="#">GS4-4010</a>                                                 | B          |                             |                             |                             |                             |                                   |                                | n/a                         | <a href="#">GS4-FAN-BM1</a><br><a href="#">GS4-FAN-BB</a>            | <a href="#">GS4-FMKIT-B</a> |
| <a href="#">GS4-4015</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             | <a href="#">GS4-FAN-BM2</a><br><a href="#">GS4-FAN-BB</a>            |                             |
| <a href="#">GS4-4020</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4025</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4030</a>                                                 | C          |                             |                             |                             |                             |                                   |                                | n/a                         | <a href="#">GS4-FAN-CM</a><br><a href="#">GS4-FAN-CB2</a>            | <a href="#">GS4-FMKIT-C</a> |
| <a href="#">GS4-4040</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4050</a>                                                 | D0**       |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-D0</a>  | <a href="#">GS4-FAN-D0M</a><br><a href="#">GS4-FAN-DB</a>            | n/a                         |
| <a href="#">GS4-4060</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4075</a>                                                 | D**        |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-D</a>   | <a href="#">GS4-FAN-DM</a><br><a href="#">GS4-FAN-DB</a>             | n/a                         |
| <a href="#">GS4-4100</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4125</a>                                                 | E**        |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-E</a>   | <a href="#">GS4-FAN-EM2</a><br><a href="#">GS4-FAN-DB</a>            | n/a                         |
| <a href="#">GS4-4150</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4175</a>                                                 | F**        |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-F</a>   | <a href="#">GS4-FAN-FM</a><br><a href="#">GS4-FAN-FB</a>             | n/a                         |
| <a href="#">GS4-4200</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |
| <a href="#">GS4-4250</a>                                                 | G          |                             |                             |                             |                             |                                   |                                | <a href="#">GS4-CBX-G</a>   | <a href="#">GS4-FAN-GM</a>                                           | n/a                         |
| <a href="#">GS4-4300</a>                                                 |            |                             |                             |                             |                             |                                   |                                |                             |                                                                      |                             |

\* Keypads and Cooling Fans are pre-installed and included with the GS4 Drives.  
They are field-replaceable and available for purchase separately as spare or replacement parts.

\*\* GS4 drives in D0, D, E and F frames can be flanged mounted and do not require a flange mount kit.



Note: Refer to the page numbers shown above for more complete information about the accessory products.

# GS4-Specific Optional Accessories – Input/Output Expansion Cards


## Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

## Input/Output Expansion Cards

Optional I/O cards allow additional inputs and outputs to be added to the GS4 internal I/O. (Only one I/O card can be installed at a time.)

| GS4 DURAPULSE Drives Input/Output Expansion Cards                                                                                                                                                    |         |                                                                                                                                                                                                           |           |                                                                                                                                                                                                                    |           |            |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|-----------|
| Part Number                                                                                                                                                                                          | Price   | Description                                                                                                                                                                                               | Terminals | Specifications                                                                                                                                                                                                     | Wire Size | Placement* | GS Drive  |
| <u><b>GS4-06CDD*</b></u>                                                                                                                                                                             | \$33.50 | DURAPULSE combination discrete I/O module, selectable sinking or sourcing 24VDC input, 24VDC output, 4-point input, 2-point output, 1 input common(s), 1 output common(s), 50mA resistive output current. | COM       | (1) Common for Input Terminals                                                                                                                                                                                     | 20~24 AWG | slot #3    | GS4 – all |
|                                                                                                                                                                                                      |         |                                                                                                                                                                                                           | DI10–DI13 | (4) Discrete Inputs; selectable sinking or sourcing<br>Internal power available: 24VDC ±5% 200mA, 5W<br>External power: 24VDC (30V max, 19V min), 30W<br>ON: activation 6.5mA @ ≥ 9VDC<br>OFF: leakage 10µA ≤ 3VDC |           |            |           |
|                                                                                                                                                                                                      |         |                                                                                                                                                                                                           | DO10–DO11 | (2) Discrete Outputs (photocoupler)<br>Duty-cycle: 50%<br>Max. output frequency: 100Hz<br>Max. current: 50mA resistive<br>Max. voltage: 48VDC                                                                      |           |            |           |
|                                                                                                                                                                                                      |         |                                                                                                                                                                                                           | DOC       | (1) Common for Output Terminals                                                                                                                                                                                    |           |            |           |
| <u><b>GS4-06NA*</b></u>                                                                                                                                                                              | \$36.00 | DURAPULSE discrete input module, sinking 120VAC input, 6-point input, 1 input common(s).                                                                                                                  | ACN       | (1) AC power common for Input Terminal (Neutral)                                                                                                                                                                   | 20~24 AWG | slot #3    | GS4 – all |
|                                                                                                                                                                                                      |         |                                                                                                                                                                                                           | DI10–DI15 | (6) Discrete Inputs; sinking<br>Input voltage: 100–130 VAC<br>Input frequency: 47–63 Hz<br>Input impedance: 27kΩ<br>Terminal response time: ON: 10ms<br>OFF: 20ms                                                  |           |            |           |
| <u><b>GS4-06TR*</b></u>                                                                                                                                                                              | \$55.00 | DURAPULSE relay output module, Form A (SPST-NO) relays, 6-point output, 6 output common(s), 3 Amps resistive output current, 1.2 Amps inductive output current, 250VAC/30VDC input.                       | R10–R15   | (6) separate commons for each relay                                                                                                                                                                                | 20~26 AWG | slot #3    | GS4 – all |
|                                                                                                                                                                                                      |         |                                                                                                                                                                                                           | RO10–RO15 | (6) normally open relay output<br>Resistive load: 5A(NO) / 250VAC<br>5A(NO) / 30VDC<br>Inductive load (COSØ 0.4)<br>2A(NO) / 250VAC                                                                                |           |            |           |
| * GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot.<br>I/O cards are designed for slot #3, and will not fit in any other slot. |         |                                                                                                                                                                                                           |           |                                                                                                                                                                                                                    |           |            |           |

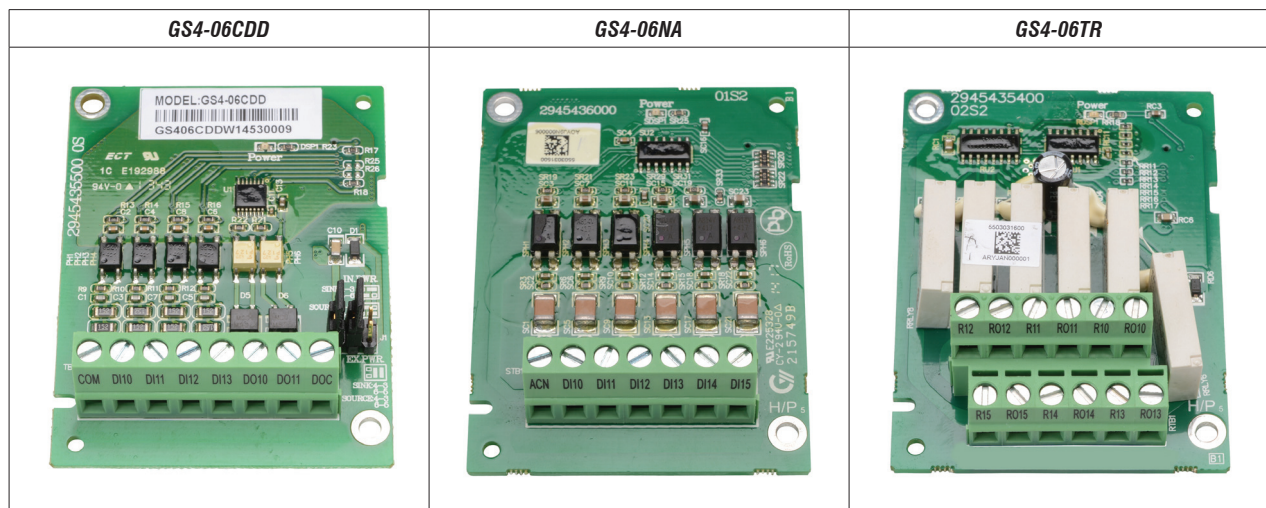

# GS4-Specific Optional Accessories – Communication Interface Cards

## Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

## Communication Cards

Communication interface cards provide EtherNet/IP™ or ModbusTCP communication capability. Only one communication card can be installed at a time.

| GS4 DURAPULSE Drives Communication Interface Cards                                                                                                                                                                    |          |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------|
| Part Number                                                                                                                                                                                                           | Price    | Description                               | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Placement* | GS Drive  |
| <b><u>GS4-CM-ENETIP*</u></b>                                                                                                                                                                                          | \$110.00 | DURAPULSE communication card, EtherNet/IP | Interface: EtherNet/IP RJ45 with MDI/MDIX auto-detect<br>Number of ports: 1 (16 connections max)<br>Transmission method: IEEE 802.3, IEEE 802.3u<br>Transmission cable: Category 5e shielding 100MHz<br>Transmission speed: 10/100 Mbps Auto-Detect<br>Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP, EtherNet/IP<br>Power supply voltage: 5VDC (supplied by the GS4 AC drive)<br>Insulation voltage: 500VDC<br>Power consumption: 0.8W<br>Weight: 25g<br>Noise immunity<br>ESD (IEC 61800-5-1, IEC 61000-4-2)<br>EFT (IEC 61800-5-1, IEC 61000-4-4)<br>Surge Test (IEC 61800-5-1, IEC 61000-4-5)<br>Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6)<br>Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity)<br>Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity)<br>Vibration / Shock immunity:<br>IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27<br>Ethernet timeout functionality for EtherNet/IP connections<br>GS4-CM-ENETIP supports 4 EtherNet/IP connections and also supports 4 ModTCP connections. These ModTCP connections cannot start/stop or change command frequency in the drive, but can be used to monitor the drive and change Parameters.<br>Ethernet timeout functionality <u>for ModTCP connections</u> is <u>not</u> supported on the EtherNet/IP card. | slot #1    | GS4 – all |
| <b><u>GS4-CM-MODTCP*</u></b>                                                                                                                                                                                          | \$97.00  | DURAPULSE communication card, ModbusTCP   | Interface: Ethernet RJ45 with MDI/MDX auto-detect<br>Number of ports: 1 (4 connections max)<br>Transmission method: IEEE 802.3, IEEE 802.3u<br>Transmission cable: Category 5e shielding 100MHz<br>Transmission speed: 10/100 Mbps Auto-Detect<br>Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP<br>Power supply voltage: 5VDC (supplied by the GS4 AC drive)<br>Insulation voltage: 500VDC<br>Power consumption: 0.8W<br>Weight: 25g<br>Noise immunity<br>ESD (IEC 61800-5-1, IEC 61000-4-2)<br>EFT (IEC 61800-5-1, IEC 61000-4-4)<br>Surge Test (IEC 61800-5-1, IEC 61000-4-5)<br>Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6)<br>Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity)<br>Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity)<br>Vibration / Shock immunity:<br>IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27<br>Ethernet Timeout functionality for ModTCP connections                                                                                                                                                                                                                                                                                                                                                                                      | slot #1    | GS4 – all |
| * GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot. Communication interface cards are designed for slot #1, and will not fit in any other slot. |          |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |           |

**GS4-CM-ENETIP**



**GS4-CM-MODTCP**



# DuraPulse Accessories – Software

## GSoft2 Drive Configuration Software

### GSoft2 Drive Configuration Software

Available for *FREE* Download

| DURAPULSE Drives GSOFT2 Drive Configuration Software                                                          |         |                                                                                                                                                                                           |                                                              |
|---------------------------------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| Part Number                                                                                                   | Price*  | Description                                                                                                                                                                               | For GS Drive                                                 |
| <b>GSOFT2</b>                                                                                                 | \$10.50 | GSOFT2 Windows configuration software, USB or free download. For use with DURApulse GS4, GS10, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter. | GS4 – all<br>GS10 – all<br>GS20(X) – all<br>GS30 – all       |
| <b>USB-485M</b>                                                                                               | \$60.00 | PC adapter, USB A to RS-485 (RJ45/RJ12).                                                                                                                                                  | GS4/GS10                                                     |
| <b>USB-CBL-AB3</b>                                                                                            | \$12.00 | Programming cable, USB A to USB B, 3ft cable length.                                                                                                                                      | GS4 – all (for Drive FW only)<br>GS20(X) – all<br>GS30 – all |
| * GSOFT2 can be downloaded for <u>free</u> or purchased on USB from AutomationDirect.com (search for GSOFT2). |         |                                                                                                                                                                                           |                                                              |

### GSOFT2 Drive Configuration Software

GSoft2 is the configuration software for the Automation DuraPulse family of drives. It is designed to allow you to connect a personal computer to the drive, and perform a variety of functions.

GSoft2 includes an integral help file with software instructions. GSoft2 can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSoft2).

### Functions

- Create new drive configurations
- Upload/download drive configurations
- Edit drive configurations
- Archive/store multiple drive configurations on your PC
- Trend drive operation parameters (not available with GS10)
- Tune the drive PID loop
- View real time key operating parameters
- Real-time trending
- Start/Stop drive and switch directions, provided drive is set up for remote operation
- View drive faults

### Computer System Requirements

GSoft2 will run on Windows PCs that meet the following requirements:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, 11
- Edge or Chrome (for HTML help support)
- 32 Mb of available memory
- 10 Mb hard drive space
- Available USB port
- USB to RS485 adapter needed for GS4 and GS10 models



# GS4/GS20(X)/GS30 Accessories – Software

## GSLogic PLC Programming Software

Optional Accessory Software Applicable Only to AC Drive Series:

- GS4
- GS20(X)
- GS30

### GSLOGIC Drive Configuration Software

Available for **FREE** Download

| GS4/GS20(X)/GS30 DURAPULSE Drives GSLogic PLC Programming Software                                              |         |                                                                                                                                                                              |                                          |
|-----------------------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Part Number                                                                                                     | Price*  | Description                                                                                                                                                                  | For GS Drive                             |
| <b>GSLOGIC</b>                                                                                                  | \$10.50 | GSLOGIC Windows logic software, USB or free download. For use with DURApulse GS4, GS20, GS20X and GS30 series AC drives. Requires PC serial port or USB-485M serial adapter. | GS4 - all<br>GS20(X) - all<br>GS30 - all |
| <b>USB-485M</b>                                                                                                 | \$60.00 | PC adapter, USB A to RS-485 (RJ45/RJ12).                                                                                                                                     | GS4 - all                                |
| <b>USB-CBL-AB3</b>                                                                                              | \$12.00 | Programming cable, USB A to USB B, 3ft cable length.                                                                                                                         | GS20(X) - all<br>GS30 - all              |
| * GSLOGIC can be downloaded for <b>free</b> or purchased on USB from AutomationDirect.com (search for GSLOGIC). |         |                                                                                                                                                                              |                                          |

### PLC Summary

The GS4, GS20(X), and GS30 drives include a built-in PLC. Programmed in ladder logic, the PLC provides a comprehensive set of instructions and 2,000 (GS20(X)), 5,000 (GS30), or 10,000 (GS4) steps of programming capacity. GSLogic PLC software includes a Help File which contains the detailed information needed to use the PLC.

The PLC functionality is included with every GS4, GS20(X), and GS30 drive, and can be accessed over communications by external PLCs (via serial Modbus), or by the drive itself (using built-in PLC instructions). The PLC is perfectly suited for applications where digital and analog I/O requirements are small. For applications with complex PLC programming or large I/O requirements, please consider Click, Productivity, or Do-More/BRX. All of these PLCs can be easily integrated with the GS drive family or PLC. The GS4-KPD keypad is capable of storing multiple PLC programs.

There are two methods for communicating from the PLC to the drive. The first method is to use the WPR and RPR instructions available in the PLC's library. These two instructions can read from or write to any AC drive parameter in the same physical drive. The second method is to use Modbus RTU. The PLC is a Serial Modbus slave only. A Modbus RTU master can communicate with the PLC via serial only; optional communication cards cannot address the PLC. If communication cards (EtherNet/IP or Modbus TCP) are the desired method of communication, the drive includes PLC Buffers parameters that can be used. Simply write the needed information from the PLC into the drive's PLC buffer parameters using the WPR instruction. The Modbus TCP or EtherNet/IP cards can then read the VFD parameters.

### GSLogic Introduction

GSLogic is the drive PLC programming software for the AutomationDirect GS4, GS20(X), and GS30 family of drives. It is designed to enable you to perform a variety of drive PLC programming functions. Windows editing functions like cut, copy, paste, multiple windows, etc., are supported. GSLogic also provides for register editing, settings, file reading, saving, online monitoring settings, and other convenience functions, such as:


- Upload/download drive PLC program files to the onboard PLC
- Create new drive PLC programs
- Edit drive PLC programs
- Archive/store multiple drive PLC programs on your PC or the GS4-KPD drive keypad
- Control drive PID loops (FPID instructions)
- View in real time all drive PLC registers
- Print drive PLC program files

GSLogic includes an integral help file that includes software instructions, how to use GSLogic, and how to use the GS drive PLC.

### GSLogic System Requirements

GSLogic is a Windows-based programming software environment. Please check the following requirements when choosing your PC configuration:

- Windows OS: **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, **11**
- 300MB free hard-disk space
- USB Port required for project transfer to drive
- USB-485M serial adapter required for GS4 models

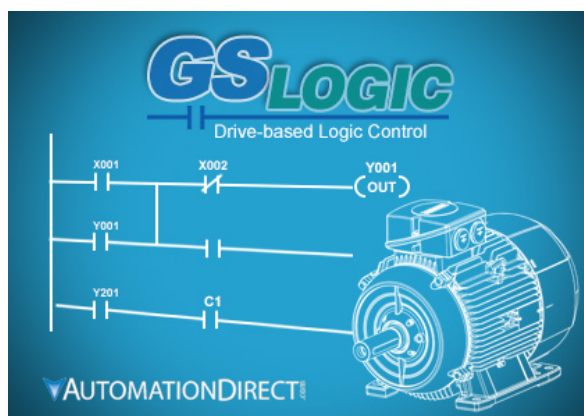

# DuraPulse Optional Accessories – Advanced LCD Keypad

## Advanced Keypad



NOTE: The keypad described below is included with the GS4 AC Drive, and is also available for purchase separately as a spare/replacement component for GS4, or an optional upgrade for GS10/GS20(X)/GS30.

## Keypad Panel-Mounting Kit

NOTE: The keypad panel-mounting kit described below is an optional accessory that is NOT included with the GS10/GS20(X)/GS30 AC drive.

| GSx Series <i>DURAPULSE</i> Drives Keypad and Keypad Panel-Mounting Kit |          |                                                                                                                                                                                                                                                                                        |                                                        |
|-------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Part Number                                                             | Price    | Description                                                                                                                                                                                                                                                                            | For GS Drive                                           |
| <b>GS4-KPD*</b>                                                         | \$107.00 | Spare or replacement keypad for GS4 AC drives; optional advanced keypad for GS20(X) drives; includes RJ45 connector; great for maintenance or back-up programs.                                                                                                                        | GS4 – all<br>GS10 – all<br>GS20(X) – all<br>GS30 – all |
| <b>GS4-BZL**</b>                                                        | \$29.50  | Keypad Panel-Mounting Kit for remote surface mounting or embedded mounting of the AC drive removable keypad; hardware included. Use a standard Cat5e RJ45 patch cable (not included) to connect a remote-mounted keypad to the drive. Max cable length for remote-mounted keypad = 5m. | GS4 – all<br>GS10 – all<br>GS20(X) – all<br>GS30 – all |

\* A keypad is included with each GS4 AC Drive; additional keypads are available for spare/replacement components.  
 \*\* The keypad mounting kit is an optional accessory that is NOT included with the GS4 AC drive; for mounting the keypad remotely from the drive.  
 Note: Keypad firmware can only be upgraded when connected to a GS4 drive.

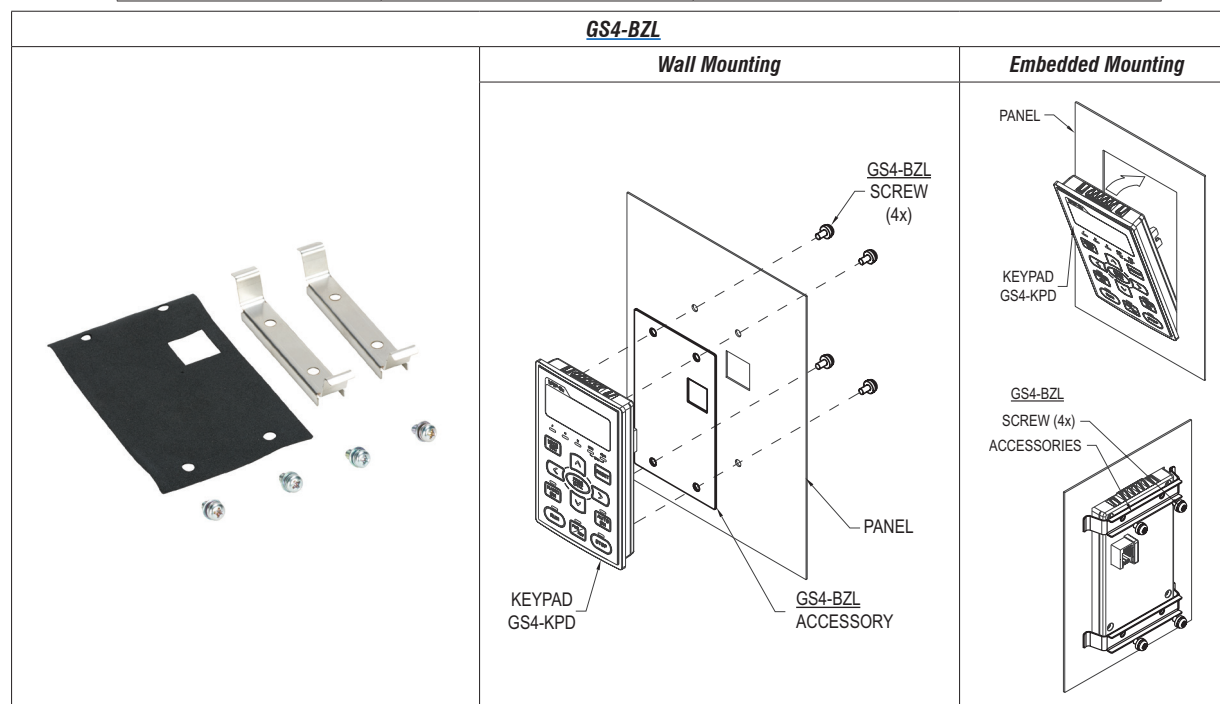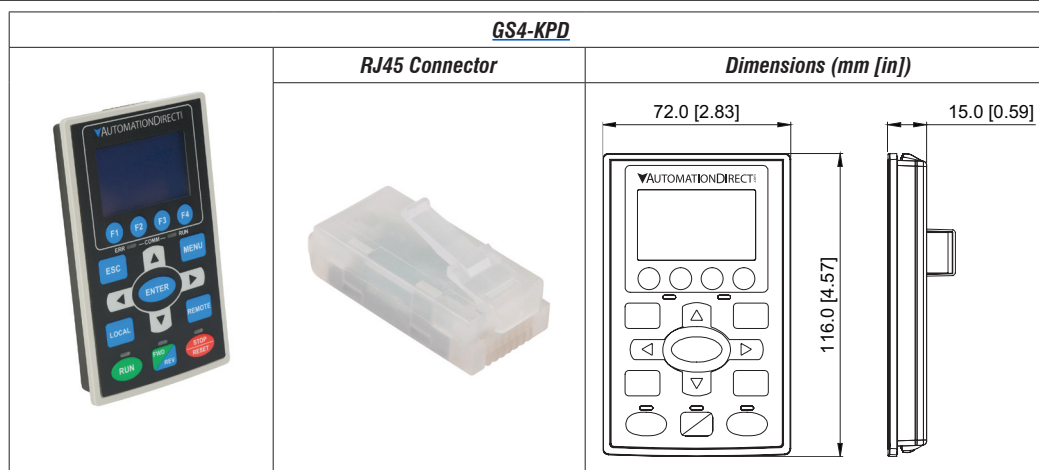

# GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

## Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

### Cooling Fans for 230V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

| GS4 230V Models – (GS4-2xxx) – Fan Selection Table |                                    |          |                                                                                     |                     |                        |         |                      |            |
|----------------------------------------------------|------------------------------------|----------|-------------------------------------------------------------------------------------|---------------------|------------------------|---------|----------------------|------------|
| Drive Model                                        | Fan Model *                        |          |                                                                                     | Description         | Size                   | Voltage | Amps / Fan           | Fans / Kit |
|                                                    | Part #                             | Price    | Photo                                                                               |                     |                        |         |                      |            |
| GS4-22P0<br>GS4-23P0<br>GS4-25P0                   | <a href="#"><u>GS4-FAN-AM</u></a>  | \$28.00  |    | Frame A main        | 40mm                   | 24      | 0.15                 | 1          |
| GS4-27P5                                           | <a href="#"><u>GS4-FAN-BM1</u></a> | \$34.50  |    | Frame B main        | 80mm                   | 24      | 0.33                 | 1          |
|                                                    | <a href="#"><u>GS4-FAN-BB</u></a>  | \$27.00  |    | Frame B board level | 40mm                   | 24      | 0.18                 | 1          |
| GS4-2010<br>GS4-2015                               | <a href="#"><u>GS4-FAN-BM2</u></a> | \$52.00  |    | Frame B main        | 80mm                   | 24      | 0.51                 | 1          |
|                                                    | <a href="#"><u>GS4-FAN-BB</u></a>  | \$27.00  |   | Frame B board level | 40mm                   | 24      | 0.18                 | 1          |
| GS4-2020<br>GS4-2025<br>GS4-2030                   | <a href="#"><u>GS4-FAN-CM</u></a>  | \$49.00  |  | Frame C main        | 92mm                   | 24      | 0.75                 | 1          |
|                                                    | <a href="#"><u>GS4-FAN-CB1</u></a> | \$28.00  |  | Frame C board level | 40mm                   | 24      | 0.18                 | 1          |
| GS4-2040<br>GS4-2050                               | <a href="#"><u>GS4-FAN-DM</u></a>  | \$174.00 |  | Frame D main        | 92mm                   | 24      | 0.75                 | 2          |
|                                                    | <a href="#"><u>GS4-FAN-DB</u></a>  | \$58.00  |  | Frame D board level | 70mm                   | 24      | 0.33                 | 1          |
| GS4-2060<br>GS4-2075                               | <a href="#"><u>GS4-FAN-EM1</u></a> | \$239.00 |  | Frame E main        | 120mm                  | 24      | 1.08                 | 2          |
|                                                    | <a href="#"><u>GS4-FAN-EB</u></a>  | \$119.00 |  | Frame E board level | 120mm                  | 24      | 0.76                 | 1          |
| GS4-2100                                           | <a href="#"><u>GS4-FAN-EM2</u></a> | \$303.00 |  | Frame E main        | 92mm<br>120mm<br>120mm | 24      | 0.75<br>1.08<br>1.08 | 3          |
|                                                    | <a href="#"><u>GS4-FAN-EB</u></a>  | \$119.00 |  | Frame E board level | 120mm                  | 24      | 0.76                 | 1          |

\* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.


# GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

## Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

## Cooling Fans for 460V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

| GS4 460V Models – (GS4-4xxx) – Fan Selection Table |                           |          |                                                                                     |                     |                        |         |                      |            |
|----------------------------------------------------|---------------------------|----------|-------------------------------------------------------------------------------------|---------------------|------------------------|---------|----------------------|------------|
| Drive Model                                        | Fan Model *               |          |                                                                                     | Description         | Size                   | Voltage | Amps / Fan           | Fans / Kit |
|                                                    | Part #                    | Price    | Photo                                                                               |                     |                        |         |                      |            |
| GS4-43P0<br>GS4-45P0<br>GS4-47P5                   | <b><u>GS4-FAN-AM</u></b>  | \$28.00  |    | Frame A main        | 40mm                   | 24      | 0.15                 | 1          |
| GS4-4010                                           | <b><u>GS4-FAN-BM1</u></b> | \$34.50  |    | Frame B main        | 80mm                   | 24      | 0.33                 | 1          |
|                                                    | <b><u>GS4-FAN-BB</u></b>  | \$27.00  |    | Frame B board level | 40mm                   | 24      | 0.18                 | 1          |
| GS4-4015<br>GS4-4020                               | <b><u>GS4-FAN-BM2</u></b> | \$52.00  |    | Frame B main        | 80mm                   | 24      | 0.51                 | 1          |
|                                                    | <b><u>GS4-FAN-BB</u></b>  | \$27.00  |    | Frame B board level | 40mm                   | 24      | 0.18                 | 1          |
| GS4-4025<br>GS4-4030<br>GS4-4040                   | <b><u>GS4-FAN-CM</u></b>  | \$49.00  |   | Frame C main        | 92mm                   | 24      | 0.75                 | 1          |
|                                                    | <b><u>GS4-FAN-CB2</u></b> | \$34.50  |  | Frame C board level | 40mm                   | 12      | 0.60                 | 1          |
| GS4-4050<br>GS4-4060                               | <b><u>GS4-FAN-D0M</u></b> | \$98.00  |  | Frame D0 main       | 80mm                   | 24      | 0.75                 | 2          |
|                                                    | <b><u>GS4-FAN-DB</u></b>  | \$58.00  |  | Frame D board level | 70mm                   | 24      | 0.33                 | 1          |
| GS4-4075<br>GS4-4100                               | <b><u>GS4-FAN-DM</u></b>  | \$174.00 |  | Frame D main        | 92mm                   | 24      | 0.75                 | 2          |
|                                                    | <b><u>GS4-FAN-DB</u></b>  | \$58.00  |  | Frame D board level | 70mm                   | 24      | 0.33                 | 1          |
| GS4-4125<br>GS4-4150                               | <b><u>GS4-FAN-EM2</u></b> | \$303.00 |  | Frame E main        | 92mm<br>120mm<br>120mm | 24      | 0.75<br>1.08<br>1.08 | 3          |
|                                                    | <b><u>GS4-FAN-EB</u></b>  | \$119.00 |  | Frame E board level | 120mm                  | 24      | 0.76                 | 1          |
| GS4-4175<br>GS4-4200                               | <b><u>GS4-FAN-FM</u></b>  | \$431.00 |  | Frame F main        | 92mm                   | 24      | 0.76                 | 4          |
|                                                    | <b><u>GS4-FAN-FB</u></b>  | \$126.00 |  | Frame F board level | 120mm                  | 24      | 1.08                 | 1          |
| GS4-4250<br>GS4-4300                               | <b><u>GS4-FAN-GM</u></b>  | \$902.00 |  | Frame G main        | 250mm                  | 48      | 2.2                  | 2          |

\* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.

# GS4-Specific Optional Accessories – Conduit Boxes

## Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

### Conduit Boxes

Optional Conduit Box Kits can be ordered separately. These kits bolt onto the bottom of the applicable GS4 drive to provide a convenient connection point for conduit entry, allowing the GS4 to maintain a IP20/NEMA 1 environmental protection rating; especially useful for GS4 drives mounted outside of an electrical control panel.

**Note:** GS4 Frames A through C have integral conduit box space built into the drive. No separate conduit boxes are necessary or available.



| GS4 Frame Sizes D0–G – Conduit Box Selection Table                                                                                                                                                                                                                                                                                                 |        |                                   |          |                                                                                     |                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------------|----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Drive                                                                                                                                                                                                                                                                                                                                              |        | Conduit Box **                    |          |                                                                                     | Description                                                                                |
| Model                                                                                                                                                                                                                                                                                                                                              | Frame* | Part #                            | Price    | Photo                                                                               |                                                                                            |
| GS4-4060,<br>GS4-4050                                                                                                                                                                                                                                                                                                                              | D0     | <a href="#"><u>GS4-CBX-D0</u></a> | \$163.00 |    | NEMA 1 conduit box kit for use with GS4 frame size D0 AC drive; mounting hardware included |
| GS4-2040,<br>GS4-2050;<br>GS4-4075,<br>GS4-4100                                                                                                                                                                                                                                                                                                    | D      | <a href="#"><u>GS4-CBX-D</u></a>  | \$163.00 |    | NEMA 1 conduit box kit for use with GS4 frame size D AC drive; mounting hardware included  |
| GS4-2060,<br>GS4-2075,<br>GS4-2100;<br>GS4-4125,<br>GS4-4150                                                                                                                                                                                                                                                                                       | E      | <a href="#"><u>GS4-CBX-E</u></a>  | \$188.00 |   | NEMA 1 conduit box kit for use with GS4 frame size E AC drive; mounting hardware included  |
| GS4-4150,<br>GS4-4200                                                                                                                                                                                                                                                                                                                              | F      | <a href="#"><u>GS4-CBX-F</u></a>  | \$271.00 |  | NEMA 1 conduit box kit for use with GS4 frame size F AC drive; mounting hardware included  |
| GS4-4250,<br>GS4-4300                                                                                                                                                                                                                                                                                                                              | G      | <a href="#"><u>GS4-CBX-G</u></a>  | \$513.00 |  | NEMA 1 conduit box kit for use with GS4 frame size G AC drive; mounting hardware included  |
| <p>* GS4 Frame Sizes A through C have integral conduit box space built into the drive; separate conduit boxes are not necessary nor available.</p> <p>** Conduit Box Kits include mounting hardware; box base, box cover, bushings, and screws.</p> <p>Conduit box dimensions are shown with the AC drive dimensions, as mounted on the drive.</p> |        |                                   |          |                                                                                     |                                                                                            |




# GS4-Specific Optional Accessories – Flange Mounting Kits

## Flange Mounting Kits

Optional GS4 drive flange mounting kits allow the heat sinks on the back of select GS4 drives to be positioned through the back of the control enclosure. Since a majority of the heat generated by the GS4 drive will be outside the enclosure, heat load will be reduced and a smaller enclosure may possibly be used. These flange mounting kits are applicable to GS4 drive frame sizes A through C.

**NOTE:** GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required (see cutout dimensions below).  
Frame size G cannot be flange-mounted.

| GS4 Frame Sizes A–C – Flange Mounting Kit Selection Table                                                                                                                                                                                                                                                                           |        |                           |         |                                                                                     |                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------|---------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Drive                                                                                                                                                                                                                                                                                                                               |        | Flange Mounting Kit **    |         |                                                                                     | Description                                                                                                                    |
| Model                                                                                                                                                                                                                                                                                                                               | Frame* | Part #                    | Price   | Photo                                                                               |                                                                                                                                |
| GS4-22P0<br>GS4-23P0<br>GS4-43P0                                                                                                                                                                                                                                                                                                    | A      | <b><u>GS4-FMKIT-1</u></b> | \$74.00 |    | GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; adapter plate and mounting hardware included |
| GS4-21P0<br>GS4-25P0<br>GS4-41P0<br>GS4-42P0<br>GS4-45P0<br>GS4-47P5                                                                                                                                                                                                                                                                | A      | <b><u>GS4-FMKIT-A</u></b> | \$62.00 |    | GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; mounting hardware included                   |
| GS4-27P5<br>GS4-2010<br>GS4-2015<br>GS4-4010<br>GS4-4015<br>GS4-4020                                                                                                                                                                                                                                                                | B      | <b><u>GS4-FMKIT-B</u></b> | \$70.00 |   | GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame B drives; mounting hardware included                            |
| GS4-2020<br>GS4-2025<br>GS4-2030<br>GS4-4025<br>GS4-4030<br>GS4-4040                                                                                                                                                                                                                                                                | C      | <b><u>GS4-FMKIT-C</u></b> | \$79.00 |  | GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame C drives; mounting hardware included                            |
| <p>* See panel cutout dimensions below for GS4 Frames A, B, C.</p> <p>* GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required. See Appendix A of the GS4 User Manual for panel cut-out dimensions for frames D0, E, F.</p> <p>* Frame size G cannot be flange-mounted.</p> |        |                           |         |                                                                                     |                                                                                                                                |

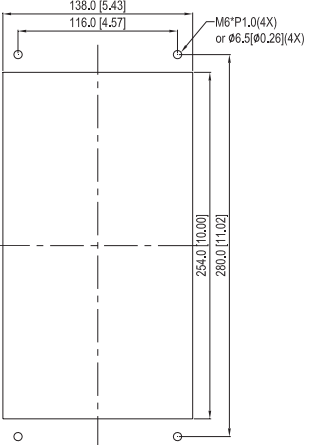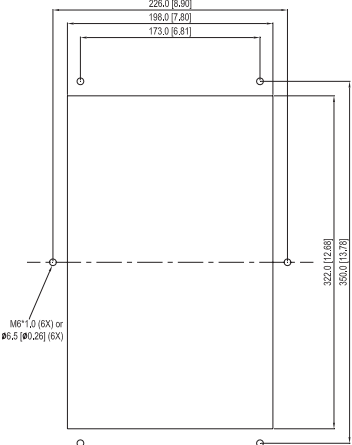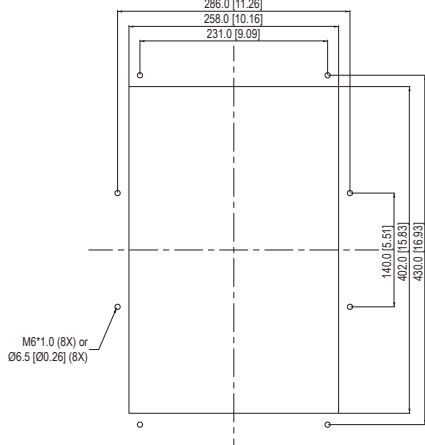
| GS4 Flange Mounting Kit Cutout Dimensions ( mm [in] )                               |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Frame A                                                                             | Frame B                                                                             | Frame C                                                                              |
|  |  |  |

# DURAPULSE GS4 AC Drives Specifications – Installation

Understanding the installation requirements for your *DURAPULSE* AC drive will help to ensure that it operates within its environmental and electrical limits.

**Note:** Never use only this catalog for installation instructions or operation of equipment; refer to the User Manual, GS4\_UMW.

| Environmental Conditions for GS4 AC Drives |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                      |                      |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------------------|
| Condition                                  | Operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Storage                                              | Transportation       |
| Installation Location                      | IEC60364-1/IEC60664-1 Pollution degree 2, Indoor use only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | n/a                                                  | n/a                  |
| Ambient Temperature                        | see separate Operating Temperature table below                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                      | -25°C to +70°C       |
| Relative Humidity                          | Max 90%, non-condensing, non-frozen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Max 95%, non-condensing, non-frozen                  |                      |
| Air Pressure                               | 86 to 106 kPa                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                      | 70 to 106 kPa        |
| Pollution Level                            | IEC721-3-3, no concentrate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                      |                      |
|                                            | Class 3C2; Class 3S2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Class 2C2; Class 2S2                                 | Class 1C2; Class 1S2 |
| Altitude                                   | 0–1000m<br>(see separate derating section for altitudes of 1000–3000m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | n/a                                                  | n/a                  |
| Package Drop                               | n/a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ISTA procedure 1A(according to weight) IEC60068-2-31 |                      |
| Vibration                                  | 1.0mm, peak to peak value range from 2Hz to 13.2Hz; 0.7G–1.0G range from 13.2Hz to 55Hz; 1.0G range from 55Hz to 512Hz. Comply with IEC 60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                      |                      |
| Impact                                     | IEC/EN 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                      |                      |
| Installation Orientation                   | <div><div>10°→</div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div>&lt;</div></div> |                                                      |                      |

| Operating Temperature and Protection Level |                                    |                         |                           |                                                                                                                                                                                 |                       |
|--------------------------------------------|------------------------------------|-------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Frame Size                                 |                                    | Top cover               | Conduit Box               | Protection Level                                                                                                                                                                | Operating Temperature |
| A–C                                        | 230V: 1.0–30 hp<br>460V: 1.0–40 hp | With top cover removed  | Standard<br>conduit plate | IP20 / UL Open Type                                                                                                                                                             | -10–50°C [14–122°F]   |
|                                            |                                    | With top cover in place |                           | IP20 / UL Type1 / NEMA 1                                                                                                                                                        | -10–40°C [14–104°F]   |
| D0–G                                       | 230V: >30hp<br>460V: >40hp         | N/A                     | With conduit box          | IP20 / UL Type1 / NEMA 1                                                                                                                                                        | -10–40°C [14–104°F]   |
|                                            | 230V: >30hp<br>460V: >40hp         | N/A                     | Without conduit<br>box    | IP00 / IP20 / UL Open Type *<br>Only the circled area is IP00.<br>Other parts are IP20.<br> | -10–50°C [14–122°F]   |

\* Only the exposed terminal blocks are IP00; the other components are IP20

\* Only the exposed terminal blocks are IP00; the other components are IP20



**WARNING:** AC DRIVES GENERATE A LARGE AMOUNT OF HEAT WHICH MAY DAMAGE THE AC DRIVE. AUXILIARY COOLING METHODS MAY BE REQUIRED TO AVOID EXCEEDING MAXIMUM OPERATING TEMPERATURE. WHEN POSSIBLE, CONSIDER FLANGE MOUNTING TO LOWER ENCLOSURE TEMPERATURES.



**WARNING:** MAXIMUM AMBIENT TEMPERATURES MUST NOT EXCEED 50°C (122°F), OR 40°C (104°F), FOR ALL GS4 MODELS.

# DURAPULSE GS4 AC Drives Specifications – Air Flow and Power (Heat) Dissipation

| GS4 AC Drives Air Flow and Power (Heat) Dissipation |                                        |          |       |                                              |          |       |                                        |          |       |
|-----------------------------------------------------|----------------------------------------|----------|-------|----------------------------------------------|----------|-------|----------------------------------------|----------|-------|
| Model Number                                        | Airflow Rate <sup>1)</sup> for Cooling |          |       |                                              |          |       | Power (Heat) Dissipation <sup>2)</sup> |          |       |
|                                                     | Flow Rate <sup>1)</sup> (cfm)          |          |       | Flow Rate <sup>1)</sup> (m <sup>3</sup> /hr) |          |       | Power Dissipation <sup>2)</sup> (Watt) |          |       |
|                                                     | External                               | Internal | Total | External                                     | Internal | Total | External (Heat sink)                   | Internal | Total |
| <a href="#">GS4-21P0</a>                            | –                                      | –        | –     | –                                            | –        | –     | 33                                     | 27       | 60    |
| <a href="#">GS4-22P0</a>                            | 14                                     | –        | 14    | 24                                           | –        | 24    | 56                                     | 31       | 87    |
| <a href="#">GS4-23P0</a>                            | 14                                     | –        | 14    | 24                                           | –        | 24    | 79                                     | 36       | 115   |
| <a href="#">GS4-25P0</a>                            | 10                                     | –        | 10    | 17                                           | –        | 17    | 113                                    | 46       | 159   |
| <a href="#">GS4-27P5</a>                            | 40                                     | 14       | 54    | 68                                           | 24       | 92    | 197                                    | 67       | 264   |
| <a href="#">GS4-2010</a>                            | 66                                     | 14       | 80    | 112                                          | 24       | 136   | 249                                    | 86       | 335   |
| <a href="#">GS4-2015</a>                            | 58                                     | 14       | 73    | 99                                           | 24       | 123   | 409                                    | 121      | 530   |
| <a href="#">GS4-2020</a>                            | 166                                    | 12       | 178   | 282                                          | 20       | 302   | 455                                    | 161      | 616   |
| <a href="#">GS4-2025</a>                            | 166                                    | 12       | 178   | 282                                          | 20       | 302   | 549                                    | 184      | 733   |
| <a href="#">GS4-2030</a>                            | 166                                    | 12       | 178   | 282                                          | 20       | 302   | 649                                    | 216      | 865   |
| <a href="#">GS4-2040</a>                            | 179                                    | 30       | 209   | 304                                          | 51       | 355   | 913                                    | 186      | 1099  |
| <a href="#">GS4-2050</a>                            | 179                                    | 30       | 209   | 304                                          | 51       | 355   | 1091                                   | 220      | 1311  |
| <a href="#">GS4-2060</a>                            | 228                                    | 73       | 301   | 387                                          | 124      | 511   | 1251                                   | 267      | 1518  |
| <a href="#">GS4-2075</a>                            | 228                                    | 73       | 301   | 387                                          | 124      | 511   | 1401                                   | 308      | 1709  |
| <a href="#">GS4-2100</a>                            | 246                                    | 73       | 319   | 418                                          | 124      | 542   | 1770                                   | 369      | 2139  |
| <a href="#">GS4-41P0</a>                            | –                                      | –        | –     | –                                            | –        | –     | 33                                     | 25       | 58    |
| <a href="#">GS4-42P0</a>                            | –                                      | –        | –     | –                                            | –        | –     | 45                                     | 29       | 74    |
| <a href="#">GS4-43P0</a>                            | 14                                     | –        | 14    | 24                                           | –        | 24    | 71                                     | 33       | 104   |
| <a href="#">GS4-45P0</a>                            | 10                                     | –        | 10    | 17                                           | –        | 17    | 103                                    | 38       | 141   |
| <a href="#">GS4-47P5</a>                            | 10                                     | –        | 10    | 17                                           | –        | 17    | 134                                    | 46       | 180   |
| <a href="#">GS4-4010</a>                            | 40                                     | 14       | 54    | 68                                           | 24       | 92    | 216                                    | 76       | 292   |
| <a href="#">GS4-4015</a>                            | 66                                     | 14       | 80    | 112                                          | 24       | 136   | 287                                    | 93       | 380   |
| <a href="#">GS4-4020</a>                            | 58                                     | 14       | 73    | 99                                           | 24       | 123   | 396                                    | 122      | 518   |
| <a href="#">GS4-4025</a>                            | 99                                     | 21       | 120   | 168                                          | 36       | 204   | 369                                    | 138      | 507   |
| <a href="#">GS4-4030</a>                            | 99                                     | 21       | 120   | 168                                          | 36       | 204   | 476                                    | 158      | 634   |
| <a href="#">GS4-4040</a>                            | 126                                    | 21       | 147   | 214                                          | 36       | 250   | 655                                    | 211      | 866   |
| <a href="#">GS4-4050</a>                            | 179                                    | 30       | 209   | 304                                          | 51       | 355   | 809                                    | 184      | 993   |
| <a href="#">GS4-4060</a>                            | 179                                    | 30       | 209   | 304                                          | 51       | 355   | 929                                    | 218      | 1147  |
| <a href="#">GS4-4075</a>                            | 179                                    | 30       | 209   | 304                                          | 51       | 355   | 1156                                   | 257      | 1413  |
| <a href="#">GS4-4100</a>                            | 186                                    | 30       | 216   | 316                                          | 51       | 367   | 1408                                   | 334      | 1742  |
| <a href="#">GS4-4125</a>                            | 257                                    | 73       | 330   | 437                                          | 124      | 561   | 1693                                   | 399      | 2092  |
| <a href="#">GS4-4150</a>                            | 223                                    | 73       | 296   | 379                                          | 124      | 503   | 2107                                   | 491      | 2598  |
| <a href="#">GS4-4175</a>                            | 224                                    | 112      | 336   | 381                                          | 190      | 571   | 2502                                   | 579      | 3081  |
| <a href="#">GS4-4200</a>                            | 289                                    | 112      | 401   | 491                                          | 190      | 681   | 3096                                   | 687      | 3783  |
| <a href="#">GS4-4250</a>                            | –                                      |          | 454   | –                                            |          | 771   | –                                      |          | 4589  |
| <a href="#">GS4-4300</a>                            |                                        |          | 454   |                                              |          | 771   |                                        |          | 5772  |

The required airflow shown in chart is for installing a single GS4 drive in a confined space.

When installing multiple GS4 drives, the required air volume would be the cumulative air volume for all drives in the enclosure.

Heat dissipation shown in the chart is for installing a single GS4 drive in a confined space.

When installing multiple drives, the volume of heat dissipation should be the cumulative heat dissipation of all drives in the enclosure.

Heat dissipation for each model is calculated by rated voltage, current and default carrier frequency.

1) External flow rate is across the heat sink. Internal flow rate is through the chassis.

Published flow rates are the result of active cooling using fans; factory-installed in the drive.

Unpublished flow rates (-) are the result of passive cooling in drives without factory-installed fans.

2) When calculating power dissipation (Watt Loss) use the total value if the drive is foot mounted, or the internal value if the drive is flange mounted. Where only a total value is published, these models cannot be flange mounted.

## Dimensions for Minimum Clearance \* ( mm / in )

| Frame Size | Above & Below | Side to Non-Heat Source | Side to Heat Source | Front |
|------------|---------------|-------------------------|---------------------|-------|
| A–C        | 60 / 2.4      | 30 / 1.2                | 10 / 0.4            | 0 / 0 |
| D(0)–F     | 100 / 4.0     | 50 / 2.0                | n/a                 | 0 / 0 |
| G          | 200 / 7.9     | 100 / 4.0               | 2 x B               | 0 / 0 |

\* The minimum mounting clearances stated in this table applies to GS4 drives frames A to G. Failure to follow the minimum mounting clearances may cause the fan to malfunction and cause a heat dissipation problem.

# DURAPULSE GS4 AC Drives Specifications – Terminals


| Control Circuit Terminals |                                                                                  |                                                                                                                                                                                                                                                                                                                                  | Main Circuit Terminals |                                          |
|---------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------|
| Terminal                  | Description                                                                      | Remarks                                                                                                                                                                                                                                                                                                                          | Terminal               | Description                              |
| +10V                      | Potentiometer Power Supply                                                       | Analog frequency setting: +10VDC 20mA max output                                                                                                                                                                                                                                                                                 | R/L1                   | Input Power – phase 1                    |
| -10V                      |                                                                                  | Analog frequency setting: -10VDC 20mA max output                                                                                                                                                                                                                                                                                 | S/L2                   | Input Power – phase 2                    |
| +24V                      | Digital Control Signal Source                                                    | +24V±5%, 200mA max output; use with DCM                                                                                                                                                                                                                                                                                          | T/L3                   | Input Power – phase 3                    |
| AI1                       | Analog Input 1                                                                   | Range: 0–10V or 0/4–20mA = 0–Max Output Frequency<br>AI1 switch = SW3; factory setting is 0–10V<br>Impedance: 20kΩ (SW3 = 0–10V); 250Ω (SW3 = 0/4–20mA)                                                                                                                                                                          | U/T1, V/T2, W/T3       | AC Drive Output                          |
| AI2                       | Analog Input 2                                                                   | Range: 0/4–20mA or 0–10V = 0–Max Output Frequency<br>AI2 Switch = SW4; factory setting is 0–20mA<br>Impedance: 250Ω (SW4 = 0/4–20mA); 20kΩ (SW4 = 0–10V);                                                                                                                                                                        | +1, +2                 | DC Choke Connection (frames A–C)         |
| AI3                       | Analog Input 3                                                                   | Impedance: 20kΩ<br>Range: -10VDC to +10 VDC = 0–Max Output Frequency<br><i>Note: For -10V to +10V operation, connect the pot to +10V and -10V. Keep the pot wiper connected to AI3.</i>                                                                                                                                          | B1, B2                 | Braking Resistor Connection (frames A–C) |
| ACM                       | Analog Common                                                                    | Common for analog terminals                                                                                                                                                                                                                                                                                                      | +1/DC+, -/DC-          | External Dynamic Brake Unit (frames D–G) |
| AO1                       | Analog Output 1                                                                  | -10 to +10V max output current 2mA; max load 5kΩ<br>Resolution: 0–10V corresponds to max operation frequency<br>Range: 0–10V or -10 to +10V<br>AO1 Switch = SW1, factory setting is 0–10V                                                                                                                                        | ⏏                      | Ground                                   |
| AO2                       | Analog Output 2<br>(internal circuit same as AO1)                                | 0–10V max output current 2mA; max load 5kΩ<br>0–20mA max output current 20mA; max load 500Ω<br>Resolution: 0–10V corresponds to max operation frequency<br>Range: 0–10V or 0/4–20mA<br>AO2 Switch = SW2; factory setting is 0–10V                                                                                                |                        |                                          |
| DIC                       | Digital Input Common Rail                                                        | Common terminal for multi-function inputs; Can be tied to DCM (for sinking) or to +24V (for sourcing)                                                                                                                                                                                                                            |                        |                                          |
| DI1–DI8                   | Digital Inputs 1 thru 8                                                          | ON: the activation current is 3.3mA ≥ 11VDC<br>OFF: leakage current tolerance is 1.4mA ≤ 5VDC                                                                                                                                                                                                                                    |                        |                                          |
| DCM                       | Digital Signal Common                                                            | Refer to terminals FO, FWD, REV                                                                                                                                                                                                                                                                                                  |                        |                                          |
| DO1                       | Digital Output 1                                                                 | The AC motor drive releases various monitor signals such as drive in operation, frequency attained, and overload indication via transistor (open collector). Range: 5–48 VDC. Use with DOC.                                                                                                                                      |                        |                                          |
| DO2                       | Digital Output 2<br>(internal circuit same as DO1)                               | Multi-function Output 2 (photocoupler). Range: 5–48 VDC. Use with DOC.                                                                                                                                                                                                                                                           |                        |                                          |
| DOC                       | Digital Output Common                                                            | Max 5–48 VDC, 50mA (user supplied)                                                                                                                                                                                                                                                                                               |                        |                                          |
| +24V                      | STO Control Signal Source                                                        | Safe Torque Off function.<br>Refer to Appendix E: Safe Torque Off for more details.                                                                                                                                                                                                                                              |                        |                                          |
| ECM                       | EStop Common                                                                     |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| SCM1                      | STO Input 1 Common                                                               |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| SCM2                      | STO Input 2 Common                                                               |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| STO1                      | STO Input 1                                                                      |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| STO2                      | STO Input 2                                                                      |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| FO                        | Digital Frequency Output                                                         | High-speed pulse output. Use with DCM.<br>Digital Frequency Out =<br>Drive Output Frequency [Hz] × P3.38 [Frequency Output Multiplier].<br>Duty-cycle: 50% ±1%<br>Min load impedance: 1kΩ/100pf<br>Max current: 30mA<br>Max voltage: 30VDC                                                                                       |                        |                                          |
| FWD                       | Forward Command                                                                  | Use with DCM. ON = forward running OFF = deceleration to stop                                                                                                                                                                                                                                                                    |                        |                                          |
| R1                        | R1 Relay Common                                                                  | Resistive Load:<br>3A(N.O.) / 3A(N.C.); 250VAC<br>5A(N.O.) / 3A(N.C.); 30VDC<br>Inductive Load (COS 0.4):<br>1.2A(N.O.) / 1.2A(N.C.); 250VAC<br>These terminals are to output monitoring signals, such as drive in operation, frequency attained, or overload indication.<br><i>Note: R1 and R2 have N.O. and N.C. contacts.</i> |                        |                                          |
| R1C                       | R1 Relay N.C.                                                                    |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| R1O                       | R1 Relay N.O.                                                                    |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| R2                        | R2 Relay Common                                                                  |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| R2C                       | R2 Relay N.C.                                                                    |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| R2O                       | R2 Relay N.O.                                                                    |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| REV                       | Reverse Command                                                                  | Use with DCM. ON = reverse running OFF = deceleration to stop                                                                                                                                                                                                                                                                    |                        |                                          |
| RJ45-1                    | RJ45 Port 1 (RS-485)                                                             | Pins 1,2,7,8: Reserved<br>Pins 3,6: SGND                                                                                                                                                                                                                                                                                         |                        |                                          |
| RJ45-2                    | RJ45 Port 2 (RS-485)                                                             | Pin 4: SG-<br>Pin 5: SG+<br>(RJ45-1 and RJ45-2 are connected internally to ports SG+ and SG- below)                                                                                                                                                                                                                              |                        |                                          |
| SG+, SG-, SGND            | Modbus RS-485 (SG+ and SG- are connected internally to the two RJ45 ports above) |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |
| ⏏                         | Digital Control Ground                                                           |                                                                                                                                                                                                                                                                                                                                  |                        |                                          |

# DURAPULSE GS4 AC Drives – Basic Wiring Diagram

## Power Wiring Diagram: GS4 230V Models – Single-Phase

**Note:** Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

**Note:** We specify DC chokes, but we do not stock them.

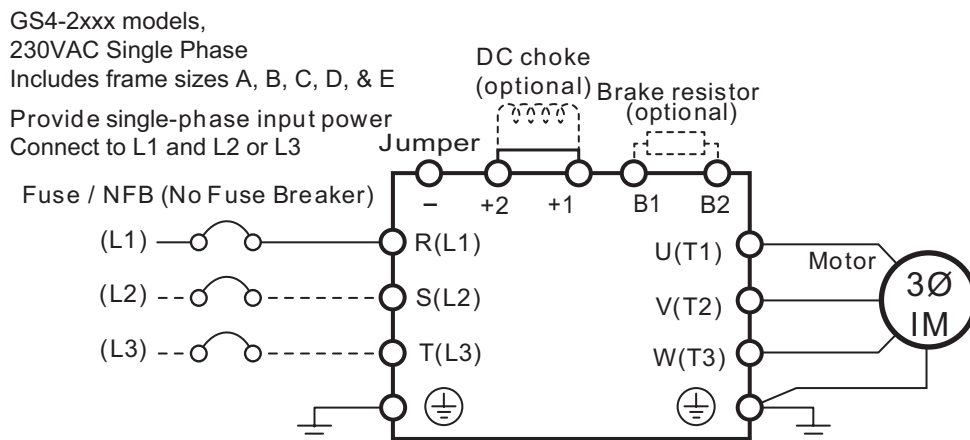

Connect 230VAC, Single-Phase power to any two of the R, S, or T terminals

## Power Wiring Diagram: GS4 Frame Size A, B, C Models – Three-Phase

**Note:** Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

**Note:** We specify DC chokes, but we do not stock them.

GS4-21P0 – GS4-2030

GS4-41P0 – GS4-4040 models

230/460VAC, 3-Phase

Includes frame sizes A, B, C

Provide 3-phase input power

## Power Wiring Diagram: GS4 Frame Size D0, D, E, F Models – Three-Phase

**Note:** Users **MUST** connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

GS4-2040 – GS4-2100


GS4-4050 – GS4-200 models

230/460VAC, 3-Phase

Includes frame sizes D0, D, E, F

Provide 3-phase input power

Fuse / NFB (No Fuse Breaker)

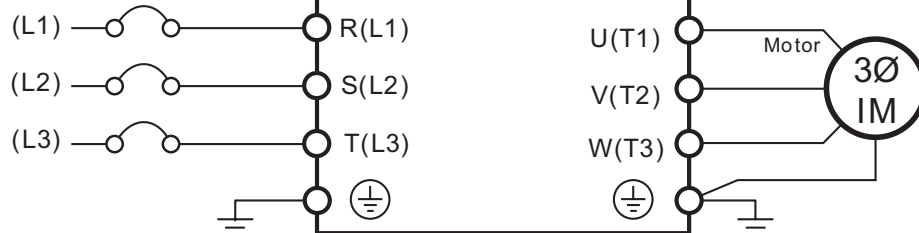

# DURAPULSE GS4 AC Drives – Basic Wiring Diagram

## Power Wiring Diagram: GS4 Frame Size G Models – Three-Phase

*Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)*


GS4-4250 &  
GS4-4300 models  
460VAC, 3-Phase

Provide 3-phase input power

+1/DC+ & -/DC- terminals are for the connection of an optional GS-xDBU dynamic braking unit.

**Do NOT connect a braking resistor directly to terminals**

**+1/DC+ and -/DC-. Connecting a resistor directly to these terminals will damage the GS4 drive!**

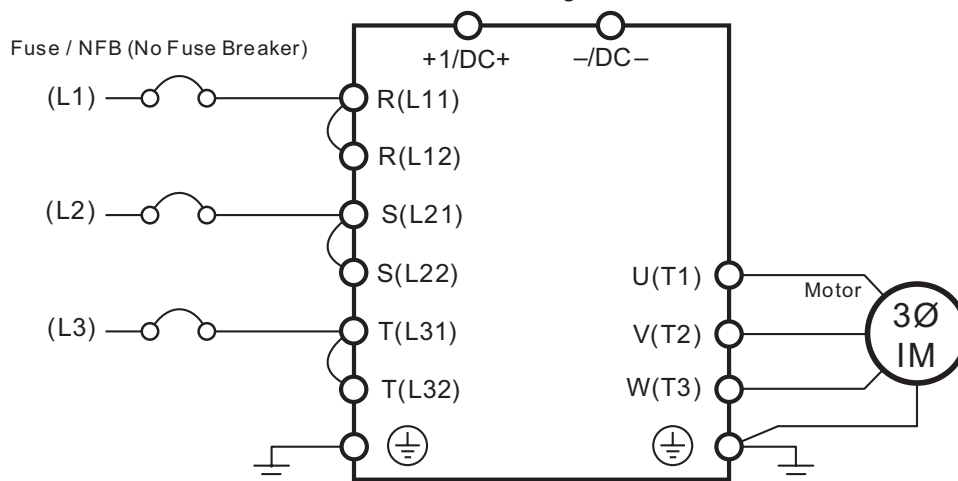

# DURAPULSE GS4 AC Drives – Basic Wiring Diagram


## Control Wiring Diagram: Full I/O with Sinking Inputs (field devices are sourcing)



Note: Users must connect wiring according to the circuit diagram shown below.



**WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.**

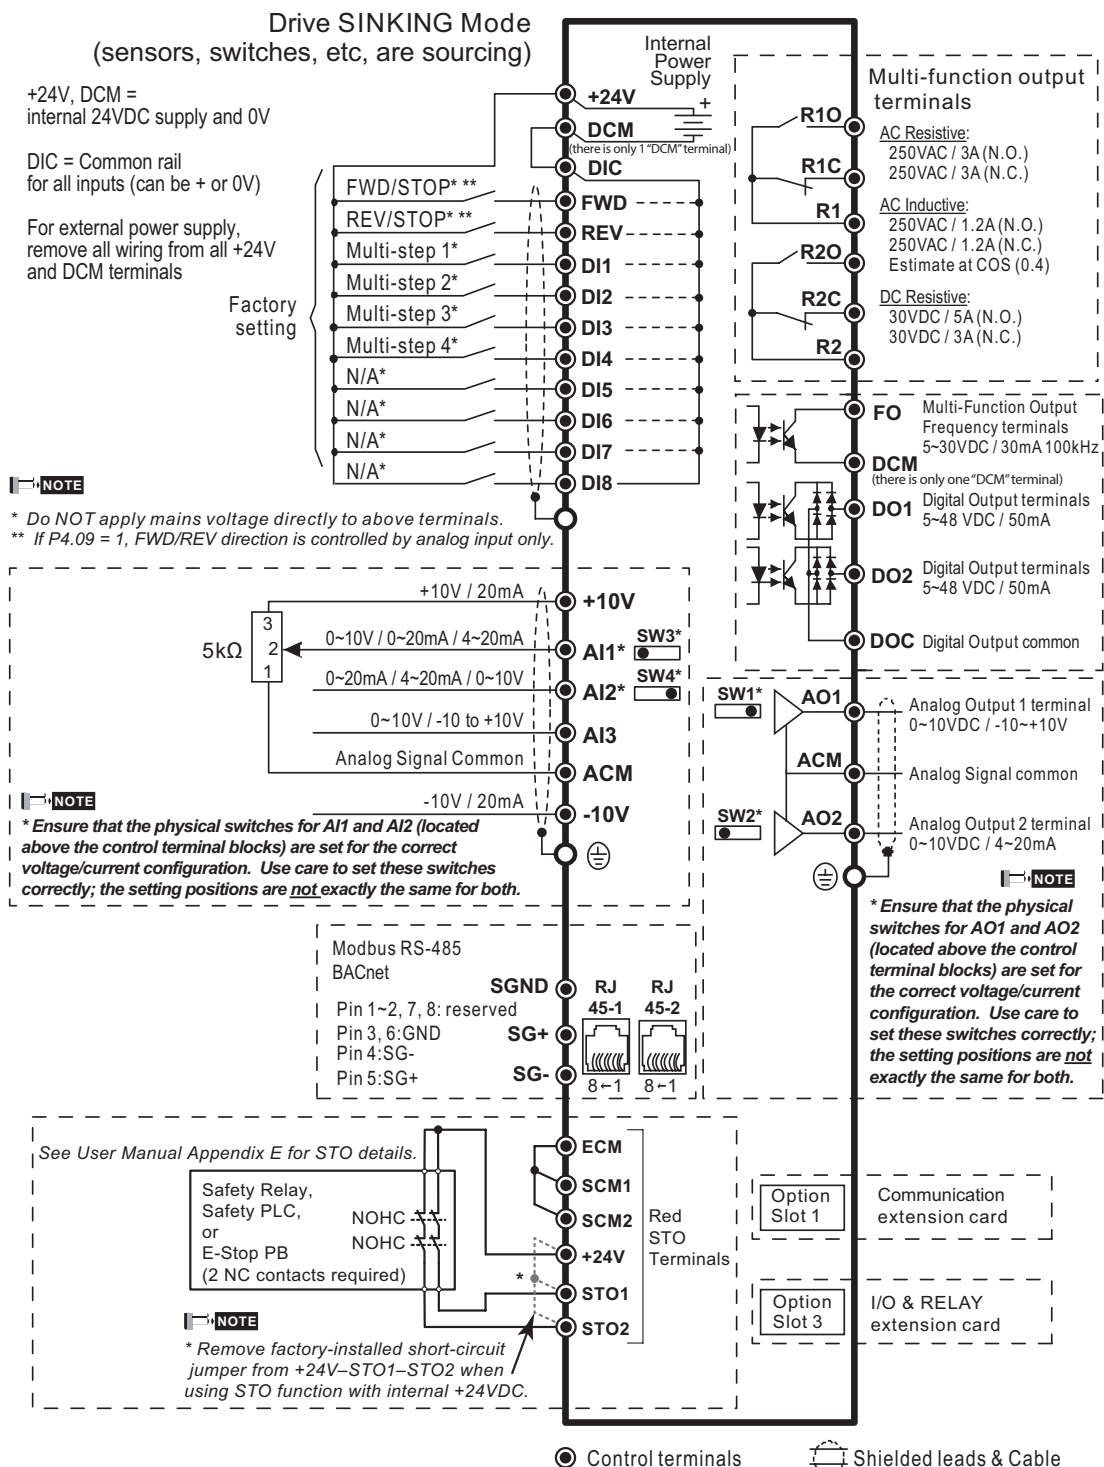

# DURAPULSE GS4 AC Drives – Basic Wiring Diagram


## Control Wiring Diagram: Full I/O with Sourcing Inputs (field devices are sinking)



Note: Users must connect wiring according to the circuit diagram shown below.



**WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.**

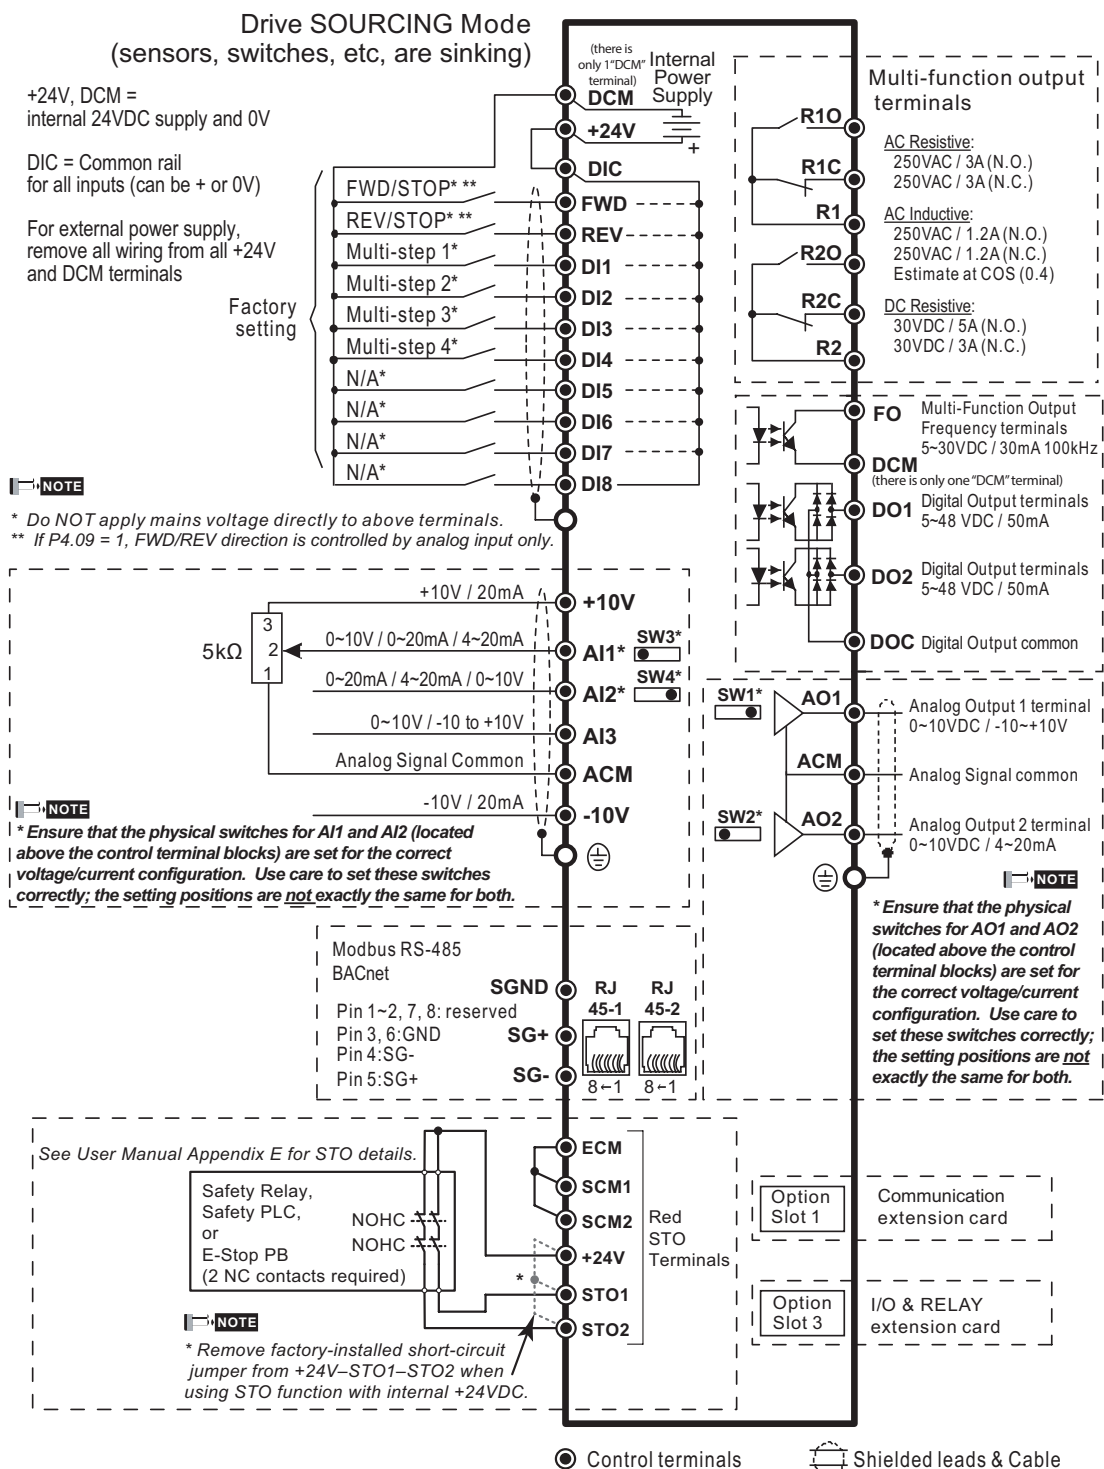

# DURApULSE GS4 AC Drives – Dimensions

## GS4 DURApULSE Frame Sizes by Drive Model


| GS4 DURApULSE Frame Sizes by Drive Model |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |
|------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| A                                        |                          | B                        |                          | C                        |                          | D0                       | D                        |                          | E                        |                          | F                        | G                        |
| 230V                                     | 460V                     | 230V                     | 460V                     | 230V                     | 460V                     | 460V                     | 230V                     | 460V                     | 230V                     | 460V                     | 460V                     | 460V                     |
| <a href="#">GS4-21P0</a>                 | <a href="#">GS4-41P0</a> | <a href="#">GS4-27P5</a> | <a href="#">GS4-4010</a> | <a href="#">GS4-2020</a> | <a href="#">GS4-4025</a> | <a href="#">GS4-4050</a> | <a href="#">GS4-2040</a> | <a href="#">GS4-4075</a> | <a href="#">GS4-2060</a> | <a href="#">GS4-4125</a> | <a href="#">GS4-4175</a> | <a href="#">GS4-4250</a> |
| <a href="#">GS4-22P0</a>                 | <a href="#">GS4-42P0</a> | <a href="#">GS4-2010</a> | <a href="#">GS4-4015</a> | <a href="#">GS4-2025</a> | <a href="#">GS4-4030</a> | <a href="#">GS4-4060</a> | <a href="#">GS4-2050</a> | <a href="#">GS4-4100</a> | <a href="#">GS4-2075</a> | <a href="#">GS4-4150</a> | <a href="#">GS4-4200</a> | <a href="#">GS4-4300</a> |
| <a href="#">GS4-23P0</a>                 | <a href="#">GS4-43P0</a> | <a href="#">GS4-2015</a> | <a href="#">GS4-4020</a> | <a href="#">GS4-2030</a> | <a href="#">GS4-4040</a> | –                        | –                        | –                        | <a href="#">GS4-2100</a> | –                        | –                        | –                        |
| <a href="#">GS4-25P0</a>                 | <a href="#">GS4-45P0</a> | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        |
| –                                        | <a href="#">GS4-47P5</a> | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        | –                        |

## Dimensions – GS4 AC Drives

Units = (mm [in])

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size A

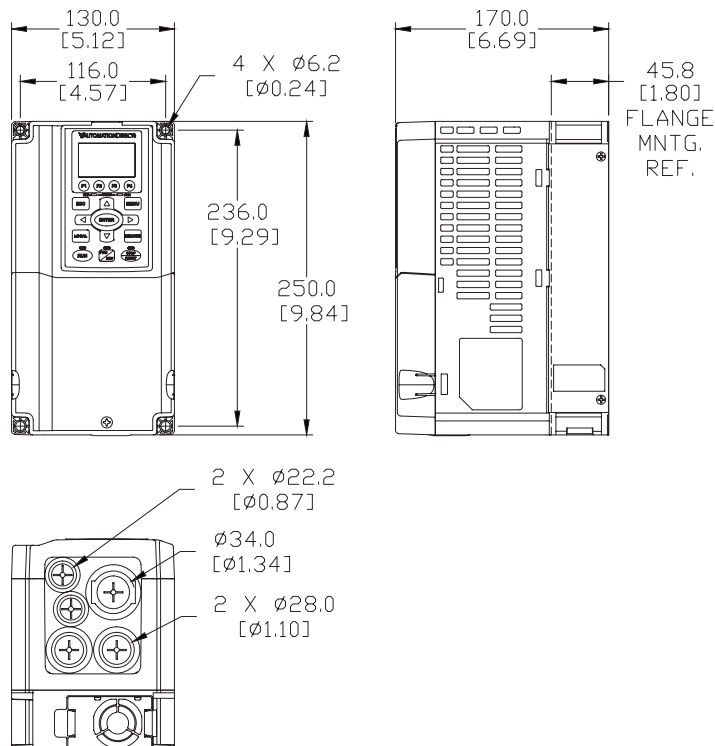


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size B

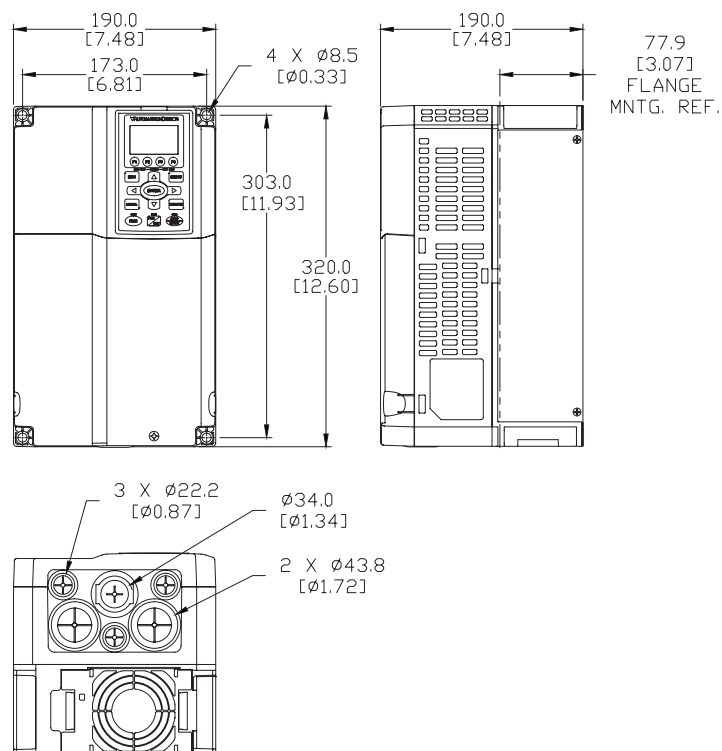

## Dimensions – Frame Size C

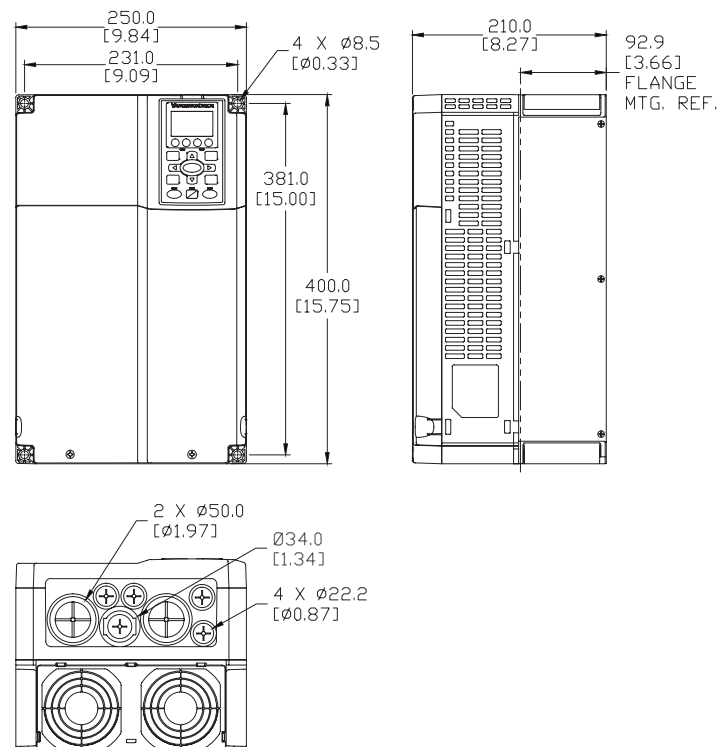


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size D0

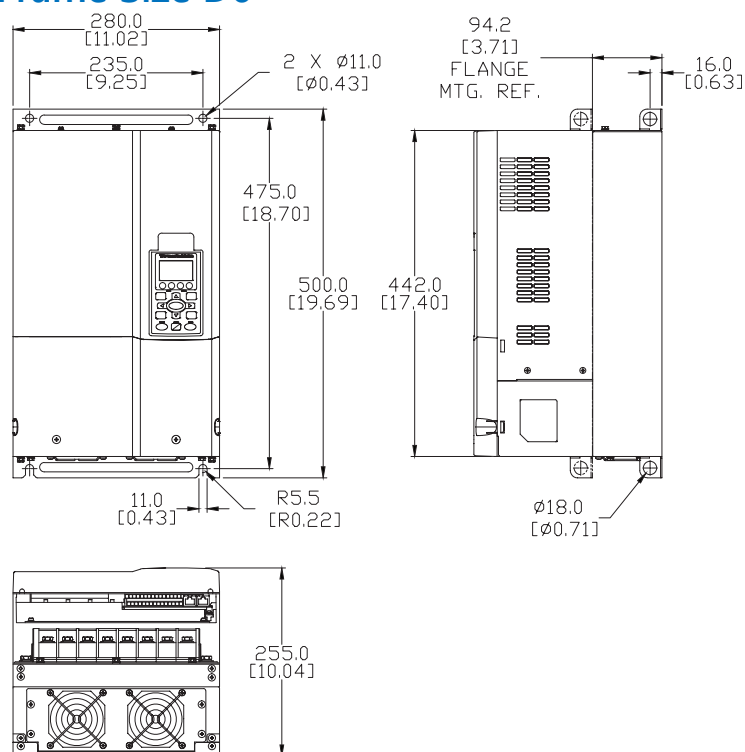

## Dimensions – Frame Size D0 with Conduit Box

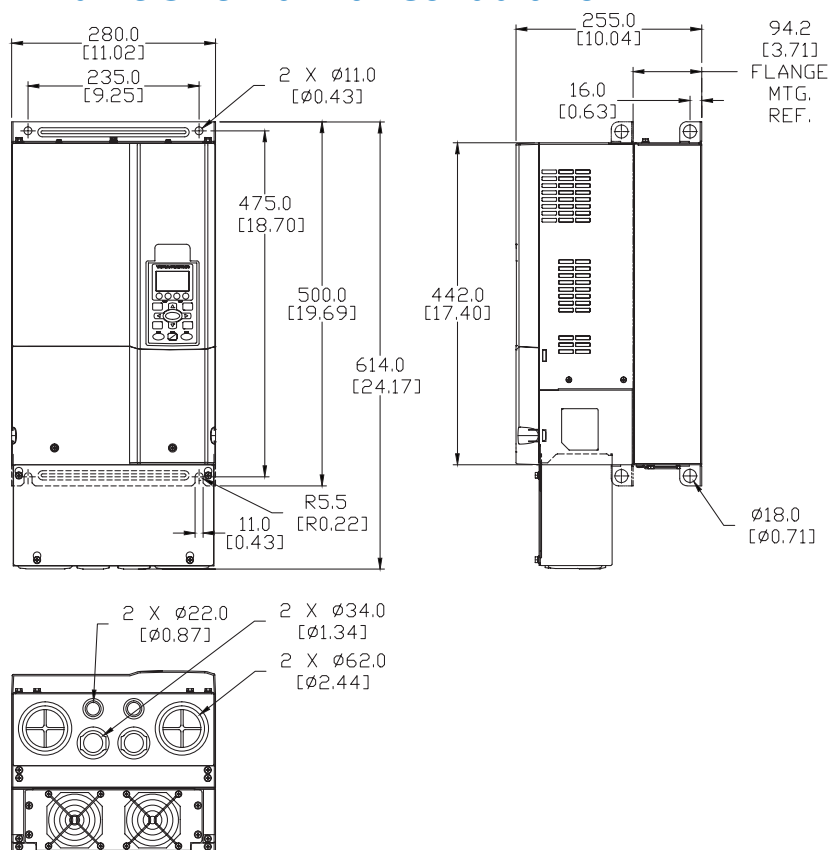


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size D

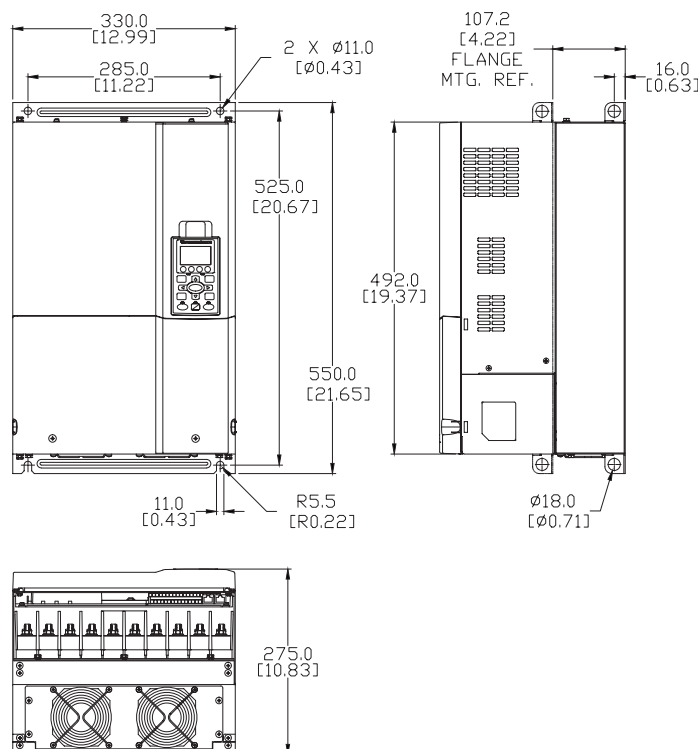

## Dimensions – Frame Size D with Conduit Box

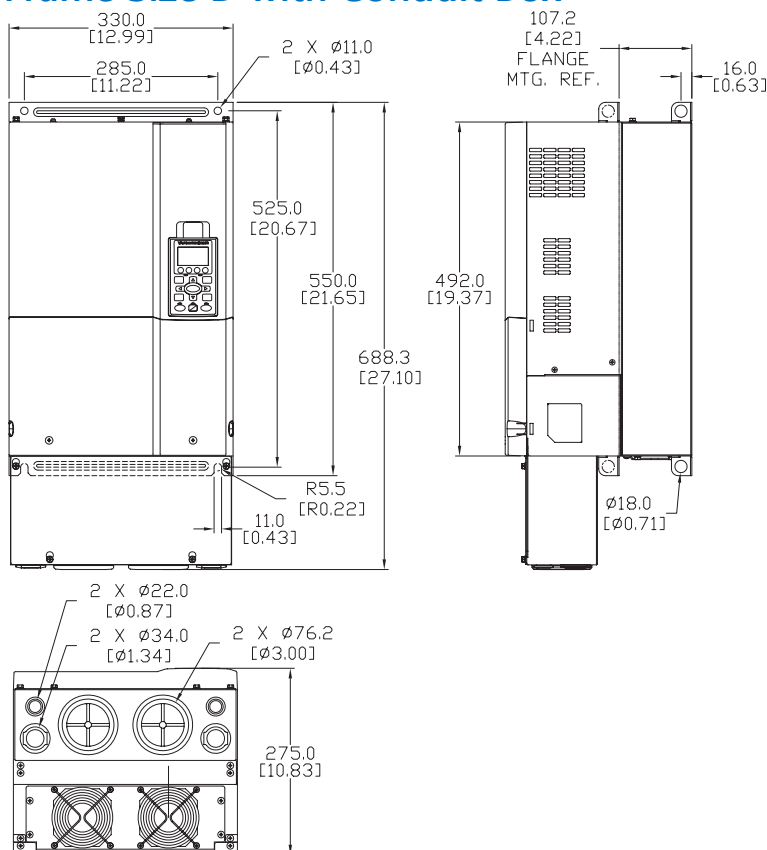


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size E

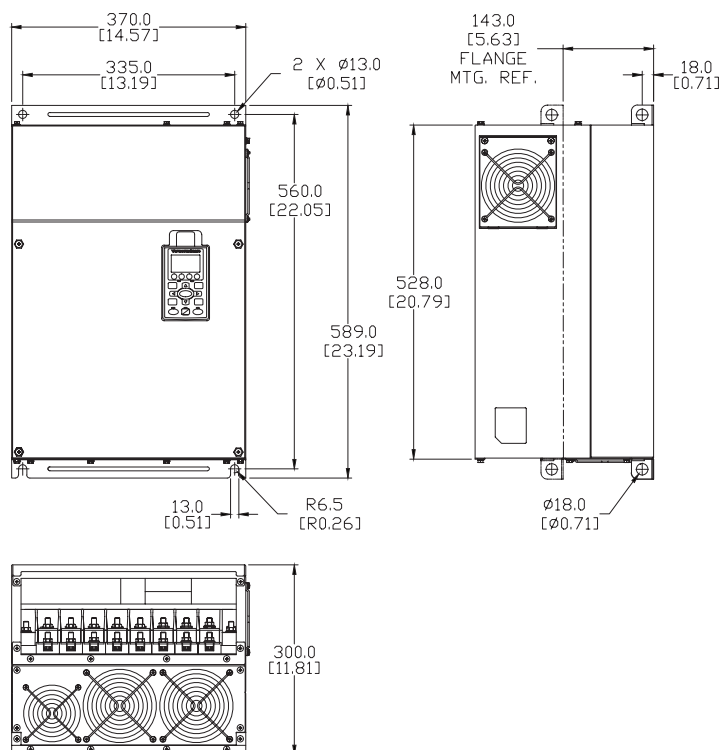

## Dimensions – Frame Size E with Conduit Box

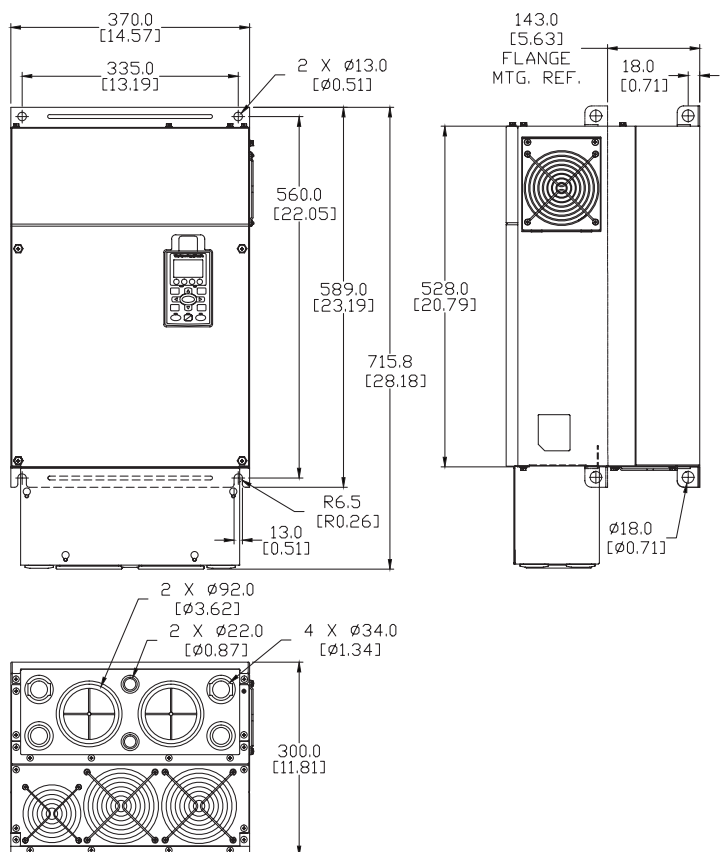


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size F

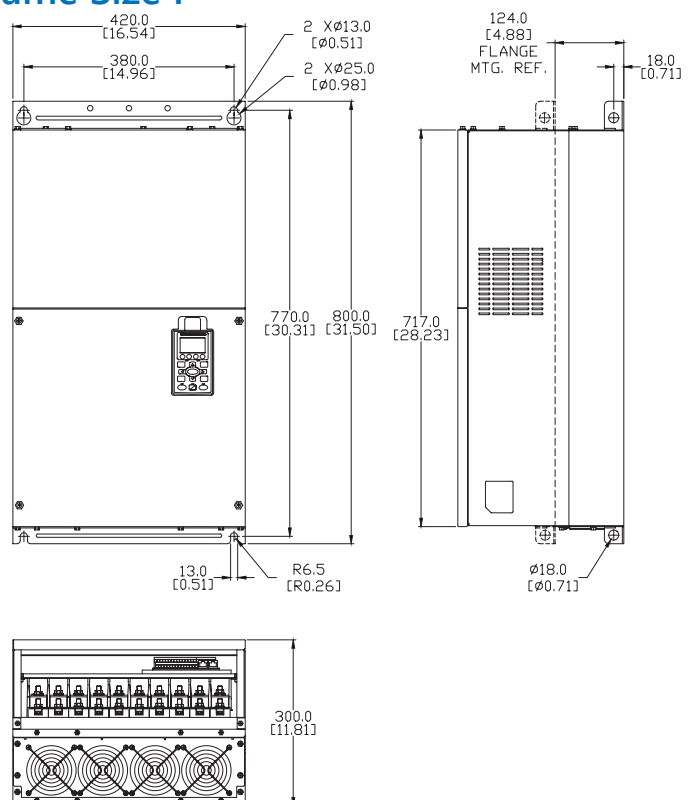

## Dimensions – Frame Size F with Conduit Box

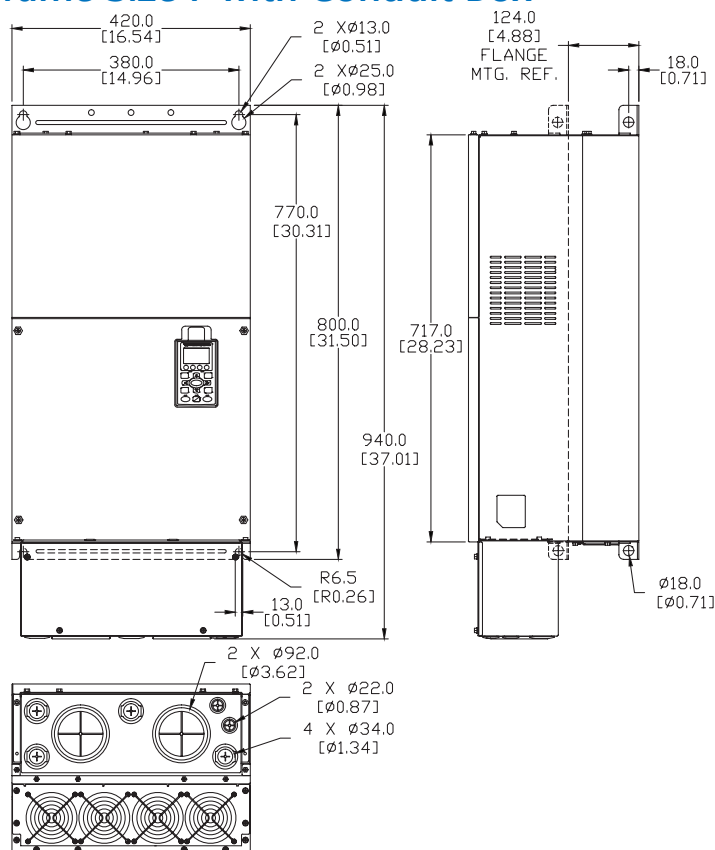


# DURAPULSE GS4 AC Drives – Dimensions

## Dimensions – GS4 AC Drives


( Units = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

## Dimensions – Frame Size G

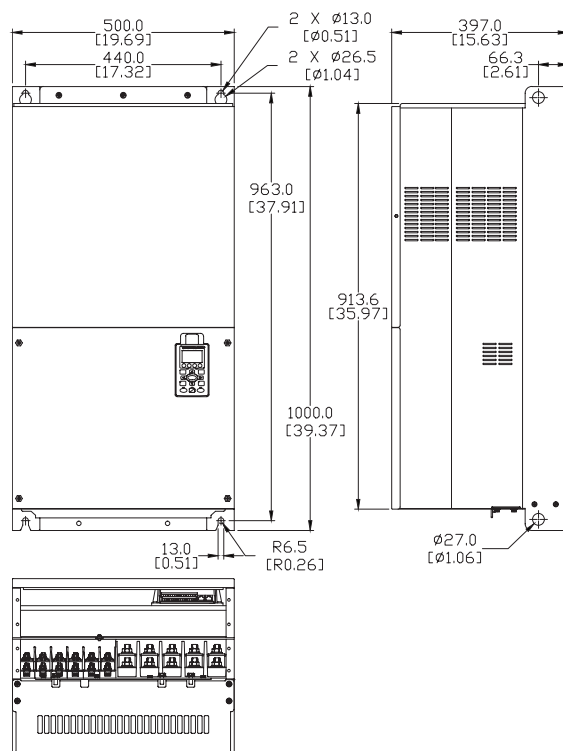


## Dimensions – Frame Size G with Conduit Box

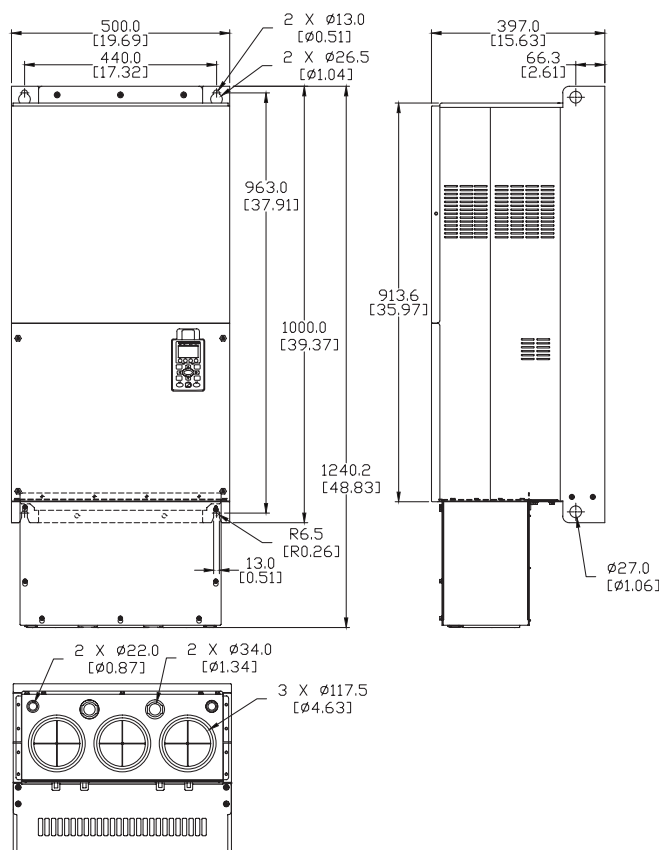

# AC Drives Optional Accessories – Overview

## Drive Accessories

(not all accessories are applicable for every drive model)

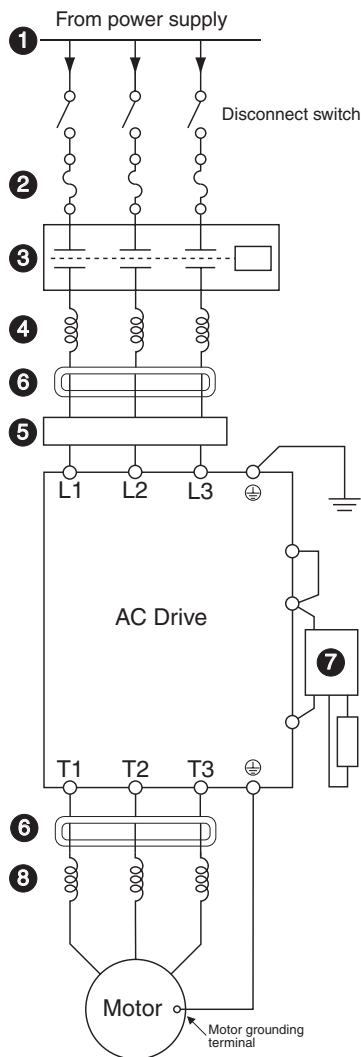

### 1 Power Supply

Please follow the specific power supply requirements as detailed in the specific drive manual.

### 2 Fuses

Input fuses protect the AC drive from excessive input current due to line surges, short circuits, and ground faults. They are recommended for all installations and may be required for UL-listed installations.

### 3 Contactor (Optional)

Do not use a contactor or disconnect switch for run/stop control of the AC drive and motor. This will reduce the operating life cycle of the AC drive. Cycling a power circuit switching device while the AC drive is in run mode should be done only in emergency situations.

### 4 Input Line Reactor (Optional)

See the Line Reactors section at [www.automationdirect.com](http://www.automationdirect.com) for more information.

Input line reactors protect the AC drive from transient overvoltage conditions, typically caused by utility capacitor switching. The input line reactor also reduces the harmonics associated with AC drives. Input line reactors are recommended for all installations.

### 5 EMI filter (Optional)

See the EMI Filters section at [www.automationdirect.com](http://www.automationdirect.com) for more information.

Input EMI filters reduce electromagnetic interference or noise on the input side of the AC drive. They are required for CE compliance and recommended for installations prone to or sensitive to electromagnetic interference.

### 6 RF filter (Optional)

RF filters reduce the radio frequency interference or noise on the input or output side of the inverter.

### 7 Braking Unit and/or Braking Resistor (Optional)

Dynamic braking allows the AC drive to produce additional braking (stopping) torque. AC drives can typically produce between 15% & 20% braking torque without the addition of any external components. The addition of optional braking may be required for applications that require rapid deceleration or high inertia loads.

### 8 Output Load Reactor or Voltage Time (dV/dT) Filter (Optional)

Output line reactors protect the motor insulation against AC drive short circuits and IGBT reflective wave damage, and also "smooth" the motor current waveform, allowing the motor to run cooler. They are **recommended for operating "noninverter-duty" motors and when the length of wiring between the AC drive and motor is less than 100 feet.**

**Voltage Time filters provide enhanced protection for motors with distances up to 1,000 feet.**

Voltage Time filters provide even more protection against wave reflection and reduce common mode noise. They are recommended when the length of wiring between the AC drive and motor is from 100 feet up to 1,000 feet.

See [www.automationdirect.com](http://www.automationdirect.com) for specific product offerings.

# GS4 DURApulse Drives Accessories – Line-Side Reactors

## Line-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 1Ø, 50/60 Hz ( <i>Constant</i> Torque; reactor installed <i>Line</i> Side) |                      |                           |                       |                 |              |              |                              |            |                  |
|------------------------------------------------------------------------------------------|----------------------|---------------------------|-----------------------|-----------------|--------------|--------------|------------------------------|------------|------------------|
| GS4 Model                                                                                | Derated Output (hp)* | CT: 1Ø Input Amps (rms)** | Saturation Amps (rms) | Inductance (mH) |              | Max Motor kW | LR Model                     | Rated Amps | LR 3% Inductance |
|                                                                                          |                      |                           |                       | 3% Impedance    | 5% Impedance |              |                              |            |                  |
| <a href="#">GS4-21P0</a>                                                                 | 0.5                  | 4.2                       | 7.6                   | 2.506           | 4.176        | 0.37         | <a href="#">LR2-20P5-1PH</a> | 4.9        | 3.74             |
| <a href="#">GS4-22P0</a>                                                                 | 0.75                 | 5.6                       | 10.1                  | 1.879           | 3.132        | 0.25         | <a href="#">LR-21P0-1PH</a>  | 8          | 2.29             |
| <a href="#">GS4-23P0</a>                                                                 | 1                    | 8.7                       | 15.7                  | 1.210           | 2.016        | 0.25         | <a href="#">LR-21P0-1PH</a>  | 8          | 2.29             |
| <a href="#">GS4-25P0</a>                                                                 | 2                    | 14                        | 25                    | 0.752           | 1.253        | 0.37         | <a href="#">LR-22P0-1PH</a>  | 12.0       | 1.53             |
| <a href="#">GS4-27P5</a>                                                                 | 3                    | 19                        | 34                    | 0.554           | 0.923        | 0.75         | <a href="#">LR-23P0-1PH</a>  | 17.0       | 1.08             |
| <a href="#">GS4-2010</a>                                                                 | 3                    | 19                        | 34                    | 0.554           | 0.923        | 0.75         | <a href="#">LR-23P0-1PH</a>  | 17.0       | 1.08             |
| <a href="#">GS4-2015</a>                                                                 | 5                    | 30                        | 54                    | 0.351           | 0.585        | 3.7          | <a href="#">LR-2010</a>      | 30.8       | 0.342            |
| <a href="#">GS4-2020</a>                                                                 | 7.5                  | 43                        | 77                    | 0.245           | 0.408        | 5.5          | <a href="#">LR-2015</a>      | 46.2       | 0.220            |
| <a href="#">GS4-2025</a>                                                                 | 10                   | 57                        | 103                   | 0.184           | 0.307        | 7.5          | <a href="#">LR-2020</a>      | 59.4       | 0.172            |
| <a href="#">GS4-2030</a>                                                                 | 10                   | 57                        | 103                   | 0.184           | 0.307        | 7.5          | <a href="#">LR-2020</a>      | 59.4       | 0.172            |
| <a href="#">GS4-2040</a>                                                                 | 10                   | 57                        | 103                   | 0.184           | 0.307        | 7.5          | <a href="#">LR-2020</a>      | 59.4       | 0.172            |
| <a href="#">GS4-2050</a>                                                                 | 10                   | 57                        | 103                   | 0.184           | 0.307        | 7.5          | <a href="#">LR-2020</a>      | 59.4       | 0.172            |
| <a href="#">GS4-2060</a>                                                                 | 15                   | 85                        | 153                   | 0.124           | 0.206        | 11           | <a href="#">LR-2025</a>      | 74.8       | 0.138            |
| <a href="#">GS4-2075</a>                                                                 | 20                   | 113                       | 203                   | 0.093           | 0.155        | 15           | <a href="#">LR-2040</a>      | 114        | 0.0886           |
| <a href="#">GS4-2100</a>                                                                 | 25                   | 130                       | 234                   | 0.081           | 0.135        | 18.5         | <a href="#">LR-2050</a>      | 143        | 0.0699           |

\* Drive output HP is derated when supplied single phase.  
 \*\* Amperage ratings expressed in the column CT: 1Ph Input Amps (rms) are with a line reactor installed on the line side of the drive.

# GS4 DURApulse Drives Accessories – Load-Side Reactors

## Load-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 1Ø, 50/60 Hz ( <i>Constant</i> Torque; reactor installed <i>Load</i> Side) |      |                           |                       |                 |              |              |                         |            |                  |
|------------------------------------------------------------------------------------------|------|---------------------------|-----------------------|-----------------|--------------|--------------|-------------------------|------------|------------------|
| GS4 Model                                                                                | HP   | CT: 3Ø Output Amps (rms)* | Saturation Amps (rms) | Inductance (mH) |              | Max Motor kW | LR Model                | Rated Amps | LR 3% Inductance |
|                                                                                          |      |                           |                       | 3% Impedance    | 5% Impedance |              |                         |            |                  |
| <a href="#">GS4-21P0</a>                                                                 | 0.5  | 2.4                       | 4.3                   | 2.893           | 4.822        | 0.37         | <a href="#">LR-20P5</a> | 2.4        | 4.2              |
| <a href="#">GS4-22P0</a>                                                                 | 0.75 | 3.2                       | 5.8                   | 2.170           | 3.617        | 0.55         | <a href="#">LR-21P0</a> | 4.6        | 2.46             |
| <a href="#">GS4-23P0</a>                                                                 | 1    | 5.0                       | 9.0                   | 1.397           | 2.328        | 0.75         | <a href="#">LR-21P0</a> | 4.6        | 2.46             |
| <a href="#">GS4-25P0</a>                                                                 | 2    | 8                         | 14                    | 0.868           | 1.447        | 1.5          | <a href="#">LR-23P0</a> | 10.6       | 0.97             |
| <a href="#">GS4-27P5</a>                                                                 | 3    | 11                        | 20                    | 0.640           | 1.066        | 2.2          | <a href="#">LR-23P0</a> | 10.6       | 0.97             |
| <a href="#">GS4-2010</a>                                                                 | 3    | 11                        | 20                    | 0.640           | 1.066        | 2.2          | <a href="#">LR-23P0</a> | 10.6       | 0.97             |
| <a href="#">GS4-2015</a>                                                                 | 5    | 17                        | 31                    | 0.405           | 0.675        | 3.7          | <a href="#">LR-25P0</a> | 16.7       | 0.626            |
| <a href="#">GS4-2020</a>                                                                 | 7.5  | 25                        | 45                    | 0.283           | 0.471        | 5.5          | <a href="#">LR-27P5</a> | 24.2       | 0.434            |
| <a href="#">GS4-2025</a>                                                                 | 10   | 33                        | 59                    | 0.213           | 0.354        | 7.5          | <a href="#">LR-2010</a> | 30.8       | 0.342            |
| <a href="#">GS4-2030</a>                                                                 | 10   | 33                        | 59                    | 0.213           | 0.354        | 7.5          | <a href="#">LR-2010</a> | 30.8       | 0.342            |
| <a href="#">GS4-2040</a>                                                                 | 10   | 33                        | 59                    | 0.213           | 0.354        | 7.5          | <a href="#">LR-2010</a> | 30.8       | 0.342            |
| <a href="#">GS4-2050</a>                                                                 | 10   | 33                        | 59                    | 0.213           | 0.354        | 7.5          | <a href="#">LR-2010</a> | 30.8       | 0.342            |
| <a href="#">GS4-2060</a>                                                                 | 15   | 49                        | 88                    | 0.143           | 0.238        | 11           | <a href="#">LR-2015</a> | 46.2       | 0.22             |
| <a href="#">GS4-2075</a>                                                                 | 20   | 65                        | 117                   | 0.108           | 0.179        | 15           | <a href="#">LR-2020</a> | 59.4       | 0.172            |
| <a href="#">GS4-2100</a>                                                                 | 25   | 75                        | 135                   | 0.093           | 0.156        | 18.5         | <a href="#">LR-2025</a> | 74.8       | 0.138            |

\* Amperage ratings are 3-phase output reactor ratings when the drive is supplied with a single-phase input.

# GS4 DURAPULSE Drives Accessories – Line/Load Reactors

## Line/Load Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

| Supply: 230V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side) |     |                                |                          |                 |              |                 |                          |               |                     |
|-------------------------------------------------------------------------------------------------|-----|--------------------------------|--------------------------|-----------------|--------------|-----------------|--------------------------|---------------|---------------------|
| GS4 Model                                                                                       | hp  | VT: 3Ø<br>Output Amps<br>(rms) | Saturation<br>Amps (rms) | Inductance (mH) |              | Max Motor<br>kW | LR Model*                | Rated<br>Amps | LR 3%<br>Inductance |
|                                                                                                 |     |                                |                          | 3% Impedance    | 5% Impedance |                 |                          |               |                     |
| <a href="#">GS4-21P0</a>                                                                        | 1   | 5                              | 8.7                      | 2.536           | 4.226        | 0.75            | <a href="#">LR-21P0</a>  | 4.6           | 2.46                |
| <a href="#">GS4-22P0</a>                                                                        | 2   | 8                              | 12.8                     | 1.585           | 2.641        | 1.5             | <a href="#">LR-23P0*</a> | 10.6          | 0.97                |
| <a href="#">GS4-23P0</a>                                                                        | 3   | 11                             | 18                       | 1.152           | 1.921        | 2.2             | <a href="#">LR-23P0</a>  | 10.6          | 0.97                |
| <a href="#">GS4-25P0</a>                                                                        | 5   | 17                             | 29                       | 0.746           | 1.244        | 3.7             | <a href="#">LR-25P0</a>  | 16.7          | 0.626               |
| <a href="#">GS4-27P5</a>                                                                        | 7.5 | 25                             | 43                       | 0.507           | 0.845        | 5.5             | <a href="#">LR-27P5</a>  | 24.2          | 0.434               |
| <a href="#">GS4-2010</a>                                                                        | 10  | 33                             | 56                       | 0.320           | 0.534        | 7.5             | <a href="#">LR-2010</a>  | 30.8          | 0.342               |
| <a href="#">GS4-2015</a>                                                                        | 15  | 49                             | 85                       | 0.216           | 0.359        | 11              | <a href="#">LR-2015</a>  | 46.2          | 0.22                |
| <a href="#">GS4-2020</a>                                                                        | 20  | 65                             | 112                      | 0.163           | 0.271        | 15              | <a href="#">LR-2020</a>  | 59.4          | 0.172               |
| <a href="#">GS4-2025</a>                                                                        | 25  | 75                             | 128                      | 0.169           | 0.282        | 18.5            | <a href="#">LR-2025</a>  | 74.8          | 0.138               |
| <a href="#">GS4-2030</a>                                                                        | 30  | 90                             | 155                      | 0.141           | 0.236        | 22              | <a href="#">LR-2040*</a> | 114           | 0.0886              |
| <a href="#">GS4-2040</a>                                                                        | 40  | 120                            | 205                      | 0.106           | 0.176        | 30              | <a href="#">LR-2040</a>  | 114           | 0.0886              |
| <a href="#">GS4-2050</a>                                                                        | 50  | 146                            | 250                      | 0.087           | 0.146        | 37              | <a href="#">LR-2050</a>  | 143           | 0.0699              |
| <a href="#">GS4-2060</a>                                                                        | 60  | 180                            | 308                      | 0.070           | 0.117        | 45              | not available*           | 169           | 0.0624              |
| <a href="#">GS4-2075</a>                                                                        | 75  | 215                            | 367                      | 0.059           | 0.098        | 55              |                          | 211           | 0.0487              |
| <a href="#">GS4-2100</a>                                                                        | 100 | 255                            | 436                      | 0.049           | 0.082        | 75              |                          | 273           | 0.0364              |

\* Some GS4 drive and reactor combinations do not fit the typical "pattern" of having similar part numbers, due to some GS4 models having higher outputs than previous GS DURApulse drives.

| Supply: 460V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side) |     |                                |                          |                 |              |                 |                         |               |                     |
|-------------------------------------------------------------------------------------------------|-----|--------------------------------|--------------------------|-----------------|--------------|-----------------|-------------------------|---------------|---------------------|
| GS4 Model                                                                                       | hp  | VT: 3Ø<br>Output Amps<br>(rms) | Saturation<br>Amps (rms) | Inductance (mH) |              | Max Motor<br>kW | LR Model                | Rated<br>Amps | LR 3%<br>Inductance |
|                                                                                                 |     |                                |                          | 3% Impedance    | 5% Impedance |                 |                         |               |                     |
| <a href="#">GS4-41P0</a>                                                                        | 1   | 3                              | 5.2                      | 8.102           | 13.503       | 0.75            | <a href="#">LR-41P0</a> | 2.1           | 8.927               |
| <a href="#">GS4-42P0</a>                                                                        | 2   | 4                              | 6.8                      | 6.077           | 10.128       | 1.5             | <a href="#">LR-42P0</a> | 3.4           | 5.790               |
| <a href="#">GS4-43P0</a>                                                                        | 3   | 6                              | 10.3                     | 4.050           | 6.751        | 2.2             | <a href="#">LR-43P0</a> | 4.8           | 4.270               |
| <a href="#">GS4-45P0</a>                                                                        | 5   | 9                              | 14.6                     | 2.700           | 4.500        | 3.7             | <a href="#">LR-45P0</a> | 7.6           | 2.770               |
| <a href="#">GS4-47P5</a>                                                                        | 7.5 | 12                             | 20                       | 2.025           | 3.375        | 5.5             | <a href="#">LR-47P5</a> | 11            | 1.680               |
| <a href="#">GS4-4010</a>                                                                        | 10  | 18                             | 31                       | 1.174           | 1.957        | 7.5             | <a href="#">LR-4010</a> | 14            | 1.290               |
| <a href="#">GS4-4015</a>                                                                        | 15  | 24                             | 41                       | 0.881           | 1.468        | 11              | <a href="#">LR-4015</a> | 21            | 0.912               |
| <a href="#">GS4-4020</a>                                                                        | 20  | 32                             | 54                       | 0.660           | 1.101        | 15              | <a href="#">LR-4020</a> | 27            | 0.694               |
| <a href="#">GS4-4025</a>                                                                        | 25  | 38                             | 65                       | 0.639           | 1.066        | 18.5            | <a href="#">LR-4025</a> | 34            | 0.569               |
| <a href="#">GS4-4030</a>                                                                        | 30  | 45                             | 77                       | 0.541           | 0.901        | 22              | <a href="#">LR-4030</a> | 40            | 0.469               |
| <a href="#">GS4-4040</a>                                                                        | 40  | 60                             | 103                      | 0.405           | 0.675        | 30              | <a href="#">LR-4040</a> | 52            | 0.387               |
| <a href="#">GS4-4050</a>                                                                        | 50  | 73                             | 124                      | 0.334           | 0.556        | 37              | <a href="#">LR-4050</a> | 65            | 0.295               |
| <a href="#">GS4-4060</a>                                                                        | 60  | 91                             | 155                      | 0.267           | 0.445        | 45              | <a href="#">LR-4060</a> | 77            | 0.227               |
| <a href="#">GS4-4075</a>                                                                        | 75  | 110                            | 189                      | 0.221           | 0.368        | 55              | <a href="#">LR-4075</a> | 96            | 0.196               |
| <a href="#">GS4-4100</a>                                                                        | 100 | 150                            | 257                      | 0.162           | 0.270        | 75              | <a href="#">LR-4100</a> | 124           | 0.152               |
| <a href="#">GS4-4125</a>                                                                        | 125 | 180                            | 308                      | 0.135           | 0.224        | 90              | <a href="#">LR-4125</a> | 156           | 0.117               |
| <a href="#">GS4-4150</a>                                                                        | 150 | 220                            | 376                      | 0.110           | 0.184        | 110             | <a href="#">LR-4150</a> | 180           | 0.103               |
| <a href="#">GS4-4175</a>                                                                        | 175 | 260                            | 445                      | 0.098           | 0.163        | 132             | <a href="#">LR-4200</a> | 240           | 0.0839              |
| <a href="#">GS4-4200</a>                                                                        | 215 | 310                            | 531                      | 0.078           | 0.130        | 160             | <a href="#">LR-4250</a> | 302           | 0.0654              |
| <a href="#">GS4-4250</a>                                                                        | 250 | 370                            | 634                      | 0.066           | 0.109        | 185             | <a href="#">LR-4250</a> | 302           | 0.0654              |
| <a href="#">GS4-4300</a>                                                                        | 300 | 460                            | 787                      | 0.054           | 0.090        | 220             | <a href="#">LR-4300</a> | 361           | 0.0565              |

# GS/DURAPULSE Drives Accessories – Line/Load Reactors

## Line/Load Reactors for GS/DURAPULSE AC Drives – Additional Specifications

| Line Reactors – LR Series – Additional Specifications |            |                 |                                             |                                                                   |                               |                               |                                             |
|-------------------------------------------------------|------------|-----------------|---------------------------------------------|-------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------------|
| Part Number                                           | Price      | Product Weight  | Wire Range                                  | Terminal Torque                                                   | Temperature Range             |                               | Environment                                 |
|                                                       |            |                 |                                             |                                                                   | Operating                     | Storage                       |                                             |
| <a href="#"><u>LR-20P5</u></a>                        | Retired    | 4.0 lb [1.8 kg] | #12–#18 AWG                                 | 10 lb·in                                                          | -40 – 104 °F<br>[-40 – 40 °C] | -40 – 149 °F<br>[-40 – 65 °C] | NEMA: open<br>IP00<br>no corrosive<br>gases |
| <a href="#"><u>LR-21P0-1PH</u></a>                    | \$78.00    | 2.8 lb [1.3 kg] | #12–#18 AWG                                 | 10 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-22P0-1PH</u></a>                    | \$86.00    | 4.3 lb [2.0 kg] | #12–#18 AWG                                 | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-23P0-1PH</u></a>                    | Retired    | 4.3 lb [2.0 kg] | #12–#18 AWG                                 | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-23P0</u></a>                        | Retired    | 4.0 lb [1.8 kg] | #12–#18 AWG                                 | 10 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-25P0</u></a>                        | \$194.00   | 8.0 lb [3.6 kg] | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-27P5</u></a>                        | \$206.00   | 8.0 lb [3.6 kg] | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-2010</u></a>                        | \$242.00   | 12 lb [5.4 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-2015</u></a>                        | \$285.00   | 12 lb [5.4 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-2020</u></a>                        | \$312.00   | 12 lb [5.4 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-2025</u></a>                        | \$460.00   | 15 lb [6.8 kg]  | #18–#4 AWG                                  | #18–#16 AWG: 25 lb·in<br>#14–#6 AWG: 30 lb·in<br>#4 AWG: 35 lb·in |                               |                               |                                             |
| <a href="#"><u>LR-2030</u></a>                        | \$490.00   | 33 lb [15 kg]   | 2/0 – #6AWG (AL or CU)                      | 120                                                               |                               |                               |                                             |
| <a href="#"><u>LR-2040</u></a>                        | \$574.00   | 33 lb [15 kg]   | 2/0 – #6AWG (AL or CU)                      | 120                                                               |                               |                               |                                             |
| <a href="#"><u>LR-2050</u></a>                        | \$670.00   | 36 lb [16 kg]   | 250kcmil – #6AWG (AL or CU)                 | 275                                                               |                               |                               |                                             |
| <a href="#"><u>LR-4010</u></a>                        | Retired    | 4.0 lb [1.8 kg] | #12–#18 AWG                                 | 10 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4015</u></a>                        | \$237.00   | 8.0 lb [3.6 kg] | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4020</u></a>                        | \$276.00   | 8.0 lb [3.6 kg] | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4025</u></a>                        | \$290.00   | 10 lb [4.5 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4030</u></a>                        | \$347.00   | 10 lb [4.5 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4040</u></a>                        | \$382.00   | 15 lb [6.8 kg]  | #18–#4 AWG                                  | 20 lb·in                                                          |                               |                               |                                             |
| <a href="#"><u>LR-4050</u></a>                        | \$448.00   | 25 lb [11 kg]   | #22–#4 AWG                                  | #22–#16 AWG: 25 lb·in<br>#14–#6 AWG: 30 lb·in<br>#4 AWG: 35 lb·in |                               |                               |                                             |
| <a href="#"><u>LR-4060</u></a>                        | \$462.00   |                 |                                             |                                                                   |                               |                               |                                             |
| <a href="#"><u>LR-4075</u></a>                        | \$700.00   | 33 lb [15 kg]   | 2/0 – #6AWG (AL or CU)                      | 120 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4100</u></a>                        | \$840.00   | 46 lb [21 kg]   | 250kcmil – #6AWG (AL or CU)                 | 275 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4125</u></a>                        | \$962.00   | 46 lb [21 kg]   | 250kcmil – #6AWG (AL or CU)                 | 275 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4150</u></a>                        | \$1,114.00 | 46 lb [21 kg]   | 250kcmil – #6AWG (AL or CU)                 | 275 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4200</u></a>                        | \$1,238.00 | 74 lb [34 kg]   | (1) 600kcmil – #4 AWG<br>(2) 250kcmil – 1/0 | 500 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4250</u></a>                        | \$1,403.00 | 74 lb [34 kg]   | (2)* 350kcmil – #4 AWG (AL or CU)           | 275 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-4300</u></a>                        | \$1,546.00 | 74 lb [34 kg]   | (2)* 350kcmil – #4 AWG (AL or CU)           | 275 lb·in                                                         |                               |                               |                                             |
| <a href="#"><u>LR-5010</u></a>                        | Retired    | 4.0 lb [1.8 kg] | #12–#18 AWG                                 | 10 lb·in                                                          |                               |                               |                                             |

\* LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.

# GS4 DURAPULSE Drives Accessories – Dynamic Braking Component Selection

## Dynamic Braking Components

Use the table below to find the appropriate braking resistor and braking unit (if applicable) for your GS4 series AC drive. For more information and installation instructions, please see the GS4 User Manual. All listed resistors are available for purchase at [www.automationdirect.com](http://www.automationdirect.com).

| GS4 AC Drive Braking Component Selection |                  |             |                                   |                             |              |            |                                       |           |                |                     |                         |                                     |      |                |                         |           |   |       |
|------------------------------------------|------------------|-------------|-----------------------------------|-----------------------------|--------------|------------|---------------------------------------|-----------|----------------|---------------------|-------------------------|-------------------------------------|------|----------------|-------------------------|-----------|---|-------|
| Drive Voltage                            | Motor Power (hp) | Drive Model | Drive Brake Capacity - Max Torque |                             | Braking Unit |            | 125% Braking Torque @ 10% Duty Cycle* |           |                |                     |                         |                                     |      |                |                         |           |   |       |
|                                          |                  |             | Min Resistor Value (Ω)            | Max Total Brake Current (A) | Quantity     | Part # GS- | Open Type Braking Resistor            |           |                |                     |                         | NEMA1 Resistors with Thermal Switch |      |                |                         |           |   |       |
|                                          |                  |             |                                   |                             |              |            | Part #                                | Quantity  | Wiring Diagram | Brake Torque (kg·m) | Total Brake Current (A) | Part #                              | Qty. | Wiring Diagram | Total Brake Current (A) |           |   |       |
| 230V                                     | 1                | GS4-21P0    | 63.3                              | 6                           | -            | n/a        | GS-BR-080W200                         | 1         | A              | 0.5                 | 1.9                     | BR-N1-240W150                       | 1    | A              | 2.6                     |           |   |       |
|                                          | 2                | GS4-22P0    | 47.5                              | 8                           |              |            | GS-BR-200W091                         | 1         |                | 1.0                 | 4.2                     | BR-N1-280W50                        | 1    |                | 7.8                     |           |   |       |
|                                          | 3                | GS4-23P0    | 38.0                              | 10                          |              |            | GS-BR-300W070                         | 1         |                | 1.5                 | 5.4                     |                                     | 1    |                |                         |           |   |       |
|                                          | 5                | GS4-25P0    | 19.0                              | 20                          |              |            | GS-BR-400W040                         | 1         |                | 2.5                 | 9.5                     | BR-N1-800W25                        | 1    |                | 15.6                    |           |   |       |
|                                          | 7.5              | GS4-27P5    | 14.6                              | 26                          |              |            | GS-BR-1K0W020                         | 1         |                | 3.7                 | 19                      | BR-N1-800W18P0                      | 1    |                | 21.7                    |           |   |       |
|                                          | 10               | GS4-2010    | 14.6                              | 26                          |              |            |                                       | 1         |                | 5.1                 |                         | BR-N1-1K1W15P0                      | 1    |                | 26.0                    |           |   |       |
|                                          | 15               | GS4-2015    | 12.6                              | 28                          |              |            | GS-BR-1K5W013                         | 1         | 7.5            | 29                  | BR-N1-1K5W14P0          | 1                                   | 27.9 |                |                         |           |   |       |
|                                          | 20               | GS4-2020    | 8.3                               | 46                          |              |            | GS-BR-1K0W4P3                         | 2S        | 10.2           | 44                  | BR-N1-2K2W08P6          | 1                                   | 45.3 |                |                         |           |   |       |
|                                          | 25               | GS4-2025    | 8.3                               | 46                          |              |            |                                       | 2S        | 12.2           |                     |                         | 1                                   |      |                |                         |           |   |       |
|                                          | 30               | GS4-2030    | 5.8                               | 66                          |              |            | GS-BR-1K5W3P3                         | 2S        | 14.9           | 58                  | BR-N1-3K0W05P8          | 1                                   | 67.2 |                |                         |           |   |       |
|                                          | 40               | GS4-2040    | 4.8*                              | 80*                         |              |            | 2                                     | 1DBU      | Not offered    |                     |                         |                                     |      |                | BR-N1-1K6W10P0          | 2 (1/DBU) | F | 79*   |
|                                          | 50               | GS4-2050    | 3.2*                              | 120*                        |              |            | 2                                     | 2DBU      |                |                     |                         |                                     |      |                | BR-N1-2K2W06P8          | 2 (1/DBU) |   | 116*  |
|                                          | 60               | GS4-2060    | 3.2*                              | 120*                        |              |            | 2                                     | 2DBU      |                |                     |                         |                                     |      |                | BR-N1-3K6W06P8          | 2 (1/DBU) |   |       |
|                                          | 75               | GS4-2075    | 2.1*                              | 180*                        |              |            | 3                                     | 2DBU      |                |                     |                         |                                     |      |                | BR-N1-2K2W06P8          | 3 (1/DBU) |   |       |
|                                          | 100              | GS4-2100    | 1.6*                              | 240*                        |              |            | 4                                     | 2DBU      |                |                     |                         |                                     |      |                | BR-N1-2K2W06P8          | 4 (1/DBU) |   |       |
| 460V                                     | 1                | GS4-41P0    | 190                               | 4                           | -            | n/a        | GS-BR-080W750                         | 1         | A              | 0.5                 | 1                       | BR-N1-240W200                       | 1    | A              | 4.0                     |           |   |       |
|                                          | 2                | GS4-42P0    | 126.7                             | 6                           |              |            | GS-BR-200W360                         | 1         |                | 1                   | 2.1                     | BR-N1-240W150                       | 1    |                | 5.3                     |           |   |       |
|                                          | 3                | GS4-43P0    | 108.6                             | 7                           |              |            | GS-BR-300W250                         | 1         |                | 1.5                 | 3                       | BR-N1-500W200                       | 1    |                | 4.0                     |           |   |       |
|                                          | 5                | GS4-45P0    | 84.4                              | 9                           |              |            | GS-BR-400W150                         | 1         |                | 2.5                 | 5.1                     | BR-N1-500W130                       | 1    |                | 6.1                     |           |   |       |
|                                          | 7.5              | GS4-47P5    | 54.3                              | 14                          |              |            | GS-BR-1K0W075                         | 1         |                | 3.7                 | 10.2                    | BR-N1-720W85                        | 1    |                | 9.3                     |           |   |       |
|                                          | 10               | GS4-4010    | 47.5                              | 16                          |              |            |                                       | 1         |                | 5.1                 |                         | BR-N1-1K2W50                        | 1    |                | 15.8                    |           |   |       |
|                                          | 15               | GS4-4015    | 42.2                              | 18                          |              |            | GS-BR-1K5W043                         | 1         | 7.5            | 17.6                | BR-N1-1K5W40            | 1                                   | 19.8 |                |                         |           |   |       |
|                                          | 20               | GS4-4020    | 26.2                              | 29                          |              |            | GS-BR-1K0W016                         | 2S        | 10.2           | 24                  | BR-N1-1K7W30            | 1                                   | 26.3 |                |                         |           |   |       |
|                                          | 25               | GS4-4025    | 23.0                              | 33                          |              |            |                                       | 2S        | 12.2           |                     | BR-N1-2K3W26            | 1                                   | 30.4 |                |                         |           |   |       |
|                                          | 30               | GS4-4030    | 23.0                              | 33                          |              |            | GS-BR-1K5W013                         | 2S        | 14.9           | 29                  | BR-N1-2K8W25            | 1                                   | 31.6 |                |                         |           |   |       |
|                                          | 40               | GS4-4040    | 14.1                              | 54                          |              |            | GS-BR-1K0W016                         | 4 (2S/2P) | D              | 20.3                | 47.5                    | BR-N1-4K0W16P0                      | 1    |                | 49.4                    |           |   |       |
|                                          | 50               | GS4-4050    | 12.7*                             | 60*                         |              |            | 1                                     | 4DBU      | Not offered    |                     |                         |                                     |      |                | BR-N1-4K7W14P7          | 1         | F | 53.7  |
|                                          | 60               | GS4-4060    | 12.7*                             | 60*                         |              |            | 1                                     | 4DBU      |                |                     |                         |                                     |      |                | BR-N1-6K9W13P6          | 1         |   | 58.1  |
|                                          | 75               | GS4-4075    | 9.5*                              | 80*                         |              |            | 2                                     | 3DBU      |                |                     |                         |                                     |      |                | BR-N1-3K6W20            | 2 (1/DBU) |   | 39.5* |
|                                          | 100              | GS4-4100    | 6.3*                              | 120*                        |              |            | 2                                     | 4DBU      |                |                     |                         |                                     |      |                | BR-N1-4K7W14P7          | 2 (1/DBU) |   | 53.7* |
|                                          | 125              | GS4-4125    | 6.3*                              | 120*                        | 2            | 4DBU       | BR-N1-6K9W13P6                        | 2 (1/DBU) |                |                     |                         |                                     |      | 58.1*          |                         |           |   |       |
|                                          | 150              | GS4-4150    | 6.0*                              | 126*                        | 1            | 5DBU       | BR-N1-13K0W06P4                       | 1         |                |                     |                         |                                     |      | 123.4          |                         |           |   |       |
|                                          | 175              | GS4-4175    | 4.0*                              | 190*                        | 1            | 6DBU       | BR-N1-18K0W03P7                       | 1         |                |                     |                         |                                     |      | 213.5          |                         |           |   |       |
|                                          | 200              | GS4-4200    | 4.0*                              | 190*                        | 1            | 6DBU       |                                       | 1         |                |                     |                         |                                     |      |                |                         |           |   |       |
|                                          | 250              | GS4-4250    | 3.4*                              | 225*                        | 1            | 7DBU       | BR-N1-13K0W06P4                       | 1         |                |                     |                         |                                     |      | 210.8          |                         |           |   |       |
|                                          | 300              | GS4-4300    | 3.0*                              | 252*                        | 2            | 5DBU       |                                       | 2 (1/DBU) |                |                     |                         |                                     |      | 123.4*         |                         |           |   |       |

\* These values are per individual DBU, as seen between DBU terminals B1 and B2.

\*\* 10% Duty Cycle with maximum ON (braking) time of 10 seconds.

# GSxx DURAPULSE Drives Accessories – Dynamic Braking Component Selection

## Brake Wiring

Use your drive's Braking Component Selection table to determine the appropriate brake resistor model and configuration for your drive. Refer to the diagrams below for examples on how to wire each possible configuration

**Diagram A (Drive + 1 Resistor or NEMA1 Resistor):**

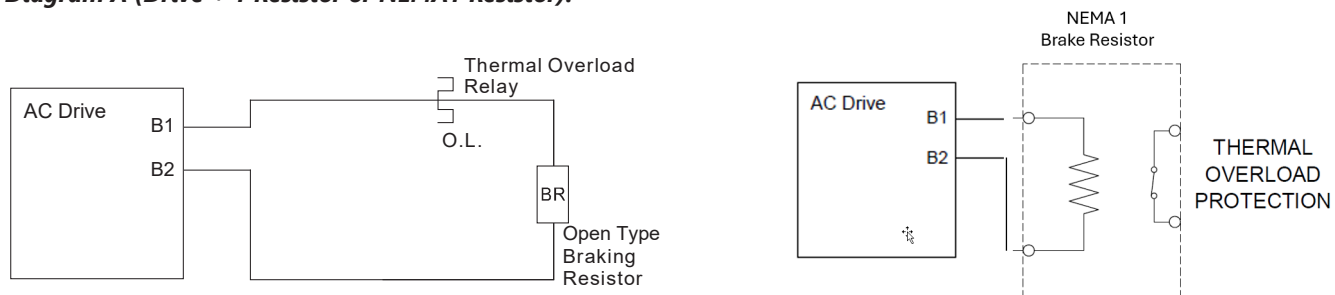


**Diagram B (Drive + 2 Series Resistors):**

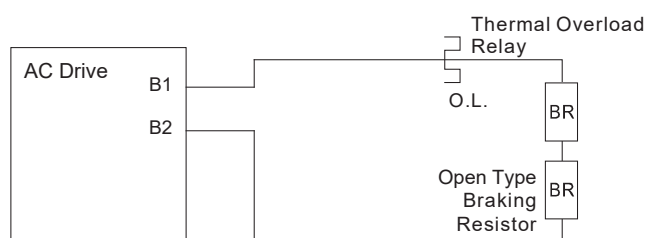


**Diagram C (Drive + 2 Parallel Resistors):**


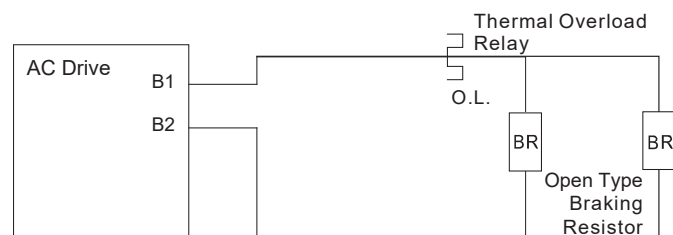


**Diagram D (drive + 2 Series and 2 Parallel Resistors):**

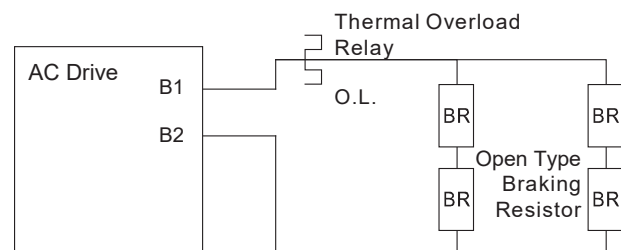

# GSxx *DURAPULSE* Drives Accessories – Dynamic Braking Component Selection

## Brake Wiring, *continued*

**Diagram E (Drive + 1 DBU with 1 NEMA1 Resistor):**


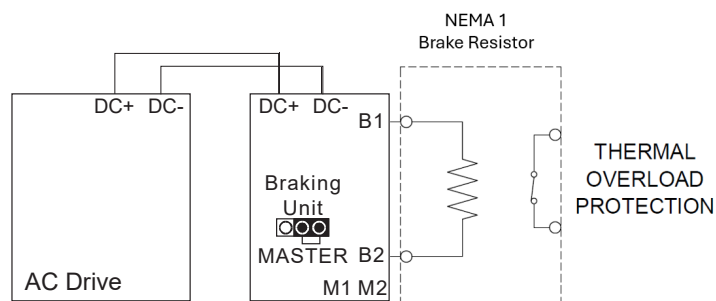


**Diagram F (Drive + DBUs with 1 Resistor or NEMA1 Resistor per DBU):**

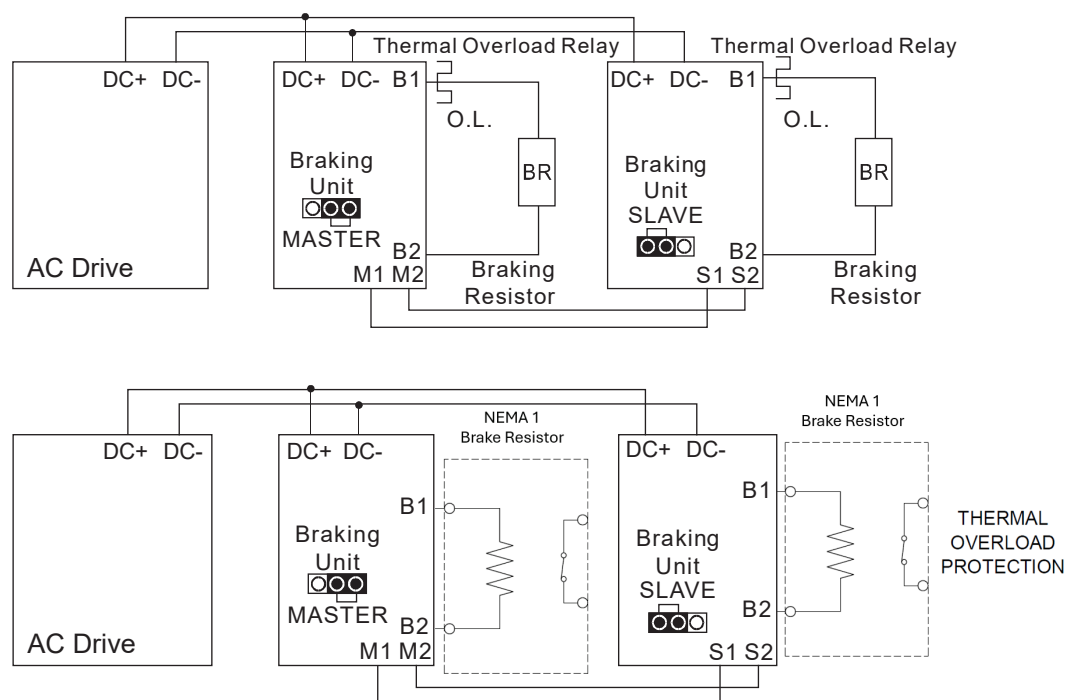

# GS/DURAPULSE Drives Accessories – Braking Unit Specifications for GS4 & GS30 DURAPULSE AC Drives

## Braking Units for DURApulse AC Drives

### Overview

Braking units are applied to absorb the motor regeneration energy when the three-phase induction motor stops by deceleration.

GS-xDBU braking units, used with GS series braking resistors, provide optimum braking performance.



Note: Braking units are available ONLY for DURApulse drives.



**WARNING: TO AVOID INJURY OR MECHANICAL DAMAGE, PLEASE REFER TO USER MANUAL GS-DB\_UMP BEFORE WIRING.**



| Dynamic Braking Unit Specifications – for GS4 & GS30 <i>DURAPULSE</i> AC Drives |                                                |                                                                             |                |                |                                 |                                                                                                                                    |                                 |                |
|---------------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------|----------------|----------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------|
| Braking Unit Part Number                                                        |                                                | <i>GS-1DBU</i>                                                              | <i>GS-2DBU</i> | <i>GS-3DBU</i> | <i>GS-4DBU</i>                  | <i>GS-5DBU</i>                                                                                                                     | <i>GS-6DBU</i>                  | <i>GS-7DBU</i> |
| Price                                                                           |                                                | \$269.00                                                                    | \$269.00       | \$364.00       | \$364.00                        | \$1,517.00                                                                                                                         | \$1,578.00                      | \$1,732.00     |
| Nominal Voltage (VAC)                                                           |                                                | 230                                                                         |                |                | 460                             |                                                                                                                                    |                                 |                |
| Max Motor Capacity (hp/[kW])                                                    |                                                | 20<br>[15]                                                                  | 30<br>[22]     | 40<br>[30]     | 60<br>[45]                      | 150<br>[110]                                                                                                                       | 200<br>[160]                    | 250<br>[185]   |
| Output Rating                                                                   | Max Discharge Current (A)<br>@ 10% Duty Cycle* | 40                                                                          | 60             | 40             | 60                              | 126                                                                                                                                | 190                             | 225            |
|                                                                                 | Continuous Discharge Current (A)               | 15                                                                          | 20             | 15             | 18                              | 45                                                                                                                                 | 50                              | 100            |
|                                                                                 | Braking Startup Voltage (VDC)                  | 330/345/360/<br>380/400/415 ±3V                                             |                |                | 600/690/720/<br>760/800/830 ±6V |                                                                                                                                    | 618/642/667/690/<br>725/750 ±6V |                |
|                                                                                 | Maximum On-Time (s)                            | 10                                                                          |                |                |                                 |                                                                                                                                    |                                 |                |
| Input DC Voltage (VDC)                                                          |                                                | 200–400                                                                     |                |                | 400–800                         |                                                                                                                                    | 400–750                         |                |
| Min Equivalent Resistor<br>for Each Braking Unit (Ω)                            |                                                | 10                                                                          | 6.8            | 20             | 13.6                            | 6                                                                                                                                  | 4                               | 3.4            |
| Protection                                                                      | Power CHARGE Lamp/LED                          | Comes ON until DC bus voltage<br>(+P – -N) drops below 50VDC                |                |                |                                 | Comes ON when DC bus voltage (DC+ –<br>DC-) rises above 300VDC.<br>Goes OFF when DC bus voltage (DC+ –<br>DC-) drops below 100VDC. |                                 |                |
|                                                                                 | Braking ACT Lamp/LED                           | ON during braking                                                           |                |                |                                 |                                                                                                                                    |                                 |                |
|                                                                                 | Fault ERR Lamp                                 | ON if a fault has occurred                                                  |                |                |                                 | n/a                                                                                                                                |                                 |                |
|                                                                                 | Overcurrent Level LED (A)                      | n/a                                                                         |                |                |                                 | 190                                                                                                                                | 290                             | 340            |
|                                                                                 | Overheat LED                                   | n/a                                                                         |                |                |                                 | Comes ON > 176°F [80°C];<br>Goes OFF < 149°F [65°C]                                                                                |                                 |                |
|                                                                                 | Heat Sink Overheat Temperture                  | 203°F [95°C]                                                                |                |                |                                 | n/a                                                                                                                                |                                 |                |
|                                                                                 | Alarm Output Relay Contact                     | 5A @ 120VAC/28VDC (RA,RB,RC)                                                |                |                |                                 | 3A @ 250VAC/28VDC (RA,RC)                                                                                                          |                                 |                |
| Environment                                                                     | Installation Location                          | indoor (no corrosive gases; no metallic dust)                               |                |                |                                 |                                                                                                                                    |                                 |                |
|                                                                                 | Operating Temperature                          | 14°F to 122 °F [-10 to +50 °C]                                              |                |                |                                 |                                                                                                                                    |                                 |                |
|                                                                                 | Storage Temperature                            | -4 to +140 °F [-20 to +60 °C]                                               |                |                |                                 |                                                                                                                                    |                                 |                |
|                                                                                 | Humidity                                       | less than 90% RH, non-condensing                                            |                |                |                                 |                                                                                                                                    |                                 |                |
|                                                                                 | Vibration                                      | 9.8 m/s <sup>2</sup> [1G] under 20Hz ; 2m/s <sup>2</sup> [0.2G] at 20–50 Hz |                |                |                                 |                                                                                                                                    |                                 |                |
| Mechanical Configuration                                                        |                                                | IP50 wall-mount enclosed                                                    |                |                |                                 | IP10 wall-mount enclosed                                                                                                           |                                 |                |
| * 10% Duty Cycle with maximum ON (braking) time of 10 seconds                   |                                                |                                                                             |                |                |                                 |                                                                                                                                    |                                 |                |


\* 10% Duty Cycle with maximum ON (braking) time of 10 seconds

# GS/DURAPULSE Drives Accessories – Braking Unit Basic Wiring for GS4 & GS30 DURAPULSE AC Drives

## Basic Dynamic Braking Wiring Diagram for GS4 & GS30 DURAPULSE AC Drives



Note: Smaller-capacity DURApulse AC Drives can connect directly to braking resistors, and do not require Dynamic Braking Units for braking. Other applications require multiple Resistors and/or multiple Dynamic Braking Units. Refer to “Dynamic Braking Component Selection” to determine which braking components are required for your application(s), and to the DURApulse Drives Dynamic Braking User Manual for complete wiring diagrams.

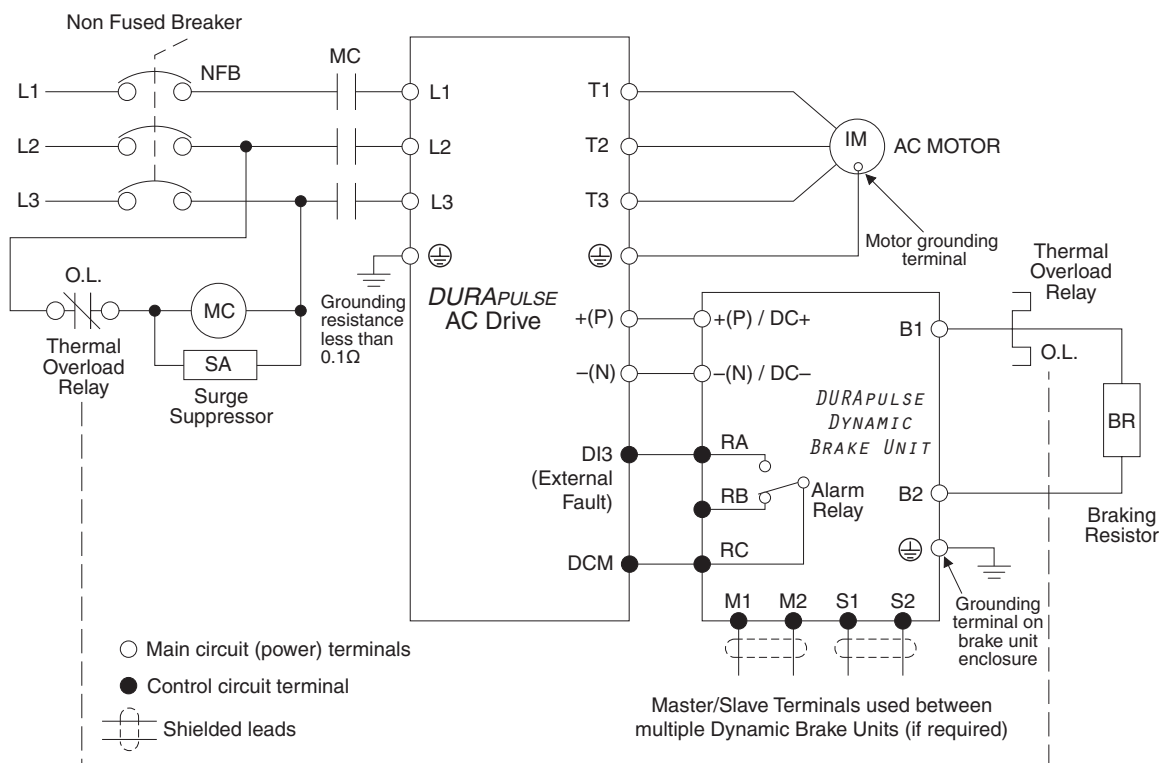


# GS/DURAPULSE Drives Accessories – Braking Unit Dimensions for GS4 & GS30 DURAPULSE AC Drives


## Braking Unit Dimensions ( Dimensions = mm [in] )

See our website: [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

### A) DBU ≤ 100hp (GS-1DBU, GS-2DBU, GS-3DBU, GS-4DBU)

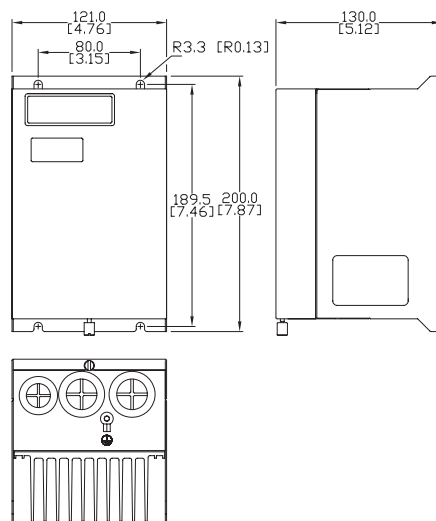

### B) DBU > 100hp (GS-5DBU, GS-6DBU, GS-7DBU)

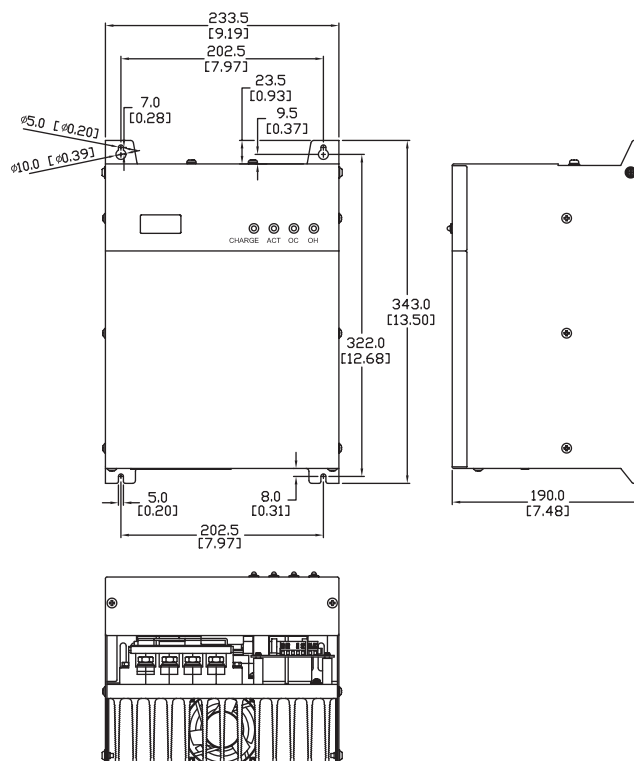

# GS4 DURAPULSE Accessories – EMI Filters Selection

## Selection (GS4)

The optional EMI Filters listed here are available for use with the GS4 drive. Selection of these accessories is application-specific and may improve drive performance. Additional information regarding filter installation and operation is available in the AutomationDirect white paper, "Applied EMI/RFI Techniques," downloadable from [AutomationDirect.com](http://AutomationDirect.com).

| EMI Filters Selection for GS4 AC Drives |                     |                                             |                          |                             |                     |
|-----------------------------------------|---------------------|---------------------------------------------|--------------------------|-----------------------------|---------------------|
| Model*                                  | Description         | EMI Filter **                               | Max Power<br>kW [max/ph] | Max Torque<br>kg-cm [lb-in] | SCCR Rating<br>(kA) |
| <a href="#">GS4-21P0</a>                | 230V 1ph/3ph 1.0 hp | <a href="#">KMF325A</a>                     | 20.8 [6]                 | 17.7 [2]                    | 5                   |
| <a href="#">GS4-22P0</a>                | 230V 1ph/3ph 2.0 hp |                                             |                          |                             |                     |
| <a href="#">GS4-23P0</a>                | 230V 1ph/3ph 3.0 hp |                                             |                          |                             |                     |
| <a href="#">GS4-25P0</a>                | 230V 1ph/3ph 5.0 hp |                                             |                          |                             |                     |
| <a href="#">GS4-27P5</a>                | 230V 1ph/3ph 7.5 hp | <a href="#">KMF370A</a>                     | 58.1 [16.8]              | 44.2 [5]                    | 5                   |
| <a href="#">GS4-2010</a>                | 230V 1ph/3ph 10hp   |                                             |                          |                             |                     |
| <a href="#">GS4-2015</a>                | 230V 1ph/3ph 15hp   |                                             |                          |                             |                     |
| <a href="#">GS4-4025</a>                | 460V 3ph 25hp       |                                             |                          |                             |                     |
| <a href="#">GS4-4030</a>                | 460V 3ph 30hp       | <a href="#">KMF3100A</a>                    | 83 [24]                  | 44.2 [5]                    | 10                  |
| <a href="#">GS4-4040</a>                | 460V 3ph 40hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2020</a>                | 230V 3ph 20hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2025</a>                | 230V 3ph 25hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2030</a>                | 230V 3ph 30hp       | <a href="#">KMF318A</a>                     | 14.9 [4.3]               | 17.7 [2]                    | 5                   |
| <a href="#">GS4-41P0</a>                | 460V 3ph 1.0 hp     |                                             |                          |                             |                     |
| <a href="#">GS4-42P0</a>                | 460V 3ph 2.0 hp     |                                             |                          |                             |                     |
| <a href="#">GS4-43P0</a>                | 460V 3ph 3.0 hp     |                                             |                          |                             |                     |
| <a href="#">GS4-45P0</a>                | 460V 3ph 5.0 hp     | <a href="#">KMF350A</a>                     | 41.5 [12]                | 44.2 [5]                    | 10                  |
| <a href="#">GS4-47P5</a>                | 460V 3ph 7.5 hp     |                                             |                          |                             |                     |
| <a href="#">GS4-4010</a>                | 460V 3ph 10hp       |                                             |                          |                             |                     |
| <a href="#">GS4-4015</a>                | 460V 3ph 15hp       |                                             |                          |                             |                     |
| <a href="#">GS4-4020</a>                | 460V 3ph 20hp       | <a href="#">MIF375</a>                      | 62.3 [18]                | 53.1 [6]                    | 10                  |
| <a href="#">GS4-4050</a>                | 460V 3ph 50hp       | <a href="#">MIF3150</a>                     | 124.6 [36]               | 177 [20]                    | 10                  |
| <a href="#">GS4-2040</a>                | 230V 3ph 40hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2050</a>                | 230V 3ph 50hp       |                                             |                          |                             |                     |
| <a href="#">GS4-4060</a>                | 460V 3ph 60hp       |                                             |                          |                             |                     |
| <a href="#">GS4-4075</a>                | 460V 3ph 75hp       | <a href="#">MIF3400B</a>                    | 332.2 [96]               | 265.5 [30]                  | 30                  |
| <a href="#">GS4-4100</a>                | 460V 3ph 100hp      |                                             |                          |                             |                     |
| <a href="#">GS4-2060</a>                | 230V 3ph 60hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2075</a>                | 230V 3ph 75hp       |                                             |                          |                             |                     |
| <a href="#">GS4-2100</a>                | 230V 3ph 100hp      | <a href="#">MIF3800 &amp; Qty. 3 TOR254</a> | 664.3 [192]              | 265.5 [30]                  | 30                  |
| <a href="#">GS4-4125</a>                | 460V 3ph 125hp      |                                             |                          |                             |                     |
| <a href="#">GS4-4150</a>                | 460V 3ph 150hp      |                                             |                          |                             |                     |
| <a href="#">GS4-4175</a>                | 460V 3ph 175hp      |                                             |                          |                             |                     |
| <a href="#">GS4-4200</a>                | 460V 3ph 200hp      |                                             |                          |                             |                     |
| <a href="#">GS4-4250</a>                | 460V 3ph 250hp      |                                             |                          |                             |                     |
| <a href="#">GS4-4300</a>                | 460V 3ph 300hp      |                                             |                          |                             |                     |

\* EMI filter selections for GS4-2xxx models are the same whether that particular model is supplied 1-Phase or 3-Phase 230VAC.  
 \*\* Part numbers are Roxburgh EMI Filters available from AutomationDirect at the web link embedded with each part number listed above.

# GS4 DURAPULSE Accessories – Fusing

## Fuse Selection for GS4 AC Drives

The fuses shown in the table below are available from [AutomationDirect](https://www.automationdirect.com). Further information, including dimensional information, is available at [AutomationDirect.com](https://www.automationdirect.com).

| Fuse Specification Chart GS4 DURAPULSE Drives                                                                                                                                                 |                             |             |       |          |                |                                      |                        |                                                  |             |       |          |                |                        |                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------|-------|----------|----------------|--------------------------------------|------------------------|--------------------------------------------------|-------------|-------|----------|----------------|------------------------|------------------------|
| Drive Model                                                                                                                                                                                   | For Three-Phase Input Power |             |       |          |                |                                      |                        | For Single-Phase Input Power                     |             |       |          |                |                        |                        |
|                                                                                                                                                                                               | HP                          | Input Power |       |          | Input Fuse *** |                                      |                        | HP                                               | Input Power |       |          | Input Fuse *** |                        |                        |
|                                                                                                                                                                                               |                             | Ø           | Volts | GS4 Amps | Fuse Amps      | Fast Acting Class T                  | Edison Class J*        |                                                  | Ø           | Volts | GS4 Amps | Fuse Amps      | Fast Acting Class T    | Edison Class J*        |
| <a href="#">GS4-21P0</a>                                                                                                                                                                      | 1                           | 3           | 230   | 6.4      | 10             | <a href="#">TJN10</a>                | <a href="#">JHL10</a>  | 0.5                                              | 1           | 230   | 6.4      | 10             | <a href="#">TJN10</a>  | <a href="#">JHL10</a>  |
| <a href="#">GS4-22P0</a>                                                                                                                                                                      | 2                           | 3           | 230   | 12       | 15             | <a href="#">TJN15</a>                | <a href="#">JHL15</a>  | 0.75                                             | 1           | 230   | 9.7      | 15             | <a href="#">TJN15</a>  | <a href="#">JHL15</a>  |
| <a href="#">GS4-23P0</a>                                                                                                                                                                      | 3                           | 3           | 230   | 16       | 25             | <a href="#">TJN25</a>                | <a href="#">JHL25</a>  | 1                                                | 1           | 230   | 15       | 20             | <a href="#">TJN20</a>  | <a href="#">JHL20</a>  |
| <a href="#">GS4-25P0</a>                                                                                                                                                                      | 5                           | 3           | 230   | 20       | 35             | <a href="#">TJN35</a>                | <a href="#">JHL35</a>  | 2                                                | 1           | 230   | 20       | 30             | <a href="#">TJN30</a>  | <a href="#">JHL30</a>  |
| <a href="#">GS4-27P5</a>                                                                                                                                                                      | 7.5                         | 3           | 230   | 28       | 50             | <a href="#">TJN50</a>                | <a href="#">JHL50</a>  | 3                                                | 1           | 230   | 26       | 40             | <a href="#">TJN40</a>  | <a href="#">JHL40</a>  |
| <a href="#">GS4-2010</a>                                                                                                                                                                      | 10                          | 3           | 230   | 36       | 70             | <a href="#">TJN70</a>                | <a href="#">JHL70</a>  | 3                                                | 1           | 230   | 26       | 40             | <a href="#">TJN40</a>  | <a href="#">JHL40</a>  |
| <a href="#">GS4-2015</a>                                                                                                                                                                      | 15                          | 3           | 230   | 52       | 100            | <a href="#">TJN100</a>               | <a href="#">JHL100</a> | 5                                                | 1           | 230   | 40       | 70             | <a href="#">TJN70</a>  | <a href="#">JHL70</a>  |
| <a href="#">GS4-2020</a>                                                                                                                                                                      | 20                          | 3           | 230   | 72       | 125            | <a href="#">TJN125</a>               | <a href="#">JHL125</a> | 7.5                                              | 1           | 230   | 58       | 100            | <a href="#">TJN100</a> | <a href="#">JHL100</a> |
| <a href="#">GS4-2025</a>                                                                                                                                                                      | 25                          | 3           | 230   | 83       | 150            | <a href="#">TJN150</a>               | <a href="#">JHL150</a> | 10                                               | 1           | 230   | 76       | 125            | <a href="#">TJN125</a> | <a href="#">JHL125</a> |
| <a href="#">GS4-2030</a>                                                                                                                                                                      | 30                          | 3           | 230   | 99       | 175            | <a href="#">TJN175</a>               | <a href="#">JHL175</a> | 10                                               | 1           | 230   | 76       | 125            | <a href="#">TJN125</a> | <a href="#">JHL125</a> |
| <a href="#">GS4-2040**</a>                                                                                                                                                                    | 40                          | 3           | 230   | 124      | 175            | <a href="#">TJN175</a>               | <a href="#">JHL175</a> | 10                                               | 1           | 230   | 63       | 90             | <a href="#">TJN90</a>  | <a href="#">JHL90</a>  |
| <a href="#">GS4-2050**</a>                                                                                                                                                                    | 50                          | 3           | 230   | 143      | 200            | <a href="#">TJN200</a>               | <a href="#">JHL200</a> | 10                                               | 1           | 230   | 63       | 90             | <a href="#">TJN90</a>  | <a href="#">JHL90</a>  |
| <a href="#">GS4-2060</a>                                                                                                                                                                      | 60                          | 3           | 230   | 171      | 250            | <a href="#">TJN250</a>               | <a href="#">JHL250</a> | 15                                               | 1           | 230   | 94       | 150            | <a href="#">TJN150</a> | <a href="#">JHL150</a> |
| <a href="#">GS4-2075</a>                                                                                                                                                                      | 75                          | 3           | 230   | 206      | 300            | <a href="#">TJN300</a>               | <a href="#">JHL300</a> | 20                                               | 1           | 230   | 124      | 175            | <a href="#">TJN175</a> | <a href="#">JHL175</a> |
| <a href="#">GS4-2100</a>                                                                                                                                                                      | 100                         | 3           | 230   | 245      | 350            | <a href="#">TJN350</a>               | <a href="#">JHL350</a> | 25                                               | 1           | 230   | 143      | 200            | <a href="#">TJN200</a> | <a href="#">JHL200</a> |
| <a href="#">GS4-41P0</a>                                                                                                                                                                      | 1                           | 3           | 460   | 4.3      | 6              | <a href="#">TJS6</a>                 | <a href="#">JHL6</a>   | single-phase input power not applicable for 460V |             |       |          |                |                        |                        |
| <a href="#">GS4-42P0</a>                                                                                                                                                                      | 2                           | 3           | 460   | 5.9      | 10             | <a href="#">TJS10</a>                | <a href="#">JHL10</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-43P0</a>                                                                                                                                                                      | 3                           | 3           | 460   | 8.7      | 15             | <a href="#">TJS15</a>                | <a href="#">JHL15</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-45P0</a>                                                                                                                                                                      | 5                           | 3           | 460   | 14       | 20             | <a href="#">TJS20</a>                | <a href="#">JHL20</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-47P5</a>                                                                                                                                                                      | 7.5                         | 3           | 460   | 17       | 25             | <a href="#">TJS25</a>                | <a href="#">JHL25</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4010</a>                                                                                                                                                                      | 10                          | 3           | 460   | 20       | 35             | <a href="#">TJS35</a>                | <a href="#">JHL35</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4015</a>                                                                                                                                                                      | 15                          | 3           | 460   | 26       | 45             | <a href="#">TJS45</a>                | <a href="#">JHL45</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4020</a>                                                                                                                                                                      | 20                          | 3           | 460   | 35       | 60             | <a href="#">TJS60</a>                | <a href="#">JHL60</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4025</a>                                                                                                                                                                      | 25                          | 3           | 460   | 40       | 70             | <a href="#">TJS70</a>                | <a href="#">JHL70</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4030</a>                                                                                                                                                                      | 30                          | 3           | 460   | 47       | 90             | <a href="#">TJS90</a>                | <a href="#">JHL90</a>  |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4040**</a>                                                                                                                                                                    | 40                          | 3           | 460   | 63       | 125            | <a href="#">TJS100</a>               | <a href="#">JHL100</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4050</a>                                                                                                                                                                      | 50                          | 3           | 460   | 74       | 100            | <a href="#">TJS110</a>               | <a href="#">JHL110</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4060</a>                                                                                                                                                                      | 60                          | 3           | 460   | 101      | 125            | <a href="#">TJS150</a>               | <a href="#">JHL150</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4075</a>                                                                                                                                                                      | 75                          | 3           | 460   | 114      | 150            | <a href="#">TJS150</a>               | <a href="#">JHL150</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4100</a>                                                                                                                                                                      | 100                         | 3           | 460   | 157      | 200            | <a href="#">TJS200</a>               | <a href="#">JHL200</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4125</a>                                                                                                                                                                      | 125                         | 3           | 460   | 167      | 250            | <a href="#">TJS250</a>               | <a href="#">JHL250</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4150</a>                                                                                                                                                                      | 150                         | 3           | 460   | 207      | 300            | <a href="#">TJS300</a>               | <a href="#">JHL300</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4175</a>                                                                                                                                                                      | 175                         | 3           | 460   | 240      | 350            | <a href="#">TJS350</a>               | <a href="#">JHL350</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4200</a>                                                                                                                                                                      | 200                         | 3           | 460   | 300      | 450            | <a href="#">TJS450</a>               | <a href="#">JHL450</a> |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4250</a>                                                                                                                                                                      | 250                         | 3           | 460   | 380      | 500            | <a href="#">TJS500</a>               | <a href="#">JHL500</a> |                                                  |             |       |          |                |                        |                        |
| —                                                                                                                                                                                             | —                           |             |       |          |                | Fast Acting Current Limiting Class L |                        |                                                  |             |       |          |                |                        |                        |
| <a href="#">GS4-4300</a>                                                                                                                                                                      | 300                         | 3           | 460   | 400      | 700            | <a href="#">LCU700</a>               |                        |                                                  |             |       |          |                |                        |                        |
| * High-speed Class J                                                                                                                                                                          |                             |             |       |          |                |                                      |                        |                                                  |             |       |          |                |                        |                        |
| ** Includes DC choke                                                                                                                                                                          |                             |             |       |          |                |                                      |                        |                                                  |             |       |          |                |                        |                        |
| *** The fuses listed above are available from <a href="https://www.automationdirect.com">AutomationDirect.com</a> . (Individual web links are associated with each part number listed above.) |                             |             |       |          |                |                                      |                        |                                                  |             |       |          |                |                        |                        |