


XBF-DC04A Analog Output Module

Part Number	Price	Classification	Description	# of Channels	Drawing
XBF-DC04A	\$162.00	Current Output	LS Electric XGB analog output module, 4-channel, current, 12-bit, output current signal range(s) of 0-20 mA and 4-20 mA, external 24 VDC required.	4	PDF


General Specifications			XBF-DC04A
			Current
Analog Output Range			4–20 mA DC 0–20 mA DC (Load resistance: 510Ω or less)
Digital Input	Type		12-bit binary data
	Range	Unsigned Value	0–4000
		Signed Value	±2000
		Precise Value	400–2000 / 0–2000
		Percentile Value	0–1000
Maximum Resolution			5μA (1/4000)
Accuracy			±0.5% or less
Maximum Conversion Speed			1ms/channel
Absolute Maximum Output			DC +25mA
Number of Output Channels			4 channels
Insulation Method			Photocoupler insulation between input terminal and PLC power (no insulation between channels)
Connection Terminal			11-point terminal block
I/O Points Occupied			Fixed type: 512 points
Current Consumption	Internal (5VDC)		110mA
	External (24VDC)		120mA
Weight			70g
Power Supply			20.4–28.8 VDC

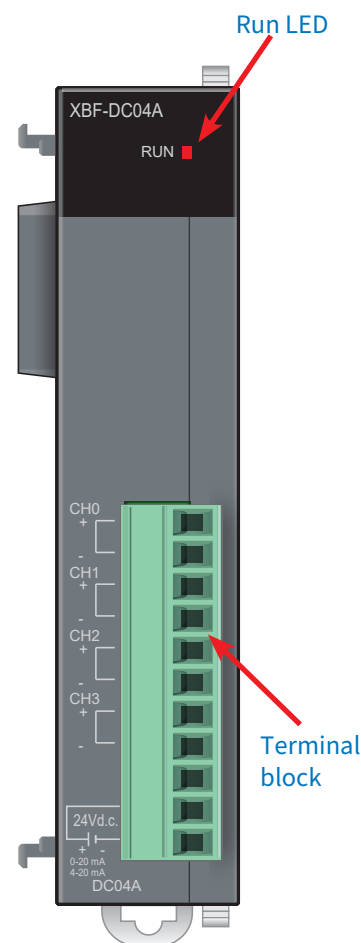

XBF-DC04A Analog Output Module Wiring

When connecting cable to your XBF-DC04A:

- Keep the AC power line away from the analog input module's external input signal line to prevent surge or inductive noise.
- Use cable rated to meet your application's ambient temperature and current needs. AWG22 (0.3mm²) or greater recommended.
- Keep cable clear of high heat and oil.
- Check polarity when wiring the terminal.
- Using high-voltage line or power line may cause abnormal operations or defects due to inductive hindrance.
- Make sure the desired channel is enabled.

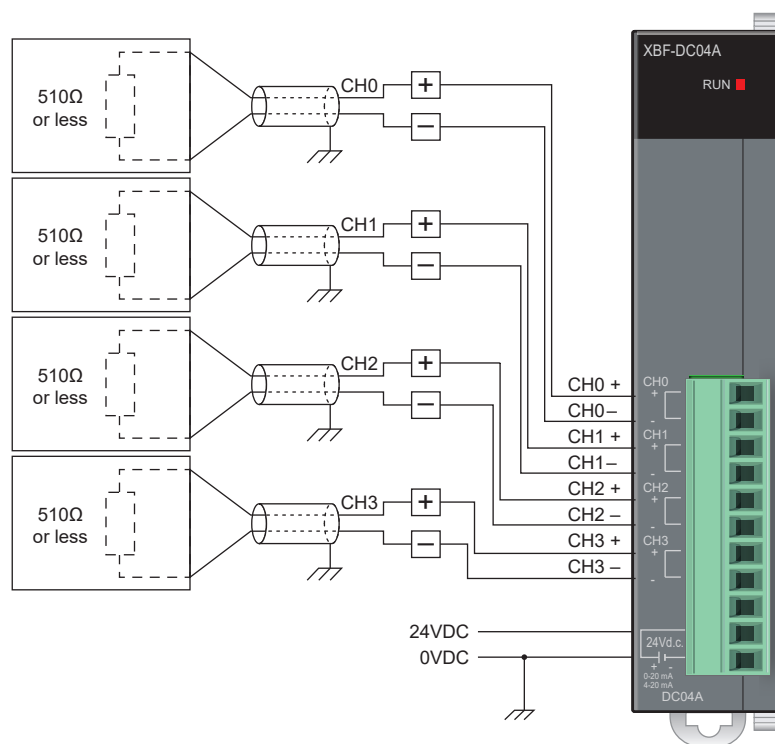

Notes:

- Use 2-core twisted shield cable
- Use AWG22 (0.3mm²) or greater cable
- Load resistance is 510Ω or less
- Terminal screwdriver: slotted 2.5 mm



XGB Analog Modules

XBF-DC04A Analog Output Module Configuration

Follow the Quick start video to learn how to Register and Configure any Analog Module:

[Analog Module Setup](#)

Direct Variables

All XGB series analog modules are assigned 32 words in the “U” memory area based on the slot number assignment. (%UW0.z.0 - %UW0.z.31, z= slot number). The actual memory address used within the 32 word block are specific to each module. See the table below for Direct Variable assignments.

For Direct Variable nomenclature explanation, see [Direct Variable User Programming Memory](#).

Symbolic Variables

Symbolic variables for the analog module can be automatically created in XG5000 software by using the top MENU bar: Edit > Register Module Variable Comments.

Symbolic variables and direct variables for XBF-DC04A are as follows (z refers to module slot number (2 to 8)).

Type	Scope	Variable (Symbolic)	Address (Direct Variable Alias)	Data Type	Comment
Tag	GlobalVariable	_0z_CH0_ACT	%UX0.z.16	BOOL	Analog Output Module: CH0 Activation Status
Tag	GlobalVariable	_0z_CH0_DATA	%UW0.z.3	WORD	Analog Output Module: CH0 Input
Tag	GlobalVariable	_0z_CH0_ERR	%UX0.z.0	BOOL	Analog Output Module: CH0 Error
Tag	GlobalVariable	_0z_CH0_OUTEN	%UX0.z.32	BOOL	Analog Output Module: CH0 Output Enable
Tag	GlobalVariable	_0z_CH1_ACT	%UX0.z.17	BOOL	Analog Output Module: CH1 Activation Status
Tag	GlobalVariable	_0z_CH1_DATA	%UW0.z.4	WORD	Analog Output Module: CH1 Input
Tag	GlobalVariable	_0z_CH1_ERR	%UX0.z.1	BOOL	Analog Output Module: CH1 Error
Tag	GlobalVariable	_0z_CH1_OUTEN	%UX0.z.33	BOOL	Analog Output Module: CH1 Output Enable
Tag	GlobalVariable	_0z_CH2_ACT	%UX0.z.18	BOOL	Analog Output Module: CH2 Activation Status
Tag	GlobalVariable	_0z_CH2_DATA	%UW0.z.5	WORD	Analog Output Module: CH2 Input
Tag	GlobalVariable	_0z_CH2_ERR	%UX0.z.2	BOOL	Analog Output Module: CH2 Error
Tag	GlobalVariable	_0z_CH2_OUTEN	%UX0.z.34	BOOL	Analog Output Module: CH2 Output Enable
Tag	GlobalVariable	_0z_CH3_ACT	%UX0.z.19	BOOL	Analog Output Module: CH3 Activation Status
Tag	GlobalVariable	_0z_CH3_DATA	%UW0.z.6	WORD	Analog Output Module: CH3 Input
Tag	GlobalVariable	_0z_CH3_ERR	%UX0.z.3	BOOL	Analog Output Module: CH3 Error
Tag	GlobalVariable	_0z_CH3_OUTEN	%UX0.z.35	BOOL	Analog Output Module: CH3 Output Enable
Tag	GlobalVariable	_0z_CH_ACT_ARY	%UX0.z.16	ARRAY[0..3] OF BOOL	Analog Output Module: Each CH Active
Tag	GlobalVariable	_0z_CH_DATA_ARY	%UW0.z.3	ARRAY[0..3] OF WORD	Analog Output Module: Each CH Input
Tag	GlobalVariable	_0z_CH_ERR_ARY	%UX0.z.0	ARRAY[0..3] OF BOOL	Analog Output Module: Each CH Error
Tag	GlobalVariable	_0z_CH_OUTEN_ARY	%UX0.z.32	ARRAY[0..3] OF BOOL	Analog Output Module: Each CH Output Enable
Tag	GlobalVariable	_0z_OUTEN	%UW0.z.2	WORD	Analog Output Module: Output Enable
Tag	GlobalVariable	_0z_RDY	%UX0.z.15	BOOL	Analog Output Module: Ready Flag

Environmental Specifications, all XGB Series Modules

Item			Specification	Reference	
Ambient Operating Temperature			0–55°C (32–131°F)	–	
Storage Temperature			-25–70°C (-13–158°F)		
Ambient Operating Humidity			5–95% relative humidity (non-condensing)		
Storage Humidity			5–95% relative humidity (non-condensing)		
Vibration ¹	Occasional Vibration	Frequency	5 ≤ f < 8.4 Hz	3.5 mm pulse width	IEC61131-3-2
			8.4 ≤ f < 150Hz	9.8 m/s ² (1G)	
	Continuous Vibration		5 ≤ f < 8.4 Hz	1.75 mm pulse width	
			8.4 ≤ f < 150Hz	4.9 m/s ² (0.5G)	
Shocks		Peak Acceleration	147 m/s ² (15G)		
		Duration	11ms		
		Pulse Wave Type	Half-sine (3 times each direction per each axis)		
Noise Resistance	Square Wave Impulse Noise		1,500VAC 900VDC	LS Electric standard	
	Electrostatic Discharge		Voltage: 4kV (contact discharge)	IEC61131-3-2 IEC61000-4-2	
	Radiated Electromagnetic Field Noise		80–1,000 MHz, 10 V/m	IEC61131-3-2 IEC61000-4-3	
	Fast Transient / Burst Noise	Classification	Voltage	IEC61131-3-2 IEC61000-4-4	
		Power Supply	2kV		
		Digital/Analog Input/Output Communication Interface	1kV		
Environment			Free from corrosive gases and excessive dust	–	
Attitude			Less than 2,000m		
Pollution Degree			Less than 2 (see note 2)		
Cooling Method			Air-cooling		

1 - Vibration of 10 times each direction (X, Y, and Z)

2 - Normally only nonconductive pollution occurs. Temporary conductivity caused by condensation is to be expected.



XGB Series PLC Family

Available I/O Modules

XGB Series I/O Modules									
Part Number	Price	Description	Digital Input	Digital Output	Analog Input	Analog Output	Motion	Bus Coupler Compatible	Smart Link Required
Digital									
<u>XBE-DC08A</u>	\$59.00	LS Electric XGB discrete input module, 8-point, 24 VDC, sinking/sourcing, 1 common(s), 8 point(s) per common. Removable terminal block included.	✓					✓	
<u>XBE-DC16A</u>	\$70.00	LS Electric XGB discrete input module, 16-point, 24 VDC, sinking/sourcing, 1 common(s), 16 point(s) per common. Removable terminal blocks included.	✓					✓	
<u>XBE-DC16B</u>	\$78.00	LS Electric XGB discrete input module, 16-point, 12-24 VDC, sinking/sourcing, 1 common(s), 16 point(s) per common. Removable terminal blocks included.	✓					✓	
<u>XBE-DC32A</u>	\$97.00	LS Electric XGB discrete input module, 32-point, 24 VDC, sinking/sourcing, 1 common(s), 32 point(s) per common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.	✓					✓	✓
<u>XBE-AC08A</u>	\$88.00	LS Electric XGB discrete input module, 8-point, 120 VAC, 2 common(s), 4 point(s) per common. Removable terminal blocks included.	✓					✓	
<u>XBE-RY08A</u>	\$80.00	LS Electric XGB relay output module, 8-point, 125 VDC/250 VAC, (8) Form A, 1 common(s), 8 point(s) per common, 2A/point, 5A/common. Removable terminal block included.		✓				✓	
<u>XBE-RY08B</u>	\$95.00	LS Electric XGB relay output module, 8-point, 125 VDC/250 VAC, (8) Form A, 8 isolated common(s), 1 point(s) per common, 2A/point. Removable terminal blocks included.		✓				✓	
<u>XBE-RY16A</u>	\$110.00	LS Electric XGB relay output module, 16-point, 125 VDC/250 VAC, (16) Form A, 2 isolated common(s), 8 point(s) per common, 2A/point, 5A/common. Removable terminal blocks included.		✓				✓	
<u>XBE-TN08A</u>	\$60.00	LS Electric XGB discrete output module, 8-point, 12-24 VDC, sinking, 1 common(s), 8 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<u>XBE-TN16A</u>	\$78.00	LS Electric XGB discrete output module, 16-point, 12-24 VDC, sinking, 1 common(s), 16 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<u>XBE-TN32A</u>	\$109.00	LS Electric XGB discrete output module, 32-point, 12-24 VDC, sinking, 1 common(s), 32 point(s) per common, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.		✓				✓	✓
<u>XBE-TP08A</u>	\$62.00	LS Electric XGB discrete output module, 8-point, 12-24 VDC, sourcing, 1 common(s), 8 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<u>XBE-TP16A</u>	\$88.00	LS Electric XGB discrete output module, 16-point, 12-24 VDC, sourcing, 1 common(s), 16 point(s) per common, 0.5A/point, 2A/common. Removable terminal blocks included.		✓				✓	
<u>XBE-TP32A</u>	\$93.00	LS Electric XGB discrete output module, 32-point, 12-24 VDC, sourcing, 1 common(s), 32 point(s) per common, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.		✓				✓	✓
<u>XBE-DN32A</u>	\$172.00	LS Electric XGB discrete combo module, Input: 16-point, 24 VDC, sinking/sourcing, Output: 16-point, 12-24 VDC, sinking, 0.2A/point, 2A/common. Requires XTB-40H terminal block and C40HH-xxSB-XBI cable.	✓	✓				✓	✓
<u>XBE-DR16A</u>	\$97.00	LS Electric XGB discrete combo module, Input: 8-point, 24 VDC, sinking/sourcing, Output: 8-point, 125 VDC/250 VAC, relay, (8) Form A (SPST) relays, 2A/point, 5A/common. Removable terminal blocks included.	✓	✓				✓	
Motion									
<u>XBF-PN04B</u>	\$350.00	LS Electric XGB 4-axis positioning module, EtherCAT Master, 1 high-speed input point(s), sinking/line driver (differential), 1-channel, differential and single-ended encoder input(s), (1) Ethernet 100Base-TX (RJ45) port(s). For use with LS Electric XEM-DxxxHx PLCs.					✓		
<u>XBF-PN08B</u>	\$395.00	LS Electric XGB 8-axis positioning module, EtherCAT Master, 1 high-speed input point(s), sinking/line driver (differential), 1-channel, differential and single-ended encoder input(s), (1) Ethernet 100Base-TX (RJ45) port(s). For use with LS Electric XEM-DxxxHx PLCs.					✓		
<u>XBF-HO02A</u>	\$176.00	LS Electric XGB counter input module, 200 kHz maximum switching frequency, 2 high-speed input point(s), 5-24 VDC, sinking, 2-channel, single-ended encoder input(s), 2 high-speed output point(s), 5-24 VDC, sinking, external 24 VDC required.					✓	✓	✓
<u>XBF-HD02A</u>	\$253.00	LS Electric XGB counter input module, 500 kHz maximum switching frequency, 2 high-speed input point(s), 5-24 VDC, sinking, 2-channel, differential encoder input(s), 2 high-speed output point(s), 5-24 VDC, sinking, external 24 VDC required.					✓	✓	✓

Note: See "Smart Link I/O System" on page tLSE-131 for the XTB-40H terminal block and cables. See "XGB PLC Replacement Terminals" on page tLSE-149 for replacement removable terminal blocks.

Continued on next page