

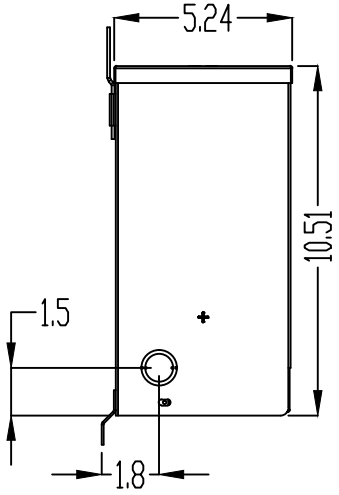



SIDE

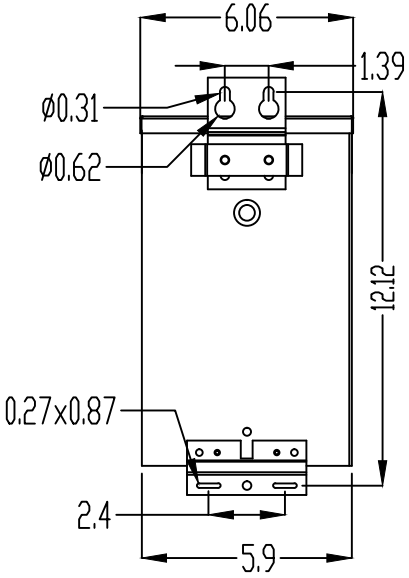


BACK 1

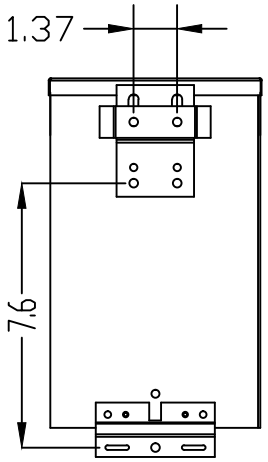


BACK 2

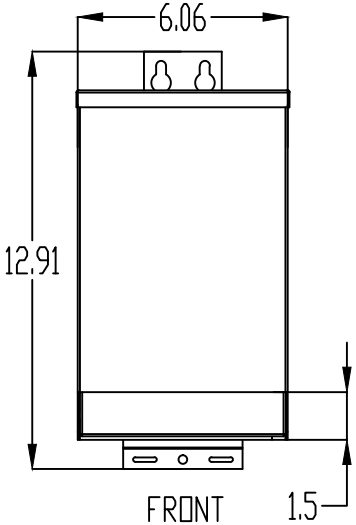

FRONT




TOP

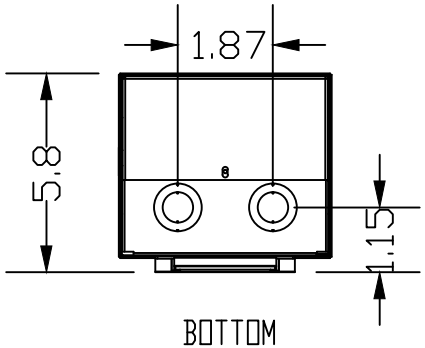

BOTTOM

For field connections, use wires insulatedFor a minimum of 75°C
Pour les connexions à pied d'oeuvre, utiliser du fil dont l'isolant convient pour au moins 75 °C.

Connection Diagram
Schéma de Connexion

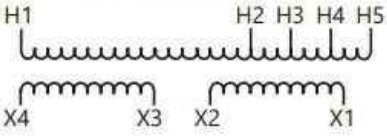

HIGH Volts	Connect HIGH Lines To	Inter-Connect	Connect LOW Lines To
277	H1, H5		
240	H1, H4		
208	H1, H3		
120	H1, H2		

LOW Volts			
120		X1 to X3 X2 to X4	X1-X4
120/240		X2 to X3	X1-X2-X4
240		X2 to X3	X1-X4

Windings X must be connected in either a parallel or series config.
Les enroulements X doivent être connectés dans uneconfiguration parallèle ou série 0220 SR

KVA	CATALOG NO.	HV	LV	ENCLOSURE	SOUND LEVEL	NO LOAD LOSSES
1.0	T1001K0220C	120/208/240/277	120/240	NEMA 3R	40 db	40 W

PHASE	FREQ.	IMPEDANCE	TEMP RISE	TYP. EFFIC.	INS. SYS(c)	TOTAL LOSSES @ OPERATING TEMP	WDG. MATL.	WEIGHT
1	60Hz	10.63%	135°C		200	92.5 W		27 lbs

REV	ECO	DESCRIPTION	BY	ENG	DATE
A	N/A	RELEASED	AJP		
BRAND					

CONFIDENTIAL AND PROPRIETARY

THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF ACME ELECTRIC

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACME ELECTRIC IS PROHIBITED

	NAME	DATE
DRAWN	F.D.	2/14/25
CHECKED		
ENG APPR.		

DIMENSIONS IN INCHES

SCALE: 1:

SHEET 1 OF 1

Acme Electric
MENOMONEE FALLS, WI 53051 USA

TITLE: T1001K0220C

SIZE B | DWG NO: | REV A