
# BCS M18BBI3-PSC80D-S04K

Order Code: BCS00M8





1) Sensing surface, 2) Housing, 3) Cover, 4) Potentiometer, 5) LED Power, 6) LED function indicator

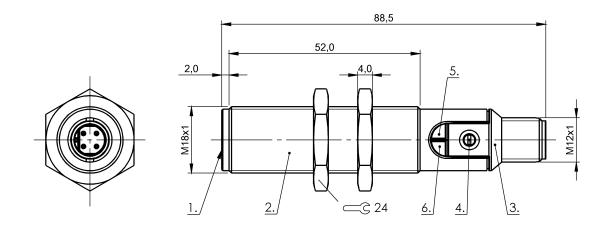







CE



Dasic	features

UKCA
cULus
WEEE
IEC 60947-5-2
Nut (2x)
Switching distance adjustable
M18
Global
yes
yes yes
yes
yes
yes M12x1-Male, 3-pin, A-coded
yes  M12x1-Male, 3-pin, A-coded yes

#### **Electrical data**

No-load current lo max. at Ue	20 mA
No-load current to max. at De	20 MA
Operating voltage Ub	1030 VDC
Protection class	II
Rated insulation voltage Ui	75 V DC
Rated operating current le	100 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	300 ms
Ripple max. (% of Ue)	10 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

#### **Environmental conditions**

Ambient temperature	-2585 °C
Contamination scale	1
IP rating	IP67
Functional safety	

### Switching output PNP normally open (NO)

Interface

#### **Capacitive Sensors**

# BCS M18BBI3-PSC80D-S04K Order Code: BCS00M8



#### Material

**Cover material** PBT PA

Housing material PBT

Material sensing surface PBT

#### Mechanical data

 Size
 M18x1

 Thread (A)
 M18x1

 Tightening torque
 2 Nm

#### Range/Distance

Hysteresis H max. (% of Sr) 15.0 %

Measuring range 1...8 mm

Rated operating distance Sn 8 mm

Repeat accuracy max. (% of Sr) 2.0 %

**Temperature drift max. (% of Sr)** 20 % [-5...55 °C]

#### Remarks

The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.

If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output. For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

# **Connector Drawings**



# **Wiring Diagrams**

