



Non-Contact RFID Locking Safety Switch

MGL-3P Operating Instructions



IMPORTANT NOTE:

Read and understand these instructions before installing, operating, or maintaining this equipment.

The product is designed to be a component of a customised safety orientated control system. It is the responsibility of the user to ensure the correct overall functionality of its systems and machines. IDEM, its subsidiaries and affiliates, are not in a position to guarantee all of the characteristics of a given system or product not designed by IDEM.

DESCRIPTION:

The MGL-3P Non-Contact RFID Coded switch has been developed to provide and maintain a high level of functional safety whilst providing a compact, reliable magnetic door interlock. Coding is achieved by using magnetic and RFID techniques and both of these principles need to be satisfied for the switch to operate safely.

The MGL-3P will connect to the majority of popular standard safety relays to achieve door interlocking up to PLe/Category 4 to ISO13849-1.

Offered in high specification robust Plastic housings with Stainless Steel 316 back plates for flexible and reliable mounting, the MGL-3P offers a compact and easily mountable solution. Provided with compact 40mm wide rectangular housing, the MGL-3P provides numerous options for mounting, ensuring discrete and straight forward installation. A large bi-colour LED at the base of the switch ensures clear status indication from all angles, and at distance.

APPLICATION:

MGL-3P RFID Coded Non-Contact Safety Locking Switch with integral holding magnet has been designed to interlock hinged or sliding guard doors. They are specifically advantageous when:

- a) high level anti-tamper is required
- b) compact or discrete mounting is required on a slim door or guard profile
- c) long mechanical life is required (no moving parts)
- d) there is a requirement to hold a guard closed

When used in combination with a Dual Channel Safety Relay or Controller they can be used to provide door interlock protection up to Category 4 and PLe to ISO13849-1.

OPERATION:

All RFID Coded Non-Contact Safety Switches are designed to conform to EN60947-5-3 and be used as directed by ISO14119, EN ISO12100 and EN60204-1. They have coded RFID sensing which provides a wide (>10mm) sensing distance and provides a high tolerance to misalignment after sensing. They can operate in extreme environments of temperature and moisture. The switches are provided factory coded either uniquely or by series master code.

IMPORTANT:

The guard locking function is Power ON applied, Power OFF released as described in ISO14119. This locking function needs to be risk assessed against any hazard to an operator in the case of machine overrun after release or loss of power.

The Risk Assessment for the particular application should include the risk of spare actuators. Spare actuators should not be readily available and must be securely controlled. Record any RFID codes as required by factory rules or with reference to any risk assessment for the particular application and user location.

INSTALLATION:

Installation of all RFID Coded Non-Contact Safety Switches must be in accordance with a risk assessment for the individual application.

The use of a Safety Relay is required for monitoring RFID Coded switches. These relays monitor 2 redundant circuits as per ISO13849-1 for up to PLe/Category 4 protection.

RFID Coded Non-Contact Safety Switches are designed to operate with most Dual Channel Safety Relays to satisfy EN60947-5-3.

M5 mounting bolts must be used to fix the switches. Tightening torque for mounting bolts to ensure reliable fixing is 2.5Nm. Always mount on to Non-Ferrous materials.

Do not mount adjacent switches or actuators closer than 100mm. To achieve nominal holding force ensure face to face alignment of magnetic parts.

After installation always check each switch function by opening and closing each guard individually in turn and ensuring that the Green LED on the switch and the LEDs on the Safety Relay or Controller are illuminated when the switch is closed and are extinguished when the switch is open. Check that the machine stops and cannot be re-started when each switch is open.

Note: The safety outputs will only close when the actuator is in place and the lock magnet is energised. Forcing open of the lock will cause the safety outputs to open.

IMPORTANT: Reset procedure for flashing Yellow LED error:

- 1 Ensure LOCK APPLIED SIGNAL is OFF.
- 2 Apply LOCK SIGNAL and wait until Yellow LED becomes steady. Switch is now reset.
- 3) Outputs will turn ON if guard is closed and aligned and the LOCK SIGNAL is applied.

FEATURES:

F1 max. = 1000N

2NC Safety Outputs (Door closed – Lock energised)

1NO Auxiliary Output for indication of door open.

No moving parts – high switch life and provides resistance to shock and vibration.

Magnetisation holding technique acts as a magnetic latch before and after unlocking.

Prevents unwanted opening of guards due to vibration either after unlocking or re-closing.

Latch retain force after removing lock signal: 80N. max.

Latch retain after re-closing: 50N. max.


MAINTENANCE / SAFETY CHECKS:

Monthly: Check alignment of actuator and look for signs of mechanical damage to the switch, actuator or cable.

Replace any switch displaying damage. **These requirements form part of the product warranty.**

The safety functions and mechanics must be tested regularly. For applications where infrequent guard access is foreseeable, the system must have a manual function test to detect a possible accumulation of faults. At least once per month for PLe Cat3/4 or once per year for PLd Cat3 (ISO13849-1). Where possible it is recommended that the control system of the machine demands and monitors these tests, and stops or prevents the machine from starting if the test is not done, (ISO14119).

Check that the machine stops and cannot be re-started when each switch is open.

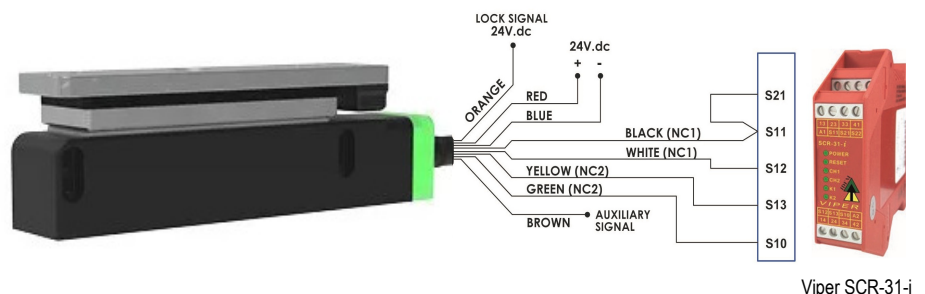


Viper SCR-31-i


Actuator Operating Direction:



Dimensions (Switch + Actuator) (mm):

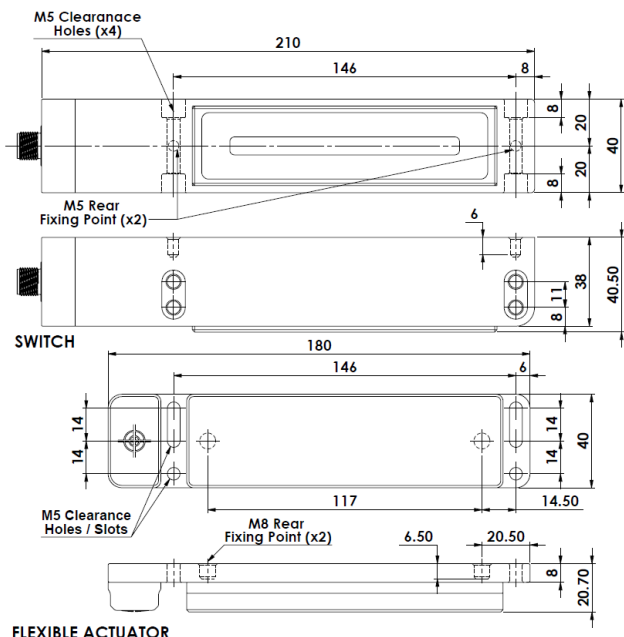

Dimensions (Optional Mounting Bracket) (mm):

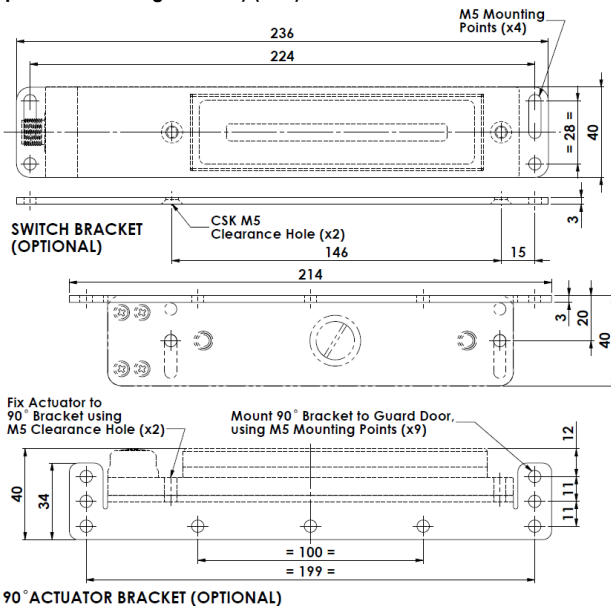

Pin View from Switch

Quick Connect (QC) 250mm (10") M12 8-Way Male Plug	Flying Lead Conductor Colours	Function	Power Ratings
3	Blue	Supply 0Vdc	50mA max.
2	Red	Supply 24Vdc	
8	Orange	Lock Applied (24Vdc)	500mA max.
7	Black	Safety Output 1	200mA
1	White	Safety Output 1	(max. switching)
4	Yellow	Safety Output 2	200mA
6	Green	Safety Output 2	(max. switching)
5	Brown	Auxiliary Signal	+24Vdc

Non-Contact RFID Locking Safety Switch

LED Operation and Switch Status Indication:



SWITCH STATUS	GUARD	GREEN LED	YELLOW LED
Locked	Closed	Steady	Off
Solenoid Power OFF (Unlocked)	Closed	Flashing	Off
Guard Open	Open	Off	Steady
Door Forced Open	Open	Off	Flashing

Standards:	ISO14119 EN60947-5-3 EN60204-1 ISO13849-1 UL508
Dielectric Withstand:	250V.ac
Insulation Resistance:	100 Mohms
Switching Distance:	Sao 1mm Close Sar 20mm Open
Tolerance to Misalignment:	5mm in any direction from a gap of 5mm
Switching frequency:	1.0 Hz maximum
Approach speed:	200mm/m to 1000mm/s
Body material:	Plastic
Temperature Range:	-25C to +40C
Enclosure Protection:	IP67
Mounting Bolts:	2 x M5 Tightening torque 2.0 Nm
Mounting Position:	Any
Power Supply:	+24Vdc ± 10% (SELV / PELV)
Maximum Switched Current (outputs):	200mA (Minimum internal resistance 8.5 Ohms)

Characteristic Data according to EN ISO13849-1:

Performance Level	e If both channels are used in combination with a SIL3/PLc control device
Category	Cat4
MTTFd	1100a
Diagnostic Coverage DC	99% (high)
Number of operating days per year:	d _{op} = 365d
Number of operating hours per day:	t _{op} = 24h
B10d:	Not mechanical parts implemented

When the product is used deviant from these assumptions (different load, operating frequency, etc.) the values have to be adjusted accordingly.


INFORMATION WITH REGARD TO UL508

Type 1 Enclosures.
Maximum temperature 40°C.
NC circuits maximum output 24V.dc 85 mA.
NO Auxiliary maximum output 24V.dc 100mA.
Powered by Class 2 or equivalent.

Part Number	Description	Coding
467006	MGL-3P-U-QC-M1 8-Way	Master
467003	MGL-3P-U-QC-M1 8-Way	Unique
Accessories		
467102	MGL-3P Replacement Actuator	
467200	MGL-3P Optional Bracket	
Female Leads		Length
140101	8-Way M12 Female Lead	5m
140102	8-Way M12 Female Lead	10m



Connection Colours

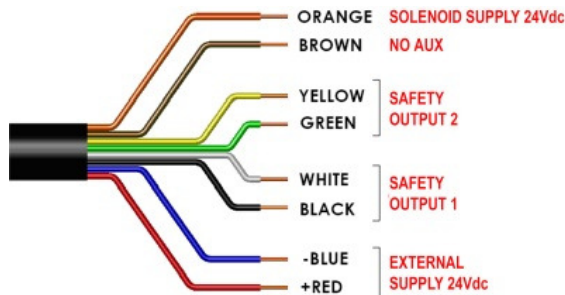

WARNING: DO NOT DEFEAT, TAMPER, OR BYPASS THE SAFETY FUNCTION. FAILURE TO DO SO CAN RESULT IN DEATH OR SERIOUS INJURY.

AVERTISSEMENT: NE PAS DESACTIVER, MODIFIER, RETIRER, OU CONTOURNER CETI INTERVERROUILLAGE IL PEUT EN RESULTER DES BLESSURES GRAVES DU PERSONNEL UTILISATEUR.

Original Instructions.

To request this data sheet in other languages please contact info@idemsafety.com
Um dieses Datenblatt in Deutscher Sprache wenden Sie sich bitte anfordern info@idemsafety.com
Pour obtenir cette fiche en Français, veuillez contacter info@idemsafety.com
Para solicitar esta hoja de datos en Español, por favor contacto con info@idemsafety.com