

IDEM Inch Hinge Safety Switches

Inch Hinge Series Housing

- Shaft hinge (Idem Inch Hinge) interlock operated
- M16, M20, 1/2" NPT threaded opening or M12 connection
- 16.5 mm- 18mm mounting profile (Inch-X); 16.5 mm- 22mm mounting profile (MK-1)
- 25mm plastic, 30mm stainless steel housings

- Compact body
- Plastic and stainless steel housings
- 90 degree adjustable head
- Force guided NC contacts

See electrical specifications later in this section.

IDEM Inch Hinge Series




IDEM Inch Hinge Safety Switches									
Part Number	Price	Body Material	Head Material	Weight (lb)	Actuator Travel / Force for Positive Opening	Contact Configuration	Shaft Size	Connection	Dimensions
HC-1-193001	\$40.00	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 80mm	1 x M16	Figure 1
HC-1-193002	\$68.00	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 80mm	M12 Quick disconnect	Figure 1
HC-1-193003	Retired	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 50mm	1 x M16	Figure 1
HC-1-193004	Retired	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 10mm x 50mm	M12 Quick disconnect	Figure 1
HC-1-193005	Retired	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 8mm x 60mm	1 x M16	Figure 1
HC-1-193006	Retired	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Solid diameter 8mm x 60mm	M12 Quick disconnect	Figure 1
HC-1-193007	\$41.50	Plastic	316 stainless steel	0.29	7 degrees/0.5N	2 N.C. Slow action	Hollow diameter 16mm x 30mm	1 x M16	Figure 1
HC-1-193008	\$70.00	Plastic	316 stainless steel	0.32	7 degrees/0.5N	2 N.C. Slow action	Hollow diameter 16mm x 30mm	M12 Quick disconnect	Figure 1

Dimensions

mm [in]

Figure 1
HC-1

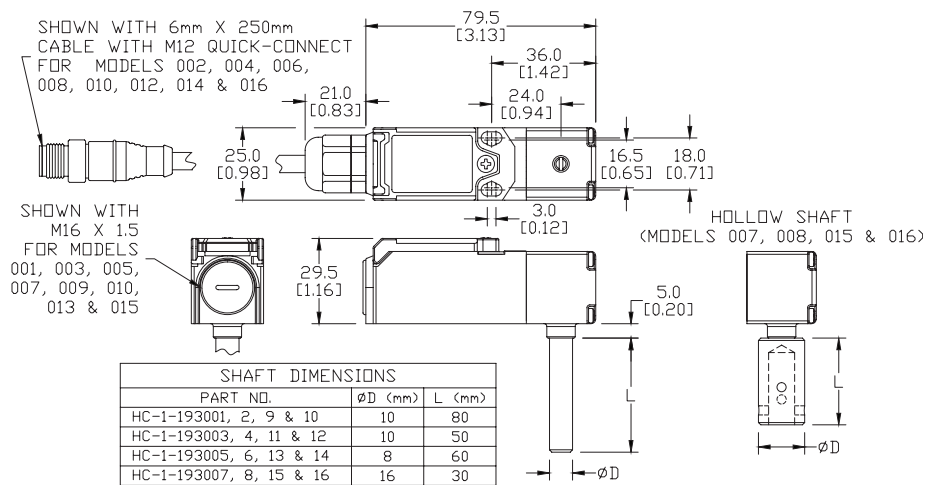

IDEM Inch Hinge Safety Switches

Dimensions

mm [in]

Figure 1
HC-1

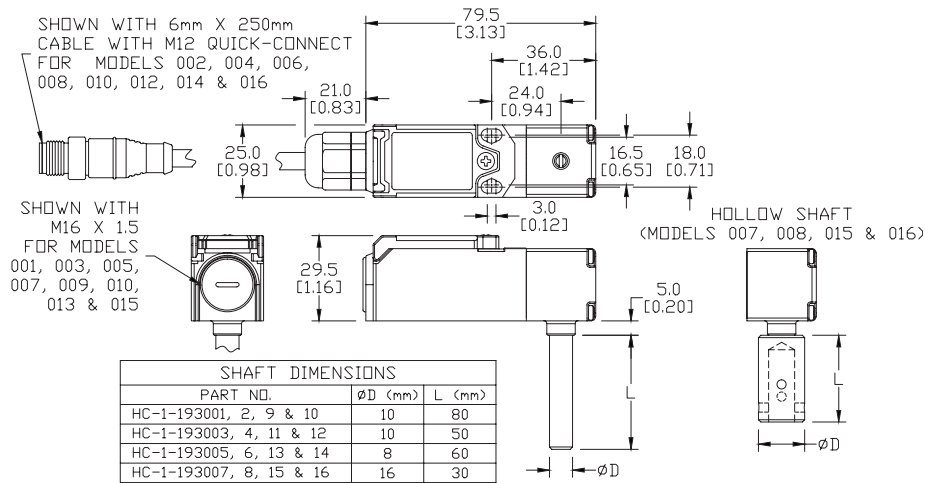


Figure 2
HC-3


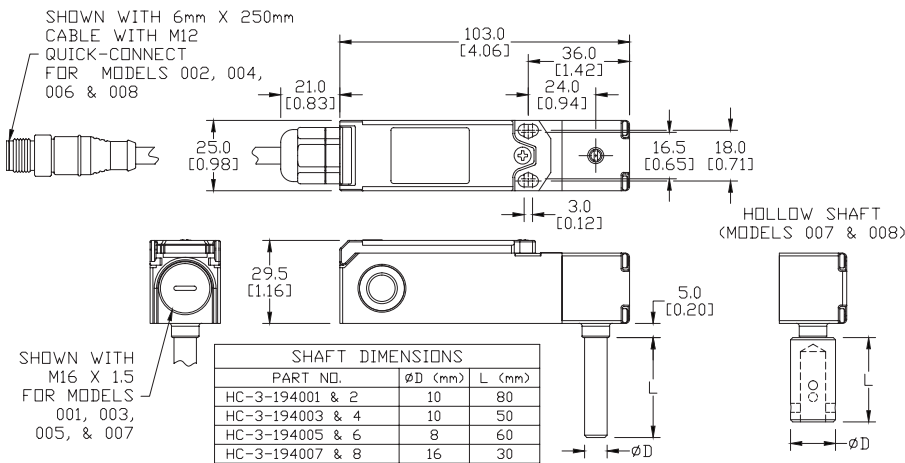


Figure 3
HC-SS



See our website, www.AutomationDirect.com, for complete Engineering drawings.

IDEM Interlock Safety Switches Specifications

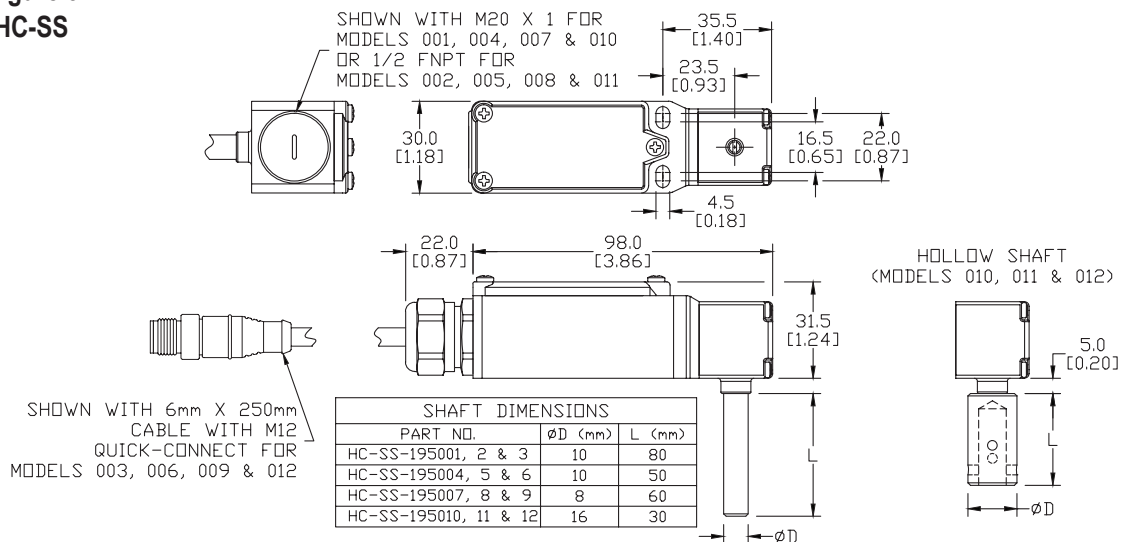

Specifications								
	IDIS	INCH/MK1	HC	KM	KP/K-SS	K-15	GLx	
Safety Classification and Reliability Data								
Switching Reliability (B10_d)	2.5 x 10 ⁶ operations at 100mA load						1.5 x 10 ⁶ operations at 100mA load	
ISO 13849-1	Up to PLe depending upon system architecture							
EN 62061	Up to SIL3 depending upon system architecture							
Safety Data - Annual Usage	8 cycles per hour / 24 hours per day / 365 days							
Agency Approvals	cULus (E258676), CE						cULus (E258676), CE, TUV	
Electrical and General Specifications								
Conductor Sizes	16-12 AWG (1.5 to 2.5 mm ²)							
Utilization Category	AC15, A300, 3A							
Thermal Current	10A							
Short Circuit Overload Protection	External 10A Fast Acting recommended							
Rated Insulation Voltage	600VAC			500VAC				
Contact Terminals	Stainless steel (Snap action plated brass); Max conductor 1.5 m ² (IDIS), 2.5 m ² (KM, K/K-15); 1 N•m [0.74 lb•ft] torque							
Maximum Switching Current	2.5A @24 VDC 6A @ 120VAC, 3A @ 240VDC (720VA Break)							
Maximum Approach/Withdrawal Speed	600mm/s [23.6 in/s]						NA	
Enclosure Protection	IP67 (IP69K on all models with both stainless steel head and body)							
Operating Temperature	-25°C to 80°C [-13°F to 176°F]							
Vibration	IEC 68-2-6, 10Hz to 55Hz + 1Hz						10Hz to 500Hz 0.35 mm [0.014 in]	
Lid Screws/Torque	Plated brass 1 N•m [0.74 lb•ft]	Stainless steel T20 Torx 1 N•m [0.74 lb•ft]	Stainless steel 1 N•m [0.74 lb•ft]				Stainless steel T20 Torx 1.5 N•m [1.11 lb•ft]	
Recommended Mounting Screws/Torque	M4 1.5 N•m [1.11 lb•ft]	M5 4N•m [2.95 lb•ft]	M4 1.5 N•m [1.11 lb•ft]		M5 4N•m [2.95 lb•ft]			
Head Screws/Torque	Stainless steel, except snap (plated brass) 1 N•m [0.74 lb•ft]	Stainless steel T20 Torx 1 N•m [0.74 lb•ft]	Stainless steel; 1 N•m [0.74 lb•ft]					

IDEM Interlock/Hinge Safety Travel Charts



Interlock Safety Switch Types

Slow-make/slow-break contacts:

A contact element in which the contact motion is dependent on the actuator speed.


Snap-action contact:

A contact element in which the contact motion is independent of the speed of the actuator. This feature ensures reliable electrical performance even in applications involving very slow moving actuators.

Contacts Configuration


1 NO and 2 NC

Slow-make/slow-break contacts




3 NC

Slow-make/slow-break contacts




1 NO and 1 NC

Snap action contacts




1 NO and 3 NC

Slow-make/slow-break contacts




1 NO and 1 NC

Slow-make/slow-break contacts




2 NO and 2 NC

Slow-make/slow-break contacts



2 NC

Slow-make/slow-break contacts



Travel Charts



Interlock Switches

2NC 1NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
33/34		Open

3NC 6.0 0 mm

11/12	Open	
21/22	Open	
31/32	Open	

3NC 1NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
31/32	Open	
43/44		Open


2NC 2NO 6.8 6.0 0 mm

11/12	Open	
21/22	Open	
33/34		Open
43/44		Open

1NC 1NO (SNAP) 6.5 0 mm

11/12	Open	
23/24		Open

Hinge Switch

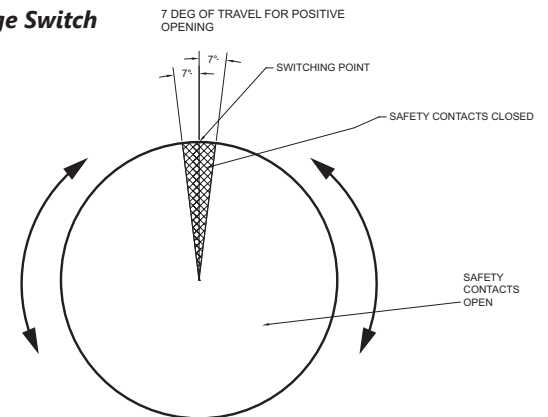

SHAFT CAN FREELY TURN WITH NO DEAD STOPS.

User to ensure that by correct positioning of the shaft at installation causes the safety contacts to open such that no hazard exists to the operator when the door is opened a few degrees.

Safety Rope Switches

0 mm 3.5 mm 14.5 mm 17.0 mm

EX	1 NO/2 NC	1 NO/3 N.C.	2 NO/2 N.C.	Latched off - Rope Slack	Tension Range (Switch Reset)	Rope Pulled
NC	11/12	11/12	11/12	Open		Open
	21/22	21/22	21/22	Open		Open
		31/32		Open		Open
NO	33/34	43/44	33/44		Open	
			43/44		Open	

Safety Products



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.