

STRIDE® FIELD I/O MODULES

ANALOG INPUT MODULE: 4-CHANNEL, CURRENT/VOLTAGE (PN# SIO-MB04ADS)

FEATURES

- Interface Ethernet 10/100 Base-T, Modbus TCP Server
- 4 isolated input channels
- Each channel supports one Current or one Voltage input simultaneously
- Isolated power source for each channel to power passive sensors
- Integrated web server to acquire the status of the analog inputs via browser
- Remotely configurable
- Connection by removable screw terminals
- LED signaling for Link/Act Ethernet, power supply
- Galvanic isolation
- UL listed / CE mark
- In compliance with EN-50022 DIN rail mounting



GENERAL DESCRIPTION

The SIO-MB04ADS device is a Modbus TCP server that can convert up to 8 analog signals applied to the inputs into engineering units in digital format. The inputs can be connected to sensors having current or voltage output. The 4 input channels are electrically isolated from each other. Each input channel is provided with an isolated power source to power passive sensors. The device guarantees high accuracy and a stable measurement versus time and temperature. The device is equipped with a selectable Watchdog Timer system. The Ethernet interface allows reading and writing the values of the internal registers of the device in real time. Signal LEDs for Ethernet activity and power supply allow direct monitoring of the system. The built-in Web Server allows remote visualization, acquisition of the analog inputs and access to the configuration parameters. Connections are made by removable screw terminals (inputs and power supply) and RJ45 plug (Ethernet). The SIO-MB04ADS is in compliance with Directive UL 61010-1 for the US market and with Directive CSA C22.2 No 61010-1 for the Canadian market. The device has full electrical isolation between the lines, providing protection against the effects of ground loops existing in industrial applications. It is housed in a tough self-extinguishing plastic enclosure which, thanks to its thin 22.5 mm profile, allows high-density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before installing the device, please read the "Installation Instructions" section. To configure the device in INIT mode, refer to the User Guide. Connect power supply, Ethernet and analog inputs as shown in the "Wiring" section. The LED states indicate the working condition of the device; see the "Front Panel LEDs" table to verify the device working state. Instructions for configuration and calibration operations are contained in the User Guide. To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (typical @ 25°C, nominal conditions)

NETWORK CONNECTIVITY		I/O SPECIFICATIONS		POWER SUPPLY	
Standard	In compliance with IEEE 802.3	Input Accuracy (1)	mA	20-30VDC	
Network Interface	Ethernet 10/100Base-T	Volt		To maintain a UL 508 panel listing use a Class 2 power supply.	
Protocol	Modbus TCP	Linearity (1)	mA	Reverse Polarity Protection	60VDC max
Max. Cable Length	100m [328ft]	Volt		Current Consumption	220mA max (4 Operative Auxiliary Supply @ 20mA)
Number of Sockets	16 simultaneous Modbus TCP connections	Input Impedance	mA	ISOLATION	
ANALOG INPUTS		Volt		Power Supply / Ethernet	1500VAC, 50Hz, 1 min
Input Type	Min Max	Thermal Drift (1) Full Scale		Inputs / Power Supply	1500VAC, 50Hz, 1 min
Current (mA)	-20mA +20mA	Auxiliary Supply	12VDC min @ 20mA (for each channel)	Inputs / Ethernet	1500VAC, 50Hz, 1 min
Voltage (Volt)	-10V +10V	Short Circuit Current	28mA	Input / Input	1500VAC, 50Hz, 1 min
		Auxiliary Supply	150ms (4 channels)	ENVIRONMENTAL CONDITIONS	
		Sampling Time		Operating Temperature	-10°C to +60°C [+14°F to +140°F]
				UL Operating Temperature	-10°C to +40°C [+14°F to +104°F]
				Storage Temperature	-40°C to +85°C [-40°F to +185°F]
				Humidity (non-condensing)	0 to 90%
				Maximum Altitude	2000m [6500ft]
				Installation	Indoor
				Pollution Degree	2
				CONNECTIONS	
				Ethernet	RJ-45
				Inputs / Power Supply	Removable screw terminals
				MECHANICAL SPECIFICATIONS	
				Material	Self-extinguishing plastic
				IP Code	IP20
				Wire diameter	0.8 to 2.1 mm² / AWG 14-18
				Tightening Torque	0.5 N·m [4.4 in·lb]
				Mounting	In compliance with DIN rail standard EN-50022
				Weight	About 160g [5.6 oz]
				EMC (for industrial environments)	
				Immunity	EN 61000-6-2
				Emission	EN 61000-6-4
				UL	
				US Standard	UL 61010-1
				Canadian Standard	CSA C22.2 No 61010-1
				CCN	NRAQ/NRAQ7
				UL Type Designation	Open Type device
				Classification	Industrial Control Equipment
				File Number	E157382

(1) Referred to input Span (difference between maximum and minimum values).

Please refer to the User Guide for more information, including the complete Modbus address list. Access the user guide by visiting <https://www.automationdirect.com/pn/doc/manual/SIO-MB04ADS> or scan the QR code below.



INSTALLATION INSTRUCTIONS

The device shall be mounted on DIN rail in a vertical and upright orientation. For optimum operation and long life follow these instructions: When the devices are installed side by side it is necessary to separate them by the following minimum distances:

- 10 mm if UL certification is required.
- 5 mm if UL certification is not required.

Make sure that sufficient air flow is provided for the device. Avoid placing raceways or other objects where they could obstruct the ventilation slits. Avoid mounting the devices above appliances generating heat; ideally locate them in the lower part of the panel.

Install the device in a place without vibrations.

Avoid routing conductors near power signal cables (motors, induction ovens, inverters, etc.). Use shielded cable for connecting signals; ground shield at one end only.

DEFAULT CONFIGURATION

- IP Address: 192.168.1.100
- Modbus Address: 1
- Default user name: admin
- Default password: password


Register	Description	Access
40002	Firmware [0]	RO
40003	Firmware [1]	RO
40004	-Reserved-	RO
40005	-Reserved-	RO
40007	Node ID	R/W
40011	System Flags	R/W
40013	Watchdog timer	R/W
40031	Input Type, Channel 0 (Inputs 1-0)	R/W
40032	Input Type, Channel 1 (Inputs 3-2)	R/W
40033	Input Type, Channel 2 (Inputs 5-4)	R/W
40034	Input Type, Channel 3 (Inputs 7-6)	R/W
40041	Analog Input (0) -mA	RO
40042	Analog Input (1) - V	RO
40043	Analog Input (2) -mA	RO
40044	Analog Input (3) - V	RO
40045	Analog Input (4) -mA	RO
40046	Analog Input (5) - V	RO
40047	Analog Input (6) -mA	RO
40048	Analog Input (7) - V	RO

Pin	Description	Channel
1	I0+	IN 0
2	COM0	
3	AUX0	
4	V0+	IN 1
5	I1+	
6	COM1	IN 2
7	AUX1	
8	V1+	IN 3
9	I2+	
10	COM2	
11	AUX2	
12	V2+	IN 3
13	I3+	
14	COM3	
15	AUX3	
16	V3+	


LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	Watchdog alarm
STS	YELLOW	OFF	Device in RUN mode
		BLINK	Device in INIT mode

MECHANICAL DIMENSIONS


MM [IN]

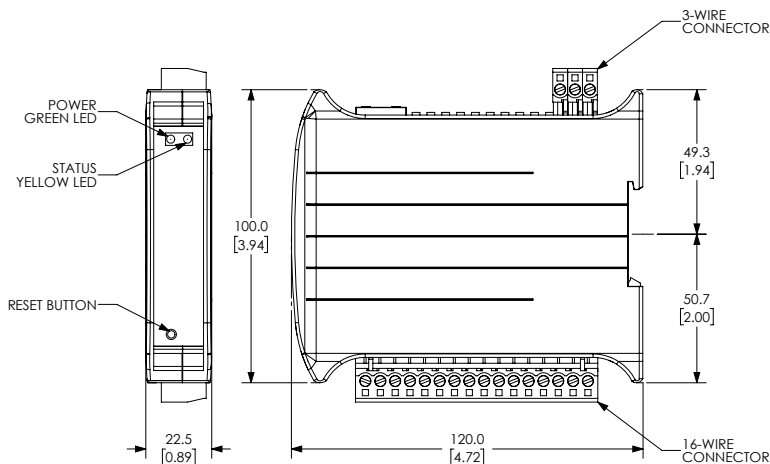

POWER SUPPLY (1)



INIT FUNCTION (2)




NOTE: (1) To maintain the UL listing use a Class 2 or SELV and limited energy power supply.


(2) See User Guide for instructions on using the INIT feature.

ANALOG INPUTS


VOLTAGE

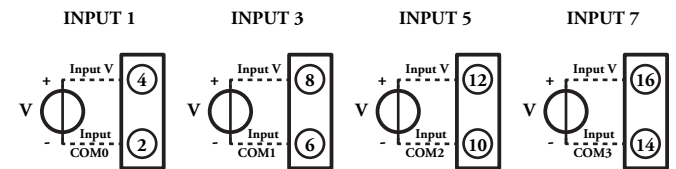

PASSIVE mA INPUT

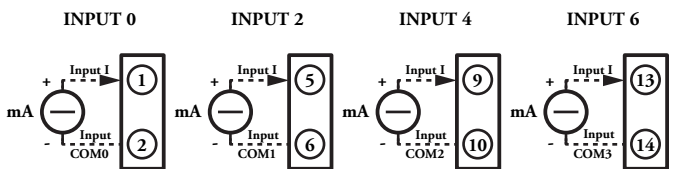

ACTIVE mA INPUT

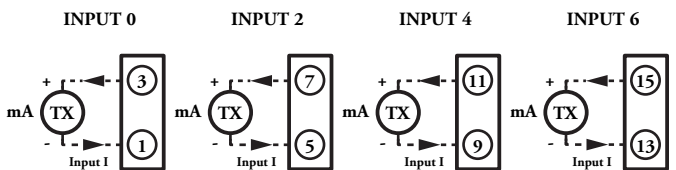

NOTES:

Power for the Active mA Inputs is provided by the Stride device from the AUX terminals.

“COM0”, “COM1”, “COM2” and “COM3” are each isolated commons.


Input Voltage 1 and Input Current 0 belong to channel 0 (CH0)

Input Voltage 3 and Input Current 2 belong to channel 1 (CH1)

Input Voltage 5 and Input Current 4 belong to channel 2 (CH2)

Input Voltage 7 and Input Current 6 belong to channel 3 (CH3)

ISOLATED ELECTRICAL SUBSYSTEMS

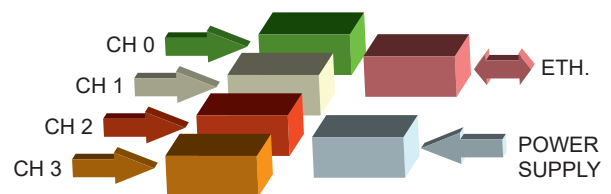

Each block represents a subsystem which is isolated from each other subsystem.

