



Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0102SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	2	3510	215T	230/460	60	3	24/11.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	90.2	В	Н	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	10	7.5	11.8	90.2	88.2
¼ Load	7.50	5.6	9.0	91.1	87.2
∕₂ Load	5.00	3.7	6.7	89.2	81.2
∕₄ Load	2.50	1.9	4.8	81.0	60.2
No Load			3.6		7.5
Locked Rotor			80		47.6

Torque						
Full Load	Locked Rotor	Pull Up	Break Down	Inertia		
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
15	265	235	355	0.62		

Safe Stall Time(s) Sound		Sound	Bearin	Approx. Motor Weight		
Cold	Hot	Pressure dB(A) @ 1M	Bearings* DE NDE		(lbs)	
35	15	-	6308ZZC3	6308ZZC3	183	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1			
Engr. Date	4/27/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			



Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0102SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	2	2880	215T	190/380	50	3	29/14.4
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	88.5	В	Н	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	10	7.5	14.4	91.2	88.0
¾ Load	7.50	5.6	11.1	92.1	85.9
½ Load	5.00	3.7	7.9	91.9	80.0
¼ Load	2.50	1.9	5.2	80.1	67.4
No Load			3.2		22.0
Locked Rotor			100		46.0

Torque						
Full Load	Locked Rotor	Pull Up	Break Down	Inertia		
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
18.2	185	165	235	0.62		

Safe Stall Time(s) Sound		Sound	Bearin	Approx. Motor Weight		
Cold	Cold Hot		DE	NDE NDE	(lbs)	
15	6	dB(A) @ 1M -	6308ZZC3	6308ZZC3	183	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

, o	Situation of the state of the s									
TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.										
Engineering	jhock	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1119 / 1					
Engr. Date	4/9/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019					




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0102SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
10	7.5	2	3510	215T	230/460	60	3	24/11.8	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.15	CONT	90.2	В	Н	40 C	
Looked Deter	Rotor wk ²		Torque				Torque		
Locked Rotor Amps	Inertia	Full Load	Locked	l Rotor	Pull U	р	Break	Down	
Allips	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	%)	
80	0.62	15	265		235		3	55	

Design Values

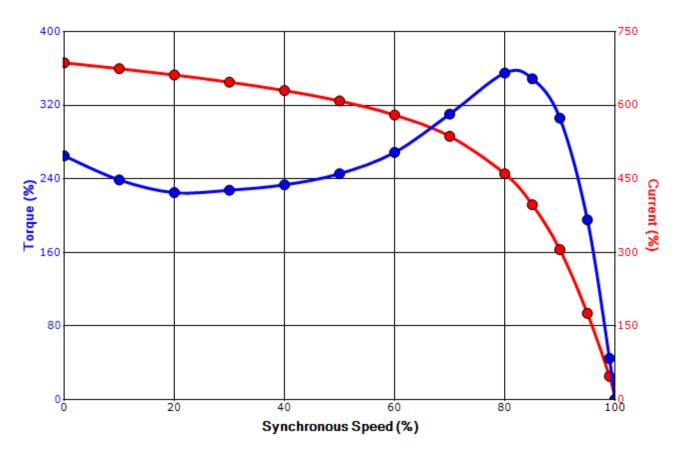



Customer	wk² Load Inertia (b-ft²)
Customer PO	Load	Туре -
Sales Order	Voltag	e (%) 100
Project #	Accel.	Time -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	4/27/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0102SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	2	2880	215T	190/380	50	3	29/14.4
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	88.5	В	Н	40 C
Looked Deter	Rotor wk ²				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	l Rotor	Pull U	р	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	%)
100	0.62	18.2	185		165		23	35

Design Values

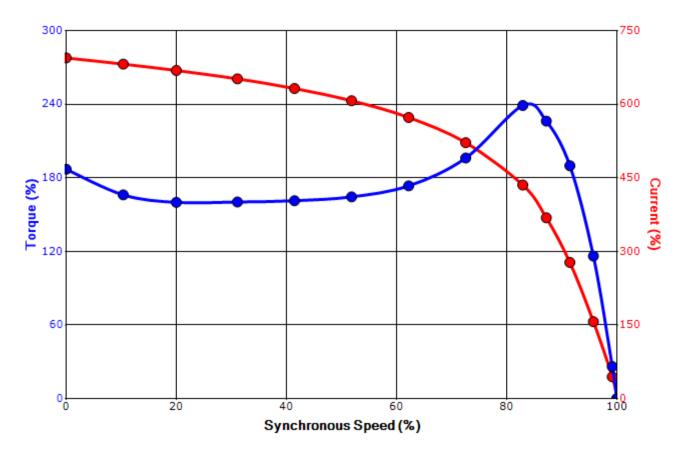



Customer	wk² Load Inertia (lb-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	-

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	4/9/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			

Motor Connection Diagrams 12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1