



# PSD25 Series Pressure Switches

## Features



- Compact pressure switch features simple setup using mechanical adjustment dials
- Extremely durable housing with 316 stainless steel process connection
- No moving parts ensure long-term stability without setpoint drift
- LEDs indicate switching and operating status
- Complementary switching outputs (N.O./N.C.), DC
- Easy set-up dials
- Vibration and shock-resistant

## Agency Approvals

- cULus, File number E320431
- CE
- RoHS



## ProSense Series Pressure Sensors

Part Number	Description	Pcs/Pkg	Wt(lb)	Price	Cable Assemblies
<b>PSD25-0P-0145H</b>	Pressure switch, DC, PNP NO/NC, 7.5 to 145 psig range, 1/4" NPT male port	1	0.21	\$008qn:	CD12L-0B-020-A0 CD12L-0B-020-C0
<b>PSD25-0P-1450H</b>	Pressure switch, DC, PNP NO/NC, 75 to 1450 psig range, 1/4" NPT male port	1	0.21	\$008qo:	CD12M-0B-070-A1 CD12M-0B-070-C1
<b>PSD25-0P-5800H</b>	Pressure switch, DC, PNP NO/NC, 290 to 5800 psig range, 1/4" NPT male port	1	0.21	\$;008tg:	(order separately - see Proximity Sensor section for cable specs)
Accessory					
<b>PSD-CV</b>	Transparent plastic protective cap for PSD series	1	0.01	\$6uu:	PSD Series Sensors

Note: Check the chemical compatibility of the sensor's wetted parts with the medium to be measured.

## ProSense PSD25 Series Technical Specifications

<b>Operating Voltage</b>	9.6 to 32 VDC
<b>Connection Pin Material</b>	Gold-plated
<b>Output Maximum Load Current</b>	500 mA - See Setting and Operation Guide on following page.
<b>Current Consumption</b>	< 25 mA
<b>Switching Frequency</b>	100 Hz
<b>Setting Accuracy of Switch Points</b>	< ± 2.5% of full range (limit point calibration)
<b>Repeatability</b>	< ± 0.5% of full range
<b>Temperature Drift</b>	< ± 0.5%, of full temperature range/10 K; 32 to 176°F (0 to 80°C).
<b>Housing Material</b>	PBT (Pocan); PC (Makrolon); FPM (Viton); stainless steel (316S12)
<b>Materials (wetted parts)</b>	Stainless steel (316S12)
<b>Operating Temperature</b>	-13 to 176°F (-25 to 80°C)
<b>Medium Temperature</b>	-13 to 176°F (-25 to 80°C)
<b>Storage Temperature</b>	-40 to 212°F (-40 to 100°C)
<b>Protection</b>	IP 67
<b>Protection Class</b>	Class III ◊
<b>Insulation Resistance</b>	> 100 MΩ (500 VDC)
<b>Shock Resistance</b>	50g (DIN / IEC 68-2-27, 11ms)
<b>Vibration Resistance</b>	20g (DIN / IEC 68-2-6, 10 - 2000 Hz)
<b>EMC</b>	
<b>EN 61000-4-2 ESD</b>	4 kV/8 kV AD
<b>EN 61000-4-3 HF Radiated</b>	10 V/m
<b>EN 61000-4-4 Burst</b>	2 kV
<b>EN 61000-4-6 HF Conducted</b>	10 V

## Applications (Type of Pressure: Relative Pressure, Liquids and Gases)

Part Number	Setpoint Scale	Resetpoint Scale	Permissible Overload Pressure	Bursting Pressure
	Bar (Psig)	Bar (Psig)	Bar (Psig)	Bar (Psig)
<b>PSD25-0P-5800H</b>	20 to 400 (290 to 5800)	12 to 392 (175 to 5685)	600 (8700)	1600 (23200)
<b>PSD25-0P-1450H</b>	5 to 100 (75 to 1450)	3 to 98 (50 to 1420)	200 (2900)	1000 (14500)
<b>PSD25-0P-0145H</b>	0.5 to 10 (7.5 to 145)	0.3 to 9.8 (5 to 142)	25 (362)	300 (4350)


Note: Full vacuum permissible



Warning! Avoid static and dynamic overpressure exceeding the given overload pressure.  
Exceeding the bursting pressure for even a short time can cause destruction of the unit and possible injuries!


# prosense® PSD25 Series Pressure Switches

## Switch Dimensions

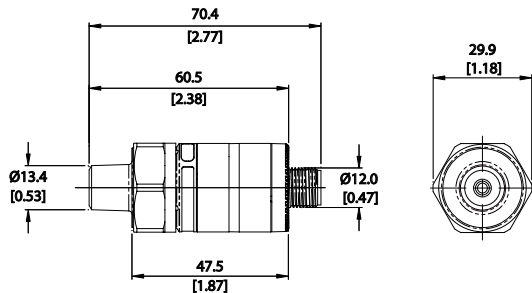

Note: tightening torque 25 Nm (18.4 lb-ft)


## Switch Cover Dimensions



Dimensions shown mm [inches]

See our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete Engineering drawings.

## PSD25 Wiring Diagrams

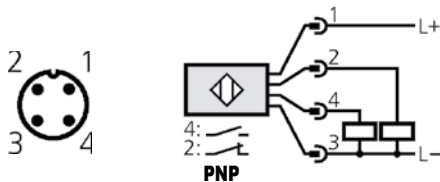


### Cable Assembly Wiring Colors:

**Pin 1 - Brown**  
**Pin 2 - White**  
**Pin 3 - Blue**  
**Pin 4 - Black**

Note: wiring colors are based on AutomationDirect CD12L and CD12M 4-pole cable assemblies.

## Setting and Operation

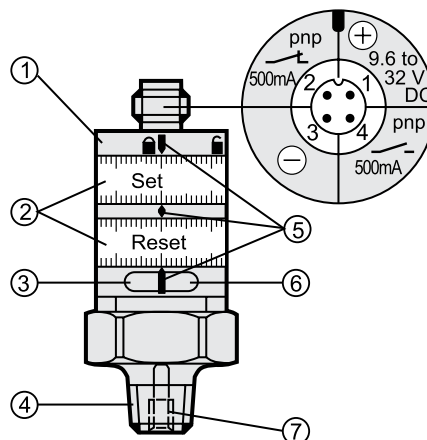

1. locking ring
  2. setting rings (manually adjustable after unlocking)
  3. LED green: supply voltage O. K.
  4. process connection 1/4" NPT; tightening torque 25 Nm
  5. setting marks
  6. LED yellow: Set value reached, OUT1 = ON / OUT2 = OFF
  7. internal thread M5
- Minimum distance between Set and Reset = 2% of the final value of the measuring range.
  - To obtain the setting accuracy: Set both rings to the minimum value, then set the requested values.