

CM Series Capacitive Proximity Sensors



M12 (12mm) metal – DC

- Sensitivity adjustment via potentiometer
- IP65 rated
- LED status indicators
- M12 quick-disconnect; purchase cable separately



CM Series Capacitive Proximity Selection Chart

Part Number	Price	Sensing Distance	Mounting	Output State	Logic	Connection	Wiring	Dimensions
CM1-AP-1H	\$0097a:	6mm [0.24 in]	Flush	N.O.	PNP	M12 (12mm) quick-disconnect	Diagram 1	Figure 1
CM1-AP-2H	\$0097b:	12mm [0.47 in]	Non-flush	N.O.	PNP	M12 (12mm) quick-disconnect	Diagram 1	Figure 1

CM Series Capacitive Proximity Specifications


Part Number	CM1-AP-1H	CM1-AP-2H
Mounting Type	Flush	Non-flush
Nominal Sensing Distance	6mm [0.24 in]	12mm [0.47 in]
Operating Distance	NA	
Material Correction Factors	NA	
Output Type	PNP; N.O. only	
Operating Voltage	10 to 36VDC	
No-load Supply Current	< 12mA	
Operating (Load) Current	100mA	
Off-state (Leakage) Current	NA	
Voltage Drop	< 2.5V	
Switching Frequency	50Hz	
Differential Travel (% of Nominal Distance)	NA	
Repeat Accuracy		
Ripple		
Time Delay Before Availability (tv)		
Reverse Polarity Protection	Yes	
Short-circuit Protection	Yes, pulsed	
Operating Temperature	-25 to 70°C [-13 to 158°F]	
Protection Degree (DIN 40050)	IEC IP65	
Indication/Switch Status	Yellow (output energized)	
Housing Material	Stainless steel	
Sensing Face Material	Polyether Ether Ketone (PEEK)	
Shock/Vibration	DIN EN 60947-5-2	
Tightening Torque	5.0 N•m [3.69 lb•ft]	
Weight	54g [1.90 oz]	
Connectors	M12 connector. 2 lock nuts included	
Agency Approvals	cULus file E328811, CE	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


CM Series Capacitive Proximity Sensors

Wiring Diagrams

Diagram 1
PNP Output

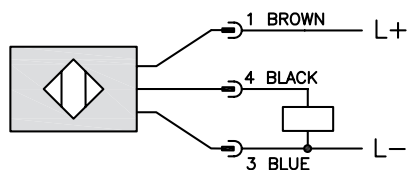


Connectors
M12 connector



Dimensions

mm [inches]

Figure 1

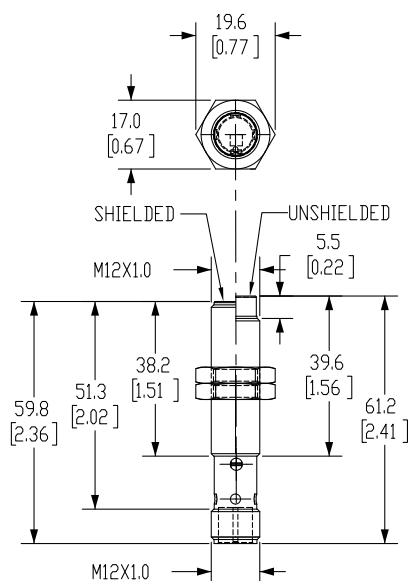


See our website: www.AutomationDirect.com for complete engineering drawings

Accessories for 12mm Sensors

Axial Mounting Bracket

Mounting bracket, axial, available in zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for right-angle adapter sensors. Hexagonal nuts not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<u>ST12A</u>	\$97_:	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 12mm sensors.	<u>PDF</u>	0.03 [13.6]
<u>ST12A7W</u>	\$97#:	Micro Detectors mounting bracket, axial, 316L stainless steel. For use with 12mm sensors.	<u>PDF</u>	0.03 [13.6]

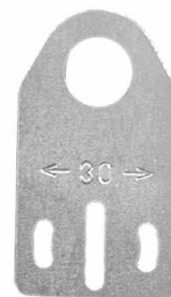

[ST12A](#)

Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal screws not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<u>ST12C</u>	\$;97!:	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 12mm sensors.	<u>PDF</u>	0.03 [13.6]
<u>ST12C7W</u>	\$97?:	Micro Detectors mounting bracket, right-angle, 316L stainless steel. For use with 12mm sensors.	<u>PDF</u>	0.03 [13.6]



[ST12C](#)

Accessories for 12mm Sensors

Right-angle Mounting Brackets

Mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors. Available with or without fixed insertion stop.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<u>OPT2102</u>	\$-1nlq:	Wenglor mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors.	<u>PDF</u>	0.05 [22.7]
<u>OPT2103</u>	\$-1nls:	Wenglor mounting bracket, right-angle, plastic. For use with 12mm sensors.	<u>PDF</u>	0.05 [22.7]



[OPT2102](#), [OPT2103](#)

Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 12mm sensors. Available in all stainless steel or with an aluminum head and stainless steel mounting plate.

Accessories for 12mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight lb [g]
<u>OPT2114</u>	\$;-1nl[:	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 12mm sensors.	Aluminum	Stainless steel	<u>PDF</u>	0.14 [63.5]
<u>OPT2115</u>	\$-1nl_:	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 12mm sensors.	304 Stainless steel	304 Stainless steel	<u>PDF</u>	0.27 [122.5]

Note: 304 stainless steel mounting rods sold separately: [OPT2109](#) (200mm [7.87 in] length), [OPT2110](#) (300mm [11.81 in] length), and [OPT2111](#) (500mm [19.69 in] length).



[OPT2114](#), [OPT2115](#)

Mounting Rods and Brackets

Mounting Rods

304 Stainless steel rods for mounting swivel brackets [OPT2112](#) - [OPT2127](#). Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

Mounting Rods for OPT2112-2127 Swivel Mounting Brackets				
Part Number	Price	Description	Drawing Link	Weight lb (g)
OPT2109	\$1nn9:	Wenglor mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	PDF	0.41 [185.97]
OPT2110	\$1nna:	Wenglor mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	PDF	0.60 [272.16]
OPT2111	\$1nnb:	Wenglor mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	PDF	0.98 [444.52]



Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods [OPT2109](#), [OPT2110](#) & [OPT2111](#).

Right-angle Mounting Brackets for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
OPT2108	\$-1nly:	Wenglor mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.	PDF	0.07 [31.8]

