



IronHorse MTS Washdown 3-phase Motors

Features

- 1/3-20 HP, 3600 and 1800 RPM
- 1/2-5 HP, 1200 RPM
- 208-230/460 volt, 60 Hz
- Fan Cooled (TEFC) or Non Ventilated (TENV) Enclosure
- IP69K Protection
- 1.15 SF
- Class F Insulation with Class B Temperature Rise
- C-Face with Rigid Base and Round Body (Footless)
- Premium Efficiency (EISA Compliant)
- NEMA Design B
- Continuous Duty
- 304 Stainless Steel Frame, End Bracket, Junction Box, and Hardware
- Stainless Steel Shaft and Key
- F1 Junction Box Location
- Horizontal or Vertical Mounting
- Lip Seal on DE and ODE
- Round Welded Junction Box with Epoxy Potted Leads
- Double Sealed Bearings Pre-Packed with Mobil Polyrex EM Grease
- Inverter Duty – 10:1 Constant Torque (CT) / 20:1 Variable Torque (VT)
- Class 1 Division 2 Groups A, B, C, D – Temperature Code T2B
- Ambient -20°C to +40°C, Altitude up to 3300 Feet Above Sea Level (FASL)
- Bi-directional Rotation
- Bakery Equipment Assessment Group (BEAG) certified (Previously BISSC)
- In Accordance with NEMA, CSA, UR, and CE



MTSP-P33-3BD18



MTSP-P33-3BD18R

Applications

Ideal for use in food and chemical processing plants, pharmaceutical applications, and other environments where corrosion-resistant, watertight motors are required.

Motor Specifications – 3-phase											
Part Number	Price	HP*	Base RPM *	Volts*	Encl.	NEMA Frame	Service Factor*	F.L. Amps*	Sound Power (dB)	Weight (lb)	Drawing Links
Rigid Base With C-face - 1800 RPM											
MTSN-P33-3BD18	\$451.00	1/3 (1/4)	1800 (1500)	208-230/460 VAC (190/380)	TENV	56C	1.15 (1.15)	1.5-1.4/0.7 (1.5-1.4/0.7)	58 dB(A)	28	PDF
MTSP-P33-3BD18	\$451.00				TEFC			1.4-1.2/0.6 (1.4-1.2/0.6)	60 dB(A)		PDF
MTSN-P50-3BD18	\$460.00	1/2 (1/3)			TENV			1.8-1.6/0.8 (1.8-1.6/0.8)	58 dB(A)	30	PDF
MTSP-P50-3BD18	\$460.00				TEFC				60 dB(A)		PDF
MTSN-P75-3BD18	\$499.00	3/4 (1/2)			TENV			2.6-2.4/1.2 (2.6-2.4/1.2)	58 dB(A)	33	PDF
MTSP-P75-3BD18	\$499.00				TEFC				2.5-2.4/1.2 (2.5-2.4/1.2)		60 dB(A)
MTSN-001-3BD18	\$643.00	1 (3/4)			TENV			3.3-3.1/1.55 (3.3-3.1/1.55)	59 dB(A)	42	PDF
MTSP-001-3BD18	\$569.00				TEFC				3.1-2.8/1.45 (3.1-2.8/1.45)		61 dB(A)
MTSN-1P5-3BD18	\$704.00	1 1/2 (1)			TENV			4.8-4.4/2.2 (4.8-4.4/2.2)	60 dB(A)	51	PDF
MTSN-1P5-3BD18-14	\$721.00				145TC				PDF		
MTSP-1P5-3BD18	\$641.00				56C				PDF		
MTSP-1P5-3BD18-14	\$659.00				145TC				PDF		
MTSN-002-3BD18	\$1,206.00		2 (1 1/2)	TENV	6.5-5.4/2.7 (6-5.4/2.7)	60 dB(A)	65		PDF		
MTSN-002-3BD18-14	\$1,219.00			145TC		PDF					
MTSP-002-3BD18	\$694.00	56C		PDF							
MTSP-002-3BD18-14	\$712.00	145TC		PDF							
MTSN-003-3BD18-18	\$1,683.00	3 (2)	TENV	8.3-7.6/3.8 (8.3-7.6/3.8)	62 dB(A)	99	PDF				
MTSP-003-3BD18-18	\$1,405.00		182TC		PDF						
MTSP-005-3BD18	\$1,573.00	5 (3)	TEFC	184TC	64 dB(A)	100	PDF				
MTSP-7P5-3BD18	\$2,233.00	7 1/2 (5)		213TC	180		PDF				
MTSP-010-3BD18	\$2,436.00	10 (7 1/2)		215TC	210		PDF				
MTSP-015-3BD18	\$5,300.00	15 (10)		254TC	370		PDF				
MTSP-020-3BD18	\$5,772.00	20 (15)		256TC	436		PDF				
					53-49/24.5 (53-49/24.5)		69 dB(A)				

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors

Motor Specifications – 3-phase													
Part Number	Price	HP*	Base RPM *	Volts*	Encl.	NEMA Frame	Service Factor*	F.L. Amps*	Sound Power (dB)	Weight (lb)	Drawing Links		
Rigid Base With C-face - 1200 RPM													
MTSP-P50-3BD12	\$525.00	1/2 (1/3)	1200 (1000)	208-230/460 VAC (190/380)	TEFC	56C	1.15 (1.15)	1.9-1.8/0.9 (1.9-1.8/0.9)	55 dB(A)	30	PDF		
MTSP-P75-3BD12	\$569.00	3/4 (1/2)						3.8-3.7/1.85 (3.8-3.7/1.85)					
MTSP-001-3BD12	\$673.00	1 (3/4)						4.2-4.0/2.0 (4.2-4.0/2.0)					
MTSP-1P5-3BD12	\$1,145.00	1 1/2 (1)						5.3-4.9/2.45 (5.3-4.9/2.45)	57 dB(A)	82	PDF		
MTSP-002-3BD12	\$1,248.00	2 (1 1/2)						6.6-6.1/3.05 (6.6-6.1/3.05)					
MTSP-003-3BD12	\$1,952.00	3 (2)						10.9-2/4.6 (10.9-2/4.6)					
MTSP-005-3BD12	\$2,297.00	5 (3)						15-14.0/7.0 (15-14.0/7.0)	61 dB(A)	170	PDF		
								200		PDF			
Rigid Base With C-face - 3600 RPM													
MTSN-P33-3BD36	\$434.00	1/3 (1/4)	3600 (3000)	208-230/460 VAC (190/380)	TENV	56C	1.15 (1.15)	1.2-1.1/0.55 (1.2-1.1/0.55)	73 dB(A)	26	PDF		
MTSP-P33-3BD36	\$434.00				TEFC				75 dB(A)		PDF		
MTSN-P50-3BD36	\$449.00	1/2 (1/3)			TENV			1.6-1.5/0.75 (1.6-1.5/0.75)	73 dB(A)	29	PDF		
MTSP-P50-3BD36	\$449.00				TEFC				75 dB(A)		PDF		
MTSN-P75-3BD36	\$516.00	3/4 (1/2)			TENV			2.3-2.2/1.1 (2.3-2.2/1.1)	73 dB(A)	33	PDF		
MTSP-P75-3BD36	\$516.00				TEFC				75 dB(A)		PDF		
MTSN-001-3BD36	\$625.00	1 (3/4)			TENV			3-2.8/1.4 (3-2.8/1.4)	74 dB(A)	39	PDF		
MTSP-001-3BD36	\$569.00				TEFC				76 dB(A)		PDF		
MTSN-1P5-3BD36	\$686.00	1 1/2 (1)			TENV			4-3.7/1.85 (4-3.7/1.85)	74 dB(A)	46	PDF		
MTSN-1P5-3BD36-14	\$707.00				TEFC				56C		4.2-4.0/2.0 (4.2-4.0/2.0)	76 dB(A)	39
MTSP-1P5-3BD36	\$624.00				143TC								
MTSP-1P5-3BD36-14	\$641.00	2 (1 1/2)			TENV			5.5-5/2.5 (5.5-5/2.5)	75 dB(A)	60	PDF		
MTSN-002-3BD36	\$1,080.00				TEFC				56C				
MTSN-002-3BD36-14	\$1,094.00				145TC								
MTSP-002-3BD36	\$677.00		56C										
MTSP-002-3BD36-14	\$697.00	3 (2)	TENV	4.9-4.8/2.4 (4.9-4.8/2.4)	76 dB(A)	46	PDF						
MTSN-003-3BD36-18	\$1,629.00		TEFC				145TC						
MTSP-003-3BD36-18	\$1,387.00		TENV				182TC						
MTSP-005-3BD36	\$1,523.00	5 (3)	TEFC	184TC	8-7.2/3.6 (8-7.2/3.6)	95	PDF						
					8.8-8.1/4.05 (8.8-8.1/4.05)	81	PDF						
					12.6-12.2/6.1 (12.6-12.2/6.1)	95	PDF						

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors

Performance Data - 3-phase																		
Part Number	HP*	F.L. RPM*	NEMA Design	F.L. Effic. %	Current			Torque				F.L. Power Factor	Moment of Inertia (lb-ft ²)					
					Full Load Amps	Locked Rotor Amps	No Load Current	Full Load (lb-ft)	Locked Rotor	Breakdown	Pull Up			% of F.L. Torque				
Rigid Base With C-face - 1800 RPM																		
MTSN-P33-3BD18	1/3 (1/4)	1760 (1455)	B	74.0	1.5-1.4/0.7	6.5	1-1.1/0.55	1.00	300	400	300	62.00	0.062					
MTSP-P33-3BD18		1745 (1455)			1.4-1.2/0.6		1.23/0.65					71.00						
MTSN-P50-3BD18	1/2 (1/3)	1745 (1450)		78.5	1.8-1.6/0.8	10	1.2-1.3/0.65	1.50	285	300	250	70.00	0.069					
MTSP-P50-3BD18							1.44-1.30/0.65					71.00						
MTSN-P75-3BD18	3/4 (1/2)	1755 (1460)		81.5	2.6-2.4/1.2	12.5	1.65-1.8/0.9	2.20		320		69.00	0.084					
MTSP-P75-3BD18							2.5-2.4/1.2					2.10-1.90/0.95		71.00				
MTSN-001-3BD18	1 (3/4)	1755 (1460)		85.5	3.3-3.1/1.55	15	1.8-2/1	3.00	300	400	290	74.00	0.138					
MTSP-001-3BD18							3.1-2.8/1.45					2.76-2.50/1.25		75.00	0.1			
MTSN-1P5-3BD18	1 1/2 (1)	1755 (1460)		86.5	4.8-4.4/2.2	20	2.55-2.8/1.4	4.40	300	400	250	74.00	0.184					
MTSN-1P5-3BD18-14							1750 (1460)					4.1-4.0/2.0		3.32-3.00/1.50	285	300	75.00	0.138
MTSP-1P5-3BD18																		
MTSP-1P5-3BD18-14																		
MTSN-002-3BD18	2 (1 1/2)	1750 (1455)		86.5	6-5.4/2.7	25	2.9-3.2/1.6	5.90	300	400	200	79.00	0.25					
MTSN-002-3BD18-14							1750 (1455)					6.2-6.0/3.0		3.87-3.50/1.75	285	300	78.00	0.184
MTSP-002-3BD18																		
MTSP-002-3BD18-14																		
MTSN-003-3BD18-18	3 (2)	1760 (1455)		89.5	8.3-7.6/3.8	32	3.2-3.5/1.75	8.80	240	310	240	82.00	0.5					
MTSP-003-3BD18-18		1750 (1470)					8.8-8.2/4.1					3.6-4/2		270	80.00	0.253		
MTSP-005-3BD18	5 (3)	1765 (1465)	89.5	13-12.5/6.25	46	6.63-6.00/3.00	14.70	225	280	220	85.00	0.5						
MTSP-7P5-3BD18	7 1/2 (5)	1755 (1470)	91.7	20-18.6/9.3	63.5	9.95-9.00/4.50	22.00	225	270	210	83.00	0.927						
MTSP-010-3BD18	10 (7 1/2)	1760 (1470)	91.7	26-24.4/12.2	81	12.16-11.00/5.50	29.30	200	265	190	83.00	1.16						
MTSP-015-3BD18	15 (10)	1765 (1470)	92.4	40-37/18.5	116	x-14.4/7.2	44.00	200	260	170	85.00	1.8						
MTSP-020-3BD18	20 (15)		93.0	53-49/24.5	145	x-17.1/8.57	58.60	250	170	170	85.00	2.4						
Rigid Base With C-face - 1200 RPM																		
MTSP-P50-3BD12	1/2 (1/3)	1155 (970)	B	75.5	1.9-1.8/0.9	10	x-1.8 / 0.9	2.20	270	220	63.00	0.088						
MTSP-P75-3BD12	3/4 (1/2)	1155 (960)		81.5	3.8-3.7/1.85	12.5	x-1.7/0.85	3.30			280	65.00	0.103					
MTSP-001-3BD12	1 (3/4)	1165 (960)		82.5	4.2-4.0/2.0	15	x-2.5/1.25	4.40	255	270	68.00	0.143						
MTSP-1P5-3BD12	1 1/2 (1)	1170 (980)		87.5	5.3-4.9/2.45	20	x-3.24/1.62	6.60	270	70.00	0.416							
MTSP-002-3BD12	2 (1 1/2)	1175 (980)		88.5	6.6-6.1/3.05	25	x-4.2/2.1	8.80	250	280	210	71.00	0.61					
MTSP-003-3BD12	3 (2)			89.5	10-9.2/4.6	32	x-6.4/3.2	13.20	250	280	74.00	1.055						
MTSP-005-3BD12	5 (3)			15-14.0/7.0	46	x-9.2/4.6	46	22.10	225	270	78.00	1.356						

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors

Performance Data - 3-phase															
Part Number	HP*	F.L. RPM*	NEMA Design	F.L. Effic. %	Current			Torque			F.L. Power Factor	Moment of Inertia (lb-ft ²)			
					Full Load Amps	Locked Rotor Amps	No Load Current	Full Load (lb-ft)	Locked Rotor	Breakdown			Pull Up		
Rigid Base With C-face - 3600 RPM															
B															
MTSN-P33-3BD36	1/3 (1/4)	3500 (2890)	B	72.0	1.2-1.1/0.55	6.5	0.72-0.8/0.4	0.50	290	320	250	78.00	0.027		
MTSP-P33-3BD36							1.06/0.53					85.00			
MTSN-P50-3BD36	1/2 (1/3)	3490 (2900)		74.0	1.6-1.5/0.75	10	0.9-0.95/0.475	0.70	285	300	250	83.00	0.036		
MTSP-P50-3BD36							1.06-0.96/0.48					87.00			
MTSN-P75-3BD36	3/4 (1/2)	3500 (2890)		77.0	2.3-2.2/1.1	12.5	1-1.1/0.55	1.10	320	430	300	83.00	0.05		
MTSP-P75-3BD36							1.22-1.10/0.55					88.00			
MTSN-001-3BD36	1 (3/4)	3530 (2915)		80.0	3-2.8/1.4	15	1.4-1.5/0.75	1.50	285	300	250	83.00	0.072		
MTSP-001-3BD36							1.55-1.40/0.70					90.00			
MTSN-1P5-3BD36	1 1/2 (1)	3525 (2910)		84.0	4-3.7/1.85	20	1.3-1.4/0.7	2.30	285	300	250	89.00	0.094		
MTSN-1P5-3BD36-14							4.2-4.0/2.0					1.77-1.60/0.80		91.00	
MTSP-1P5-3BD36														2.90	90.00
MTSP-1P5-3BD36-14															91.00
MTSN-002-3BD36	2 (1 1/2)	3520 (2915)	85.5	5.5-5/2.5	25	1.8-2/1	2.90	230	290	200	89.00	0.13			
MTSN-002-3BD36-14						4.9-4.8/2.4					1.92-1.74/0.87		91.00		
MTSP-002-3BD36													4.40	85.00	
MTSP-002-3BD36-14														89.00	
MTSN-003-3BD36-18	3 (2)	3535 (2925)	86.5	8-7.2/3.6	32	2.35-2.6/1.3	4.40	270	290	240	85.00	0.145			
MTSP-003-3BD36-18						8.8-8.1/4.05					89.00				
MTSP-005-3BD36	5 (3)	3525 (2930)	88.5	12.6-12.2/6.1	46	4.87-4.40/2.20	7.30	225	280	220	91.00	0.26			

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors

Motor Specifications – 3-phase												
Part Number	Price	HP*	Base RPM *	Volts*	Encl.	NEMA Frame	Service Factor*	F.L. Amps*	Sound Power (dB)	Weight (lb)	Drawing Links	
C-face - 1800 RPM												
MTSN-P33-3BD18R	\$433.00	1/3 (1/4)	1800 (1500)	208-230/460 VAC (190/380)	TENV	56C	1.15 (1.15)	1.5-1.4/0.7 (1.5-1.4/0.7)	58 dB(A)	28	PDF	
MTSP-P33-3BD18R	\$431.00				TEFC			1.4-1.2/0.6 (1.4-1.2/0.6)	60 dB(A)	27	PDF	
MTSN-P50-3BD18R	\$444.00	1/2 (1/3)			TENV			1.8-1.6/0.8 (1.8-1.6/0.8)	58 dB(A)	30	PDF	
MTSP-P50-3BD18R	\$443.00				TEFC				60 dB(A)	29	PDF	
MTSN-P75-3BD18R	\$481.00	3/4 (1/2)			TENV			2.6-2.4/1.2 (2.6-2.4/1.2)	58 dB(A)	33	PDF	
MTSP-P75-3BD18R	\$477.00				TEFC				60 dB(A)	32	PDF	
MTSN-001-3BD18R	\$626.00	1 (3/4)			TENV			3.3-3.1/1.55 (3.3-3.1/1.55)	59 dB(A)	42	PDF	
MTSP-001-3BD18R	\$549.00				TEFC				61 dB(A)	35	PDF	
MTSN-1P5-3BD18R	\$686.00	1 1/2 (1)			TENV			4.8-4.4/2.2 (4.8-4.4/2.2)	60 dB(A)	51	PDF	
MTSN-1P5-3BD18R-14	\$705.00				145TC				PDF			
MTSP-1P5-3BD18R	\$619.00				56C				4.1-4.0/2.0 (4.1-4.0/2.0)	61 dB(A)	41	PDF
MTSP-1P5-3BD18R-14	\$634.00				145TC					PDF		
MTSN-002-3BD18R	\$1,171.00	2 (1 1/2)	TENV	6.5-4.2/2.7 (6.5-4.2/2.7)	60 dB(A)	65	PDF					
MTSN-002-3BD18R-14	\$1,184.00		145TC		PDF							
MTSP-002-3BD18R	\$672.00		56C		6.2-6.0/3.0 (6.2-6.0/3.0)	61 dB(A)	50	PDF				
MTSP-002-3BD18R-14	\$691.00		145TC			PDF						
C-face - 3600 RPM												
MTSP-P33-3BD36R	\$417.00	1/3 (1/4)	3600 (3000)	208-230/460 VAC (190/380)	TEFC	56C	1.15 (1.15)	1.2-1.1/0.55 (1.2-1.1/0.55)	75 dB(A)	25	PDF	
MTSP-P50-3BD36R	\$431.00	1/2 (1/3)						1.6-1.5/0.75 (1.6-1.5/0.75)		28	PDF	
MTSP-P75-3BD36R	\$499.00	3/4 (1/2)						2.3-2.2/1.1 (2.3-2.2/1.1)		32	PDF	
MTSP-001-3BD36R	\$552.00	1 (3/4)						2.9-2.8/1.4 (2.9-2.8/1.4)		34	PDF	
MTSP-1P5-3BD36R	\$605.00	1 1/2 (1)						4.2-4.0/2.0 (4.2-4.0/2.0)	76 dB(A)	38	PDF	
MTSP-1P5-3BD36R-14	\$624.00							143TC		PDF		
MTSP-002-3BD36R	\$655.00	2 (1 1/2)						56C	4.9-4.8/2.4 (4.9-4.8/2.4)	45	PDF	
MTSP-002-3BD36R-14	\$677.00							145TC		PDF		

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors


Performance Data - 3-phase																		
Part Number	HP*	F.L. RPM*	NEMA Design	F.L. Effic. %	Current			Torque			F.L. Power Factor	Moment of Inertia (lb-ft ²)						
					Full Load Amps	Locked Rotor Amps	No Load Current	Full Load (lb-ft)	Locked Rotor	Breakdown			Pull Up					
% of F.L. Torque																		
C-face - 1800 RPM																		
MTSN-P33-3BD18R	1/3 (1/4)	1760 (1455)	B	74.0	1.5-1.4/0.7	6.5	1-1.1/0.55	1.00	300	400	300	62.00	0.062					
MTSP-P33-3BD18R		1745 (1455)		82.5	1.4-1.2/0.6	8	x-0.78/0.39					71.00						
MTSN-P50-3BD18R	1/2 (1/3)	1745 (1450)		78.5	1.8-1.6/0.8	10	1.2-1.3/0.65	1.50	285	300	250	70.00	0.069					
MTSP-P50-3BD18R				82.5			1.44-1.30/0.65					78.00						
MTSN-P75-3BD18R	3/4 (1/2)	1755 (1460)		81.5	2.6-2.4/1.2	12.5	1.65-1.8/0.9	2.20	2.20	320	300	69.00	0.084					
MTSP-P75-3BD18R		1745 (1455)		82.5	2.5-2.4/1.2		2.10-1.90/0.95					78.00						
MTSN-001-3BD18R	1 (3/4)	1755 (1460)		85.5	3.3-3.1/1.55	15	1.8-2/1	3.00	300	400	290	74.00	0.138					
MTSP-001-3BD18R		1750 (1460)					3.1-2.8/1.45					2.76-2.50/1.25		285	300	75.00	0.1	
MTSN-1P5-3BD18R	1 1/2 (1)	1755 (1460)		86.5	4.8-4.4/2.2	20	2.55-2.8/1.4	4.40	300	400	250	74.00	0.184					
MTSN-1P5-3BD18R-14							1750 (1460)					4.1-4.0/2.0		3.32-3.00/1.50	285	300	75.00	0.138
MTSP-1P5-3BD18R																		
MTSP-1P5-3BD18R-14							2 (1 1/2)					1750 (1455)		86.5	6.2-6.0/3.0	25	3.87-3.50/1.75	5.90
MTSN-002-3BD18R	2 (1 1/2)	1750 (1455)		86.5	6-5.4/2.7	25		2.9-3.2/1.6	5.90	300	400		290					
MTSN-002-3BD18R-14							75.00					0.138						
MTSP-002-3BD18R			79.00				0.25											
MTSP-002-3BD18R-14			78.00				0.184											
C-face - 3600 RPM																		
MTSP-P33-3BD36R	1/3 (1/4)	3500 (2890)	B	74.0	1.2-1.1/0.55	8	x-0.74/0.37	0.50	285	300	250	85.00	0.027					
MTSP-P50-3BD36R	1/2 (1/3)	3460 (2900)		77.0	1.6-1.5/0.75	10	1.06-0.96/0.48	0.70				88.00	0.036					
MTSP-P75-3BD36R	3/4 (1/2)	3500 (2890)		80.0	2.3-2.2/1.1	12.5	1.22-1.10/0.55	1.10				90.00	0.05					
MTSP-001-3BD36R	1 (3/4)	3470 (2890)		80.0	2.9-2.8/1.4	15	1.55-1.40/0.70	1.50				90.00	0.054					
MTSP-1P5-3BD36R	1 1/2 (1)	3480 (2900)		84.0	4.2-4.0/2.0	20	1.77-1.60/0.80	2.30				2.30	2.30	2.30	2.30	91.00	0.072	
MTSP-1P5-3BD36R-14				86.5														
MTSP-002-3BD36R	2 (1 1/2)	3480 (2900)		85.5	4.9-4.8/2.4	25	1.92-1.74/0.87	2.90				2.90	2.90	2.90	2.90	91.00	0.094	
MTSP-002-3BD36R-14																		

*@ 60Hz (@ 50Hz)



IronHorse MTS Washdown 3-phase Motors

Wiring Diagram

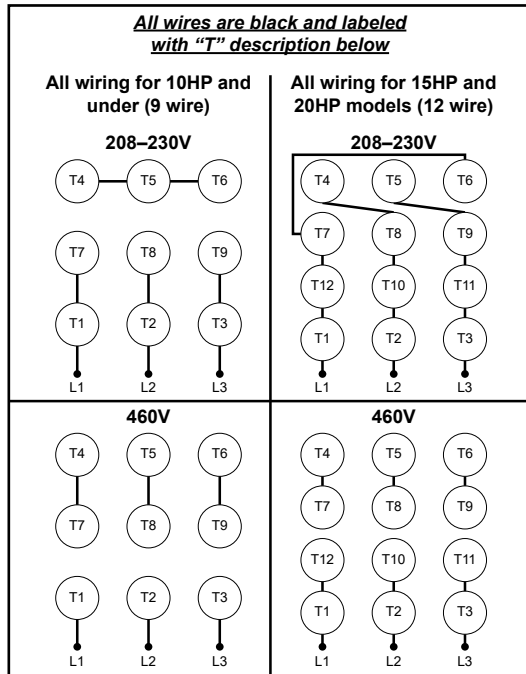

Accessories



MTAS-FAN-56



MTAS-SHROUD-56140

MTSP Accessories		
Part Number	Price	Fits
Replacement Fans		
MTAS-FAN-56	\$30.00	1/3hp, 1/2hp and 3/4hp IronHorse MTS series TEFC motors
MTAS-FAN-143180	\$30.00	1hp 2- and 4-pole, 1-1/2hp 2-pole and 3hp and 5hp 4-pole IronHorse MTS series TEFC motors
MTAS-FAN-145	\$30.00	1-1/2hp 4-pole, 2hp 2- and 4-pole IronHorse MTS series TEFC motors
MTAS-FAN-180-26	\$33.00	1hp, 1-1/2hp and 2hp 6-pole and 3hp and 5hp 2-pole IronHorse MTS series TEFC motors
MTAS-FAN-210-6	\$37.00	3hp and 5hp 6-pole IronHorse MTS series TEFC motors
MTAS-FAN-210	\$37.00	7-1/2hp and 10hp IronHorse MTS series TEFC motors
MTAS-FAN-250	\$40.00	15hp and 20hp IronHorse MTS series TEFC motors
Replacement Shrouds		
MTAS-SHROUD-56140	\$100.00	56 and 140T frame IronHorse MTS series TEFC motors
MTAS-SHROUD-180	\$134.00	180T frame IronHorse MTS series TEFC motors
MTAS-SHROUD-210	\$168.00	210T frame IronHorse MTS series TEFC motors
MTAS-SHROUD-250	\$242.00	250T frame IronHorse MTS series TEFC motors

Mounting

MTSP/MTSN stainless-steel motors can be mounted in any orientation, horizontal or vertical. Ensure the T-drain plugs are installed as necessary for proper drainage.


The motors have four drain holes in the 12:00, 3:00, 6:00, and 9:00 positions. Motors are shipped with Drain Seal plugs installed in all positions. T drain plugs are packaged separately. If drainage is needed, replace any drain seal plug with the included T drain plug. Installation location should be the lowest point of the motor based on the mounting orientation.

For 56C and 140TC:

- Drive End—No Drain Installed. Optional M10x1 T-Drain Plug ships with motor (install if front drain is needed).
- Opposite Drive End – No Drain installed. Optional M6x1 T-Drain Plug ships with motor. (install if rear drain needed).

For 180TC, 210TC, 250TC:

- Drive End—No Drain installed. Optional M10x1 T-Drain Plug ships with motor (install if drain is needed).
- Opposite Drive End – No drain holes.

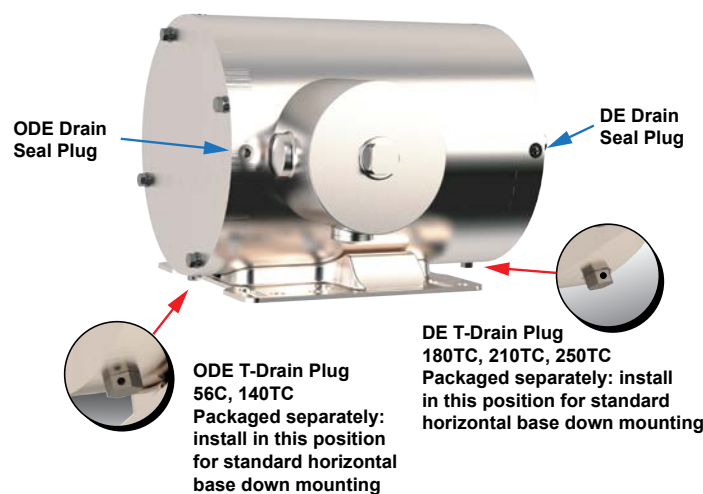



AC Motor Selection – IronHorse® General Purpose Motors

IronHorse® 3-Phase Motor Selection					
Motor Series	MTR2/MTRP	MTRJ/MTRJP	MTDP	MTSP/MTSN	MTCP2
Paint Color	Black	Black	Blue	Stainless	Gray
Main Characteristics	General Purpose Rolled Steel	Jet Pump	Rolled Steel Open Drip Proof	Stainless Steel Premium Efficiency IP69K	Cast-Iron Hazardous Duty
Electrical Characteristics					
Horsepower range	1/3 - 3	1/3 - 3	1 - 50	1 - 20	1 - 300(T) 1 - 30(TC)
Base speed	1800; 3600	3600	1800; 3600	1200; 1800; 3600	1200; 1800; 3600
Standard Voltage	208-230/460 VAC; 230/460 VAC	208-230/460 VAC; 230/460 VAC	208-230/460 VAC	208-230/460 VAC	208-230/460 VAC; 460VAC
Phase / Base Frequency (Hz)	3-phase / 60 Hz				
Service Factor	1.15	1.15	1.15 (sine), 1.0 (drive)		1.25 (1-200) 1.15 (250-300) 1.0 (all w/ drive)
Design Code (NEMA)	B				
Insulation Class	Class F				
Insulation System	Dip and Bake	Dip and Bake Twice	VPI	Dip and Bake	Vacuum Impregnation
Duty Cycle	Continuous				
Thermal protection	None				
Hazard Classification	None			Class 1 / Div 2	
Mechanical Characteristics					
Frame size	56C or HC - 326T	56J	56C - 326T	56C - 256TC	143T/TC - 449T
Enclosure	ODP / TEFC	TEFC	ODP / TEFC	TEFC / TENV	TEFC
Enclosure Rating	IP43		IP23	IP69K	IP55
Frame material	Rolled steel		Rolled steel	304 Stainless steel	Cast iron
End bracket material	Aluminum	Aluminum	≤256 frame- Aluminum >256- Cast iron	304 Stainless steel	Cast iron
Junction box material	Steel	Steel	Steel	304 Stainless steel	Cast iron
Fan guard material	Steel	Steel	N/a	304 Stainless steel	Steel
Fan material	Polypropylene plastic	Plastic	N/a	Heat-Resistant Polyethylene	Plastic
Lead termination	Junction Box				
standard mounting	C-face with removable rigid base		Rigid base	C-face round body and C-face with rigid base	Rigid base, c-face with rigid base (1-100 hp)
Drive end shaft slinger	Yes	Yes	None	Yes	Yes
Bearings	Ball				1-300 hp - 2p, 1-75 hp - 4p & 6p: Ball 100-300 hp - 4p & 6p: Roller
Grease	Mobil Polyrex EM		NS7 ENS	Mobil Polyrex EM	
Standard junction box assembly position	F1				F1 (field convertible F2)
Performance Characteristics					
Constant Torque speed range	4:1	4:1	10:1	10:1	10:1
Variable Torque speed range	10:1	10:1	20:1	20:1	20:1
Constant Horsepower speed range	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Temperature rise	B				
Encoder provisions	None				
Other Characteristics					
Warranty*	2 years	2 years	2 years	1 year	2 years
Agency Approvals **	CSA, CE	CSA,CE	CSA	NEMA, CSA, UR, CE, BISCC	CSA, ISO9001, CE

* See Terms and Conditions for motor warranty explanation.

1) For warranty on IronHorse motors below 50hp, warranty service can be arranged through AutomationDirect.

2) For warranty on IronHorse motors 50hp and above, motors must be inspected by a local EASA motor repair or service center; (see AutomationDirect Terms & Conditions).

** To obtain the most current agency approval information, see the Agency Approval Checklist on the specific part number's web page.

*** 56HC motors are capable of 56C C-face mounting, and are also compatible with 56, 143T, and 145T foot mounting dimensions.