

# IEC Limit Switches

## AAM Series Metal Housing (Side Rotary Lever Actuator)

- Small body allows mounting in tight spaces
- Durable cast metal housing
- Single conduit 1/2" NPT opening or 5-pin M12 quick-disconnect
- 1 N.O. and 1 N.C. contact on all units
- Snap-action (Z11) contacts

AAM Series Limit Switches With Metal Enclosure Selection Chart							
Part Number	Price	Drawing Link	Actuator Type	Max. Actuation Speed (m/s [ft/sec])	Min. Actuation Force (N) or Torque (N•m)	Min. Positive Opening Force (N) or Torque (N•m)	Connection Type
<a href="#">AAM2F43Z11</a>	\$15.00	<a href="#">PDF</a>	Side rotary lever with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	1/2-in NPT cable entry
<a href="#">AAM7F43Z11</a>	\$21.00	<a href="#">PDF</a>	Side rotary lever with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	5-pin M12 quick-disconnect (bottom)
<a href="#">AAM2F46Z11</a>	\$15.00	<a href="#">PDF</a>	Side rotary lever inward with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	1/2-in NPT cable entry
<a href="#">AAM7F46Z11</a>	\$22.00	<a href="#">PDF</a>	Side rotary lever inward with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	5-pin M12 quick-disconnect (bottom)
<a href="#">AAM2F53Z11</a>	\$15.00	<a href="#">PDF</a>	Side rotary adjustable metal lever with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	1/2-in NPT cable entry
<a href="#">AAM7F53Z11</a>	\$22.00	<a href="#">PDF</a>	Side rotary adjustable metal lever with 18mm metal roller	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	5-pin M12 quick-disconnect (bottom)
<a href="#">AAM2F71Z11</a>	\$15.00	<a href="#">PDF</a>	Side rotary adjustable 3mm stainless steel rod	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	1/2-in NPT cable entry
<a href="#">AAM7F71Z11</a>	\$22.00	<a href="#">PDF</a>	Side rotary adjustable 3mm stainless steel rod	1.5 [4.92]	0.10 N•m [0.07 lb•ft]	0.32 N•m [0.24 lb•ft]	5-pin M12 quick-disconnect (bottom)




### Housing style




# IEC Limit Switches

## AAM Series Metal Housing (Side Rotary Lever Actuator)


### Connector



### Contact Configuration



### Z11 Snap-action contacts 1 N.O. and 1 N.C.

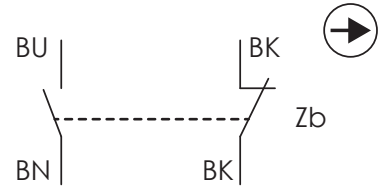

# IEC Limit Switches Specifications


IEC Limit Switches Specifications			
Type	Plastic		Metal
<b>Environmental</b>			
Degree of Protection	IEC IP65		IEC IP66
Temperature Range <sup>1</sup>	Stocking: -30 to 80°C [-22 to 176° F] Working: -25 to 70°C [-13 to 158°F]		Stocking: -30 to 80°C [-22 to 176°F] Working: -10 to 70°C [14 to 158°F];
Rated Insulation Voltage	690V (degree of pollution 3)		
<b>Mechanical Ratings</b>			
Working Positions <sup>2</sup>	All actuators can be rotated in 90° increments		
Mechanical Life	Straight line working heads: 30 million operations	Side rotary heads: 25 million operations,	Multidirectional heads: 10 million operations
Enclosure Material	Fiberglass-reinforced plastic - V0 class (UL94)		Die-cast aluminum
<b>Contact Blocks Rating</b>			
Positive Opening <sup>3</sup>	Yes, all models		
Electrical Ratings	AC15	Make: 60A@120VAC; 30A @ 240VAC; 18A @ 400VAC Break: 10A @ 24VAC; 6.5 A @130VAC; 3.1 A @ 230VAC; 1.8 A @ 400VAC	
	DC13	2.8A @ 24VDC; 0.5A @ 110VDC	
Maximum Switching Frequency	Contact blocks: all two cycles per second		
Repeat Accuracy	0.01 mm on the operating points at 1 million operations		
Short-Circuit Protection	Cartridge fuses gl 10A-500V 10.3x38 1 100KA		
Contact Resistance	0.025 Ω		
Recommended Minimum Operating Speed	With snap-action contacts: 20mm [0.787 in] per minute <sup>4</sup> With slow-action contacts: 500mm [19.685 in] per minute <sup>5</sup>		
Rated Insulation Voltage	660V		
Terminals Marking	According to CENELEC EN 50013		
Wiring Connections	2 x 2.5mm <sup>2</sup> (AWG14) to 2 x 0.5mm <sup>2</sup> (AWG18)		
Wiring Terminal Type	Captive screw with self-lifting pressure plate		
Wiring Terminal Markings	According to CENELEC EN50013		
User Protection	Double insulation (plastic models only)		
<b>Contact Blocks Performance</b>			
Operation Frequency	3600 ops/h		
Electrical Durability (according to IEC 947-5-1)	Utilization categories AC-15 and DC-13; load factor of 0.5. See table and curves in supplemental section.		
Approvals	UL file E191072, CE		
Tools Needed	Phillips screwdriver, #1 #2 / Hex wrench, 10mm		

1. Minimum temperatures assume that the atmosphere is free of moisture, which could cause moving parts to freeze up.
2. Some types of actuators, such as a long, heavy spring with the adjustable actuator fully extended, may not work properly if installed in a horizontal position.
3. Positive opening in a snap-action contact block is performed by a rigid mechanism that forces the N.C. contact to open in case the snap action mechanism fails. This would provide protection if, for example, the contacts became "welded" together by excessive current rush. Generally, positive opening is not considered to work properly on switches with actuators that are not a solid design (such as a spring or rubber roller), despite the fact that the contact block itself has positive opening. In order to be considered as having positive opening, a switch must not have flexible components between actuator actioning points and the electrical contact.
4. This is the speed at which snap-action contact blocks are tested. There is no minimum operating speed for snap-action contacts because the speed has no influence on the switch action. When using spring actuators, the changeover time may vary from 1ms to 3ms from maximum to minimum operating speed.
5. Slow-action contacts must not be operated at very low speeds because of the tendency to maintain the arc if contacts are not rapidly separated.


# Limit Switches Supplemental

## Electrical Durability (according to IEC 947-5-1)

### AC-15 Snap Action

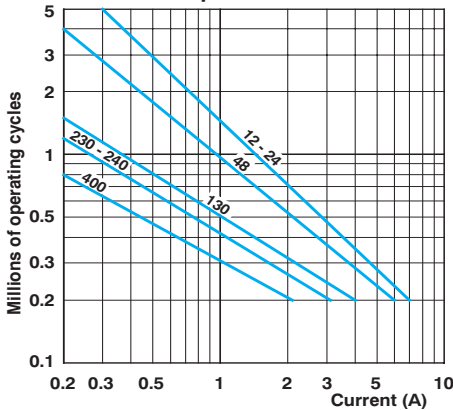

### AC-15 Slow Action

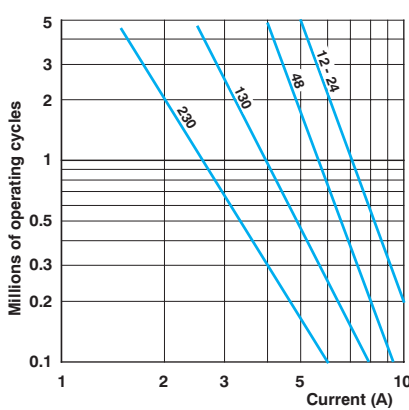

#### Limit switch types

**Snap-action contact:** A contact element in which the contact motion is independent of the speed of the actuator. This feature ensures reliable electrical performance even in applications involving very slow moving actuators.

**Slow-make/slow-break contacts:** A contact element in which the contact motion is dependent on the actuator speed.

#### Terminal identification (IEC)

Each terminal is marked with two digits. The first digit indicates the pole (circuit). The second digit indicates the type of contact.


\_1-\_2 is N.C., \_3-\_4 is N.O.  
so 11-12, 21-22 are N.C., while 13-14, 23-24 are N.O.

DC-13	Snap Action	Slow Action
	Power breaking for a durability of 5 million cycles	
24V	9.5 W	12W
48V	6.8 W	9W
110V	3.6 W	6W

Terminal Markings	
European	
Terminal No.	Type
11-12	N.C. contact of pole no. 1 <sup>1</sup>
13-14	N.O. contact of pole no. 2 <sup>1</sup>
21-22	N.C. contact of pole no. 2 <sup>2</sup>
23-24	N.O. contact of pole no. 1 <sup>2</sup>

<sup>1</sup> With non-isolated contacts    <sup>2</sup> With isolated contacts


Note: Green/yellow wire is physical earth ground.

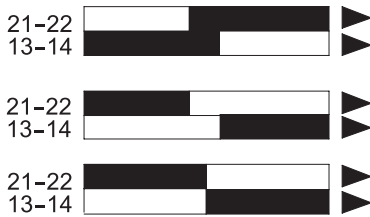


**Make-before-break (overlapping) SPDT:** the N.O. contact closes before the N.C. contact opens. (See ex: Y11)

**Break-before-make (offset) SPDT:** the N.C. contact opens before the N.O. contact closes. (See ex: X11)

**Simultaneous make and break SPDT:** the N.C. contact opens at the same time as the N.O. contact closes. (See ex: Z11)




#### Bar Chart Examples (cam angle is 30 degrees)

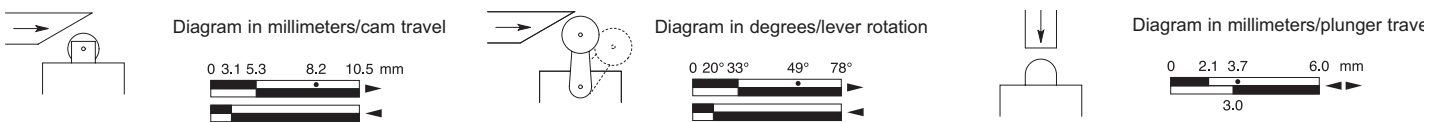


## Changeable working heads (E42, E52, E71)

View of cam insert when looking at bottom of head once removed from switch body.


To change position, push in and twist until it locks into place

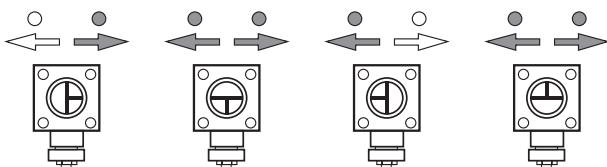

Positioning - 90° each way





Adjustable lever from 0-360° (6° each increment)



# Contact Displacement Values

**Z11 Snap Action Contacts**  
**1 N.O. and 1 N.C.**

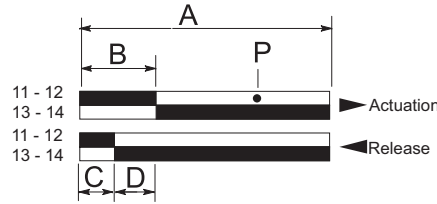

- A = Max. travel of the operator in mm or degrees
- B = Tripping travel of both contacts on actuation
- C = Tripping travel of both contacts on release
- D = Differential travel (between actuation and release)
- P = Point from which positive opening is assured during actuation



Contact Displacement Values				
Part Series	Displacement Values — mm [in] or degrees			
	A	B	C	P
<b>AEM Halogen</b>				
<b><u>AEM2G12Z11-HF1</u></b>	8.7 [0.343]	3.8 [0.150]	2.4 [0.095]	7.5 [0.295]
<b><u>AEM2G16Z11-HF1</u></b>	5 [0.197]	2.2 [0.867]	1.4 [0.055]	4.3 [0.169]
<b><u>AEM2G42Z11-HF1</u></b>	74°	32°	21°	65°
<b><u>AEM2G51Z11-HF1</u></b>	74°	32°	21°	65°
<b><u>AEM2G71Z11-HF1</u></b>	74°	32°	21°	65°
<b><u>AEM2G93Z11-HF1</u></b>	—	10°	20°	—
<b>AAM Series</b>				
<b><u>AAMxF11Z11x</u></b>	5.6 [0.220]	2.5 [0.098]	1.3 [0.051]	4.1 [0.161]
<b><u>AAMxF12Z11x</u></b>	5.6 [0.220]	2.5 [0.098]	1.3 [0.051]	4.1 [0.161]
<b><u>AAMxT14Z11x</u></b>	5.6 [0.220]	2.5 [0.098]	1.3 [0.051]	4.1 [0.161]
<b><u>AAMxT35Z11x</u></b>	21 [0.827]	9 [0.354]	4.5 [0.177]	14.5 [0.571]
<b><u>AAMxF43Z11x</u></b>	74°	31°	17°	47°
<b><u>AAMxF46Z11x</u></b>	74°	31°	17°	47°
<b><u>AAMxF53Z11x</u></b>	74°	31°	17°	47°
<b><u>AAMxF71Z11x</u></b>	74°	31°	17°	47°
<b><u>AAMxT93Z11x</u></b>	—	12°	23°	—
<b>AAP Series</b>				
<b><u>AAPxT10Z11x</u></b>	5.6 [0.220]	2.5 [0.098]	1.3 [0.051]	4.1 [0.161]
<b><u>AAPxT13Z11x</u></b>	9.6 [0.378]	4.7 [0.185]	2.5 [0.098]	7.6 [0.299]
<b><u>AAPxT14Z11x</u></b>	5.6 [0.220]	2.5 [0.098]	1.3 [0.051]	4.1 [0.161]
<b><u>AAPxT35Z11x</u></b>	21 [0.827]	9 [0.354]	4.5 [0.177]	14.5 [0.571]
<b><u>AAPxT41Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT42Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT45Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT51Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT5100Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT5200Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT71Z11x</u></b>	74°	31°	17°	47°
<b><u>AAPxT93Z11x</u></b>	—	12°	23°	—

Contact Displacement Values tables continued on next page

# Achieve™ IEC Limit Switches Bar Charts


## Contacts Configuration and Bar Charts

- A = Max. travel of the operator in mm or degrees
- B = Tripping travel of both contacts on actuation
- C = Tripping travel of both contacts on release
- D = Differential travel (between actuation and release)
- P = Point from which positive opening is assured during actuation

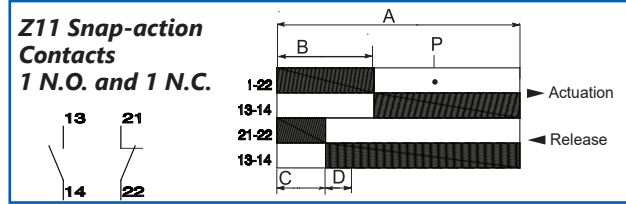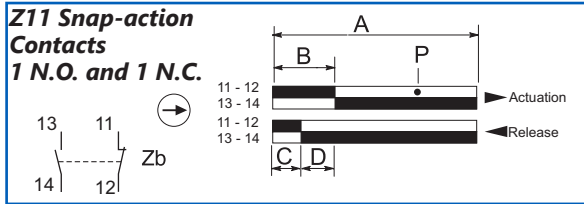

Contact Displacement Values				
Part Series	Displacement Values (mm [in] or degrees)			
	A	B	C	P
ABMxE11Z11	6.0 [0.24]	3.0 [0.12]	1.8 [0.07]	4.6 [0.18]
ABMxE13Z11	10.5 [0.41]	5.3 [0.21]	3.1 [0.12]	8.2 [0.32]
ABMxE32Z11	15.5 [0.61]	6.3 [0.25]	3.1 [0.12]	10.8 [0.43]
ABMxE42Z11	78°	33°	20°	49°
ABMxE52Z11	78°	33°	20°	49°
ABMxE71Z11	78°	33°	20°	49°
ABMxE92Z11	—	21°	9°	—
ABMxE93Z11	—	21°	21°	—
ABPxH14Z11	5.9 [0.23]	2.2 [0.09]	1.0 [0.04]	3.8 [0.15]
ABPxH19Z11	10.5 [0.41]	4.6 [0.18]	2.4 [0.09]	7.5 [0.30]
ABPxH35Z11	17 [0.67]	6.8 [0.27]	3.8 [0.15]	11.3 [0.44]
ABPxH41Z11	90°	31°	19°	47°
ABPxH51Z11	90°	31°	19°	47°
ABPxH71Z11	90°	31°	19°	47°
ABPxH92Z11	—	27°	15°	—
ABPxH93Z11	—	27°	15°	—

Contact Displacement Values				
Part Number	Displacement Values (mm [in] or degrees)			
	A	B	C	P
ADP2T13Z11	9.6 [0.37]	4.7 [0.19]	2.5 [0.10]	7.6 [0.29]
ADP2T14Z11	5.6 [0.22]	2.5 [0.10]	1.3 [0.05]	4.1 [0.16]
ADP2T35Z11	21 [0.82]	9.0 [0.35]	4.9 [0.19]	14.5 [0.57]
ADP2T41Z11	74°	31°	17°	47°
ADP2T45Z11	74°	31°	17°	47°
ADP2T51Z11	74°	31°	17°	47°
ADP2T5100Z11	74°	31°	17°	47°
ADP2T71Z11	74°	31°	17°	47°
ADM2F11Z11	5.6 [0.22]	2.5 [0.10]	1.3 [0.05]	4.1 [0.16]
ADM2F12Z11	9.6 [0.37]	4.7 [0.19]	2.5 [0.10]	7.6 [0.29]
ADM2T35Z11	21 [0.82]	9.0 [0.35]	4.9 [0.19]	14.5 [0.57]
ADM2F43Z11	74°	31°	17°	47°
ADM2F46Z11	74°	31°	17°	47°
ADM2F53Z11	74°	31°	17°	47°
ADM2F71Z11	74°	31°	17°	47°
ADM2T93Z11	23°	23°	12°	—
ADM2T9805Z11A	5.6 [0.22]	2.0 [0.07]	0.9 [0.03]	—

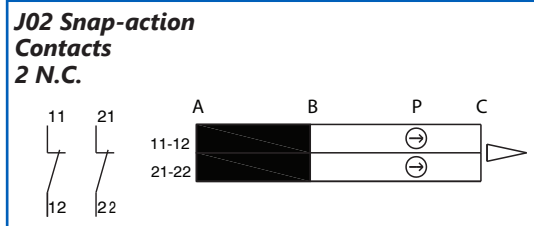

Contact Displacement Values				
Part Number	Displacement Values (mm [in] or degrees)			
	A	B	C	P
AHP2R002J02-024	—	2.4 [0.09]	—	4 [0.15]
AHP2T11J02-024	—	2.4 [0.09]	—	4 [0.15]
AHP2T12J02-024	—	4.5 [0.17]	—	7.4 [0.29]
AHP2T30J02-024	—	8.6 [0.33]	—	13.1 [0.51]
AHP2T32J02-024	—	8.6 [0.33]	—	13.1 [0.51]
AHP2T41J02-024	—	30°	—	46°
AHP2T5100J02-024	—	30°	—	46°
AHP2T5200J02-024	—	30°	—	46°



# Limit Switches Supplemental

## Contact Displacement Values (continued)



A = Max. travel of the operator in mm or degrees

B = Tripping travel of the N.C. contact

C = Tripping travel of the N.O. contact

D = Differential travel (between actuation and release)

P = Point from which positive opening is assured during actuation

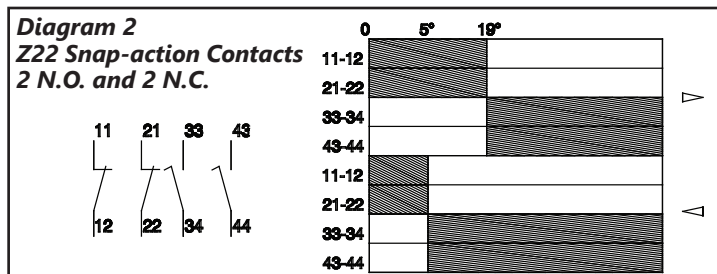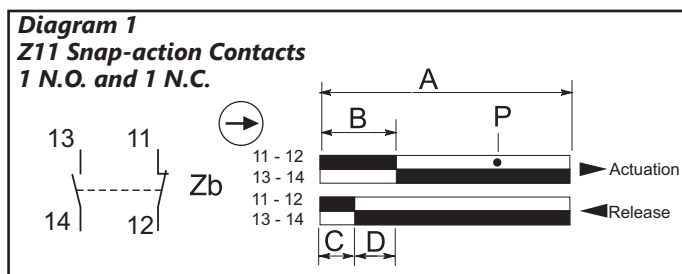

Contact Displacement Values					
Part Series	Contact Configuration	Displacement Values mm [in] or degrees			
		A	B	C	P
AEP2G11	Z11	5.0 [0.20]	2.2 [0.09]	1.4 [0.06]	4.3 [0.17]
AEP2G11	Z22	5.0 [0.20]	2.1 [0.82]	1.3 [0.05]	4.0 [0.16]
AEP2G12	Z11	8.7 [0.34]	3.8 [0.15]	2.2 [0.09]	7.5 [0.30]
AEP2G12	Z22	8.7 [0.34]	3.8 [0.15]	2.3 [0.09]	7.0 [0.27]
AEP2G16	Z11	5.0 [0.20]	2.2 [0.09]	1.4 [0.06]	4.3 [0.17]
AEP2G16	Z22	5.0 [0.20]	2.1 [0.82]	1.3 [0.05]	4.0 [0.16]
AEP2G21	Z22	5.0 [0.20]	2.1 [0.82]	1.3 [0.05]	4.0 [0.16]
AEP2G22	Z22	8.7 [0.34]	3.8 [0.14]	2.3 [0.09]	7.0 [0.27]
AEP2G41	Z11	74°	32°	21°	65°
AEP2G41	Z22	75°	30°	10°	55°
AEP2G42	Z11	74°	32°	21°	65°
AEP2G43	Z11	74°	32°	21°	65°
AEP2G51	Z11	74°	32°	21°	65°
AEP2G51	Z22	75°	30°	10°	55°
AEP2G71	Z11	74°	32°	21°	65°
AEP2G92	Z11	—	20°	10°	—
AEP2G93	Z11	—	20°	10°	—
AEP2G93	Z22	—	19°	5°	—

# IEC Limit Switches Accessories

## Replacement Contact Blocks

Easily-installed replacement contact blocks fit both heavy-duty IEC and double-insulated limit switches, including mini-DIN models.

*Note: Limit switches come standard with snap-action contacts (AGZ11-SWITCH.) To replace contact block, remove limit switch cover. Carefully remove old contact block and install replacement. Contact blocks are supplied with an adapter to fit into larger ABM and ABP switches. Remove this adapter when installing contacts in mini-DIN AAP models.*



Replacement Contact Blocks			
Part Number	Price	Contact Type	Action
<a href="#">AGZ11-SWITCH</a>	\$6.25	Snap-action 1 N.C. and N.O.	3ms change-over time
<a href="#">AGZ02-SWITCH</a>	\$6.00	Snap-action 2 N.C.	3ms change-over time
<a href="#">AGX11-SWITCH</a>	\$6.00	Slow-action 1 N.C. and 1 N.O.	Break before make
<a href="#">AGY11-SWITCH</a>	\$6.00	Slow-action overlay 1 N.C. and 1 N.O.	Make before break
<a href="#">AGW02-SWITCH</a>	\$6.50	Slow-action delay 2 N.C.	Simultaneous
<a href="#">AGW20-SWITCH</a>	\$4.50	Slow-action overlay 2 N.O.	Simultaneous

## Additional Lever Arms, Spare Parts and Accessories for ABM Series

Additional Lever Arms/Spare Parts and Accessories			
Part Number	Price	Drawing Link	Actuator Type
<a href="#">AGE42-LEVER</a>	\$6.00	<a href="#">PDF</a>	Lever with stainless steel roller for E42 models (replacement lever)
<a href="#">AGE44-LEVER</a>	\$6.00	N/A	Lever with 50mm diameter rubber roller (fits E42 models)
<a href="#">AGE52-LEVER</a>	\$7.25	<a href="#">PDF</a>	Lever with stainless steel roller for E52 models (replacement lever)
<a href="#">AGE54-LEVER</a>	\$7.25	<a href="#">PDF</a>	Lever with 50mm diameter rubber roller (fits E52 models)


Note: See the Bar Charts page of this section for more information.



### Replacement actuator levers for heavy-duty IEC models

Easily-replaceable actuators for E42 and E52 model limit switches.

Note: These models have an E42 or E52 in the part number, for example, [ABM1E42Z11](#).

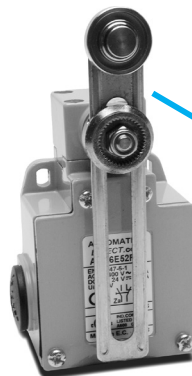

### [AGE52-LEVER](#)

(Replacement lever shown installed on [ABM5E52Z11](#) limit switch)



### [AGE54-LEVER](#)

