


DL05 I/O Specifications


D0-05DD-D **\$287.00**
Wiring diagram and specifications

| D0-05DD-D Specifications | | |
|---------------------------------------|---------------------------------------|--|
| DC Power Supply Specifications | Voltage Range | 12–24 VDC 20W max. |
| | Number of Input Pts. | 8 (sink/source) |
| | Number of Commons | 2 (isolated) |
| | Input Voltage Range | 12–24 VDC |
| | Input Impedance | (X0-X2) 1.8K @ 12–24 VDC (X3-X7) 2.8K @ 12–24 VDC |
| | On Current/ Voltage Level | >5mA/10VDC |
| | OFF Current/ Voltage Level | <0.5 mA/<2VDC |
| | Response Time | X0-X2 X3-X7 |
| | OFF to ON Response | <100µs <8ms |
| | ON to OFF Response | <100µs <8ms |
| | Fuses | None |
| DC Output Specifications | Number of Output Pts. | 6 (sinking) |
| | Number of Commons | 1 |
| | Output Voltage Range | 6–27 VDC |
| | Peak Voltage | 50VDC |
| | Max. Frequency (Y0, Y1) | 7kHz |
| | ON Voltage Drop | 0.5 VDC @ 1A |
| | Maximum Current | 0.5 A / point (Y0-Y1)* 1.0 A / point (Y2-Y5) |
| | Maximum Leakage Current | 15µ @ 30VDC |
| | Maximum Inrush Current | 2A for 100ms 10A for 10ms |
| | OFF to ON Response | <10µ |
| | ON to OFF Response | <30µs (Y0-Y1) <60µs (Y2-Y5) |
| | External DC Power Required | 20–28 VDC 150mA max. |
| | Status Indicators | Logic side |
| | Fuses | None (external recommended) |


*When output points Y0 and Y1 are not used in pulse mode, the maximum output current is 1.0 A

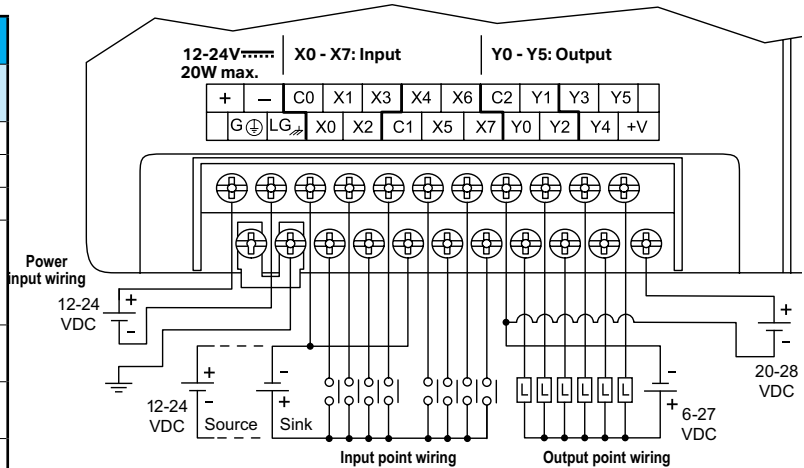


Equivalent input circuit,
high-speed inputs (X0-X2)

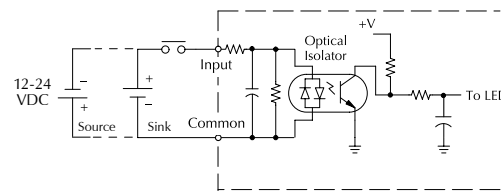


Equivalent input circuit,
standard inputs (X3-X7)

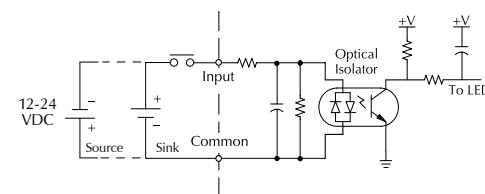


Equivalent output circuit
standard outputs (Y2-Y5)

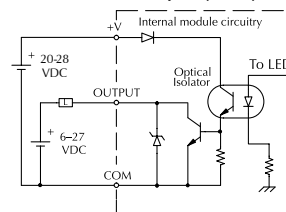

Equivalent output circuit
pulse outputs (Y0-Y1)

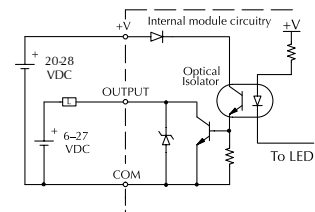

Derating chart for DC outputs

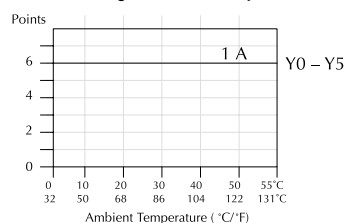

Features at a Glance

The DL05 and DL06 micro PLCs are complete self-contained systems. The CPU, power supply, and I/O are all included inside the same housing. Option modules are available to expand the capability of each PLC family for more demanding applications. The standard features of these PLCs are extraordinary and compare favorably with larger and more expensive PLCs.

The specification tables to the right are meant for quick reference only. Detailed specifications and wiring information for each model of the DL05 and DL06 PLCs can be found in those specific sections.

Program capacity

Most boolean ladder instructions require a single word of program memory. Other instructions, such as timers, counters, etc., require two or more words. Data is stored in V-memory in 16-bit registers.

Performance

The performance characteristics shown in the tables represent the amount of time required to read the inputs, solve the Relay Ladder Logic program and update the outputs.

Instructions

A complete list of instructions is available at the end of this section.

Communications

The DL05 and DL06 offer powerful communication features normally found only on more expensive PLCs.

Special features

The DC input and DC output PLCs offer high-speed counting or pulse output. Option module slots allow for discrete I/O expansion, analog I/O, or additional communication options.

DL05 CPU Specifications

System capacity

| | |
|-------------------------------------|------------------|
| Total memory available (words)..... | 6K |
| Ladder memory (words)..... | 2048 |
| V-memory (words)..... | 4096 |
| User V-memory..... | 3968 |
| Non-volatile user V-memory..... | 128 |
| Battery backup..... | Yes ¹ |
| Total built-in I/O..... | 14 |
| Inputs..... | 8 |
| Outputs..... | 6 |
| I/O expansion..... | Yes ¹ |

Performance

| | |
|--|-----------|
| Contact execution (Boolean)..... | 0.7 µs |
| Typical scan (1K Boolean) ² | 1.5-3 ms. |

Instructions and diagnostics

| | |
|---------------------------------------|----------------|
| RLL ladder style..... | Yes |
| RLLPLUS/flowchart style (Stages)..... | Yes/256 |
| Run-time editing..... | Yes |
| Supports Overrides..... | Yes |
| Scan..... | Variable/fixed |

Number of Instructions 133

Types of Instructions:

| | |
|--------------------------------|------------------|
| Control relays..... | 512 |
| Timers..... | 128 |
| Counters..... | 128 |
| Immediate I/O..... | Yes |
| Subroutines..... | Yes |
| For/next loops..... | Yes |
| Timed interrupt..... | Yes |
| Integer math..... | Yes |
| Floating-point math..... | No |
| PID..... | Yes |
| Drum sequencers..... | Yes |
| Bit of word..... | Yes |
| ASCII print..... | Yes |
| Real-time clock/calendar..... | Yes ¹ |
| Internal diagnostics..... | Yes |
| Password security..... | Yes |
| System and user error log..... | No |

Communications

Built-in ports: Two RS-232C

Protocols supported:

| | |
|--|--|
| K-sequence (proprietary protocol)..... | Yes |
| DirectNet Client/Server..... | Yes |
| Modbus RTU Client/Server..... | Yes |
| ASCII out..... | Yes |
| Baud rate..... | |
| Port 1..... | 9,600 baud (fixed) |
| Port 2..... | selectable 300-38,400 baud (default 9,600) |

Specialty Features

| | |
|-------------------------|------------------------|
| Filtered inputs..... | Yes ¹ |
| Interrupt input..... | Yes ³ |
| High speed counter..... | Yes, 5kHz ² |
| Pulse output..... | Yes, 7kHz ² |
| Pulse catch input..... | Yes ³ |

1- These features are available with use of certain option modules. Option module specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

DL06 CPU Specifications

System capacity

| | |
|---|------------------|
| Total memory available (words)..... | 14.8K |
| Ladder memory (words)..... | 7680 |
| V-memory (words)..... | 7616 |
| User V-memory..... | 7488 |
| Non-volatile user V-memory..... | 128 |
| Built-in battery backup (D2-BAT-1)..... | Yes |
| Total I/O..... | 36 |
| Inputs..... | 20 |
| Outputs..... | 16 |
| I/O expansion..... | Yes ¹ |

Performance

| | |
|--|---------|
| Contact execution (Boolean)..... | 0.6 µs |
| Typical scan (1K Boolean) ² | 1-2 ms. |

Instructions and diagnostics

| | |
|---------------------------------------|----------------|
| RLL ladder style..... | Yes |
| RLLPLUS/flowchart style (Stages)..... | Yes/1024 |
| Run-time editing..... | Yes |
| Supports Overrides..... | Yes |
| Scan..... | Variable/fixed |
| Number of Instructions..... | 229 |

Types of Instructions:

| | |
|--------------------------------|------|
| Control relays..... | 1024 |
| Timers..... | 256 |
| Counters..... | 128 |
| Immediate I/O..... | Yes |
| Subroutines..... | Yes |
| For/next loops..... | Yes |
| Table functions..... | Yes |
| Timed interrupt..... | Yes |
| Integer math..... | Yes |
| Trigonometric functions..... | Yes |
| Floating-point math..... | Yes |
| PID..... | Yes |
| Drum sequencers..... | Yes |
| Bit of word..... | Yes |
| Number type conversion..... | Yes |
| ASCII in, out, print..... | Yes |
| LCD instruction..... | Yes |
| Real-time clock/calendar..... | Yes |
| Internal diagnostics..... | Yes |
| Password security..... | Yes |
| System and user error log..... | No |

Communications

Built-in ports:

- One RS-232C
- One multi-function RS232C/RS422/RS485

NOTE: RS485 is for MODBUS RTU only.

Protocols supported:

| | |
|--|--|
| K-sequence (proprietary protocol)..... | Yes |
| DirectNet Client/Server..... | Yes |
| Modbus RTU Client/Server..... | Yes |
| ASCII in/out..... | Yes |
| Baud rate..... | |
| Port 1..... | 600 baud (fixed) |
| Port 2..... | selectable 300-38,400 baud (default 9,600) |

Specialty Features

| | |
|-------------------------|-------------------------|
| Filtered inputs..... | Yes ³ |
| Interrupt input..... | Yes ³ |
| High speed counter..... | Yes, 7kHz ² |
| Pulse output..... | Yes, 10kHz ² |
| Pulse catch input..... | Yes ³ |

1- These features are available with use of certain option module. Option module specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

tDL5-4


Product Dimensions and Installation

It is important to understand the installation requirements for your DL05 or DL06 system. Your knowledge of these requirements will help ensure that your system operates within its environmental and electrical limits.

Plan for safety

This catalog should never be used as a replacement for the user manual. You can purchase, download free, or view online the user manuals for these products. The [D0-USER-M](#) is the publication for the DL05 PLCs, and the [D0-06USER-M](#) is the publication for the DL06 PLCs. The [D0-OPTIONS-M](#) is the user manual for the option modules. These user manuals contain important safety information that must be followed. The system installation should comply with all appropriate electrical codes and standards.



Unit dimensions and

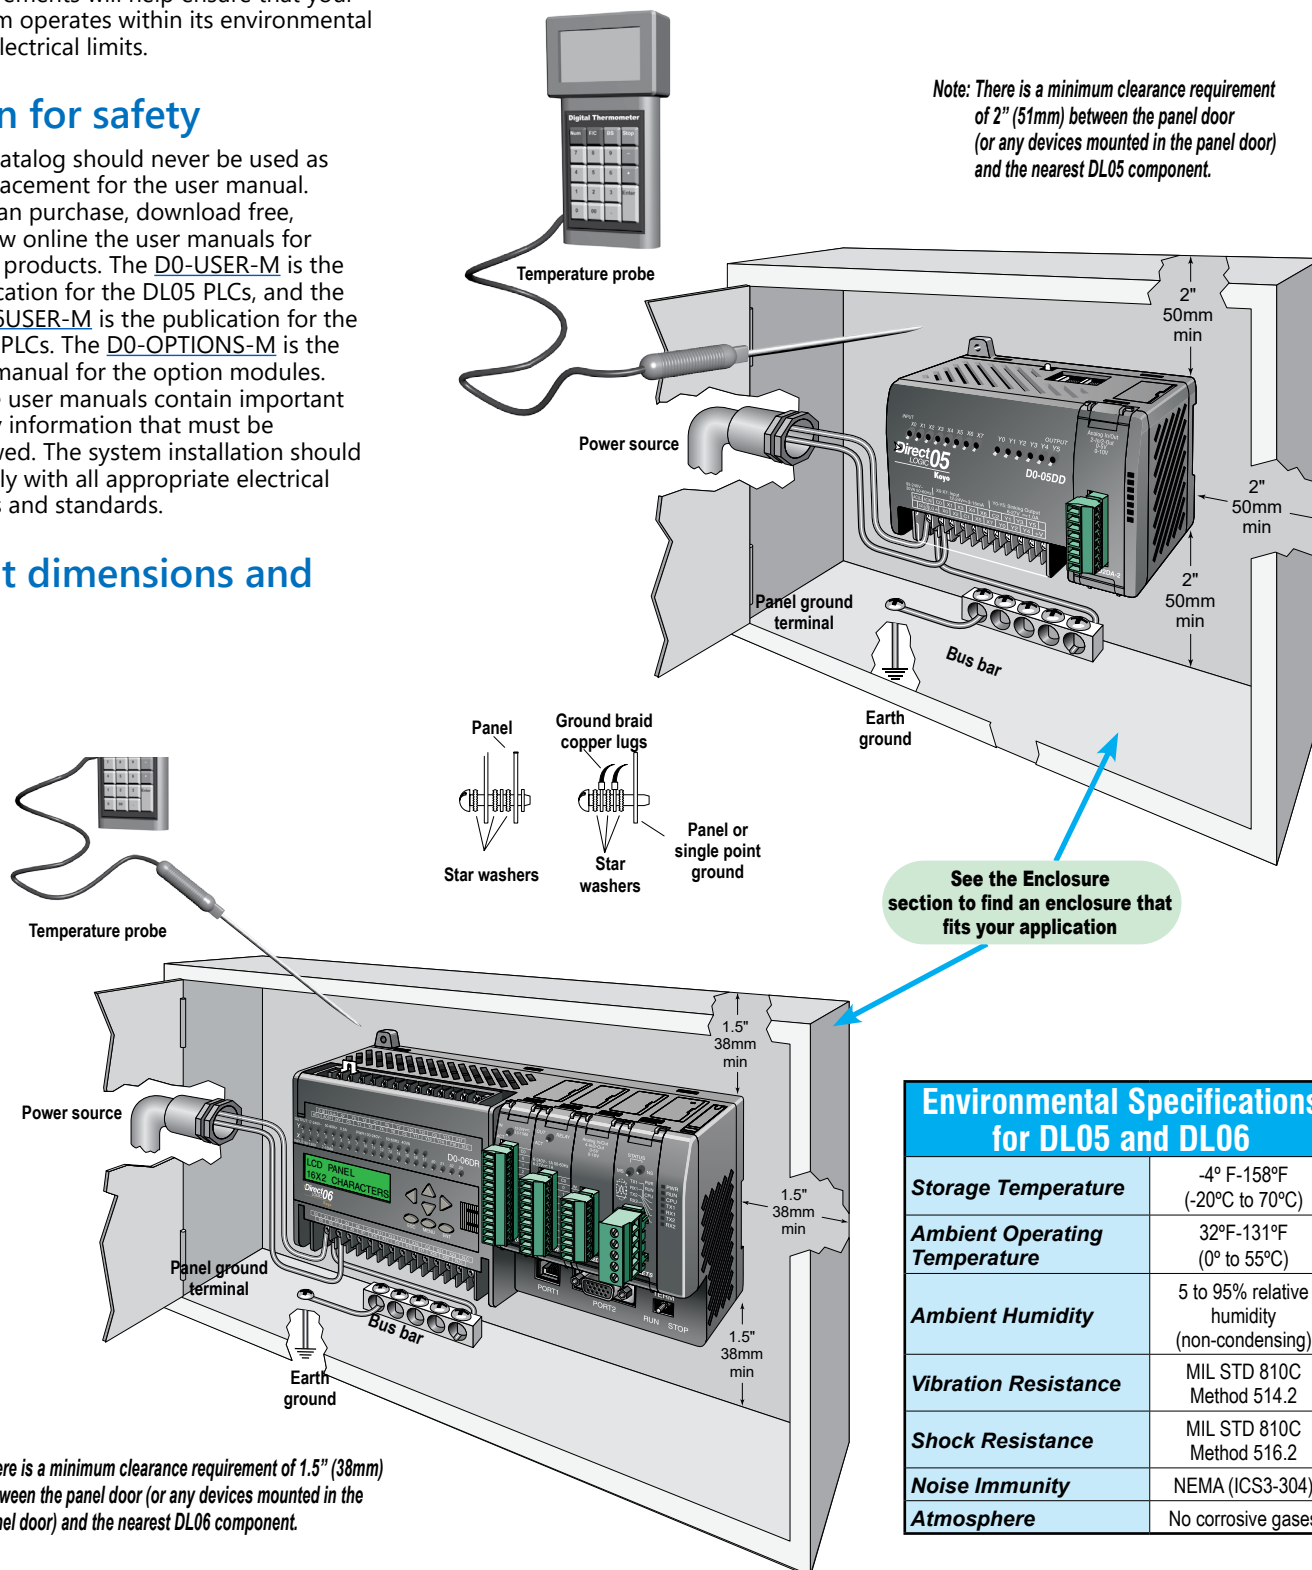




Product Dimensions and Installation

Mounting Orientation



DL05 and DL06 PLCs must be mounted properly to ensure ample airflow for cooling purposes. It is important to follow the unit orientation requirements and to verify that the PLC's dimensions are compatible with your application. Notice particularly the grounding requirements and the recommended cabinet clearances.

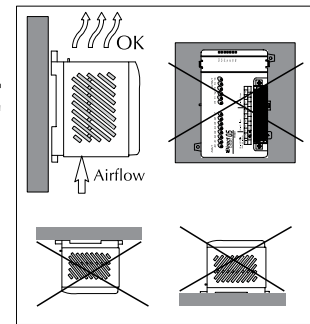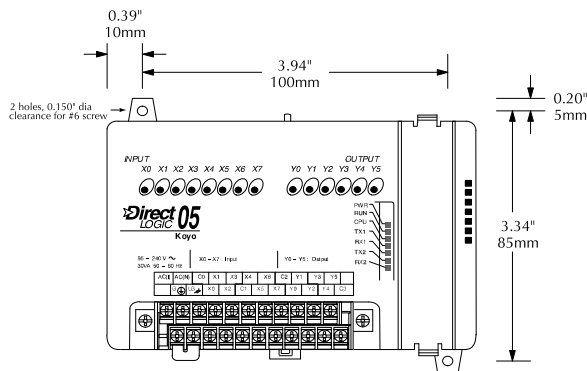

Mounting orientation

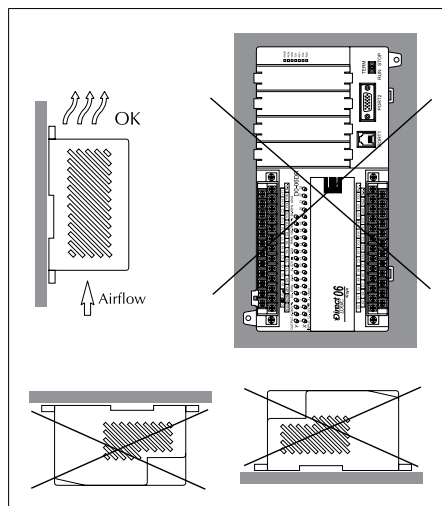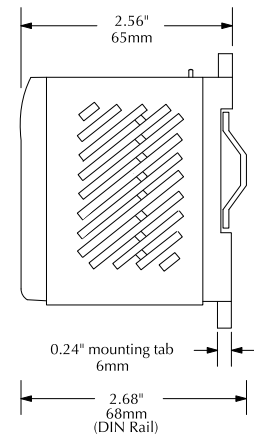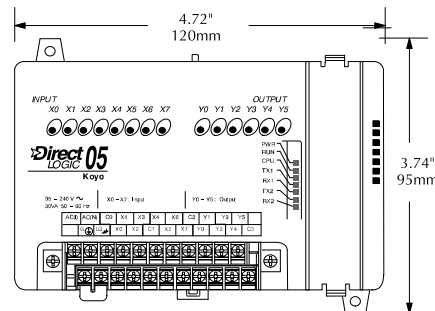

Mounting orientation

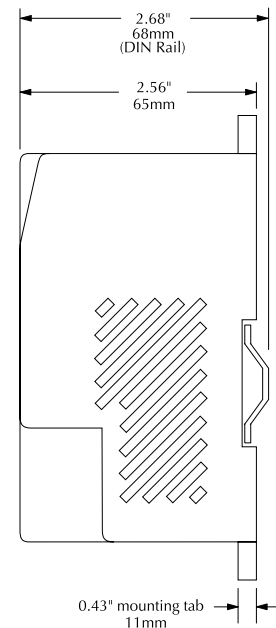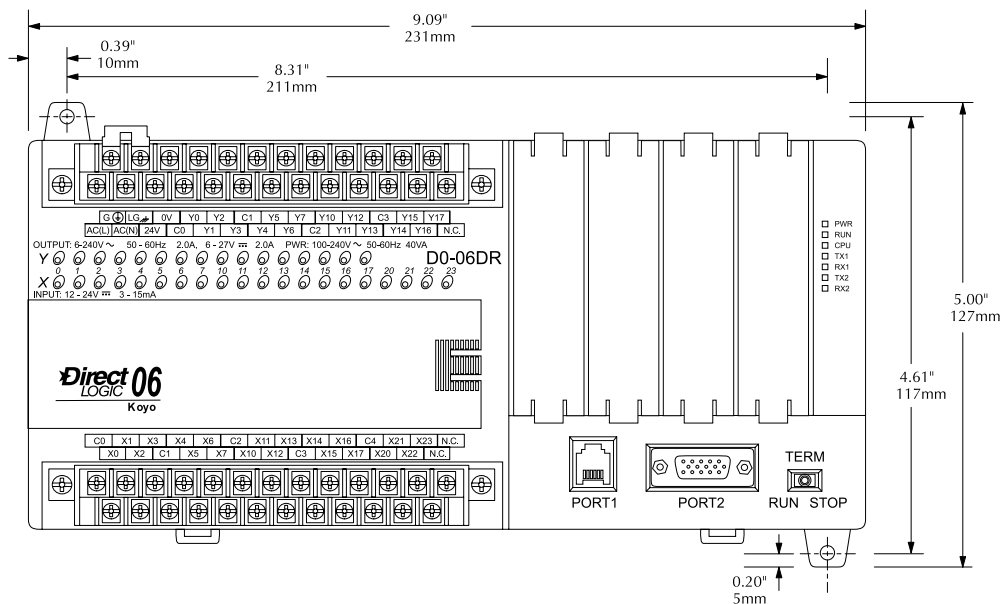

Ports, Status Indicators, and Modes

Port 1


Port 1 is a 6-pin, fixed configuration port and has the same pin assignments on the DL05 and the DL06. Please refer to the table and diagrams on this page. This port can be used to connect to an HPP, DirectSOFT, an operator interface, or other external device. Features include:

- 9600 baud
- 8 data bits
- Odd parity
- 1 start bit, 1 stop bit
- Station address of 1
- Asynchronous, half-duplex, DTE


Protocols supported (as Server):

- K sequence, **DirectNET**, Modbus RTU


| DL05 & DL06 Port 1 Pin Descriptions | | |
|-------------------------------------|-----|----------------------------|
| 1 | 0V | Power (-) connection (GND) |
| 2 | 5V | Power (+) connection |
| 3 | RXD | Receive data (RS-232C) |
| 4 | TXD | Transmit data (RS-232C) |
| 5 | 5V | Power (+) connection |
| 6 | 0V | Power (-) connection (GND) |

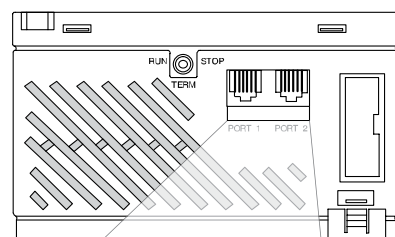


DL05



6-pin Female Modular Connector

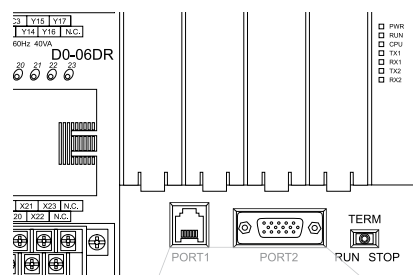

DL06

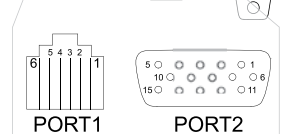

6-pin Female Modular Connector

15-pin Female D-sub Connector

Port 2

Port 2 is a configurable port on both the DL05 and the DL06 PLCs. The DL05 PLC uses a 6-pin modular connector and offers RS-232 communications only. The DL06 PLC uses a 15-pin HD-sub connector and offers RS-232, RS-422, or RS-485 communications. Please refer to the table and diagrams on this page for more information. This port can be used to connect to an HPP, DirectSOFT, an operator interface, or other external device. Features of port 2 include:

- 300, 600, 1200, 2400, 4800, 9600 (default), 19,200, 38,400 baud
 - 8 data bits
 - Odd (default), even, or no parity
 - 1 start bit, 1 stop bit
 - Station address: 1 (default)
 - 1-90 DirectNET, K sequence
 - 1-247 Modbus RTU
 - Asynchronous, half-duplex, DTE
- Protocols supported:
- K sequence (Server), **DirectNET** (Client/Server), Modbus (Client/Server)

| DL05 Port 2 Pin Descriptions | | |
|------------------------------|-----|----------------------------|
| 1 | 0V | Power (-) connection (GND) |
| 2 | 5V | Power (+) connection |
| 3 | RXD | Receive data (RS-232C) |
| 4 | TXD | Transmit data (RS-232C) |
| 5 | RTS | Ready to send |
| 6 | 0V | Power (-) connection (GND) |

| DL06 Port 2 Pin Descriptions | | |
|------------------------------|------|--------------------------------|
| 1 | 5V | Power (+) connection |
| 2 | TXD | Transmit data (RS-232C) |
| 3 | RXD | Receive data (RS-232C) |
| 4 | RTS | Ready to send (RS232C) |
| 5 | CTS | Clear to send (RS232C) |
| 6 | RXD- | Receive data (-) (RS-422/485) |
| 7 | 0V | Power (-) connection (GND) |
| 8 | 0V | Power (-) connection (GND) |
| 9 | TXD+ | Transmit data (+) (RS-422/485) |
| 10 | TXD- | Transmit data (-) (RS-422/485) |
| 11 | RTS+ | Ready to send (+) (RS-422/485) |
| 12 | RTS- | Ready to send (-) (RS-422/485) |
| 13 | RXD+ | Receive data (+) (RS-422/485) |
| 14 | CTS+ | Clear to send (+) (RS-422/485) |
| 15 | CTS- | Clear to send (-) (RS-422/485) |


DL05 and DL06 status indicators

| Status Indicators | | |
|-------------------|--------|--|
| Indicator | Status | Meaning |
| PWR | ON | Power good |
| | OFF | Power failure |
| RUN | ON | CPU is in Run Mode |
| | OFF | CPU is in Stop or Program Mode |
| CPU | ON | CPU self diagnostics error |
| | OFF | CPU self diagnostics good |
| TX1 | ON | Data is being transmitted by the CPU-Port 1 |
| | OFF | No data is being transmitted by the CPU-Port 1 |
| RX1 | ON | Data is being received by the CPU-Port 1 |
| | OFF | No data is being received by the CPU-Port 1 |
| TX2 | ON | Data is being transmitted by the CPU-Port 2 |
| | OFF | No data is being transmitted by the CPU-Port 2 |
| RX2 | ON | Data is being received by the CPU-Port 2 |
| | OFF | No data is being received by the CPU-Port 2 |

DL05 and DL06 mode switches

| Mode Switch Position | CPU Action |
|--------------------------|--|
| RUN (Run Program) | CPU is forced into the RUN mode if no errors are encountered. No program changes are allowed by the programming/monitoring device. |
| TERM (Terminal) | RUN PROGRAM and the TEST modes are available. Mode and program changes are allowed by the programming/monitoring device. |
| STOP | CPU is forced into the STOP mode. No changes are allowed by the programming/monitoring device. |

Use the optional low profile 15-pin adapter to make option module wiring easier.

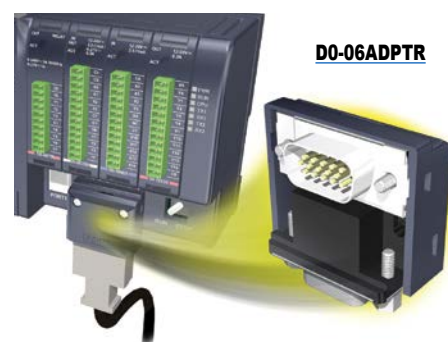

DL05 / DL06 PLCs

tDL5-10