



Fan Heaters for Enclosures, DIN Rail and Screw Mounted



027009-00 and 027019-00



028009-01 and 028109-01



028009-00 and 028109-00

Applications

The fan heaters are designed to prevent the formation of condensation and ensure an evenly distributed interior air temperature in enclosures. The heater is connected using the internal terminal connectors. The desired temperature can be set and maintained by the integrated thermostat (where available) or external thermostat and the high-performance axial fan provides forced air circulation. The heater design minimizes side surface temperatures of the housing. The small size of these heaters makes them ideal for use in enclosures where space is at a premium.

Features

- Compact fan heater
- Quiet operation
- Heating power adjusts to ambient temperature
- Integrated adjustable thermostat (027009-00 and 027019-00)
- DIN rail mountable
- Screw mount available (028009-00, 028009-01, 028109-00 and 028109-01)



Fan Heaters (DIN Rail and Screw Mounted) Specifications			
Model	027009-00 and 027019-00	028009-00 and 028109-00	028009-01 and 028109-01
Heating Element	PTC Resistor - Temperature limiting		
Overheat protection	Built-in temperature limiter		
Axial Fan, Ball Bearing	Service life 50,000h at 77°F (25°C)	Service life 40,000 h at 104°F (40°C)	
Connection	2-pole terminal 14 AWG max. (2.5 mm ²), torque 0.8 Nm max.		
Housing	Plastic, UL 94V-0, light gray	Plastic, UL 94V-0, black	
Function Control Light	LED	N/A	N/A
Mounting	Clip for 35 mm DIN rail, EN 60715		Screw mount
Mounting Position	Vertical (exhaust up)		
Recommended Mounting Distance	1.97 in. (50 mm) sides and bottom 3.94 in. (100 mm) above		
Operating/Storage Temperature	-49° to 158°F (-45° to 70°C)		
Protection Class	II (double insulated)		
Protection Type	IP20		
Approvals	CE, UL Recognized File No. E204590, RoHS compliant	CE, UL Recognized File No. E150057, RoHS compliant	

Part Number	Price	Heating capacity ¹	Operating Voltage	Max. current (inrush)	Air flow, free blowing	Thermostat range	Weight (approx.)
		(@ 60 Hz)					
027009-00	\$143.75	550 W	100-120 VAC, 50/60 Hz	14.0 A	20 cfm (35 m ³ /h)	32° to 140°F	2.0 lbs. (907 g)
027019-00	\$160.25	650 W		15.0 A	26 cfm (45 m ³ /h)		2.4 lbs. (1088 g)
028009-00	\$86.75	150 W		6.0 A	8 cfm (13.8 m ³ /h)	N/A	0.66 lb (300 g)
028009-01	\$86.75			N/A			
028109-00	\$110.00	400 W		9.0 A	32 cfm (54 m ³ /h)	N/A	1.1 lb (500 g)
028109-01	\$110.00					N/A	

¹ At 68°F (20°C) ambient temperature


Fan Heaters for Enclosures, DIN Rail and Screw Mounted (continued)

Dimensions:

- Company Information
- Terminal Blocks
- Power Distribution Blocks
- Wiring Accessories
- ZIPLink Connection System
- Multi-wire Connectors
- Sensor Cables and Connectors
- M12 Junction Blocks
- Panel Interface Connectors
- Wiring Duct
- Cable Ties
- Wire
- Flexible Cord
- Multi-conductor Flex Cable
- Data Cables
- Wire Management Products
- Power Supplies
- DC Converters
- Transformers and Filters
- Circuit Protection
- Tools
- Test Equipment
- Enclosures
- Enclosure Climate Control
- Safety: Electrical Components
- Safety: Protective Wear
- Terms and Conditions


027009-0 and 0270019-00

Inches [mm]

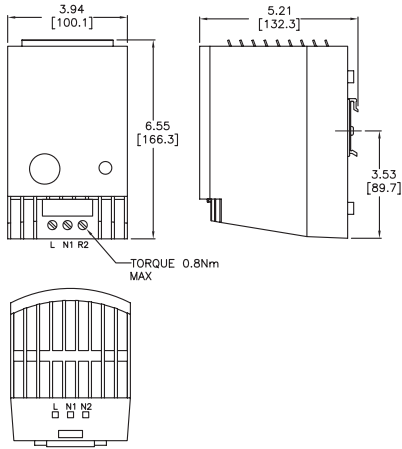


028009-00

Inches [mm]

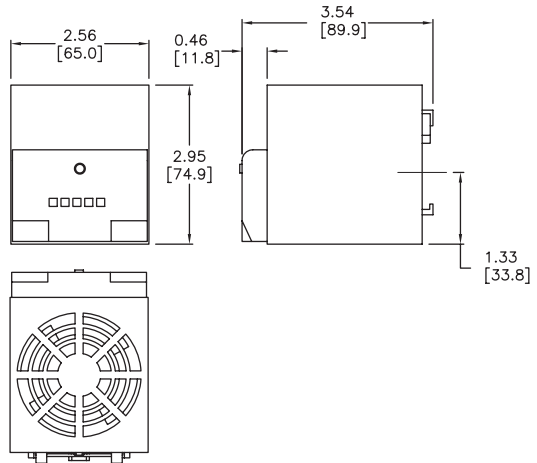


028009-01

Inches [mm]

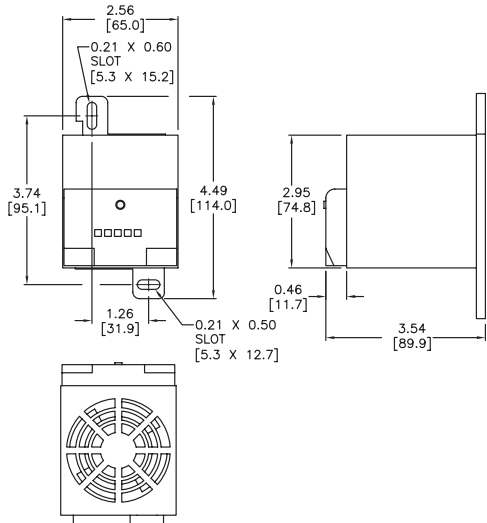


028109-00

Inches [mm]

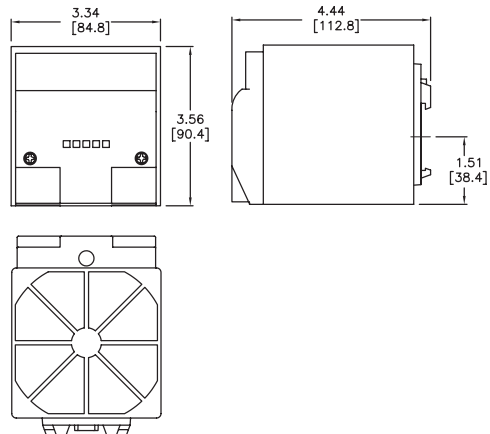


028109-01

Inches [mm]

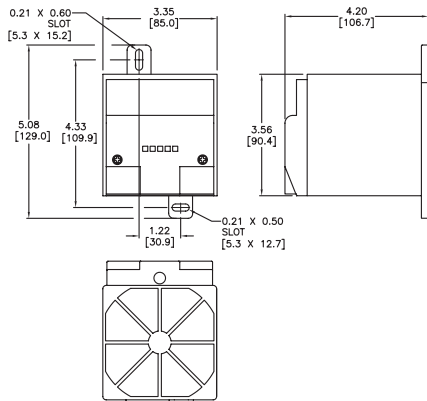


Wiring Diagrams

027009-00 and 027019-00



Wiring note: Only connect the L and N1 terminals - N2 is not used and Grounding is not required.

028009-00, 028009-01, 028109-00 and 028109-01





Fan Heaters for Enclosures, Panel or DIN Rail Mounted

Applications

The fan heaters are designed to prevent the formation of condensation and ensure an evenly distributed interior air temperature in enclosures. These fan heaters include an integrated thermostat for temperature control. These models were designed as a stationary unit to be mounted on the panel or DIN rail.

Features

- Compact fan heater
- Quiet operation
- Integrated adjustable thermostat
- Built-in overheat protection
- Double insulated plastic housing
- Panel or DIN rail mounting



130599-00



130609-00

Part Number	Price	Weight (approx.)
130599-00	\$189.75	3.1 lbs (1.4 kg)
130609-00	\$229.25	2.6 lbs (1.2 kg)


Fan Heaters (Panel or DIN Rail Mounted) Specifications		
Model	130599-00	130609-00
Heating Element	High-performance cartridge	PTC Resistor - Temperature limiting
Overheat protection	Built-in temperature limiter	
Heating Capacity ¹	950W	1200W
Operating Voltage	100-120 VAC, 50/60 Hz	
Max. Current (Inrush)	N/A	16.0A
Air Flow (free blowing)	94 cfm (160 m ³ /h)	
Thermostat Range	32° to 140°F (0° to 60°C)	
Axial Fan, Ball Bearing	Service life 50,000 h at 77°F (25°C)	
Connection	2-pole terminal 14 AWG max. (2.5 mm ²), with strain relief, clamping torque 0.8 Nm max.	
Housing	Plastic, UL 94V-0, black	
Mounting	Clip for 35 mm DIN rail, EN 60715 or M6 screws (not included)	
Mounting Position	Vertical (exhaust up)	
Recommended Mounting Distance	1.97 in. (50 mm) sides and bottom 3.94 in. (100 mm) above	
Operating/Storage Temperature	-49° to 158°F (-45° to 70°C)	
Protection Class	II (double insulated)	
Protection Type	IP20	
Approvals	CE, UL Recognized File No. E234324, RoHS compliant	CE, UL Recognized File No. E150057, RoHS compliant

¹ At 68°F (20°C) ambient temperature

Dimensions:


130599-00

Inches [mm]

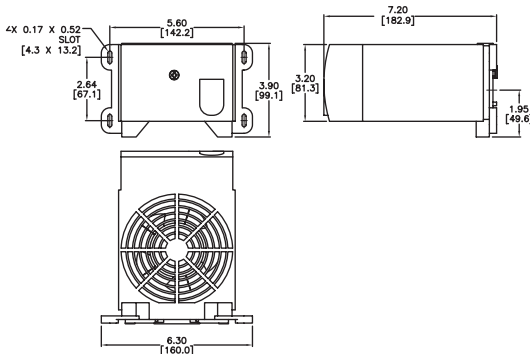


130609-00

Inches [mm]

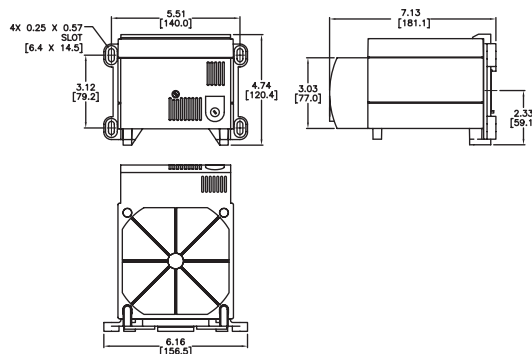

Wiring Diagram



Industrial strength heating options for your enclosure from AutomationDirect

Thermostats

- Compact design
- Fixed set point or wide adjustment ranges
- Color coded modules and temperature dials
- N.C. / N.O. in one unit (Part Numbers 011630-00, 011640-00, 011720-00 and 011720-01)
- Separate adjustable temperatures (Part Numbers 011720-00 and 011720-01)
- 35mm DIN rail mounting
- CE, UL Recognized, RoHS compliant



Hygrostats and Hygrotherms

Electronic hygrostats sense the relative humidity in an enclosure and turn on a heater at the setpoint to prevent the formation of condensation in the enclosure. Electronic hygrotherms sense the ambient temperature and relative air humidity to turn a connected device on or off according to setpoints.



Heaters

- Compact design
- Quiet operation
- Low surface temperatures (convection heaters)
- Double insulated protection
- 35mm DIN rail and panel mounting options
- CE, UL Recognized, RoHS compliant



- Company Information
- Terminal Blocks
- Power Distribution Blocks
- Wiring Accessories
- ZIPLink Connection System
- Multi-wire Connectors
- Sensor Cables and Connectors
- M12 Junction Blocks
- Panel Interface Connectors
- Wiring Duct
- Cable Ties
- Wire
- Flexible Cord
- Multi-conductor Flex Cable
- Data Cables
- Wire Management Products
- Power Supplies
- DC Converters
- Transformers and Filters
- Circuit Protection
- Tools
- Test Equipment
- Enclosures
- Enclosure Climate Control
- Safety: Electrical Components
- Safety: Protective Wear
- Terms and Conditions

Enclosure Heating and Heater Selection

Why Heat an Enclosure?

Today's miniaturization of enclosure components results in high packing densities, which in turn results in higher temperatures within the enclosure. These high temperatures are harmful to electronic components. In response, cooling systems have become standard in many applications. However, just as critical and widely underestimated, are failures caused by the formation of moisture.

Under certain climatic conditions, moisture can build up not only in outdoor or poorly insulated enclosures, but also in highly protected and well-sealed enclosures.

Moisture and Failure

Moisture, especially when combined with aggressive gases and dust, causes atmospheric corrosion and can result in the failure of components such as circuit breakers, busbars, relays, integrated circuit boards and transformers. The greatest danger lies in conditions where electronic equipment is exposed to relatively high air humidity or extreme variations in temperature, such as day-and-night operation or outdoor installation. Failure of components in such cases is usually caused by changing contact resistances, flashovers, creepage currents or reduced insulation properties.

Eliminate Moisture

Moisture and corrosion will remain low if relative air humidity stays below 60%. However, relative humidity above 65% will significantly increase moisture and corrosion problems. This can be prevented by keeping the environment inside an enclosure at a temperature as little as 9°F (5°C) higher than that of the ambient air. Constant temperatures are a necessity to guarantee optimal operating conditions. Continuous temperature changes not only create condensation but they reduce the life expectancy of electronic components significantly. Electronic components can be protected by cooling during the day and heating at night.

Thermal Management

Modern enclosure heaters are designed to protect against condensation. They heat the air inside enclosures, preventing water vapor from condensing on components while providing the greatest possible air circulation and low energy consumption.

Other heating element technology improvements include:

- Longer operating life
- Greater energy efficiencies
- Quick wiring options
- Easier mounting

Heater Location

Ideally, most heaters will perform optimally when mounted near the bottom of an enclosure and used in conjunction with a separate controller such as a thermostat and/or hygostat. With the controller located in an area of the cabinet that is representative of the average temperature or humidity requirement, the heater should then be placed in a position near the bottom but not directly beneath the controller. This placement will ensure that the controller is not influenced by direct heat from the heater.

Heater Calculation

Follow Steps 1-5 to determine the heating requirement of an enclosure (US units - left column, metric - right)

STEP 1: Determine the Surface Area (A) of your enclosure which is exposed to open air.

Enclosure Dimensions:

height = _____ feet _____ meters

width = _____ feet _____ meters

depth = _____ feet _____ meters

Choose Mounting Option from next page, and calculate the surface area as indicated

$$A = \text{_____ ft}^2 \text{ or } \text{_____ m}^2$$

STEP 2: Choose the Heat Transmission Coefficient (k) for your enclosure's material of construction.

painted steel = 0.511 W/(ft²•K) 5.5 W/(m²•K)

stainless steel = 0.344 W/(ft²•K) 3.7 W/(m²•K)

aluminum = 1.115 W/(ft²•K) 12 W/(m²•K)

plastic or insulated

stainless = 0.325 W/(ft²•K) 3.5 W/(m²•K)

$$k = \text{_____ W/(ft}^2\text{•K)} \text{ or } \text{_____ W/(m}^2\text{•K)}$$

STEP 3: Determine the Temperature Differential (ΔT).

A. Desired enclosure interior temp. = _____ °F _____ °C

B. Lowest ambient (outside) temp. = _____ °F _____ °C

Subtract B from A = Temp. diff. (ΔT) = _____ °F _____ °C

For these calculations, ΔT must be in degrees Kelvin (K). Therefore, divide ΔT (°F) by 1.8. ΔT = _____ K

STEP 4: Determine Heating Power (P_V), if any (generated from existing components, i.e. transformer).

$$P_V = \text{_____ W} \text{ or } \text{_____ W}$$

STEP 5: Calculate the Required Heating Power (P_H) for your enclosure based on the above values.

If enclosure is located inside:


$$P_H = (A \times k \times \Delta T) - P_V = \text{_____ W}$$

If enclosure is located outside:


$$P_H = 2 \times (A \times k \times \Delta T) - P_V = \text{_____ W}$$

Enclosure Mounting Types and Surface Area Calculations


1. Free-Standing



$$\text{Area (A)} = 1.8 (H \times W) + 1.8 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.8 (H \times W) + 1.4 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.8 (H \times W) + (H \times D) + 1.8 (W \times D)$$


2. Wall-Mounted



$$\text{Area (A)} = 1.4 (H \times W) + 1.8 (H \times D) + 1.8 (W \times D)$$




$$\text{Area (A)} = 1.4 (H \times W) + 1.4 (H \times D) + 1.8 (W \times D)$$

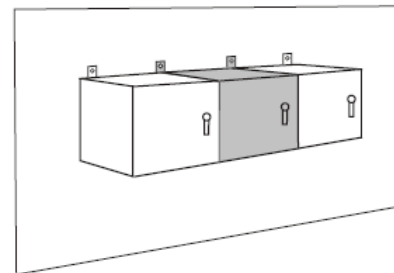


$$\text{Area (A)} = 1.4 (H \times W) + (H \times D) + 1.8 (W \times D)$$


3. Ground

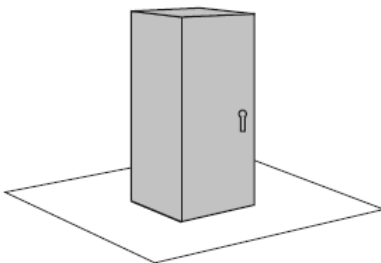

$$\text{Area (A)} = 1.8 (H \times W) + 1.8 (H \times D) + 1.4 (W \times D)$$

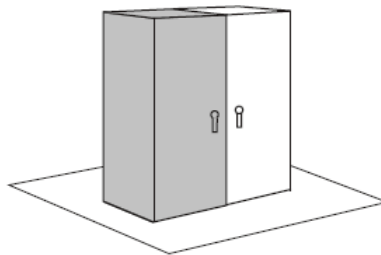


$$\text{Area (A)} = 1.8 (H \times W) + 1.4 (H \times D) + 1.4 (W \times D)$$

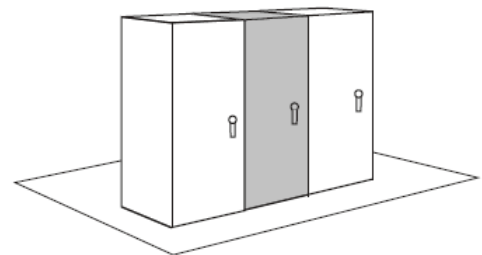


$$\text{Area (A)} = 1.8 (H \times W) + (H \times D) + 1.4 (W \times D)$$


4. Ground and Wall



$$\text{Area (A)} = 1.4 (H \times W) + 1.8 (H \times D) + 1.4 (W \times D)$$



$$\text{Area (A)} = 1.4 (H \times W) + 1.4 (H \times D) + 1.4 (W \times D)$$

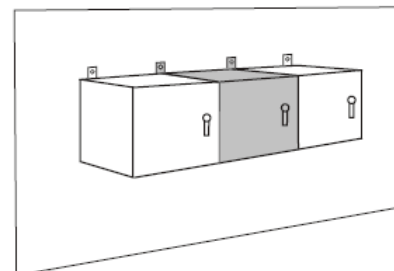

$$\text{Area (A)} = 1.4 (H \times W) + (H \times D) + 1.4 (W \times D)$$

Company Information

Terminal Blocks

Power Distribution Blocks

Wiring Accessories

ZIPLink Connection System

Multi-wire Connectors

Sensor Cables and Connectors

M12 Junction Blocks

Panel Interface Connectors

Wiring Duct

Cable Ties

Wire

Flexible Cord

Multi-conductor Flex Cable

Data Cables

Wire Management Products

Power Supplies

DC Converters

Transformers and Filters

Circuit Protection

Tools

Test Equipment

Enclosures

Enclosure Climate Control

Safety: Electrical Components

Safety: Protective Wear

Terms and Conditions