

# 3P Series Molded Case Circuit Breakers

## Overview

### Overview

Designed to provide branch and feeder circuit protection in industrial control panels, this line of Molded Case Circuit Breakers supplies protection against overload in conductors and short circuit in connected equipment such as motors. They are UL listed for installation in UL 508 control panels. Their small size, in relation to standard circuit breakers or other comparable devices, saves panel space. Four frame sizes and all standard accessories are available.

### Features

- UL489 listed performance for branch circuit overcurrent protection and disconnecting means
- Patented contact conductor designs featuring high-speed "blow-open" action, providing superior performance when high level fault currents produce extra-ordinary electromechanical forces
- Advanced arc extinguishing technology
- Toggle handle provides three positions (on/off/tripped) along with visual indicators
- Manufactured in ISO 9000 certified facilities
- HACR (heating, air conditioning and refrigeration) rated
- G-Frame and F-Frame breakers are suitable for reverse feed
- K-Frame and L-Frame breakers include 3-pole adjustable magnetic trip.

### Listings

- UL 489 MCCB, File: E7819
- Field-installed accessories: UL file E64983
- CSA 22.2 No.5, File: 43556
- IEC 157-1
- NEMA Standards Pub. No. AB1-1993



Manufactured by Eaton Corporation

*Note: These parts available for sale to North American locations only.*

### Molded Case Circuit Breakers Technical Specifications

| Circuit Breaker Type | Ampere Rating at 40°C | No. Poles | Volts |     | Type of Trip* | Federal Specification W-C-375b | UL 489 Interrupting Ratings (rms Symmetrical Amperes) (kA) |     |     |          |
|----------------------|-----------------------|-----------|-------|-----|---------------|--------------------------------|------------------------------------------------------------|-----|-----|----------|
|                      |                       |           | AC    | DC  |               |                                | Volts AC (50/60 Hz)                                        |     |     | Volts DC |
|                      |                       |           |       |     |               |                                | 240                                                        | 480 | 600 | 250**    |
| G-Frame              | 15 -100               | 3         | 480   | 250 | N.I.T.U       | 13b                            | 65                                                         | 22  | –   | 10       |
| F-Frame              | 60 - 225              | 3         | 600   | 250 | N.I.T.U       | 22a                            | 65                                                         | 35  | 18  | 10       |
| K-Frame              | 250 - 400             | 3         | 600   | 250 | I.T.U         | 23a                            | 65                                                         | 35  | 25  | 10       |
| L-Frame              | 400 - 600             | 3         | 600   | 250 | I.T.U         | 23a                            | 65                                                         | 35  | 25  | 22       |

\*Note: N.I.T.U denotes non-interchangeable trip unit. I.T.U denotes interchangeable trip unit.

\*\*Note: For DC or 1-phase AC applications, use the two outside poles of the 3-pole circuit breaker

### Molded Case Circuit Breakers Part Numbering System

G 3P - 020 - AUX

Accessory Description Code  
AUX: auxiliary contact  
STAC: shunt trip AC  
STDC: shunt trip DC

UVAC: undervoltage release  
UVDC: undervoltage release

Amp Rating

3 Pole

Molded Case Circuit Breaker Series (by frame size)  
G: 15 to 100 Amp      F: 60 to 225 Amp  
K: 250 to 400 Amp    L: 400 to 600 Amp

# 3P Series Molded Case Circuit Breakers

## 250-400 Amp K-Frame

K-Frame circuit breakers are available as individual components or in a kit. Breaker frame includes 3-pole adjustable magnetic trip. Available

accessories are field installable on this frame size. All breakers include base mounting hardware for panel mount applications.

| K-Frame Series Three Pole Molded Case Circuit Breakers |            |                                                                                                          |                                    |               |                                      |                               |
|--------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------|------------------------------------|---------------|--------------------------------------|-------------------------------|
| Part Number                                            | Price      | Description                                                                                              | Kits                               | Ampere Rating | Voltage                              | Interrupt Capacity            |
| <a href="#">K3P-250</a>                                | \$1,832.00 | Molded case circuit breaker with adjustable thermal magnetic trip; line and load lug terminals included. | MCCB only                          | 250           | 240VAC<br>480VAC<br>600VAC<br>250VDC | 65kA<br>35kA<br>25kA<br>10kA* |
| <a href="#">K3P-250-AUX</a>                            | \$2,110.00 |                                                                                                          | Kit includes K3P-250 and A1X3PK    |               |                                      |                               |
| <a href="#">K3P-250-STAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-250 and SNT3P11K  |               |                                      |                               |
| <a href="#">K3P-250-STDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-250 and SNT3P04K  |               |                                      |                               |
| <a href="#">K3P-250-UVAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-250 and UVH3LP08K |               |                                      |                               |
| <a href="#">K3P-250-UVDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-250 and UVH3LP21K |               |                                      |                               |
| <a href="#">K3P-300</a>                                | \$1,832.00 | Molded case circuit breaker with adjustable thermal magnetic trip; line and load lug terminals included. | MCCB only                          | 300           |                                      |                               |
| <a href="#">K3P-300-AUX</a>                            | \$2,110.00 |                                                                                                          | Kit includes K3P-300 and A1X3PK    |               |                                      |                               |
| <a href="#">K3P-300-STAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-300 and SNT3P11K  |               |                                      |                               |
| <a href="#">K3P-300-STDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-300 and SNT3P04K  |               |                                      |                               |
| <a href="#">K3P-300-UVAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-300 and UVH3LP08K |               |                                      |                               |
| <a href="#">K3P-300-UVDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-300 and UVH3LP21K |               |                                      |                               |
| <a href="#">K3P-350</a>                                | \$1,832.00 | Molded case circuit breaker with adjustable thermal magnetic trip; line and load lug terminals included. | MCCB only                          | 350           |                                      |                               |
| <a href="#">K3P-350-AUX</a>                            | \$2,110.00 |                                                                                                          | Kit includes K3P-350 and A1X3PK    |               |                                      |                               |
| <a href="#">K3P-350-STAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-350 and SNT3P11K  |               |                                      |                               |
| <a href="#">K3P-350-STDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-350 and SNT3P04K  |               |                                      |                               |
| <a href="#">K3P-350-UVAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-350 and UVH3LP08K |               |                                      |                               |
| <a href="#">K3P-350-UVDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-350 and UVH3LP21K |               |                                      |                               |
| <a href="#">K3P-400</a>                                | \$1,832.00 | Molded case circuit breaker with adjustable thermal magnetic trip; line and load lug terminals included. | MCCB only                          | 400           |                                      |                               |
| <a href="#">K3P-400-AUX</a>                            | \$2,110.00 |                                                                                                          | Kit includes K3P-400 and A1X3PK    |               |                                      |                               |
| <a href="#">K3P-400-STAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-400 and SNT3P11K  |               |                                      |                               |
| <a href="#">K3P-400-STDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-400 and SNT3P04K  |               |                                      |                               |
| <a href="#">K3P-400-UVAC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-400 and UVH3LP08K |               |                                      |                               |
| <a href="#">K3P-400-UVDC</a>                           | \$2,068.00 |                                                                                                          | Kit includes K3P-400 and UVH3LP21K |               |                                      |                               |

\*Note: For DC or 1-phase AC applications, use the two outside poles of the 3-pole circuit breaker

| K-Frame Accessory Selection Guide |          |                                                                                                 |
|-----------------------------------|----------|-------------------------------------------------------------------------------------------------|
| Part Number                       | Price    | Description                                                                                     |
| <a href="#">KHMVD12B</a>          | \$175.00 | NEMA 1/12 rotary handle for K-Frame. Position indicating. Lock-off feature. Shaft length: 12"   |
| <a href="#">HM3R12X</a>           | \$212.00 | NEMA 4/4X rotary handle for K-Frame. Position indicating. Lock-off feature. Shaft length: 12"   |
| <a href="#">HM3R24X</a>           | \$237.00 | NEMA 4/4X rotary handle for K-Frame. Position indicating. Lock-off feature. Shaft length: 24"   |
| <a href="#">F3S03C</a>            | \$631.00 | NEMA 1/12 flexible shaft cable operator for K-Frame. Flange Mounted. Lockable. Cable length: 3' |
| <a href="#">F3S06C</a>            | \$662.00 | NEMA 1/12 flexible shaft cable operator for K-Frame. Flange Mounted. Lockable. Cable length: 6' |
| <a href="#">A1X3PK</a>            | \$310.00 | Field installable auxiliary contact for K-Frame MCCB, SPDT, 18" pigtail leads                   |
| <a href="#">SNT3P11K</a>          | \$481.00 | Field installable 110 - 240 VAC / 110 - 125 VDC shunt trip for K-Frame, 18" pigtail leads       |
| <a href="#">SNT3P04K</a>          | \$481.00 | Field installable 12/24 VDC / VAC shunt trip for K-Frame, 18" pigtail leads                     |
| <a href="#">3TA401K</a>           | \$135.00 | Replacement lug kit for K-Frame. Package of 3                                                   |
| <a href="#">UVH3LP08K</a>         | \$481.00 | Field installable 110 - 127 VAC undervoltage release for K-Frame, 18" pigtail leads             |
| <a href="#">UVH3LP21K</a>         | \$481.00 | Field installable 24 VDC undervoltage release for K-Frame, 18" pigtail leads                    |

Note: See 3P Series Molded Case Circuit Breakers Accessories catalog pages for accessory electrical specifications.

| AWG Wire Range Specifications |               |           |                |                                   |
|-------------------------------|---------------|-----------|----------------|-----------------------------------|
| Circuit Breaker               | Ampere Rating | Wire Type | AWG Wire Range | Metric Wire Range mm <sup>2</sup> |
| K-Frame                       | 250 - 350     | Cu/Al     | 250 - 500 (1)  | 120 - 240                         |
|                               | 400           |           | 3/0 - 250 (2)  | 95 - 120                          |



[K3P-400](#)



[KHMVD12B](#)



[F3S03C](#)



[A1X3PK](#)



[SNT3P04K](#)




[3TA401K](#)



[UVH3LP08K](#)

# 3P Series Molded Case Circuit Breakers

## 250-400 Amp K-Frame

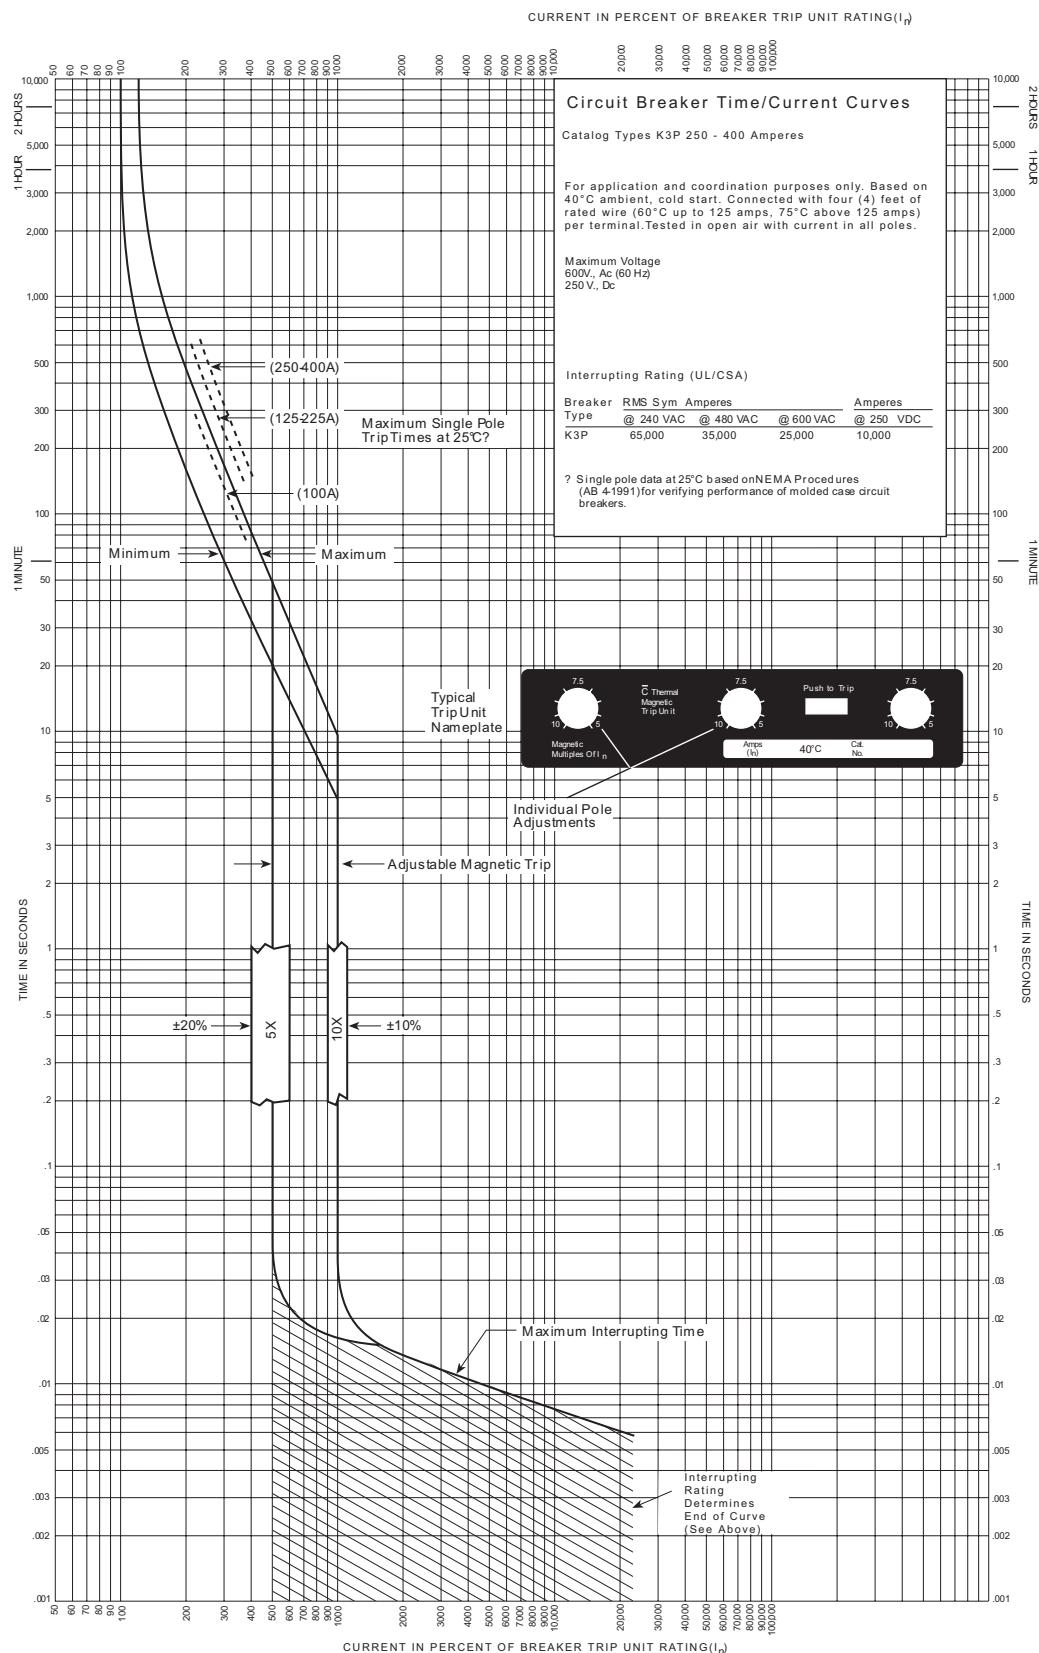


# 3P Series Molded Case Circuit Breakers

## Dimensions


### Dimensions

mm [inches]

#### 250 - 400 Amp K-Frame

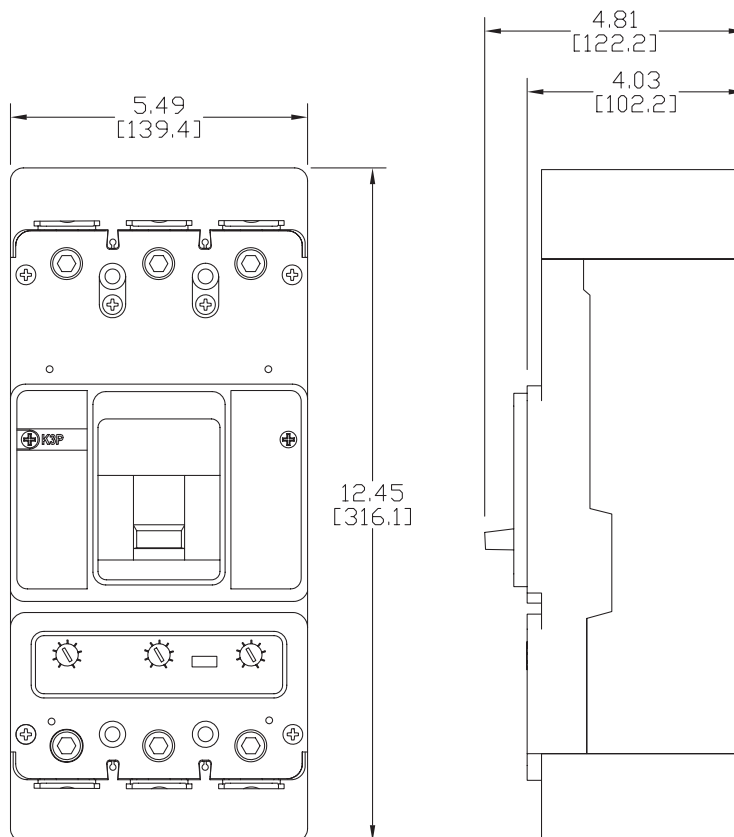

#### 400 - 600 Amp L-Frame

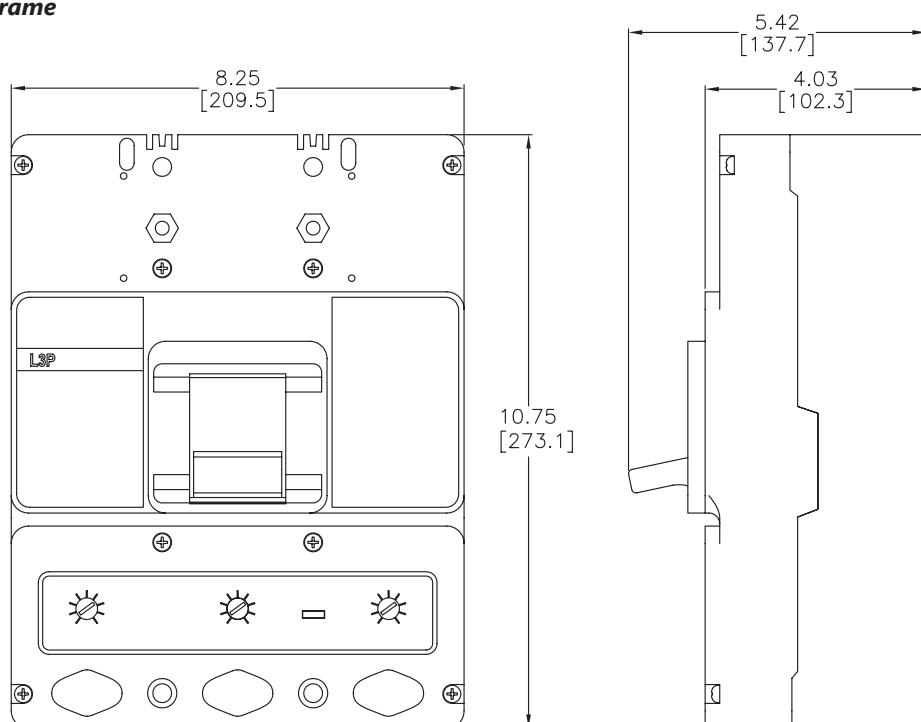


# 3P Series Molded Case Circuit Breakers

## Accessories


### Field Mountable Accessories



**GHMVD12B**

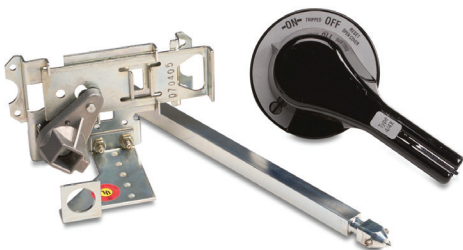

**HM1R12X**

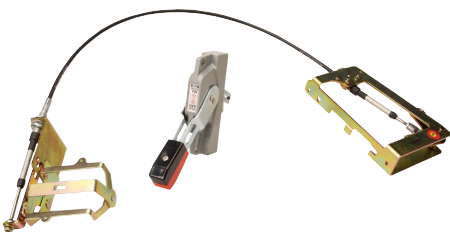

**F0S03C**

### Rotary Handles

A rotary handle is available for each frame size of molded case circuit breaker.

The C-Series rotary handle (HM) is available for F, K, & L frame molded case breakers. These robust and durable handles include the following features:

- Suitable for use with NEMA 4/4X enclosures
- Handle, shaft, and mechanism made from all metal parts
- Large handle easily accommodates gloves
- Heavy Duty Metal locking hasp
- Door interlock and defeater
- Standard ON/OFF/Trip markings and a 45-degree rotation
- UL 489, CSA

The Universal rotary series handles (HMV) is available for G, F, K, & L frame molded case breakers. These handles include the following features:

- Suitable for use with NEMA 1/12 enclosures
- Composite Nylon handle with metal shaft, and mechanism
- Large handle easily accommodates gloves
- Access Handle Lock-Off by pressing arrow on handle insert
- Door interlock and defeater
- Global ON/OFF markings (I/ON, O/OFF) and TRIP indication on handle plus 90-degree rotation
- UL 489, IEC 947-1/-2, CSA

### Rotary Handle Accessory Selection Guide

| Part Number                     | Price    | Description                                                                   |
|---------------------------------|----------|-------------------------------------------------------------------------------|
| <a href="#"><b>GHMVD06B</b></a> | \$110.00 | NEMA 1/12 black rotary handle for G-Frame MCCB. Shaft length: 6in [152.4 mm]  |
| <a href="#"><b>GHMVD12B</b></a> | \$123.00 | NEMA 1/12 black rotary handle for G-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>FHMVD12B</b></a> | \$123.00 | NEMA 1/12 black rotary handle for F-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM1R12X</b></a>  | \$173.00 | NEMA 4/4X black rotary handle for F-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM1R24X</b></a>  | \$194.00 | NEMA 4/4X black rotary handle for F-Frame MCCB. Shaft length: 24in [609.6 mm] |
| <a href="#"><b>KHMVD12B</b></a> | \$175.00 | NEMA 1/12 black rotary handle for K-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM3R12X</b></a>  | \$212.00 | NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM3R24X</b></a>  | \$237.00 | NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 24in [609.6 mm] |
| <a href="#"><b>LHMVD12B</b></a> | \$202.00 | NEMA 1/12 black rotary handle for L-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM4R12X</b></a>  | \$276.00 | NEMA 4/4X black rotary handle for L-Frame MCCB. Shaft length: 12in [304.8 mm] |
| <a href="#"><b>HM4R24X</b></a>  | \$292.00 | NEMA 4/4X black rotary handle for L-Frame MCCB. Shaft length: 24in [609.6 mm] |

### Flex Shaft™ Flexible Handle

Meeting crucial time limits for shutdown procedures is easier with an externally mounted handle. The flexible handle makes it possible to operate the circuit breaker externally and can be used in enclosures of varying depths and heights. It can be used with NEMA 1, NEMA 3R and NEMA 12 enclosures, and it accepts up to three padlock shackles. Each item includes a painted steel handle, breaker operating mechanism, and cable.

*Note: A minimum bending radius of four inches is necessary for proper operation.*

### Flex Shaft™ Flexible Handle Accessory Selection Guide

| Part Number                   | Price    | Description                                                                      |
|-------------------------------|----------|----------------------------------------------------------------------------------|
| <a href="#"><b>F0S03C</b></a> | \$473.00 | NEMA 1/12 flex shaft cable operator for G-Frame MCCB. Cable length: 3ft [0.91 m] |
| <a href="#"><b>F0S06C</b></a> | \$529.00 | NEMA 1/12 flex shaft cable operator for G-Frame MCCB. Cable length: 6ft [1.83 m] |
| <a href="#"><b>F1S03C</b></a> | \$529.00 | NEMA 1/12 flex shaft cable operator for F-Frame MCCB. Cable length: 3ft [0.91 m] |
| <a href="#"><b>F1S06C</b></a> | \$573.00 | NEMA 1/12 flex shaft cable operator for F-Frame MCCB. Cable length: 6ft [1.83 m] |
| <a href="#"><b>F3S03C</b></a> | \$631.00 | NEMA 1/12 flex shaft cable operator for K-Frame MCCB. Cable length: 3ft [0.91 m] |
| <a href="#"><b>F3S06C</b></a> | \$662.00 | NEMA 1/12 flex shaft cable operator for K-Frame MCCB. Cable length: 6ft [1.83 m] |
| <a href="#"><b>F4S04C</b></a> | \$721.00 | NEMA 1/12 flex shaft cable operator for L-Frame MCCB. Cable length: 4ft [1.22 m] |
| <a href="#"><b>F4S06C</b></a> | \$829.00 | NEMA 1/12 flex shaft cable operator for L-Frame MCCB. Cable length: 6ft [1.83 m] |

# 3P Series Molded Case Circuit Breakers

## Accessories

**F0S03HP**

### High Performance Flex Shaft™ Flange Handles

These two-position flange handles feature external front mounting. Models are available for NEMA 1/3R/12 and 4/4X enclosures and for G-frame, F-frame, K-frame or L-frame model MCCBs. All models are lockable in the OFF position and are defeatable. The Flex Shaft handle will accept up to three padlock shackles, each with a maximum diameter of 0.375 in [9.5 mm]. Each item includes a high-strength nylon handle, breaker operating mechanism, and cable.

### Flange Handle Accessory Selection Guide


| Part Number                     | Price    | Description                                                                |
|---------------------------------|----------|----------------------------------------------------------------------------|
| <a href="#"><u>F0S03HP</u></a>  | \$309.00 | 3ft [0.91 m] cable length, NEMA 1/3R/12. For use with G-frame model MCCBs. |
| <a href="#"><u>F0S06HP</u></a>  | \$352.00 | 6ft [1.83 m] cable length, NEMA 1/3R/12. For use with G-frame model MCCBs. |
| <a href="#"><u>F1S03HP</u></a>  | \$352.00 | 3ft [0.91 m] cable length, NEMA 1/3R/12. For use with F-frame model MCCBs. |
| <a href="#"><u>F1S06HP</u></a>  | \$379.00 | 6ft [1.83 m] cable length, NEMA 1/3R/12. For use with F-frame model MCCBs. |
| <a href="#"><u>F3S03HP</u></a>  | \$429.00 | 3ft [0.91 m] cable length, NEMA 1/3R/12. For use with K-frame model MCCBs. |
| <a href="#"><u>F3S06HP</u></a>  | \$450.00 | 6ft [1.83 m] cable length, NEMA 1/3R/12. For use with K-frame model MCCBs. |
| <a href="#"><u>F4S04HP</u></a>  | \$504.00 | 4ft [1.22 m] cable length, NEMA 1/3R/12. For use with L-frame model MCCBs. |
| <a href="#"><u>F4S06HP</u></a>  | \$580.00 | 6ft [1.83 m] cable length, NEMA 1/3R/12. For use with L-frame model MCCBs. |
| <a href="#"><u>F0S03HPX</u></a> | \$340.00 | 3ft [0.91 m] cable length, NEMA 4/4X. For use with G-frame model MCCBs.    |
| <a href="#"><u>F0S06HPX</u></a> | \$387.00 | 6ft [1.83 m] cable length, NEMA 4/4X. For use with G-frame model MCCBs.    |
| <a href="#"><u>F1S03HPX</u></a> | \$387.00 | 3ft [0.91 m] cable length, NEMA 4/4X. For use with F-frame model MCCBs.    |
| <a href="#"><u>F1S06HPX</u></a> | \$418.00 | 6ft [1.83 m] cable length, NEMA 4/4X. For use with F-frame model MCCBs.    |
| <a href="#"><u>F3S03HPX</u></a> | \$473.00 | 3ft [0.91 m] cable length, NEMA 4/4X. For use with K-frame model MCCBs.    |
| <a href="#"><u>F3S06HPX</u></a> | \$496.00 | 6ft [1.83 m] cable length, NEMA 4/4X. For use with K-frame model MCCBs.    |
| <a href="#"><u>F4S04HPX</u></a> | \$543.00 | 4ft [1.22 m] cable length, NEMA 4/4X. For use with L-frame model MCCBs.    |
| <a href="#"><u>F4S06HPX</u></a> | \$625.00 | 6ft [1.83 m] cable length, NEMA 4/4X. For use with L-frame model MCCBs.    |

**Note:** A minimum bending radius of four inches is necessary for proper operation.

# 3P Series Molded Case Circuit Breakers

## Accessories

### Field Mountable Accessories

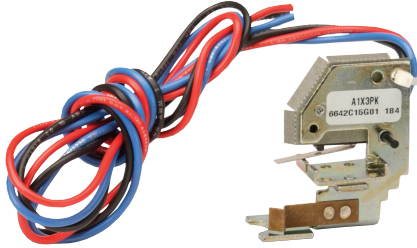

A1X3PK

#### Auxiliary Contact

The auxiliary contact provides circuit breaker contact status information by monitoring the position of the molded cross bar which contains the moving contact arms. The auxiliary switch is used for remote indication and interlock system verification, and consists of one SPDT switch housed in a plug-in module. Each SPDT switch has one 'a' and one 'b' contact. When the circuit breaker contacts are open, the 'a' contact is open and the 'b' contact is closed.

**Note:** Field installable auxiliary contacts are not available for the G and F frame breakers.

For G and F frame auxiliary contacts, order breakers with -AUX as part of the part number. Please see G and F-frame sections for available selections.

#### Auxiliary Contact Accessory Selection Guide

| Part Number            | Price    | Description                                                                   |
|------------------------|----------|-------------------------------------------------------------------------------|
| <a href="#">A1X3PK</a> | \$310.00 | Field installable auxiliary contact for K-Frame MCCB, SPDT, 18" pigtail leads |
| <a href="#">A1X4PK</a> | \$318.00 | Field installable auxiliary contact for L-Frame MCCB, SPDT, 18" pigtail leads |


#### K-Frame Electrical Ratings <sup>1,2</sup>

|                                 | Max Volts | Frequency | Max Amperes       | Dielectric Withstand Voltage | Notes                                                                                                                                                      |
|---------------------------------|-----------|-----------|-------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>K-Frame Auxiliary Switch</b> | 600       | 50/60 Hz  | 6                 | 2500                         | 1. Endurance: 5000 electrical operations plus 1000 mechanical operations.<br>2. Pigtail wire size: 18 AWG (0.82 mm <sup>2</sup> )<br>3. Non-inductive load |
|                                 | 125       | DC        | 0.50 <sup>3</sup> |                              |                                                                                                                                                            |
|                                 | 250       | DC        | 0.25 <sup>3</sup> |                              |                                                                                                                                                            |

#### L-Frame Electrical Ratings <sup>1,2</sup>

|                                 | Max Volts | Frequency | Max Amperes       | Dielectric Withstand Voltage | Notes                                                                                                                                                      |
|---------------------------------|-----------|-----------|-------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>L-Frame Auxiliary Switch</b> | 600       | 50/60 Hz  | 6                 | 2500                         | 1. Endurance: 5000 electrical operations plus 1000 mechanical operations.<br>2. Pigtail wire size: 18 AWG (0.82 mm <sup>2</sup> )<br>3. Non-inductive load |
|                                 | 125       | DC        | 0.50 <sup>3</sup> |                              |                                                                                                                                                            |
|                                 | 250       | DC        | 0.25 <sup>3</sup> |                              |                                                                                                                                                            |

#### Undervoltage Release



UVH3LP21K

This product monitors a voltage (typically a line voltage) and trips the circuit breaker when the voltage falls to between 70% and 35% of the solenoid coil rating. It consists of a continuous rated solenoid, with a plunger and tripping lever mounted in a plug-in module.

**Note:** The undervoltage release is a pre-installed accessory on G-Frame and F-Frame breakers.

#### Undervoltage Release Accessory Selection Guide

| Part Number               | Price    | Description                                                           |
|---------------------------|----------|-----------------------------------------------------------------------|
| <a href="#">UVH3LP08K</a> | \$481.00 | Field installable 110 - 127 VAC undervoltage release for K-Frame MCCB |
| <a href="#">UVH4LP08K</a> | \$513.00 | Field installable 110 - 127 VAC undervoltage release for L-Frame MCCB |
| <a href="#">UVH3LP21K</a> | \$481.00 | Field installable 24 VDC undervoltage release for K-Frame MCCB        |
| <a href="#">UVH4LP21K</a> | \$550.00 | Field installable 24 VDC undervoltage release for L-Frame MCCB        |

| <b>K-Frame Undervoltage Release Mechanism</b> | Supply Voltage       | Dropout Voltage |      | Pickup Voltage | VA  | Notes                                                                                    |
|-----------------------------------------------|----------------------|-----------------|------|----------------|-----|------------------------------------------------------------------------------------------|
|                                               |                      | Min             | Max  | Max            |     |                                                                                          |
|                                               | 24 VDC               | 8.4             | 16.8 | 20.4           | 3.1 | 1. Endurance: 5000 electrical operations plus 1000 mechanical operations.<br>2. 50/60 Hz |
|                                               | 110 VAC <sup>2</sup> |                 |      |                | 1.8 |                                                                                          |
|                                               | 120 VAC <sup>2</sup> | 44.5            | 77.0 | 93.5           | 2.1 |                                                                                          |
|                                               | 127 VAC <sup>2</sup> |                 |      |                | 2.4 |                                                                                          |

| <b>L-Frame Undervoltage Release Mechanism</b> | Supply Voltage       | Dropout Voltage |      | Pickup Voltage | VA  | Notes                                                                                    |
|-----------------------------------------------|----------------------|-----------------|------|----------------|-----|------------------------------------------------------------------------------------------|
|                                               |                      | Min             | Max  | Max            |     |                                                                                          |
|                                               | 24 VDC               | 8.4             | 16.8 | 20.4           | 3.1 | 1. Endurance: 5000 electrical operations plus 1000 mechanical operations.<br>2. 50/60 Hz |
|                                               | 110 VAC <sup>2</sup> |                 |      |                | 1.8 |                                                                                          |
|                                               | 120 VAC <sup>2</sup> | 44.5            | 77.0 | 93.5           | 2.1 |                                                                                          |
|                                               | 127 VAC <sup>2</sup> |                 |      |                | 2.4 |                                                                                          |

# 3P Series Molded Case Circuit Breakers

## Accessories

### Field Mountable Accessories

#### Shunt Trip

The Shunt Trip provides remote controlled tripping of the circuit breaker. Consisting of an intermittent rated solenoid with a tripping plunger and a cutoff switch assembled to a plug-in module, shunt trip coils are designed to be applied at specific AC or DC voltages.



**SNT3P04K**

#### Shunt Trip Accessory Selection Guide

| Part Number      | Price    | Description                                                              |
|------------------|----------|--------------------------------------------------------------------------|
| <b>SNT3P11K</b>  | \$481.00 | Field installable 110/240 VAC / 110/125 VDC shunt trip for K-Frame MCCB. |
| <b>SNT4RP11K</b> | \$550.00 | Field installable 110/240 VAC shunt trip for L-Frame MCCB                |
| <b>SNT3P04K</b>  | \$481.00 | Field installable 12/24 VAC/DC shunt trip for K-Frame MCCB               |
| <b>SNT4RP03K</b> | \$550.00 | Field installable 12/24 VAC/DC shunt trip for L-Frame MCCB               |

| K-Frame<br>Shunt<br>Trip | Supply<br>Voltage | Min<br>Operating<br>Voltage | VA  | Supply<br>Voltage | Min<br>Operating<br>Voltage | VA  | Notes                                                                                                                                                                                         |
|--------------------------|-------------------|-----------------------------|-----|-------------------|-----------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | VAC 50/60 Hz      |                             |     | VDC               |                             |     | <div>1. Endurance: 5000 electrical operations plus 1000 mechanical operations.</div> <div>2. Approx. unlatching time: 6 ms<br/>Approx. total circuit breaker contact opening time: 8 ms</div> |
|                          | 12                | 9                           | 45  | 12                | 8.4                         | 35  |                                                                                                                                                                                               |
|                          | 24                |                             | 200 | 24                |                             | 170 |                                                                                                                                                                                               |
|                          | 110               | 60                          | 100 | 110               | 77                          | 110 |                                                                                                                                                                                               |
|                          | 120               |                             | 120 | 120               | 77                          | 130 |                                                                                                                                                                                               |
|                          | 127               |                             | 140 | 125               | 77                          | 140 |                                                                                                                                                                                               |
|                          | 208               |                             | 420 | —                 | —                           | —   |                                                                                                                                                                                               |
|                          | 220               |                             | 470 | —                 | —                           | —   |                                                                                                                                                                                               |
|                          | 240               |                             | 550 | —                 | —                           | —   |                                                                                                                                                                                               |

| L-Frame<br>Shunt<br>Trip | Supply<br>Voltage | Min<br>Operating<br>Voltage | VA  | Supply<br>Voltage | Min<br>Operating<br>Voltage | VA  | Notes                                                                                                                                                                                                                  |
|--------------------------|-------------------|-----------------------------|-----|-------------------|-----------------------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | VAC 50/60 Hz      |                             |     | VDC               |                             |     | <div>1. Endurance: 5000<br/>electrical operations<br/>plus 1000 mechanical<br/>operations.</div> <div>2. Approx. unlatching<br/>time: 6 ms<br/>Approx. total circuit<br/>breaker contact opening<br/>time: 18 ms</div> |
|                          | 12                | 9                           | 45  | 12                | 9                           | 35  |                                                                                                                                                                                                                        |
|                          | 24                |                             | 200 | 24                |                             | 170 |                                                                                                                                                                                                                        |
|                          | 110               | 60                          | 100 | —                 | —                           | —   |                                                                                                                                                                                                                        |
|                          | 120               |                             | 120 | —                 | —                           | —   |                                                                                                                                                                                                                        |
|                          | 127               |                             | 140 | —                 | —                           | —   |                                                                                                                                                                                                                        |
|                          | 208               |                             | 420 | —                 | —                           | —   |                                                                                                                                                                                                                        |
|                          | 220               |                             | 470 | —                 | —                           | —   |                                                                                                                                                                                                                        |
|                          | 240               |                             | 550 | —                 | —                           | —   |                                                                                                                                                                                                                        |

# 3P Series Molded Case Circuit Breakers

## Accessories


### Field Mountable Accessories

#### Six-wire Connector

This is a field installable multi-wire connector which allows six wires to be connected to the load side (OFF) end terminals. It is used to distribute the load from the circuit breaker to multiple devices without the use of separate distribution terminal blocks. UL listed for copper only as used on the load side (OFF) end. Includes mounting hardware, insulators and tin-plated aluminum connectors.

#### Six-wire Connector Accessory Selection Guide

| Part Number                      | Price   | Description                                                 |
|----------------------------------|---------|-------------------------------------------------------------|
| <a href="#"><u>3TA100G6K</u></a> | \$87.00 | For G-Frame MCCBs. Pkg. of 3. Wire size: 14 - 6 AWG, copper |
| <a href="#"><u>3TA150F6K</u></a> | \$87.00 | For F-Frame MCCBs. Pkg. of 3. Wire size: 14 - 6 AWG, copper |

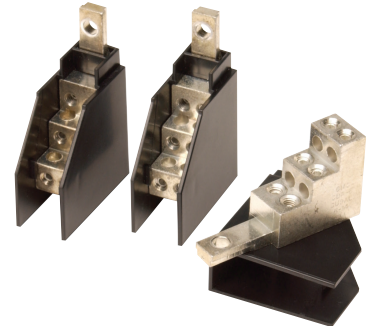

[3TA100G6K](#)

#### Multi-Wire Box Type Wiring Lug

These multi-wire lugs allow for cost and space savings within a panel and allow for improved short-circuit ratings by eliminating the need for power distribution blocks. Designed for load-side mounting. Choose for G-frame, F-frame, or K-frame model MCCBs. Mounting hardware and insulators included. Package of 3.

#### Multi-Wire Box Type Wiring Lug Selection Guide

| Part Number                      | Price    | Description                                                                  |
|----------------------------------|----------|------------------------------------------------------------------------------|
| <a href="#"><u>3TA100G3K</u></a> | \$72.00  | 100A, 3 openings, #14-2 AWG copper only. For use with G-frame model MCCBs.   |
| <a href="#"><u>3TA150F3K</u></a> | \$80.00  | 225A, 3 openings, #14-2 AWG copper only. For use with F-frame model MCCBs.   |
| <a href="#"><u>3TA400K3K</u></a> | \$161.00 | 400A, 3 openings, #14-2/0 AWG copper only. For use with K-frame model MCCBs. |
| <a href="#"><u>3TA400K6K</u></a> | \$161.00 | 400A, 6 openings, #14-3 AWG copper only. For use with K-frame model MCCBs.   |



[3TA100G3K](#)


#### Replacement Lug Kit

Line and load terminals provide wire connecting capabilities for specific ranges of continuous current ratings and wire types. Replacement lugs will accept wire types Cu/Al as standard.

#### Replacement Lug Kit Accessory Selection Guide

| Part Number                      | Price    | Description                                                                                                                                                      |
|----------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#"><u>3TA225FD</u></a>  | \$129.00 | Replacement lug kit for F-Frame MCCB. Wire range (1) #4-4/0 (25-95 mm²). Package of (3) terminals.                                                               |
| <a href="#"><u>3TA401K</u></a>   | \$135.00 | Replacement lug kit for K-Frame MCCB. Wire range (2) 2/0-250 kcmil or (1) 2/0-500 kcmil (70-240 mm²). 3-pole kit (one terminal per pole and one terminal cover). |
| <a href="#"><u>3TA603LDK</u></a> | \$166.00 | Replacement lug kit for L-Frame MCCB. 3-pole kit (one terminal per pole and one terminal cover). Wire range 400-500 AWG (185-240 mm²), 2 conductors.             |

Note: G-frame terminals are factory-installed only. No replacement terminals available.

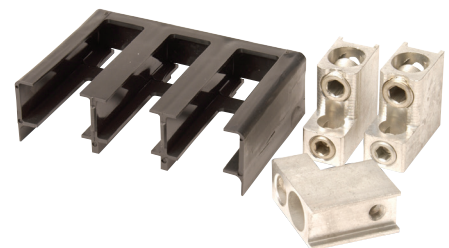

[3TA401K](#)

#### Din Rail Mounting Clip

#### Din Rail Mount Clip Accessory Selection Guide

| Part Number                 | Price   | Description                                                                       |
|-----------------------------|---------|-----------------------------------------------------------------------------------|
| <a href="#"><u>GDIN</u></a> | \$15.00 | Clip for mounting G-Frame to 35 mm Din rail. Mounting hardware included. Pkg of 1 |



[GDIN](#)

# 3P Series Molded Case Circuit Breakers

## Accessories

### Field Mountable Accessories

#### NEMA 12 Safety Door Hardware

Type C361 door interlocking safety handle kits are designed for use with AutomationDirect 3P series MCCBs and flexible handle when mounted in an SDN12, or equivalent, enclosure. These handles secure the SDN12 enclosure, protecting against unauthorized entry while the MCCB is in the ON position. Use them on enclosures with right-side flanges only and material thickness from 16 gauge through 3/16 in. All mounting hardware is included for enclosures up to 40in [101.6 cm] tall. The addition of the C361KR roller kit is necessary for enclosures taller than 40in [101.6 cm] that require a 3-point latch. See SDN12 Enclosures section for enclosure specifications.

| Safety Door Hardware Selection Guide |          |                                                                                                                                                                                                                                    |
|--------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part Number                          | Price    | Description                                                                                                                                                                                                                        |
| <b><u>C361KJ4</u></b>                | \$360.00 | Handle length: 4in [10.16 cm]. Mounting hardware included for enclosures up to 40in [101.6 cm] tall. For taller enclosures that require a 3-point latch, the C361KR (purchase separately) will also be needed.                     |
| <b><u>C361KJ6</u></b>                | \$378.00 | Handle length: 6in [15.24 cm]. Mounting hardware included for enclosures up to 40in [101.6 cm] tall. For taller enclosures that require a 3-point latch, the C361KR (purchase separately) will also be needed.                     |
| <b><u>C361KR</u></b>                 | \$77.00  | Door interlocking safety roller kit for use with the C361KJ4 and C361KJ6 safety handle kits when the SDN12 series enclosure is taller than 40in [101.6 cm] and 3-point latching is required. Kit includes roller and all hardware. |

*Note: The 1/4" x 1/2" standard mill rectangular locking bar is not supplied with these kits. The bar is supplied with the enclosures.*



Safety Handle shown on enclosure