

# GSD4 Series DC Drives

## GSD4 Introduction



GSD4-24x-xC



GSD4-240-10N4X

GSD4 Series DC Drives	
Motor Rating Range @ 24/36 VAC <sub>IN</sub>	1/50 – 1/6 hp
Motor Rating Range @ 120/240 VAC <sub>IN</sub>	1/50 – 2 hp

## Overview

IronHorse GSD4 series DC drives provide cost efficient, reliable control for permanent magnet, shunt wound, and universal motors. The drives incorporate up-to-date design and engineering in a compact package.

Installation and field adjustments are facilitated using a barrier type terminal strip and large, easily adjustable trim pots to adjust horsepower ranges.

The GSD4-24A-5C model operates on a low input voltage of 24/36 VAC with an output of 1/50 – 1/6 hp.

Standard features include an inhibit circuit for start-stop operation, and 1% speed regulation over a 50:1 speed range. Dual voltage 120/240 VAC or 24/36 VAC models are available.

Long life and quality are assured by 100% full load testing.

## Features

- Dual input voltage 120/240 VAC or 24/36 VAC, 50/60Hz
- Adjustable horsepower settings
- Barrier terminal strip
- Full-wave bridge supply
- 1% speed regulation with armature voltage feedback ( $\pm 1/2\%$  with tach feedback)
- Adjustable minimum speed
- Adjustable maximum speed
- Adjustable IR compensation
- Adjustable current limit
- Adjustable acceleration and deceleration (enclosed model only)
- Line voltage compensation
- 5k $\Omega$  speed potentiometer with leads, dial and knob included
- 50:1 speed range
- Overload capacity: 200% for one minute
- Transient voltage protection
- Voltage following mode or DC tachometer follower by supplying ungrounded analog input signal
- DC tachometer feedback
- Inhibit circuit – permits start and stop without breaking AC lines
- Shunt field supply provided

## Accessories

- Replacement speed potentiometer kit
- Digital potentiometer
- Manual reverse switch
- Accel/Decel adjustment card
- Analog current input card
- Analog voltage input card
- Heatsink

*Detailed descriptions and specifications for GSD accessories are available in the "GSD Series DC Drives Accessories" section.*

## Typical Applications

- Auger feeders
- Automated door actuators
- Commercial cooking equipment
- Commercial lift
- Food production
- Industrial pumping systems
- Measurement instruments
- Miniature lathes and mills
- Packaging / material-handling equipment
- Printing and labeling machines
- Small shop machine tools
- Spray / print reciprocating head

# GSD4 Series DC Drives


## GSD4 Selection and Specifications

GSD4 Series DC Drives – Selection & Specifications				
Model	GSD4-24A-5C	GSD4-240-1C	GSD4-240-5C	GSD4-240-10N4X
Price	\$78.00	\$70.00	\$72.00	\$253.00
Package Configuration	open frame			NEMA 4X
Power Quality Form Factor	1.4			
Input Voltage (@50/60Hz)	24/36 VAC ±10%	120/240 VAC ±10%		
Output Voltage	0–24/36 VDC	0–90/180 VDC		
Shunt Field Voltage	20VDC @ 24VAC in 30VDC @ 36VAC in (1A max)	100VDC @ 120VAC in 200VDC @ 240VAC in (1A max)	100VDC @ 120VAC in 200VDC @ 240VAC in (0.5A max)	
Motor Rating @ Low V (hp) Motor Rating @ High V (hp)	1/50 – 1/6	1/50 – 1/8 1/25 – 1/4	1/8 – 1/2 1/4 – 1	1/8 – 1 1/4 – 2
Output Current (continuous) **	5.5A (DC)	1.2A (DC)	5.5A (DC)	10A (DC)
Current Overload Capacity	200% for 60s			
Current Limit (adjustable)	1–15A (DC)	0.3–2.5A (DC)	1–15A (DC)	
Transient Protection	none	Metal Oxide Varistor (MOV)		
I.R. Compensation	adjustable			
Speed Adjustment	5kΩ potentiometer or 0–10VDC isolated input signal			
		4–20mA	n/a	
	–	0–5VDC thru 0–250VDC		
Speed Range	50:1			
Speed Regulation	±1% of base speed			
Maximum Speed	adjustable from 60% to 110% of base speed			
Minimum Speed	0–30% of adjustable maximum speed			
Acceleration	0.5s (fixed)			adjustable from 0.5–8s
Deceleration				
Dynamic Braking	no			
Plugging Capability **	no			
Electrical Connections	8-position terminal strip; 22–14 AWG			
External Fusing Required	Bussman ABC or Littelfuse 314 series ceramic fuses or equivalent Refer to wiring diagrams for details			
Operating Temperature	-10 to 45 °C [14 to 113 °F]		-10 to 40 °C [14 to 104 °F]	
Thermal Protection	current limiting			
Mounting Orientation	can be mounted in any orientation			
Corrosive Gases	NOT compatible with any corrosive gases			
Weight	8.0 oz [203g]	37 oz [1049g]	10.5 oz [297g]	59.5 oz [1687g]
Agency Approvals	RoHS, CE	cUL <sub>US</sub> listed (E198015), RoHS, CE		cUL <sub>US</sub> listed (E198015), RoHS
Optional Accessories *				
Replacement Potentiometer	GSDA-5K			
Digital Potentiometer	GSDA-DP			
Manual Reverse Switch	GSDA-MREV			
Accel/Decel Adjustment Card	GSDA-ACCDEC-4			–
Analog Current Input Card	GSDA-AI-A			–
Analog Voltage Input Card	–	GSDA-AI-V4		–
Heatsink	GSDA-HTSNK-4			–
* For accessories details, refer to the "GSD Series DC Drives Accessories" section.				
** Plugging is a method of rapidly changing motor direction by reversing motor armature polarity, while the motor is still running.				

# GSD4 Series DC Drives

## GSD4 Wiring Diagrams

### GSD4-24x-xC Basic Wiring Diagram – (refer to User Manual for more detailed wiring information)

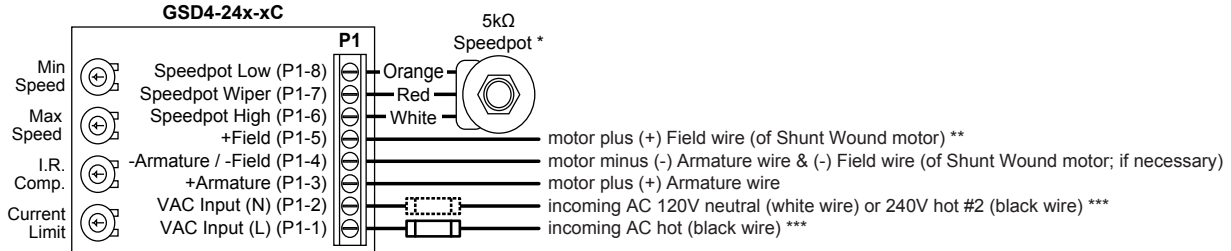

\* P1-6 has internal +12V, and connects to Speedpot High (white wire). THIS INPUT MUST NOT BE GROUNDED!

For start-stop applications, the connection between P1-6 and Speedpot High can be opened and closed by a SPST switch.

\* P1-7 connects to Speedpot Wiper (red wire). THIS INPUT MUST NOT BE GROUNDED!

For Voltage-Follower applications, THIS INPUT MUST NOT BE GREATER THAN +12V MAXIMUM!

\* P1-8 connects to Speedpot Low, and is raised and lowered by the Min Speed trimpot. THIS INPUT MUST NOT BE GROUNDED!

Electronic speed input (voltage follower) may be referenced to this input if the Min Speed trimpot adjustments are to be active.

Otherwise, inputs may be referenced to -Armature, which will bypass the Min Speed trimpot.


\*\* +F connection is only for Shunt Wound motor; NOT for Permanent Magnet motor.

For motors with dual voltage field, i.e. 50/100V or 100/200V, connect the highest value.

\*\*\* Fuse hot AC inputs only; refer to Fusing section for size and type. Fuse both AC lines for 240 VAC input. Do NOT fuse AC(N) on 120V systems.

Connect incoming AC ground (green wire) to GSD4 chassis.


### GSD4-240-10N4X Basic Wiring Diagram – (refer to User Manual for more detailed wiring information)

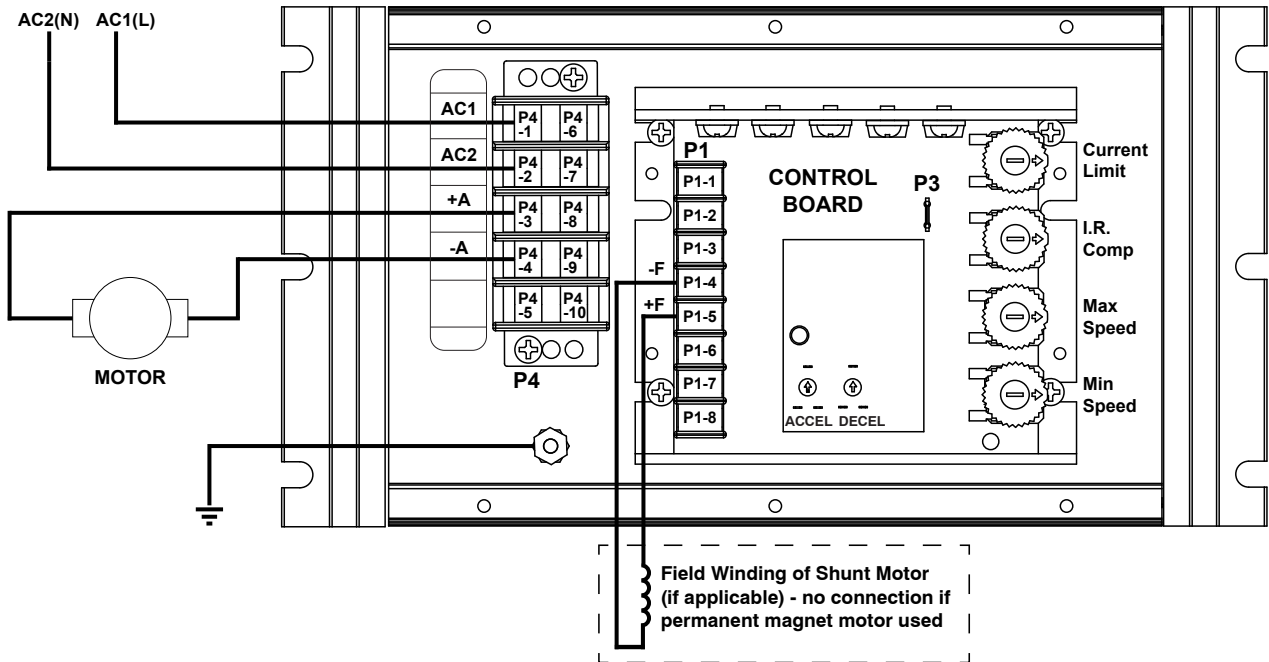

# GSD4 Series DC Drives

## GSD4 Dimensions – dimensions = in [mm]

### GSD4-24x-xC Dimensions

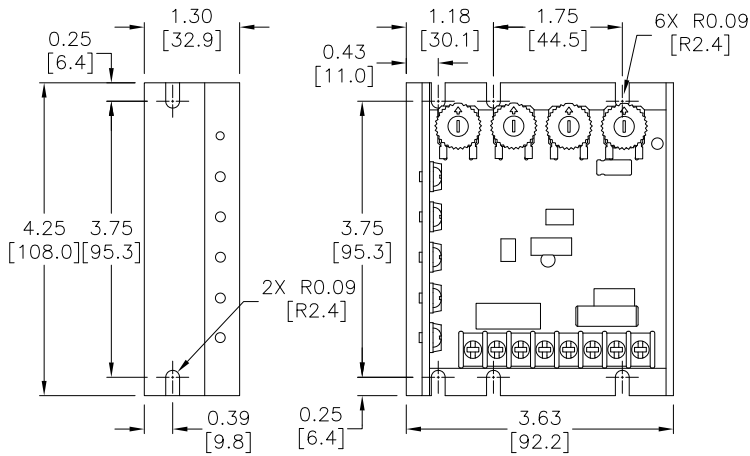

### GSD4-240-10N4X Dimensions

