

# IronHorse<sup>®</sup> Rolled-Steel AC Motors – 1-Phase

## 56C/56HC Frame TEFC Motors – Single-Phase 0.33 to 2 hp

### Features


- Totally Enclosed Fan Cooled (TEFC) enclosure
- IP43 environmental rating
- NEMA 56C or 56HC flange mount (varies by model)
- Rolled steel shell frame / cast aluminum end bell
- Removable base / bolt-on/bolt-off mounting feet
- No mounting orientation restrictions
- Steel fan cover
- Large all-metal capacitor cover with rubber gasket and oversized capacitors
- Large easy-to-wire junction box with rubber gasket
- Heavy duty oversized ball bearings
- High tensile strength steel shaft
- Large Mylar nameplate with easy-to-read wiring diagram
- Electrically reversible
- NEMA design L or N (varies by model)
- Class F winding insulation
- Service Factor: 1.15
- Two year warranty
- cCSA<sub>US</sub> certified, CE

### Accessories Available

- Start capacitors (replacement/spare)
- Run capacitors (replacement/spare)
- Centrifugal switches (replacement/spare)
- Stationary switches (replacement/spare)
- Junction boxes (replacement/spare)
- Fans (replacement/spare)
- Fan shrouds (replacement/spare)
- Motor bases (replacement/spare)

### Applications

- Conveyors
- Fans
- Gear reducers
- Pumps

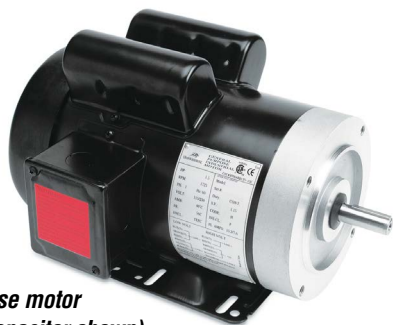

**MTR Series 1-phase motor**  
(model with run capacitor shown)



**MTR2 Series 1-phase motor**  
(model without run capacitor shown)

Motor Specifications – Single-Phase 56C/56HC Frame Motors														
Part Number	Price	HP		Base RPM		1-phase Voltage		Housing	NEMA Frame	Service Factor		F.L. Amps		Approx Weight (lb)
		60 Hz	50 Hz	60 Hz	50 Hz	60Hz	50Hz			60Hz	50Hz	115V/230V 60Hz	110/220V 50Hz	
<b>MTR2-P33-1AB18</b>	\$101.00	1/3	1/4	1800	1500	115/230	110/220	TEFC	56C flange mount	1	1.15	5.2 / 2.6	5.4 / 2.7	22
<b>MTR2-P50-1AB18</b>	\$105.00	1/2	1/3									7.2 / 3.6	7.2 / 3.6	25
<b>MTR2-P75-1AB18</b>	\$116.00	3/4	1/2									10.0 / 5.0	9.6 / 4.8	29
<b>MTR2-001-1AB18</b>	\$129.00	1	3/4									13.0 / 6.5	12.4 / 6.2	36
<b>MTR2-1P5-1AB18</b>	\$165.00	1-1/2	1									14.5 / 7.3	14.0 / 7.0	37
<b>MTR2-002-1AB18</b>	\$198.00	2	1-1/2									19.6 / 9.8	23.4 / 11.7	44
<b>MTR-P33-1AB18</b>	\$101.00	1/3	-	-	-	115/208-230	-	F1 conduit box location	56C flange mount	-	-	6.6 / 3.3	-	26
<b>MTR-P50-1AB18</b>	\$105.00	1/2										8.8 / 4.4		28
<b>MTR-P75-1AB18</b>	\$116.00	3/4										11.0 / 5.5		32
<b>MTR-001-1AB18</b>	\$129.00	1										13.6 / 6.8		38
<b>MTR-1P5-1AB18</b>	\$159.00	1-1/2										15.2 / 7.6		45
<b>MTR2-P33-1AB36</b>	\$119.00	1/3										1/4		3600
<b>MTR2-P50-1AB36</b>	\$125.00	1/2	1/3	6.5 / 3.3	6.4 / 3.2	23								
<b>MTR2-P75-1AB36</b>	\$139.00	3/4	1/2	9.2 / 4.6	9.2 / 4.6	27								
<b>MTR2-001-1AB36</b>	\$146.00	1	3/4	11.5 / 5.8	10.2 / 5.1	30								
<b>MTR2-1P5-1AB36</b>	\$159.00	1-1/2	1	13.0 / 6.5	11.4 / 5.7	31								
<b>MTR2-002-1AB36</b>	\$187.00	2	1-1/2	17.0 / 8.5	14.6 / 7.3	37								
<b>MTR-1P5-1AB36</b>	\$152.00	1-1/2	-	-	115/208-230	-	-	F1 conduit box location	56C	-	-	14.2 / 7.1	-	37

Note: Please review the AutomationDirect Terms & Conditions for warranty and service on this product.


# IronHorse<sup>®</sup> Rolled-Steel AC Motors – 1-Phase

## 56C/56HC Frame TEFC Motors – Single-Phase 0.33 to 2 hp


Performance Data – Single-Phase 56C/56HC Frame Motors (230V/60Hz data except as indicated)														
Part Number	HP		NEMA Design	F.L. RPM		Current @ 115V/230V (Amps)			Torque (lb-ft)			F.L. Efficiency (%)	F.L. Power Factor	Rotor Inertia (lb-ft <sup>2</sup> )
	60 Hz	50 Hz		60 Hz	50 Hz	230V No Load	Full Load	Locked Rotor	Full Load	Locked Rotor	Break-down			
<b>1800 RPM</b>														
<b>MTR2-P33-1AB18</b>	1/3	1/4	N	1425	1725	2.05	5.2/2.6	33/16	1.01	3.54	2.57	63.0	0.58	0.048
<b>MTR2-P50-1AB18</b>	1/2	1/3				2.74	7.2/3.6	44/21	1.49	5.09	3.54	64.5	0.68	0.059
<b>MTR2-P75-1AB18</b>	3/4	1/2				3.14	10.0/5.0	62/30	2.26	7.06	5.16	67.0	0.71	0.074
<b>MTR2-001-1AB18</b>	1	3/4				4.39	13.0/6.5	80/40	3.03	9.30	8.23	70.0	0.69	0.095
<b>MTR2-1P5-1AB18</b>	1-1/2	1	L	1725	1725	5.23	14.5/7.3	110/55	4.46	8.70	10.45	77.0	0.84	0.095
<b>MTR2-002-1AB18</b>	2	1-1/2				8.07	19.6/9.8	152/76	6.06	12.17	13.81	79.0	0.82	0.121
<b>MTR-P33-1AB18</b>	1/3		N	-	-	2.2	6.6/3.3	31/18	1.02	3.06	2.81	56.0	0.62	0.075
<b>MTR-P50-1AB18</b>	1/2					2.93	8.8/4.4	37/21	1.52	4.56	4.18	57.0	0.63	0.080
<b>MTR-P75-1AB18</b>	3/4					3.67	11.0/5.5	55/32	2.29	6.30	5.73	65.0	0.65	0.095
<b>MTR-001-1AB18</b>	1					4.53	13.6/6.8	75/43	3.04	8.36	7.60	68.0	0.66	0.120
<b>MTR-1P5-1AB18</b>	1-1/2					5.07	15.2/7.6	120/65	4.57	11.43	10.28	71.0	0.75	0.142
<b>3600 RPM</b>														
<b>MTR2-P33-1AB36</b>	1/3	1/4	N	2850	3450	2.14	5.4/2.7	37/19	0.50	2.18	1.96	59.5	0.72	0.031
<b>MTR2-P50-1AB36</b>	1/2	1/3				2.23	6.5/3.3	47/23	0.74	2.59	2.42	63.0	0.74	0.034
<b>MTR2-P75-1AB36</b>	3/4	1/2				2.82	9.2/4.6	66/33	1.12	4.62	3.44	66.5	0.78	0.041
<b>MTR2-001-1AB36</b>	1	3/4				3.04	11.5/5.8	82/41	1.50	4.48	3.83	69.5	0.80	0.047
<b>MTR2-1P5-1AB36</b>	1-1/2	1	L	2850	3450	3.90	13.0/6.5	109/55	2.21	3.22	5.08	77.0	0.94	0.047
<b>MTR2-002-1AB36</b>	2	1-1/2				4.51	17.0/8.5	131/65	3.02	4.45	6.82	79.5	0.94	0.060
<b>MTR-1P5-1AB36</b>	1-1/2		N			3.0	14.2/7.1	116/58	2.2	7.5	5.4	72.0	0.9	0.030

### Dimensions – (units = inches)


#### MTR-xxx-1ABxx

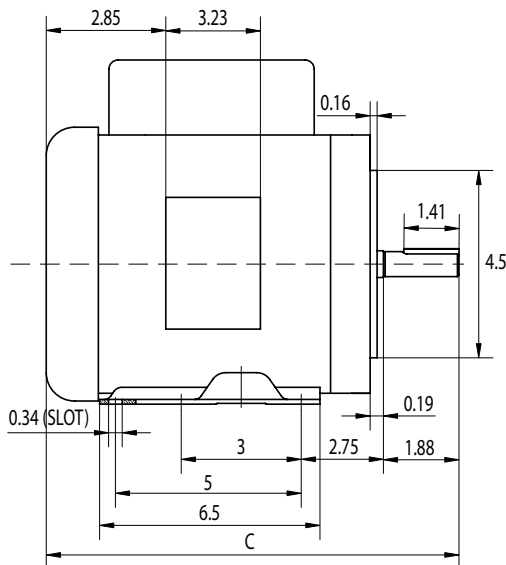

C = 12.4 in; all except 1 & 1.5 hp motors  
 C = 13 in; 1 hp (1800 rpm) & 1.5 hp (3600 rpm)  
 C = 13.8 in; 1.5 hp (1800 rpm)



MTR-xxx-1ABxx IronHorse Motors  
 (single-phase rolled steel)

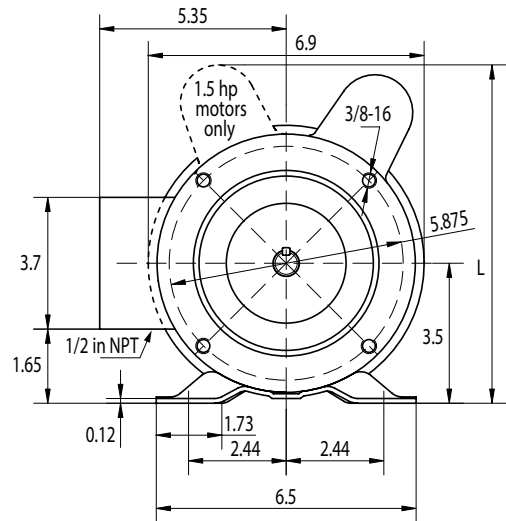

L = 8.19 in; all except 1.5 hp motors  
 L = 8.5 in; 1.5 hp motors

# IronHorse® Rolled-Steel AC Motors – 1-Phase


## 56C/56HC Frame TEFC Motors – Single-Phase 0.33 to 2 hp

Dimensions – (units = inches)

### MTR2-Pxx-1ABxx, MTR2-001-1ABxx


PART NUMBER	DIM. C
MTR2-P33-1AB18	11.90
MTR2-P33-1AB36	11.90
MTR2-P50-1AB18	11.90
MTR2-P50-1AB36	11.90

PART NUMBER	DIM. C
MTR2-P75-1AB18	12.40
MTR2-P75-1AB36	11.90
MTR2-001-1AB18	12.90
MTR2-001-1AB36	12.40

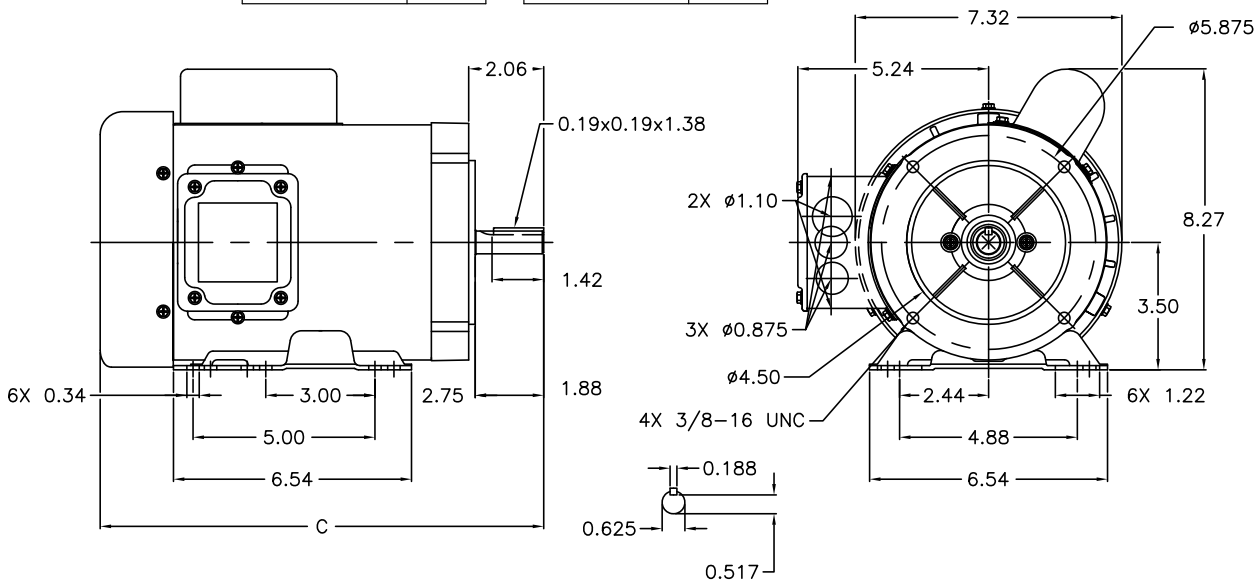

### MTR2-1P5-1ABxx, MTR2-002-1ABxx

PART NUMBER	DIM. C
MTR2-1P5-1AB18	12.90
MTR2-002-1AB18	13.90
MTR2-1P5-1AB36	12.40
MTR2-002-1AB36	12.90

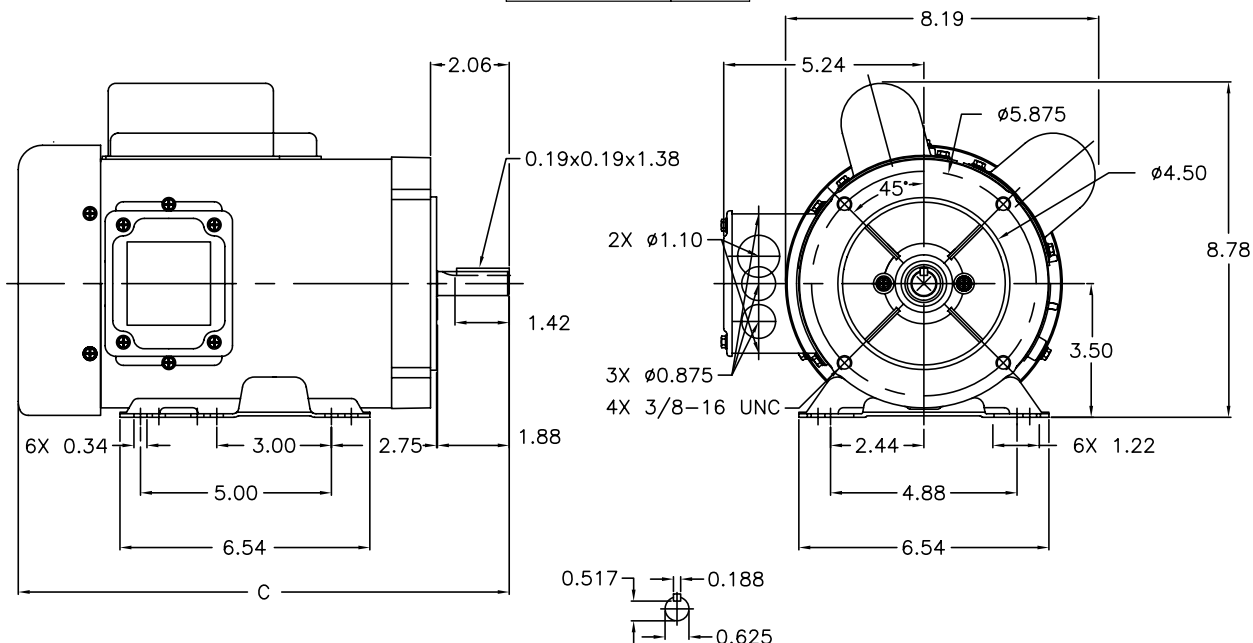

# IronHorse<sup>®</sup> AC Motor Accessories – 1-Phase

## 56C/56HC Frame TEFC Motors – Single-Phase – 0.33 to 2 hp – Motor Accessories

### Start Capacitors

Single-phase motors use capacitors to provide starting torque when power is first applied to the motor. AutomationDirect offers *spare/replacement* starting capacitors for our single-phase IronHorse motors.

### Run Capacitors

In addition to the start capacitors and centrifugal switches, IronHorse 1-1/2 and 2 hp single-phase motors also have run capacitors which allow the motors to develop higher running torque, greater efficiency, and improved power factor. We offer *spare/replacement* run capacitors for single-phase IronHorse motors.

### Centrifugal Switches

The start capacitors are no longer needed once the motors begin turning, so they are then taken out of the circuit by a centrifugal switch. We also offer *spare/replacement* switches for our motors.

### Stationary Switches

MTR2 series motors have a separate stationary switch that works with the centrifugal switch; both switches are required.

(MTR series motors have only the one centrifugal switch.)



**Junction Box**  
**MTAR-JBOX-56**



**Junction Box**  
**MTA2-JBOX-56**



**Start Capacitor**  
**MTA-CAP-02**



**Run Capacitor**  
**MTA-CAP-07**



**Fan**  
**MTAR-FAN-56**



**Fan**  
**MTA2-FAN-56**




**Centrifugal Switch** **MTA-CSW-01**



**Fan Shroud**  
**MTAR-SHROUD-56**




**Fan Shroud**  
**MTA2-SHROUD-56**



**Stationary Switch**  
**MTA-CSW-04**



**Motor Base**  
**MTAR-BASE-56**



**Motor Base**  
**MTA2-BASE-56**

# IronHorse<sup>®</sup> AC Motor Accessories – 1-Phase

## 56C/56HC Frame TEFC Motors – Single-Phase – 0.33 to 2 hp – Motor Accessories

MTR Series Single-Phase Motor Spare/Replacement Parts (NOT for MTR2 Motors)*								
Part Number	Price	Accessory Type	Capacitance (µF)	Rated Voltage	Dimension Height x Ø (in [mm])	Applicable MTR Motor Number	MTR Motor HP : RPM	
<b>MTA-CAP-01</b>	\$10.50	start capacitor	200	165	3.15 x 1.65 [80.0 x 41.9]	MTR-P33-1AB18	1/3 : 1800	
<b>MTA-CAP-02</b>	\$10.50	start capacitor	250			MTR-P50-1AB18 MTR-P75-1AB18	1/2 : 1800 3/4 : 1800	
<b>MTA-CAP-03</b>	\$10.50	start capacitor	300			MTR-001-1AB18	1 : 1800	
<b>MTA-CAP-04</b>	\$10.50	start capacitor	250			MTR-1P5-1AB18	1-1/2 : 1800	
<b>MTA-CAP-08</b>	\$10.50	start capacitor	400			MTR-1P5-1AB36	1-1/2 : 3600	
<b>MTA-CAP-06</b>	\$10.50	run capacitor	40	450	4.02 x 1.75 [102.1 x 44.5]	MTR-1P5-1AB18	1-1/2 : 1800	
<b>MTA-CAP-09</b>	\$10.50	run capacitor	35		4.0 x 1.8 [101 x 45]	MTR-1P5-1AB36	1-1/2 : 3600	
<b>MTA-CSW-01</b>	\$10.50	centrifugal switch	n/a	250	n/a	MTR-xxx-1AB18	all 1800 rpm	
<b>MTA-CSW-02</b>	\$10.50					MTR-1P5-1AB36	all 3600 rpm	
<b>MTAR-BASE-56</b>	\$12.00	motor base		n/a		n/a	MTR-xxx-1ABxx	all
<b>MTAR-FAN-56</b>	\$12.00	fan						
<b>MTAR-JBOX-56</b>	\$12.00	junction box						
<b>MTAR-SHROUD-56</b>	\$12.00	fan shroud						

\* These accessories are spare/replacement components only for MTR series IronHorse motors. Accessories for MTR series motors are not compatible with MTR2 series motors.

MTR2 Series Single-Phase Motor Spare/Replacement Parts (NOT for MTR Motors)*								
Part Number	Price	Accessory Type	Capacitance (µF)	Rated Voltage	Dimension Height x Ø (in [mm])	Applicable MTR2 Motor Number	MTR2 Motor HP : RPM	
<b>MTA-CAP-10</b>	\$13.00	start capacitor	200	165	2.80 x 1.46 [71.1 x 37.1]	MTR2-P33-1AB36	1/3 : 3600	
<b>MTA-CAP-11</b>	\$14.00	start capacitor	300		MTR2-P33-1AB18 MTR2-P50-1AB36	1/3 : 1800 1/2 : 3600		
<b>MTA-CAP-12</b>	\$15.00	start capacitor	400		MTR2-P50-1AB18 MTR2-P75-1AB36	1/2 : 1800 3/4 : 3600		
<b>MTA-CAP-13</b>	\$22.00	start capacitor	500		MTR2-P75-1AB18 MTR2-001-1AB18 MTR2-001-1AB36	3/4 : 1800 1 : 1800 1 : 3600		
<b>MTA-CAP-14</b>	\$22.00	run capacitor	40	250	3.38 x 1.81 [85.9 x 46.0]	MTR2-1P5-1ABxx MTR2-002-1ABxx	1-1/2 : 1800 1-1/2 : 3600	
<b>MTA-CAP-15</b>	\$38.00	start capacitor	800	165	4.41 x 1.85 [112.0 x 47.0]		2 : 1800 2 : 3600	
<b>MTA-CSW-03</b>	\$11.00	centrifugal switch	n/a	125	n/a	MTR2-xxx-1AB36	all 3600 rpm	
<b>MTA-CSW-04</b>	\$11.00	stationary switch				MTR2-xxx-1ABxx	all	
<b>MTA-CSW-08</b>	\$11.00	centrifugal switch				MTR2-xxx-1AB18	all 1800 rpm	
<b>MTA2-BASE-56</b>	\$12.00	motor base		n/a		n/a	MTR2-xxx-1ABxx	all
<b>MTA2-FAN-56</b>	\$12.00	fan						
<b>MTA2-JBOX-56</b>	\$12.00	junction box						
<b>MTA2-SHROUD-56</b>	\$12.00	fan shroud						

\* These accessories are spare/replacement components only for MTR2 series IronHorse motors. Accessories for MTR2 series motors are not compatible with MTR series motors.

# AC Motor Selection – IronHorse® General Purpose Motors

IronHorse® General Purpose Motor Selection					
Characteristics	1-Phase		3-Phase		
	56C/56HC Frame Rolled Steel***	T Frame Farm Duty	56C/56HC Frame Rolled Steel***	56C Frame Stainless Steel	Cast Iron T & TC Frames
<b>Electrical Characteristics</b>					
Horsepower range	1/3 – 2	2 – 5	1/3 – 3	1/3 – 3/4	PE: 1–200(T); 1–100(TC) EPAct: 250–300(T)
Base speed (# Poles)	1800 (4), 3600 (2)	1800 (4)	1800 (4), 3600 (2)		1200(6), 1800 (4), 3600(2)
Standard Voltage	115/208-230, 115/230	230	208-230/460		208-230/460 (250 & 300 hp 460V only)
Phase / Base Frequency (Hz)	1 / 60		3 / 60		
Service Factor	1.15		1.15 (line) ; 1.0 (drive)		
Design Code (NEMA)	L, N	L	B		
Insulation Class	F				
Insulation System	dip & bake twice	VPI, then bake, then dip and bake	dip & bake	double dip & bake	EPAct: double dip & bake PE: VPI
Duty Cycle	continuous				
Thermal protection	none	yes	none		
<b>Mechanical Characteristics</b>					
Frame size (mounting)	56C or 56HC	182T – 184T	56C or 56HC		143T/TC – 405TC/449T
Enclosure	TEFC				
Frame material	rolled steel		304 stainless steel		cast iron
End bracket material	aluminum	cast iron	aluminum	304 stainless steel	cast iron
Junction box material	steel		304 stainless steel		cast iron
Fan guard material	steel	steel	steel	304 stainless steel	steel
Fan material	polypropylene plastic	plastic	plastic	heat-resistant polyethylene	plastic (143T/TC - 445/7T) aluminum (449T)
Lead termination	junction box				
Standard mounting	C-Face with Removable Rigid Base	Rigid Base	C-Face with Removable Rigid Base	C-Face with Rigid Base C-Face with Round Body	Rigid Base (C-Flange kit available EPAct) C-Face with Rigid Base (1-100 hp)
Drive end shaft slinger	yes				
Paint	black	green	black	n/a	EPAct: epoxy primer / synthetic alkyd enamel PE: polyurethane enamel
Bearings	ball				1-75 hp: ball 100-300 hp: roller
Grease	Mobil Polyrex EM		Korschun lithium-based		Mobil Polyrex EM
Standard junction box assembly position	F1				F1 (some sizes reversible to F2)
<b>Performance Characteristics</b>					
Constant Torque speed range	n/a	n/a	2:1 (MTR, MTSS); 4:1 (MTRP, MTR2)		2:1 (EPAct) 4:1 (Premium Efficiency)
Variable Torque speed range	n/a	n/a	5:1 (MTR, MTSS); 10:1 (MTRP, MTR2)		5:1 (EPAct) 10:1 (Premium Efficiency)
Constant Horsepower speed range	n/a	n/a	1.5:1		1.5:1
Temperature rise	F	B			
Encoder provisions	none				
<b>Other Characteristics</b>					
Warranty*	2 years		1 year		2 years
Agency Approvals **	CE, cCSA <sub>US</sub>		cCSA <sub>US</sub>		CE, cCSA <sub>US</sub>
* See Terms and Conditions for motor warranty explanation. 1) For warranty on IronHorse motors below 50 hp, warranty service can be arranged through AutomationDirect. 2) For warranty on IronHorse motors 50 hp and above, motors must be inspected by a local EASA motor repair or service center; (see AutomationDirect Terms & Conditions). ** To obtain the most current agency approval information, see the Agency Approval Checklist on the specific part number's web page. *** 56HC motors are capable of 56C C-face mounting, and are also compatible with 56, 143T, and 145T foot mounting dimensions.					