



# Multi-Wire Connectors

## Features

- Available in 3A, 10A, 16A, 6B, 10B, 16B, and 24B sizes
- Heavy-duty metal housings in polyester powder-coated die-cast aluminum alloy or self-extinguishing thermoplastic housing
- Single locking system (one lever locked on two pegs) or double locking system (two levers locked on four pegs)
- Mechanical duration of 500 cycles
- Operating temperatures from -40 to 125°C [-40 to 257°F]
- IP65 degree of protection with enclosure when coupled
- Conforms with EN61984, VDE 0110, VDE 0627, and UL 1977 standards
- UL and CE approvals

## Housings

### Hoods




- Available with top entry and side entry cable passages
- Standard profiles
- Threaded cable passages with NPT threads
- Stainless steel or thermoplastic locking pegs

### Bases, Couplers, and Covers

- Surface- and bulkhead-mounted bases
- Seal gaskets made of anti-aging, oil-resistant and fuel-resistant vinyl nitrile elastomer
- Locking levers made of galvanized steel or self-extinguishing glass-filled thermoplastic; guarantees perfect closing and sealing

### Inserts

- Self-extinguishing thermoplastic reinforced with glass fibers
- Asymmetric guide rails prevent incorrect coupling
- Captive installation screws allow for easy and secure installation to bases and hoods
- Laser-printed or molded terminal/contact positions on both sides of insert
- Copper alloy contacts with hard silver plating - available with stainless steel captive screw terminal or machined crimp contact
- Wide contact surface for ground terminals
- IP20 without enclosures
- Suitable for stranded and solid conductors

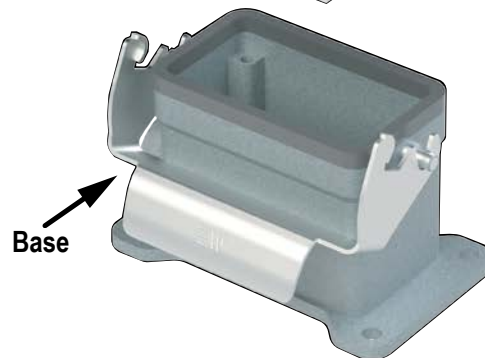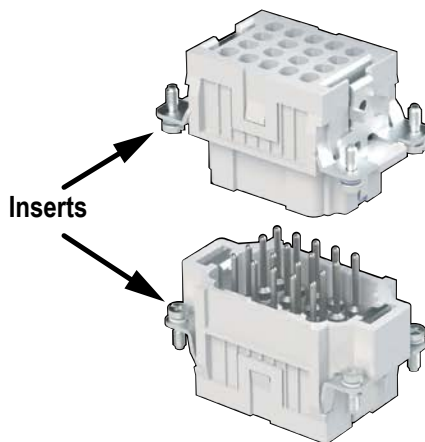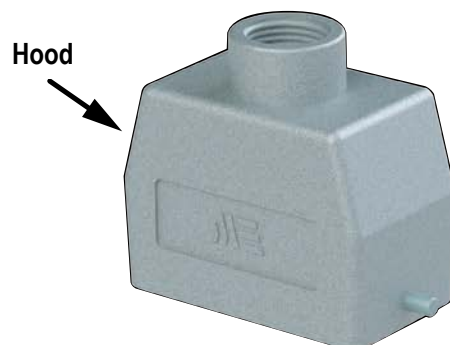

### Agency Approvals

- UL Recognized File number E307105
- CE



To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.

## General Characteristics

### Application Examples

- Electronic machinery
- Robots
- Control equipment
- Power connections
- Control and signal circuits
- Packaging machinery
- Theatrical applications
- Industrial equipment
- Electrical panels

### Inserts

METEcon multi-wire connectors require one male and one female insert. The inserts are available in multiple pole configurations from 2-poles plus ground up to 108-poles plus ground and with termination sizes ranging from 26 to 12 AWG, 10 to 80 Amps.

METEcon inserts are made of UL 94 V-0 rated self-extinguishing thermoplastic resin rated at a maximum temperature of 125°C (257°F). The inserts are available in screw terminal and crimp-style contact block connections. The contacts are copper alloy with a hard silver-plated alloy. The plastic insulators are numbered on both sides by laser printing or molding in accordance with EN 60068-2-70.

- Suitable for use with alternating current (AC) or direct current (DC)
- Leading protective ground
- Polarized for correct mating
- Interchangeable for male and female inserts in hoods and bases
- Captive screws
- Exception: 3A has housing/hood specifically for female or for male.


### Housings

The housings for the METEcon multi-wire connectors consist of a hood that mates with a base or a coupler.

They are made of die-cast aluminum with a polyester powder finish or from self-extinguishing thermoplastic and are suitable for use in industrial applications.

A single- or double-lever locking system assures coupling stability and protection against accidental opening. The locking system is comprised of stainless steel or glass-filled thermoplastic levers, with compatible interlocking pegs.

## Size and Identification

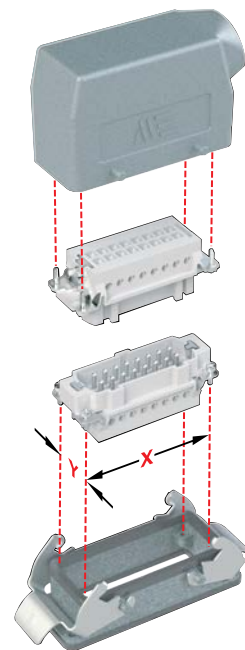

**Size 16B**

The size of each type of connector is determined by the distance between the center points of the four installation screws. These four points are common to both the insert and the housing. This is indicated by "X"- "Y" in the illustration above.

The table below lists the size identification and the actual X-Y distance for each type of connector offered.

| Size       | Distance<br>X-Y             |
|------------|-----------------------------|
| <b>3A</b>  | 21 x 21mm* [0.83 x 0.83in]  |
| <b>10A</b> | 49.5 x 16mm [1.95 x 0.63in] |
| <b>16A</b> | 66 x 16mm [2.60 x 0.63in]   |
| <b>6B</b>  | 44 x 27mm [1.73 x 1.06in]   |
| <b>10B</b> | 57 x 27mm [2.24 x 1.06in]   |
| <b>16B</b> | 77.5 x 27mm [3.05 x 1.06in] |
| <b>24B</b> | 104 x 27mm [4.09 x 1.06in]  |

\* The center distance cannot be given because the 3A inserts have only one screw: 21 x 21 indicates the size of the sectioned insert.

## Conductor Termination

### Overview

Two types of conductor termination are available for METEcon inserts:


- Screw terminations
- Crimp terminations

### Screw Terminations

Screw terminations consist of contacts made of silver-plated copper alloy and are incorporated with a wire clamp (with the exception of the size 3A inserts and size 24B with 80A contacts) for firmly securing the conductors. The screw terminals use stainless steel captive screws and meet VDE 0609 / EN 60999 standards.

Proper conductor installation requires no special preparation when using inserts with the wire clamp terminals (no wire ferrules). The table below lists the current rating, maximum wire gauge, and stripping lengths.

| Current Rating | Max Wire Gauge     |      | Stripping Length<br>mm [n] |
|----------------|--------------------|------|----------------------------|
|                | (mm <sup>2</sup> ) | AWG  |                            |
| 10A            | 2.5                | 14   | 7 [0.28]                   |
| 16A            | 2.5                | 14   | 7 [0.28]                   |
| 35A            | 6.0                | 10   | 7 [0.28]                   |
| 16/80A         | 2.5/16             | 14/6 | 7.5 [0.3] / 14 [0.55]      |

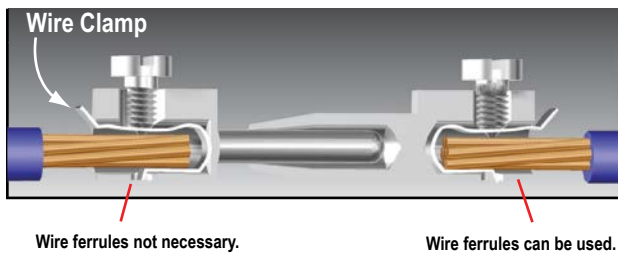

### Screw Terminals with Clamps

The value of tensile strength of conductors in accordance with the dimensions of the screws and the wires are shown in the following table:

| Wire Gauge<br>mm <sup>2</sup> [AWG]      | 1.5<br>[16] | 2.5<br>[14] | 4<br>[12] | 6<br>[10] | 10<br>[8] | 16<br>[6] |
|------------------------------------------|-------------|-------------|-----------|-----------|-----------|-----------|
| Size of Screw                            | M3          | M3          | M3.5      | M4        | M4        | M6        |
| Tensile Strength of<br>Stranded Wire (N) | 40          | 50          | 60        | 80        | 90        | 100       |

Increasing the tightening torque does not necessarily improve the contact resistance. The screw torques are selected according to standard EN 60999-1, to provide excellent mechanical, thermal, and electrical behavior. The conductor or terminal may be damaged if the recommended values are significantly exceeded.

### Insert Screw Specifications

| Insert Size | Screw Type      | Screw Size | Tightening Torque<br><br>N·m<br>[in·lb] | Recommended Screwdriver Size | Recommended Screwdriver Part Number |
|-------------|-----------------|------------|-----------------------------------------|------------------------------|-------------------------------------|
| 3A          | 10 Amp Terminal | M3         | 0.50<br>[4.4]                           | 0.4 x 2.5                    | <a href="#">TW-SD-VSL-2</a>         |
|             | Installation    |            |                                         |                              |                                     |
|             | Ground          | M3.5       |                                         |                              |                                     |
| 10A, 16A    | 16 Amp Terminal | M3         | 0.50<br>[4.4]                           | 0.5 x 3.0                    | <a href="#">TW-SD-SL-1</a>          |
|             | Installation    |            |                                         |                              |                                     |
|             | Ground          | M4         |                                         |                              |                                     |
| 6B, 10B     | 16 Amp Terminal | M3         | 0.50<br>[4.4]                           | Ph 0 - 0.8 x 4               | <a href="#">TW-SD-VSL-3</a>         |
|             | Installation    |            |                                         |                              |                                     |
|             | Ground          | M4         |                                         | Ph 2 1.0 x 5.5               | <a href="#">TW-SD-VSL-4</a>         |
| 16B         | 35 Amp Terminal | M4         | 1.2<br>[10.6]                           | Ph 1 - 0.8 x 4               | <a href="#">TW-SD-VSL-3</a>         |
|             | 16 Amp Terminal | M3         | 0.50<br>[4.4]                           | Ph 0 - 0.8 x 4               |                                     |
|             | Installation    |            |                                         |                              |                                     |
|             | Ground          | M4         | 1.2<br>[10.6]                           | Ph 2 1.0 x 5.5               |                                     |
| 24B         | 80 Amp Terminal | M6         | 1.5 mm² [16 AWG]<br>1.2<br>[10.6]       | 1.0 x 5.5                    | <a href="#">TW-SD-VSL-4</a>         |
|             |                 |            | 2.5 mm² [14 AWG]<br>2<br>[17.7]         |                              |                                     |
|             |                 |            | 4-16 mm² [12-6 AWG]<br>3<br>[26.6]      |                              |                                     |
|             | 16 Amp Terminal | M3         | 0.50<br>[4.4]                           | Ph 0 - 0.8 x 4               | <a href="#">TW-SD-VSL-3</a>         |
|             | Installation    |            |                                         |                              |                                     |
|             | Ground          | M4         | 1.2<br>[10.6]                           | Ph 2 1.0 x 5.5               | <a href="#">TW-SD-VSL-4</a>         |

### Crimp Terminations

Crimp terminations consist of contacts made of silver-plated copper alloy. Crimp terminations are accomplished by applying a crimp contact to the conductor by means of a crimping tool. Crimp contacts are available in several sizes:

10 amp, 26-14 AWG ; 16 amp, 26-12 AWG

A perfect crimp connection is gas-tight, corrosion-free, and is equal to a cold weld of the parts being connected. Wires to be connected must be carefully matched with the correct wire size of crimp contacts.

The requirements for crimp connectors are depicted in IEC 60352, part 2.

Note: Low currents and voltages:

METEcon standard contacts (screw and crimp) have a silver-plated surface. This metal has excellent conductive properties. During the contact's lifetime, the silver surface generates a black oxide layer due to its affinity to sulphur (always present in the atmosphere). This layer is conductive smooth and very thin and is partly interrupted when the contacts are mated and non mated, thus guaranteeing very low contact resistances. In the case of very low current or voltage, small changes to the transmitted signal may be encountered.


## Crimp Contact to Insert Installation

Proper installation of the crimp contacts is important for a good electrical and mechanical connection. The following steps will ensure correct installation.

### Step 1: Select the Crimp Contacts

Select a crimp contact based on the rating of the Insert you are using; 10 or 16 amps; the gender (male or female), and the gauge of wire being used.

### Step 2:

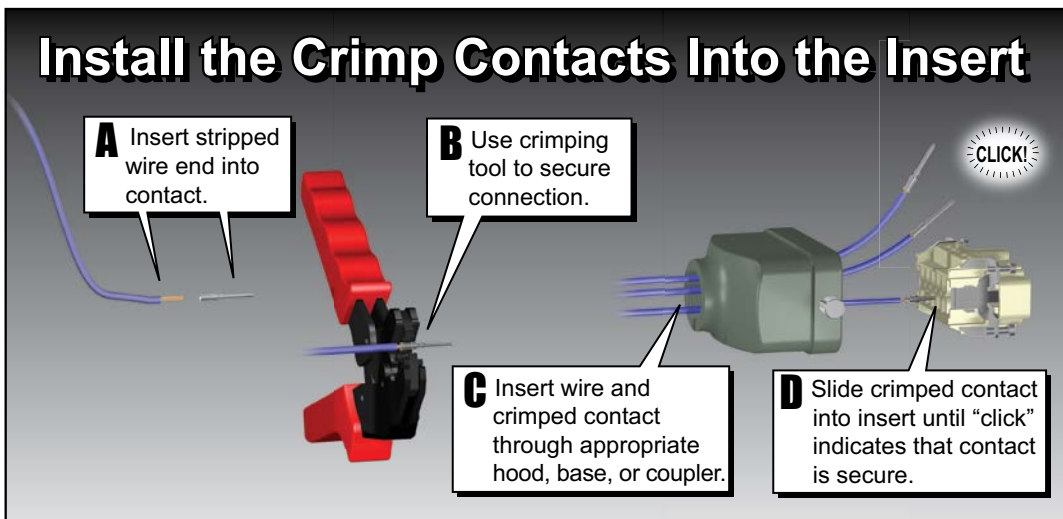


### Step 3: Install the Insert into the Housing


Now that the crimp contacts are installed, the Insert can be placed into the housing by aligning the corner installation screws of the insert with the screw holes located in the corners of the housing. Tighten the screws according to the tightening torques listed in the Insert Screw Specifications table in this document.

### Wire Entry Connection

METEcon openings for easy conduit and cable terminations. The openings come in NPT threaded sizes 3/8", 1/2", or 3/4".

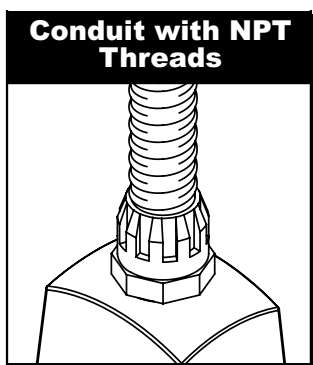

Secures NPT threaded flexible conduit directly to the housing.

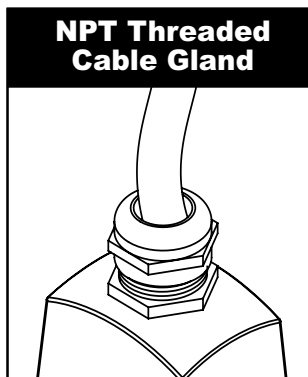

For securing a cable to the housing, use an NPT threaded cable gland.



# Multi-Wire Connectors

## Standards

The Inserts are designed and manufactured to conform with EN 61984, (IEC 61984), VDE 0627, and UL 1977/CSA C22.2 182.3 standards. They are certified and labeled with the cULus and CE marks. The connectors are therefore in conformance with both European/International and American systems. This permits them to be used in a wider range of applications worldwide.

|                       |                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| • EN 61984            | Connectors safety requirements and tests                                                                                          |
| • VDE 0627            | Connectors (DIN VDE 0627)                                                                                                         |
| • EN 60664-1          | Insulation coordination for equipment within low-voltage systems                                                                  |
| • VDE 0110            | Table 4 concerning clearance and creepage distances                                                                               |
| • EN 60512            | Connectors for electronic equipment, tests, and measurements                                                                      |
| • UL 1977             | Component connectors for use in data, signal, control, and power applications                                                     |
| • CSA.C22.2 No. 182.3 | Special use attachment, plugs, receptacles, and connectors                                                                        |
| • EN 60529            | Degree of protection provided by enclosures (IP degree)                                                                           |
| • EN 60423            | Conduits for electrical purposes. Outside diameters of conduits for electrical installations and thread for conduits and fittings |

## Directives and Declarations

### LVD Directive

Directive 2006/95/EC of the European Parliament and of the council of 12 December 2006 on the harmonization of the laws of Members States relating to electrical equipment designed for use within certain voltage limits.

### RoHS Directive

Directive 2011/65/EU and amendment (EU) 2015/863 restricts the use of the following ten substances:

Lead (Pb)

Mercury (Hg)

Cadmium (Cd)

Hexavalent chromium (Cr6+)

Polybrominated biphenyls (PBB)

Polybrominated diphenyl ether (PBDE)

Bis(2-ethylhexyl) phthalate (DEHP)

Butyl benzyl phthalate (BBP)


Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration Evaluation, Authorization and Restriction of Chemicals (REACH), establishing a European Chemicals Agency, amending Directive 1999/45/EC and repealing Council Regulation (EEC) No 793/93 and Commission Regulation (EC) No 1488/94 as well as Council Directive 76/769/EEC and Commission Directives 91/155/EEC, 93/67/EEC, 93/105/EEC and 2000/21/EC.

 **WARNING - ACCORDING TO EN 61984, CONNECTORS SHOULD NOT BE COUPLED AND DECOUPLED UNDER ELECTRICAL LOAD.**




# Multi-Wire Connectors

## Screw Terminal Basic Assembly

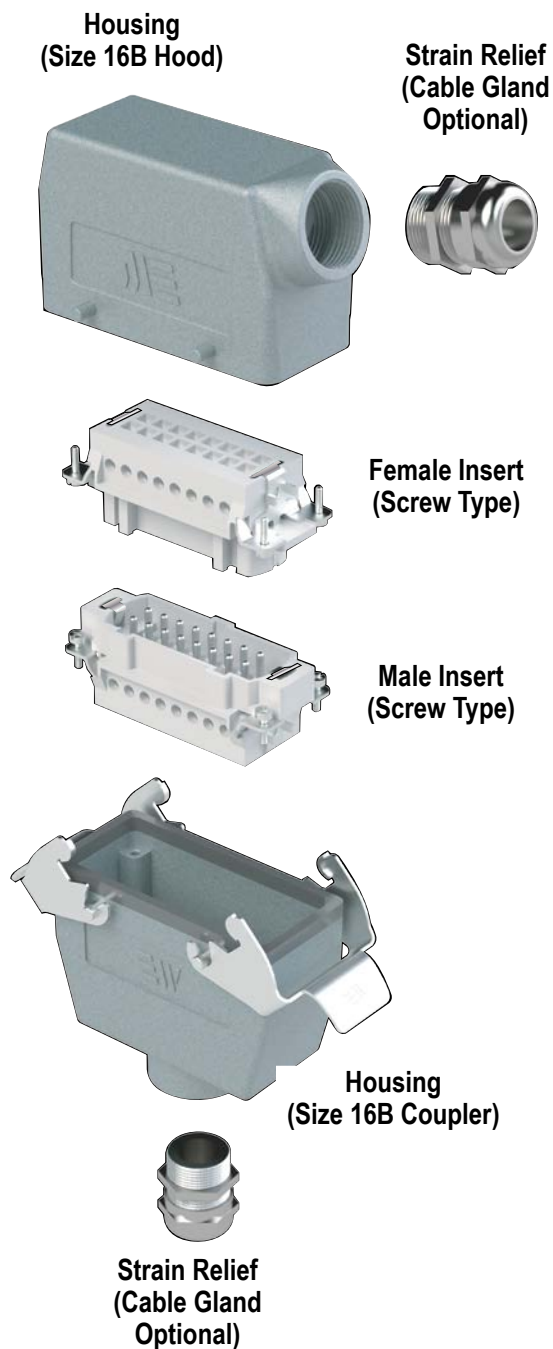

## Crimp Contact Basic Assembly

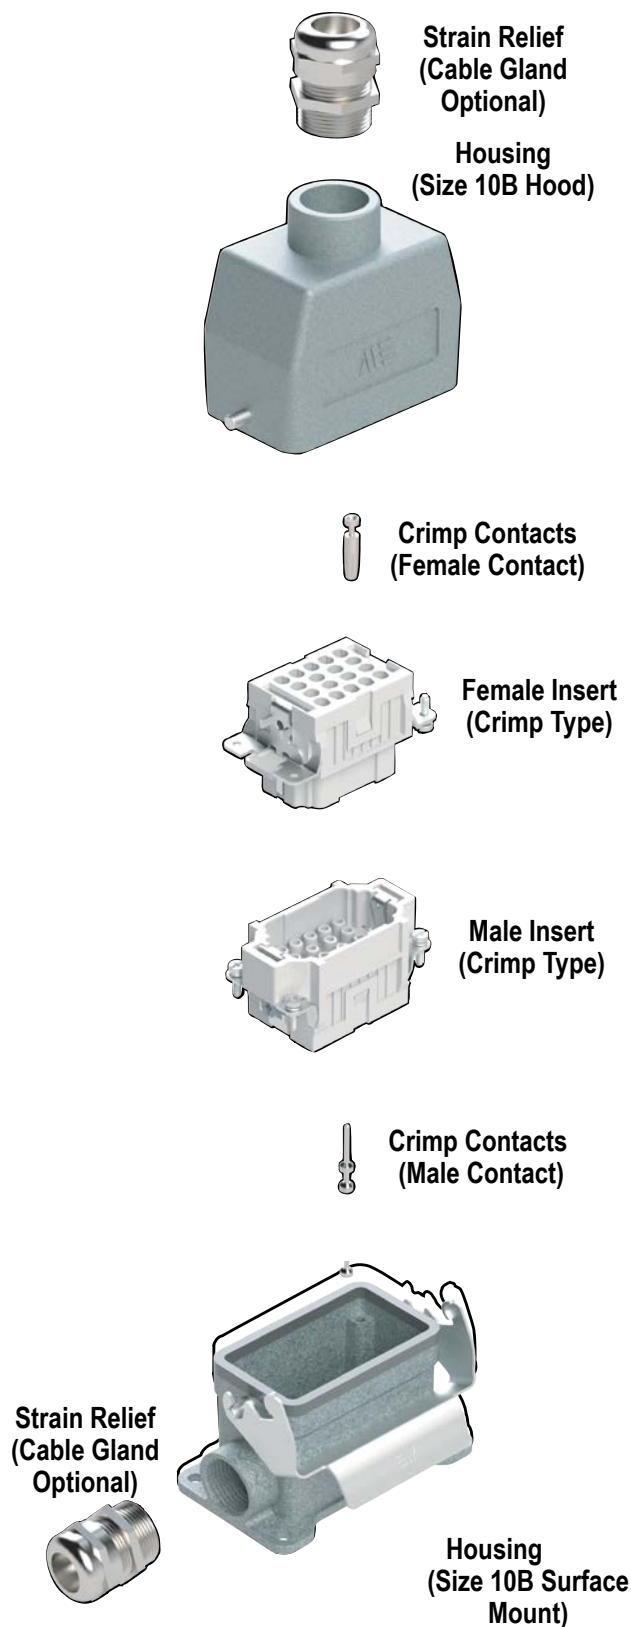



# Multi-Wire Connectors Specifications

| Technical Characteristics                     |                                                                        |                           |                                                |      |       |           |            |           |            |
|-----------------------------------------------|------------------------------------------------------------------------|---------------------------|------------------------------------------------|------|-------|-----------|------------|-----------|------------|
| Connector Size                                |                                                                        |                           | 3A                                             |      |       | 10A       |            | 16A       |            |
| Inserts                                       | Number of Poles                                                        |                           | 2+PE                                           | 3+PE | 4+ PE | 10+PE     | 15+PE      | 16+PE     | 25+PE      |
|                                               | UL/CSA Rated Voltage*                                                  |                           | 600 VAC/VDC                                    |      |       |           |            |           |            |
|                                               | Maximum Rated Current                                                  |                           | 10 amp                                         |      |       | 16 amp    | 10 amp     | 16 amp    | 10 amp     |
|                                               | EN 61984 (2001-11)<br>Pollution Degree 3                               | Rated Voltage AC/DC       | 250 / 400V                                     |      |       | 250V      |            |           |            |
|                                               |                                                                        | Impulse Withstand Voltage | 4kV                                            |      |       |           |            |           |            |
|                                               | Continuous Current Carrying Capacity                                   |                           | Refer to Electrical Engineering section charts |      |       |           |            |           |            |
|                                               | Insulation Resistance                                                  |                           | ≥ 10 <sup>10</sup> Ω                           |      |       |           |            |           |            |
|                                               | Material                                                               |                           | Polycarbonate                                  |      |       |           |            |           |            |
|                                               | Temperature Range                                                      |                           | -40 to 125°C [-40 to 257°F]                    |      |       |           |            |           |            |
|                                               | Flammability                                                           |                           | UL 94 V-0                                      |      |       |           |            |           |            |
|                                               | Degree Protection                                                      | With Housing              | IP65                                           |      |       |           |            |           |            |
|                                               |                                                                        | Without Housing           | IP20                                           |      |       |           |            |           |            |
|                                               | Mechanical Working Life                                                |                           | ≥ 500 Cycles                                   |      |       |           |            |           |            |
|                                               | Conductor Termination                                                  | Screw Terminals           | √                                              | √    | √     | √         | N/A        | √         | N/A        |
| Crimp Contacts                                |                                                                        | N/A                       | N/A                                            | N/A  | N/A   | √         | N/A        | √         |            |
| Contacts                                      | Material                                                               |                           | Silver-plated copper alloy                     |      |       |           |            |           |            |
|                                               | Minimum Recommended Load (voltage & current)                           |                           | 5V / 5mA AC/DC                                 |      |       |           |            |           |            |
|                                               | Contact Resistance                                                     |                           | ≤ 1mΩ                                          |      |       | ≤ 1mΩ     | ≤ 3mΩ      | ≤ 1mΩ     | ≤ 3mΩ      |
|                                               | Screw Terminal Wire Size                                               | mm <sup>2</sup>           | 1.0 - 2.5                                      |      |       | 1.0 - 2.5 | N/A        | 1.0 - 2.5 | N/A        |
|                                               |                                                                        | AWG                       | 18 - 14                                        |      |       | 18 - 14   | N/A        | 18 - 14   | N/A        |
|                                               | Screw Terminal Tightening Test Torque N·m [in·lb]                      |                           | 0.5 [4.4]                                      |      |       | 0.5 [4.4] | N/A        | 0.5 [4.4] | N/A        |
|                                               | Screw Terminal Stripping Length (mm)                                   |                           | 7                                              |      | N/A   | 7         | N/A        | 7         | N/A        |
|                                               | Crimp Terminal Wire Size                                               | mm <sup>2</sup>           | N/A                                            |      |       | N/A       | 0.14 - 2.5 | N/A       | 0.14 - 2.5 |
|                                               |                                                                        | AWG                       | N/A                                            |      |       | N/A       | 26 - 14    | N/A       | 26 - 14    |
| Crimp Terminal Stripping Length (mm)          |                                                                        | N/A                       |                                                |      | N/A   | 8         | N/A        | 8         |            |
| Thermoplastic Hoods/<br>Bases/Couplers/Covers | Material                                                               |                           | Polycarbonate                                  |      |       | N/A       |            |           |            |
|                                               | Locking Element                                                        |                           | PA66                                           |      |       |           |            |           |            |
|                                               | Flammability                                                           |                           | UL 94 V-0                                      |      |       |           |            |           |            |
|                                               | Housings Seal                                                          |                           | NBR (Nitrile rubber)                           |      |       |           |            |           |            |
|                                               | Degree of Protection Acc. to EN 60529 (coupled)                        |                           | IP65                                           |      |       |           |            |           |            |
|                                               | Temperature Range                                                      |                           | -40 to 125°C [-40 to 257°F]                    |      |       |           |            |           |            |
|                                               | Thread                                                                 |                           | Metric EN 50262 Pg DIN 40430                   |      |       |           |            |           |            |
| Aluminum Hoods/Bases/<br>Couplers/Covers      | Material                                                               |                           | Die cast aluminum alloy                        |      |       |           |            |           |            |
|                                               | Locking Element                                                        |                           | Stainless steel                                |      |       | PA66      |            |           |            |
|                                               | Housings Seal                                                          |                           | NBR (Nitrile)                                  |      |       |           |            |           |            |
|                                               | Degree of Protection Acc. to EN 60529 (coupled)<br>NEMA 250, UL50, 50E |                           | IP65                                           |      |       |           |            |           |            |
|                                               | Temperature Range                                                      |                           | -40 to 125°C [-40 to 257°F]                    |      |       |           |            |           |            |
|                                               | Thread                                                                 |                           | NPT ASME B1.20.1                               |      |       |           |            |           |            |

\* Connectors should not be coupled and decoupled under electrical load.

# Multi-Wire Connectors

## Size 16A

**29423****29422****294233025****294223025**

| 16A Inserts |                     |                     |                             |
|-------------|---------------------|---------------------|-----------------------------|
| Insert Type | No. of Poles        | 16+PE               | 25+PE                       |
|             | Rated Voltage AC/DC | 600 VAC/VDC         | 600 VAC/VDC                 |
|             | Max. Rated Current  | 16 amp              | 10 amp                      |
|             | Termination Type    | Screw Terminal      | Crimp Contacts              |
| Male        | Part Number         | <b>29423</b>        | <b>294233025</b>            |
|             | Price               | \$10.50             | \$9.50                      |
|             | Drawing Link        | <a href="#">PDF</a> | <a href="#">PDF</a>         |
|             | Crimp Contact Size* | N/A                 | 10 Amp METE 14104xxx series |
|             | Weight g [oz]       | 64.64 [2.28]        | 32.89 [1.16]                |
| Female      | Part Number         | <b>29422</b>        | <b>294223025</b>            |
|             | Price               | \$11.00             | \$10.00                     |
|             | Drawing Link        | <a href="#">PDF</a> | <a href="#">PDF</a>         |
|             | Crimp Contact Size* | N/A                 | 10 Amp METE 14103xxx series |
|             | Weight g [oz]       | 72.44 [2.56]        | 38.10 [1.34]                |

\* Crimp contacts must be purchased separately. The XXX represents wire AWG. See Accessories section for complete part numbers.

**2936323005****2936423005****2936223005****293602**

| 16A Aluminum Hoods and Housings           |                           |                   |         |                                               |               |                     |
|-------------------------------------------|---------------------------|-------------------|---------|-----------------------------------------------|---------------|---------------------|
| Housing Component                         | Threaded Opening          | Part Number       | Price   | Works With                                    | Weight g [oz] | Drawing Link        |
| Hood, Side Entry, (2-Peg)                 | (1) 1/2 NPT threaded hole | <b>2936323005</b> | \$8.50  | METE size 16A single lever connector housings | 113.85 [4.02] | <a href="#">PDF</a> |
| Hood, Top Entry, (2-Peg)                  | (1) 1/2 NPT threaded hole | <b>2936423005</b> | \$9.00  | METE size 16A single lever connector housings | 114.76 [4.05] | <a href="#">PDF</a> |
| Surface Mount, Side Entry, (Single Lever) | (1) 1/2 NPT threaded hole | <b>2936223005</b> | \$12.00 | METE size 16A 2-peg connector housings        | 137.44 [4.85] | <a href="#">PDF</a> |
| Bulkhead Base, (Single Lever)             | N/A                       | <b>293602</b>     | \$7.50  | METE size 16A 2-peg connector housings        | 63.50 [2.24]  | <a href="#">PDF</a> |

# Multi-Wire Connectors Accessories

## Crimp Contacts - 10 and 16 Amp

Crimp contacts are made of hard silver-plated alloy. Wires to be connected must be carefully matched with the correct wire size of crimp contacts. Crimp contacts should be installed using a crimping tool.

### 10 Amp Crimp Contacts - 100/Pack

| Male                            | Price   | Weight<br>g [oz] | Female                          | Price   | Weight<br>g [oz] | Wire Gauge mm <sup>2</sup><br>[AWG] | Stripping<br>Length |
|---------------------------------|---------|------------------|---------------------------------|---------|------------------|-------------------------------------|---------------------|
| <a href="#"><u>14104164</u></a> | \$40.00 | 71.67 [2.53]     | <a href="#"><u>14103164</u></a> | \$45.00 | 68.95 [2.43]     | 0.14-0.37 [26-22]                   | 8mm<br>[0.31in]     |
| <a href="#"><u>14104264</u></a> | \$40.00 | 70.31 [2.48]     | <a href="#"><u>14103264</u></a> | \$45.00 | 68.49 [2.42]     | 0.5 [20]                            |                     |
| <a href="#"><u>14104364</u></a> | \$40.00 | 67.59 [2.38]     | <a href="#"><u>14103364</u></a> | \$45.00 | 67.13 [2.37]     | 0.75 [18]                           |                     |
| <a href="#"><u>14104564</u></a> | \$40.00 | 66.23 [2.34]     | <a href="#"><u>14103564</u></a> | \$45.00 | 66.68 [2.35]     | 1.5 [16]                            |                     |
| <a href="#"><u>14104664</u></a> | \$40.00 | 61.60 [2.17]     | <a href="#"><u>14103664</u></a> | \$45.00 | 62.60 [2.21]     | 2.5 [14]                            |                     |



Male Crimp Contact



Female Crimp Contact



Male Crimp Contact



Female Crimp Contact

### 16 Amp Crimp Contacts - 100/Pack

| Male                            | Price   | Weight<br>g [oz] | Female                          | Price   | Weight<br>g [oz] | Wire Gauge mm <sup>2</sup><br>[AWG] | Stripping<br>Length |
|---------------------------------|---------|------------------|---------------------------------|---------|------------------|-------------------------------------|---------------------|
| <a href="#"><u>14106164</u></a> | \$35.50 | 120.43 [4.25]    | <a href="#"><u>14105164</u></a> | \$40.00 | 156.95 [5.54]    | 0.14-0.37 [26-22]                   | 7.5mm<br>[0.29in]   |
| <a href="#"><u>14106264</u></a> | \$35.50 | 135.17 [4.77]    | <a href="#"><u>14105264</u></a> | \$40.00 | 162.84 [5.74]    | 0.5 [20]                            |                     |
| <a href="#"><u>14106364</u></a> | \$35.50 | 131.09 [4.62]    | <a href="#"><u>14105364</u></a> | \$40.00 | 146.51 [5.17]    | 0.75 [18]                           |                     |
| <a href="#"><u>14106564</u></a> | \$35.50 | 131.32 [4.63]    | <a href="#"><u>14105564</u></a> | \$40.00 | 152.86 [5.39]    | 1.5 [16]                            |                     |
| <a href="#"><u>14106664</u></a> | \$35.50 | 139.71 [4.93]    | <a href="#"><u>14105664</u></a> | \$40.00 | 166.47 [5.87]    | 2.5 [14]                            |                     |
| <a href="#"><u>14106864</u></a> | \$35.50 | 136.53 [4.82]    | <a href="#"><u>14105864</u></a> | \$40.00 | 154.68 [5.46]    | 4.0 [12]                            |                     |

### Crimp Contact Tools

| Part Number                      | Price    | Qty | Description                              | Weight<br>[lb] |
|----------------------------------|----------|-----|------------------------------------------|----------------|
| <a href="#"><u>ZP-MC-CT1</u></a> | \$775.00 | 1   | Crimping tool w/die set and locator      | 1.593          |
| <a href="#"><u>ZP-MC-CT2</u></a> | \$112.00 |     | Crimping tool w/die set only, no locator | 0.814          |
| <a href="#"><u>ZP-MC-RT1</u></a> | \$116.00 |     | Removal tool for 10A contacts            | 0.081          |
| <a href="#"><u>ZP-MC-RT2</u></a> | \$105.00 |     | Removal tool for 16A contacts            | 0.086          |



[ZP-MC-CT1](#)



[ZP-MC-CT2](#)



[ZP-MC-RT1](#)



[ZP-MC-RT2](#)

## Electrical Engineering Data - Load Diagrams

