

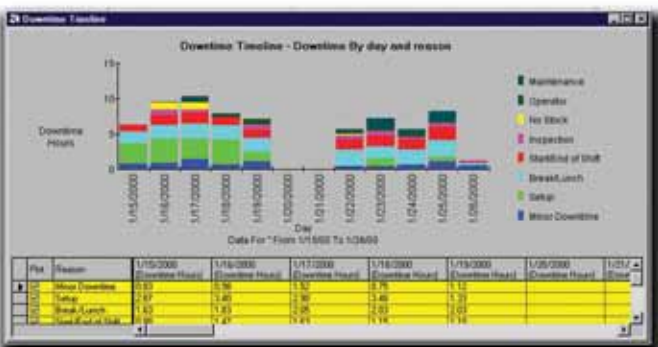


# Think & Do Live! Overview

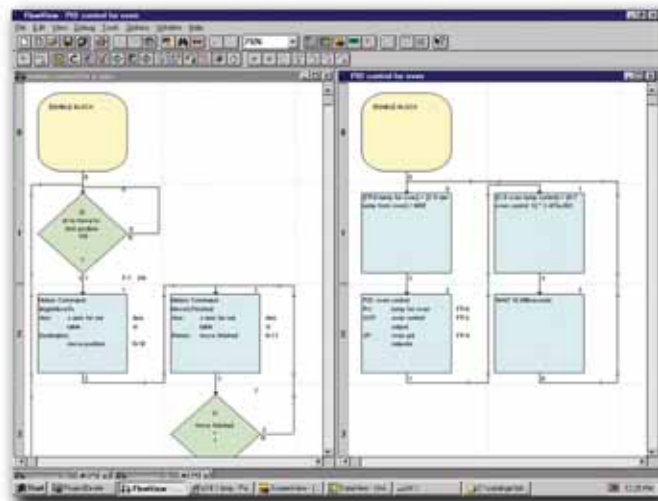

Lots of features for a little price

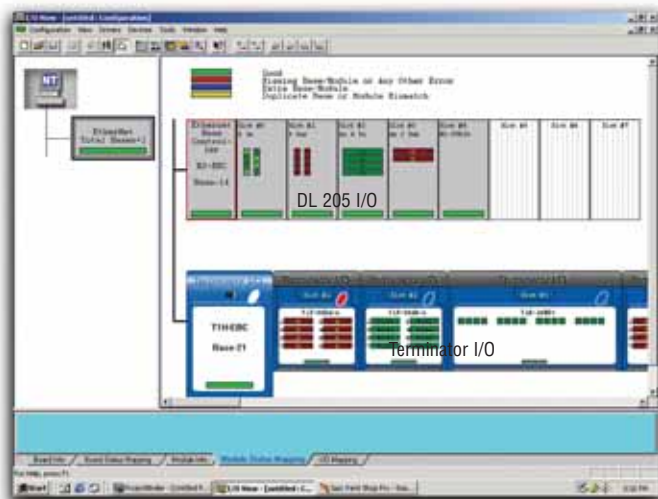

- Think & Do Live! Development & Runtime Licenses**
- PC-ENT-LIVE** <--->  
Includes one Live! development and runtime license. Use to develop or modify a Think & Do Live! project on a PC.
  - PC-ENT-LIVE-E** <--->  
Live! Development/Runtime License with 1-year ESS (Extended Service Subscription)
  - ESS-ENT-LIVE** <--->  
Live! Development/Runtime 1-year ESS (Extended Service Subscription) only  
*Note: This subscription cannot be purchased online. Call us at (800)633-0405 to order. New keycode will be issued. Valid software serial number required at time of purchase.*
  - UPG-ENT-LIVE** <--->  
Live! Development/Runtime upgrade to most current version
  - PC-WPLC-LIVE** <--->  
Live! programming pack for DL205 WinPLC CPUs. Includes one development license without HMI.
  - PC-WPLC-LIVE-UPG** <--->  
Upgrades from PC-WPLC-LIVE to the full PC-ENT-LIVE Development/Runtime package adds HMI capability

## Easy connection to I/O and serial devices

- All I/O drivers are included, with virtually no limit on I/O tags including Ethernet, Profibus, DeviceNet and SDS
- Built-in serial communication block within the flowchart environment allows easy communication to barcode readers, drives, and other smart devices
- All motion drivers are included for both serial and PC-card based motion

## Integrated motion and PID control with easy-to-use flowchart blocks

- Common flowchart language for motion control independent of the motion card you choose
- All motion parameters accessible to flowcharts and screens
- Several motion drivers supported; check the Phoenix Contact Web site for the latest list
- Easy to synchronize motion and control with your flowchart logic
- 64 full function PID loops
- Advanced PID functions like cascaded loops, bumpless transfer, anti-windup and wildflow variables allow you to perform complex process control applications

## Productivity analysis tools

- Downtime analysis — monitor machine downtime by reason codes to identify production bottlenecks
- Cycletime analysis — View machine cycle time by hour, shift or operator to enable you to increase machine and production yield
- Capacity analysis — compare production yield versus maximum capacity to determine maintenance schedules, identify supply problems, or to justify new equipment purchases

## Also includes

Powerful debugging and offline logic testing tools

**Check out:**  
[www.phoenixcon.com/software](http://www.phoenixcon.com/software) for full details

- PLC Overview
- DL05/06 PLC
- DL105 PLC
- DL205 PLC
- DL305 PLC
- DL405 PLC
- Field I/O
- Software**
- C-more HMIs
- Other HMI
- AC Drives
- Motors
- Steppers/Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Current Sensors
- Pushbuttons/Lights
- Process
- Relays/Timers
- Comm.
- TB's & Wiring
- Power
- Circuit Protection
- Enclosures
- Appendix
- Part Index

# PC Control with Field I/O

Think & Do, with your choice of I/O, is a powerful, flexible solution for all your automation needs. The example below uses Ethernet, but Think & Do PC Control supports DeviceNet, Profibus, and other popular fieldbus networks as well.

## Business System



Uplink to Office LAN



Ethernet Base Controller's [TIH-EBC(100)] on-board serial port provides a link to label printer/applier or another serial device.

Terminator I/O distributes small groups of I/O at control points throughout the process

### Dedicated I/O LAN



Main factory floor PC coordinates production, manages product database, and controls material handling systems

Control PCs using separate Ethernet ports to isolate the control networks from the business LAN(s)

### Fail-safe mode choices:

- 1) All I/O off
- 2) Timer-based I/O hold
- 3) Preset pattern

(For all distributed I/O mastered from a PC.)



Ethernet link to production databases



DL205 I/O on Ethernet supports a wide range of I/O, including the H2-CTRIO counter module



Third-party PC motion card controlling three-axis servo system for grinding heads.

Think & Do Live! controls automated grinding machine. Local HMI with touchscreen replaces pushbuttons



Data tags from other PCs are shared over LAN for HMI and control



Industrial modem connection supplies machine support data to OEM



E-SW05U industrial Ethernet switch

Third-party PC card interface to Ethernet vision inspection system



Think & Do Live! controls application of specialty surfaces in oven using complex flow calculations. Also performs visual inspection of finished product

**All industrial hardware shown is available in this catalog**

GPIB/IEEE488 to legacy Laser Surface Analyzer



# PC Control on a WinPLC

The WinPLC has open PC functionality and maintains what you love about PLCs, including the PLC package and price.

The WinPLC is a product that brings the best of the PC control and the PLC worlds to a common platform. PLCs control more automation than any other form of controller. However, it often isn't enough just to control I/O for today's business-aware applications. From the proprietary operating system and ladder logic programming to the hardware design, PLCs were not designed for handling string or array data, complex math, or network collaboration with other software applications and intelligent devices. For success with these applications, use the WinPLC.

The WinPLC module fits into the CPU slot of the popular DL205 series PLC bases for fast, convenient control of DL205 I/O

modules. Programs are downloaded on the WinPLC just like a PLC. However, the WinPLC uses Windows CE, a real time operating system, with the advantages of PC software such as OPC, ActiveX® and other Microsoft communication tools. The WinPLC offers both deterministic control and PC connectivity. Control, data management, communication and integration with business systems are easy with the WinPLCs advanced software development tools.

Develop projects for the WinPLC with Think & Do Studio, Think & Do Live!, or the low cost Live! programming pack for the WinPLC (PC-WPLC-LIVE), which includes flowchart logic, reusable subcharts, PID functions, serial drivers, Modbus TCP and a free OPC/DDE server. You can also upgrade to the full Live package by ordering PC-WPLC-LIVE-UPG.

Or, for qualified OEMs or software developers, the WinPLC comes in a CE-only version (available from Host Engineering directly) for VB and C++ programmers to develop their own control code. If you are interested in the CE-only version, visit

[www.hosteng.com](http://www.hosteng.com) for details.

## WinPLC features

- Fits into DL205 CPU slot
- Backplane communications to DL205 I/O
- 100 MHz CPU models
- 4 MB ROM/2 MB RAM (WPLC1 and WPLC2)
- 8 MB ROM/8 MB RAM (WPLC3)
- Microsoft® Windows® CE operating system
- 10 Mbps Ethernet port and RS232 serial port



## Best of the PC world

- Easily handles complex math algorithms and string or array data
- Easy serial communications
- Built-in Ethernet port
- Standard Windows (Win CE)
- Seamless integration with HMI, SCADA and Enterprise systems
- Advanced software development tools

## Best of the PLC world

- Direct backplane access to I/O
- Standard micro PLC form factor
- Diskless operation
- Non-volatile program and data memories
- Logic control independent of HMI
- Low cost



It's more than a PLC, it's a WinPLC !

## WinPLC CPUs

For both Think & Do Studio and Think & Do Live!

**4 MB ROM/2 MB RAM**


H2-WPLC2-EN (100MHz)....<--->

**CPU with extra memory  
8 MB ROM/ 8 MB RAM**

H2-WPLC3-EN (100 MHz)....<--->


\* The WinPLC does not support Think & Do PC Control Software's HMI graphics, SQL communications, productivity analysis, and some motion control features.

# Serial Communications in an EBC or WinPLC

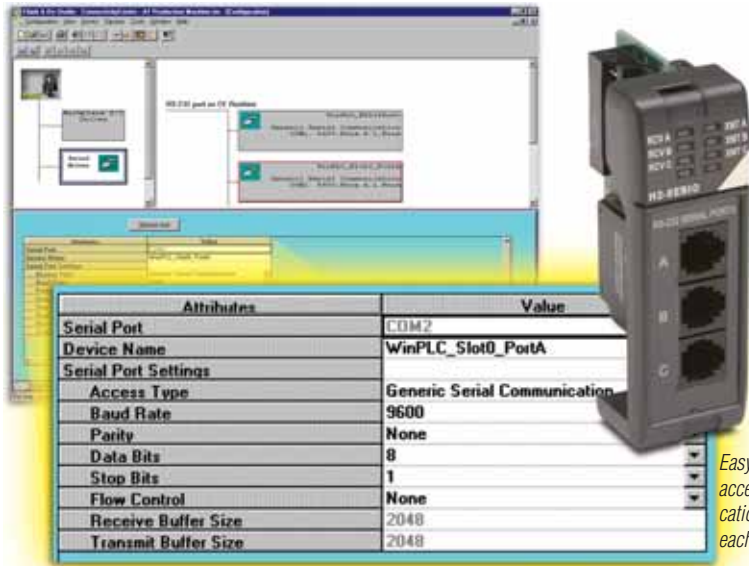

Easy point and click access to set communication parameters for each port individually

H2-SERIO Specifications	
<b>Module Type</b>	Intelligent module for use with H2-EBC and all WinPLCs
<b>Number of Modules Supported per WinPLC</b>	3
<b>Connector</b>	RJ12 jack
<b>Power Consumption</b>	210mA @ 5VDC
<b>Operating Environment</b>	0 to 60°C (32°F to 140°F), 5% to 95% RH (non-condensing)
<b>Baud Rates</b>	300 baud - 57.6 Kbaud



RJ12 (6P6C) female modular connector

## H2-SERIO port pin assignments

- 1 0V Power (-) connection (GND)
- 2 CTS Clear to Send
- 3 RXD Receive Data (RS232C)
- 4 TXD Transmit Data (RS232C)
- 5 RTS Request to Send
- 6 0V Signal Ground (GND)

## H2-SERIO <--->

In addition to the built-in serial port on the WinPLC or EBC, you can also add as many as nine additional serial ports for Think & Do applications. Install up to three H2-SERIO modules into a WinPLC base or an H2-EBC base, and you have “PC-like” serial ports to communicate to multiple serial devices, such as barcode scanners. All Think & Do products include advanced string and array functions that make manipulating serial data a snap.

Both Think & Do Studio and Think & Do Live! support easy point-&-click access to set baud rate, parity, data bits, and stop bits for each port. Think & Do allows each port to be designated as a Modbus slave or a generic serial device. Each port on the H2-SERIO module is capable of full hardware handshaking.

*Note: While the H2-SERIO will support virtually any serial device, processing large amounts of serial data will increase system response time. This is important to consider when using multiple H2-SERIO modules, especially in a WinPLC local base that also includes an H2-ERM, H2-CTRIO or other specialty modules.*

*Due to the large amount of data inherent with serial devices, the H2-SERIO module is not supported across an H2-ERM - H2-EBC link. The H2-SERIO module is supported in a WinPLC local base and in H2-EBC bases connected to a PC system master.*

# Ethernet I/O from a WinPLC Base



H2-ERM <--->  
H2-ERM-F <--->

## H2-ERM(-F)

The Ethernet Remote Master H2-ERM (-F) allows a WinPLC solution to expand beyond a single I/O base, over a high speed Ethernet link. Add an H2-ERM to a WinPLC local base and connect it with one EBC (Ethernet Base Controller) to control larger amounts of I/O or to distribute your I/O for more convenient wiring. Both Think & Do Studio and Think & Do Live! support the H2-ERM module.

The H2-ERM connects to your control network using a Category 5 UTP cable for cable runs up to 100 meters. Use repeaters to extend distances.

Our fiber optic version uses industry standard 62.5/125 ST-style fiber optic cables and can be run up to 2,000 meters.

Specifications	H2-ERM	H2-ERM-F
<b>Communications</b>	10BaseT Ethernet	10BaseFL Ethernet
<b>Data Transfer Rate</b>	10Mbps	
<b>Link Distance</b>	100 meters (328 ft.)	2K meters (6560 ft.)
<b>Ethernet Port</b>	RJ45	ST-style fiber optic
<b>Ethernet Protocols</b>	TCP/IP, IPX	
<b>Power Consumption</b>	530mA @5VDC	670mA @5VDC
<b>Usage</b>	One ERM per WinPLC system	

*The WinPLC with the H2-ERM can be configured in complex systems with any of several specialty modules. Therefore, to ensure reliable performance on any system, default support for the H2-ERM product is one H2-ERM with one H2-EBC.*

# A PC with WinPLC System


## A great material handling solution

Data flows between control system and order processing system



Multi-port Ethernet card(s) save the cost of a managed switch (IP-forwarding must be enabled)

PC controls sortation machine and has HMI and motion control. Tracks packages from induction to diverting location

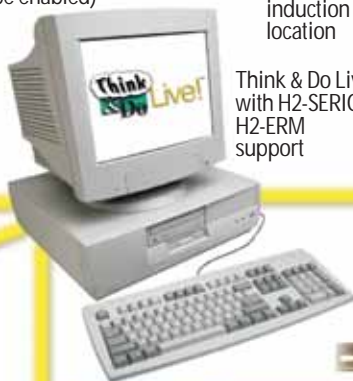

Think & Do Live! with H2-SERIO and H2-ERM support

DL205 remote I/O base with Counter module (H2-CTRIO) for counting and pulse output

Terminator I/O on Ethernet for fastest response



Terminator I/O combines I/O modules with a terminal block base for very compact I/O enclosures along sortation system



### Induction station

WinPLC controls conveyors from warehouse pick area to induction area. The WinPLC with Ethernet Remote Master (H2-ERM) and 3-port serial module (H2-SERIO) has serial interfaces to a tote scanner and operator interfaces.

Serial link to tote scanner



Touch panel

Data tag links between WinPLC and PC systems



E-SW05U industrial Ethernet switch



Touch panel



WinPLC used here for local logic. Don't need local logic? Use an H2-EBC for the same I/O and serial functionality with Live! or Studio



Add packaging station modules as required



### Packing stations

WinPLC with local I/O for indicator lights, packing station sensors and interlocks to take-away conveyors. H2-SERIO 3-port serial modules provide links to packing station devices. Operators pack and weigh the packages, and apply and scan each label before sending packages to the shipping area.

Up to 10 serial ports per WinPLC base

Note: Large volumes of serial data will impact WinPLC I/O scan time.

PLC Overview
DL05/06 PLC
DL105 PLC
DL205 PLC
DL305 PLC
DL405 PLC
Field I/O
<b>Software</b>
C-more HMIs
Other HMI
AC Drives
Motors
Steppers/Servos
Motor Controls
Proximity Sensors
Photo Sensors
Limit Switches
Encoders
Current Sensors
Pushbuttons/Lights
Process
Relays/Timers
Comm.
TB's & Wiring
Power
Circuit Protection
Enclosures
Appendix
Part Index