

# DINnectors Accessories

## Steel DIN Rails Features



### 35 mm wide

- Available in 1-meter lengths
- 7.5 mm-high rails primarily used to mount terminal blocks, relays, timers and small PLCs such as the DL05, DL06, DL105, DL205, CLICK, and Productivity3000
- 15 mm-high rails for mounting larger and heavier components such as contactors and larger PLCs

### 15 mm wide

- Available in 1-meter lengths
- DN-R15S1 exclusively for mounting mini terminal blocks such as the DN-M10-A

	Part Number	Pcs/Pkg	Price/Pkg	Part#	Pcs/Pkg	Price/Pkg	Part Number	Pcs/Pkg	Price/Pkg
<b>DIN Rail</b>	<b>DN-R35S1</b>	10	<--->	<b>DN-R35HS1</b>	10	<--->	<b>DN-R15S1</b>	10	<--->
	<b>DN-R35S1-2</b>	2	<--->	<b>DN-R35HS1-2</b>	2	<--->	<b>DN-R15S1-2</b>	2	<--->
<b>Steel DINnectors Accessories Specifications</b>									
<b>Description</b>	Steel, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 7.5 mm (0.30 in) high			Steel, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 15 mm (0.59 in) high			Steel, slotted, 3'3" (1 m) length, 15 mm (0.59 in) wide, 5.5 mm (0.22 in) high		
<b>Plating</b>	Zinc-plated and chromated								
<b>International Standards</b>	EN60715. RoHS								
<b>Suggested Mounting Screw Type</b>	M6			M6			M4		

## Aluminum DIN Rail Features



### 35 mm wide

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Lightweight, easy to cut and deburr
- Terminal blocks only
- Maximum mounting screw #10-32 or M5
- Available in 1-meter lengths




### 35 mm wide raised

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Enables users to raise terminal blocks 2¼" above the back panel
- Terminal blocks only
- Available in 1-meter lengths
- Bushing or grommet recommended for wire access hole (example Heyco UB-875 not sold by ADC)


	Part Number	Pcs/Pkg	Price/Pkg	Part Number	Pcs/Pkg	Price/Pkg
<b>DIN Rail</b>	<b>DN-R35SAL1</b>	10	<--->	<b>DN-R35SAL2-2</b>	2	<--->
	<b>DN-R35SAL1-2</b>	2	<--->			
<b>Aluminum DIN Rail Specifications</b>						
<b>Description</b>	Aluminum, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 10 mm (0.39 in) high			Aluminum, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 58 mm (2.28 in) high		
<b>Plating</b>	Galvanic zinc plating, non-anodized finish					
<b>International Standards</b>	DIN 50960, RoHS					
<b>Suggested Mounting Screw Type</b>	#10-32 or M5					

# DINnectors Accessories



## Dimensions mm [inches]

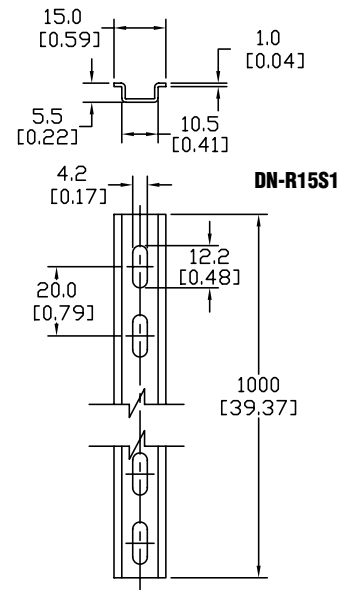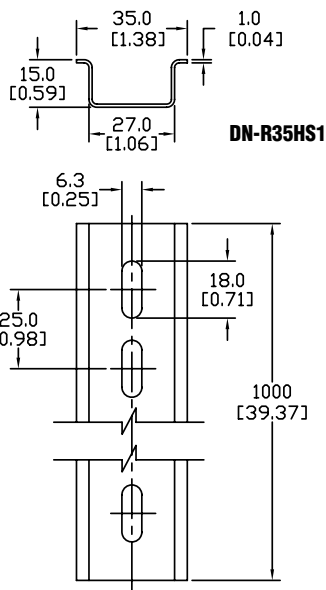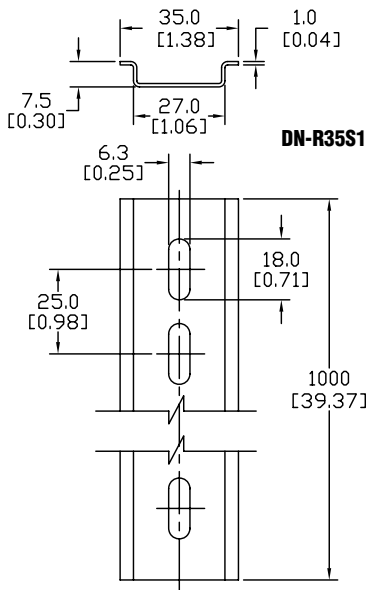

**DN-R35SAL1  
DN-R35SAL1-2**

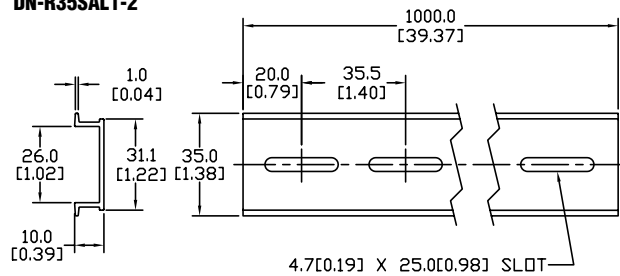

**DN-R35SAL2-2**

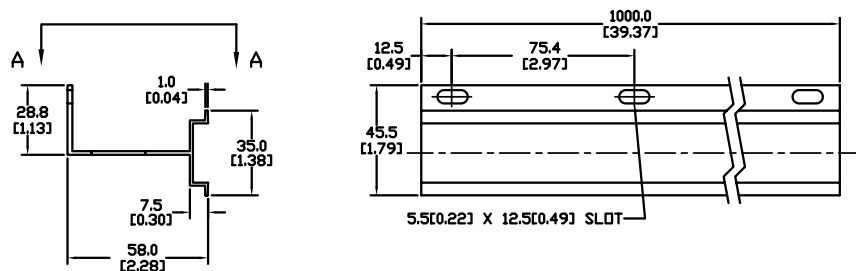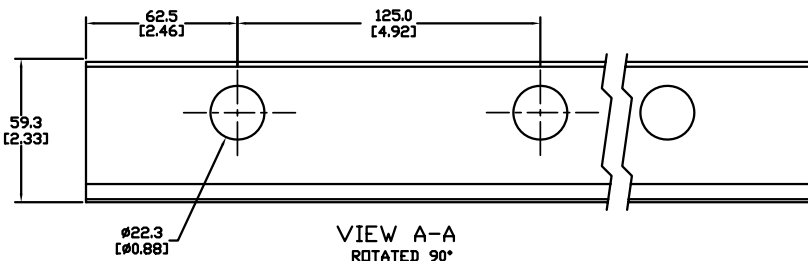

# DINnectors Brackets and Mounting Clips

## DIN rail support brackets

- Angled support brackets raise and tilt mounting rails 30 degrees from mounting surface for easier wiring
- DN-ASB1 plated steel support bracket
- DN-ASB2-10 cold-rolled steel treated with galvanic zinc plating and passivation

## DIN rail mounting clips

- Snap small devices not made for mounting onto 35mm DIN rails
- Zinc plated steel

DIN Rail Support Brackets and Mounting Clips			
Part Number	Description	Pcs/Pkg	Price Each
<b>DN-ASB1</b>	30° angled DIN rail support bracket (M6-1.0 screws not included)	50	<--->
<b>DN-ASB2-10</b>	30° angled DIN rail support bracket (M6-1.0 screws included)	10	<--->
<b>DN-SSB25-10</b>	1" (25 mm) DIN rail support bracket (M6-1.0 screws included)	10	<--->
<b>DN-SSB50-10</b>	2" (50 mm) DIN rail support bracket (M6-1.0 screws included)	10	<--->
<b>DN-SSB70-10</b>	2.75" (70 mm) DIN rail support bracket (M6-1.0 screws included)	10	<--->
<b>DN-SSB90-10</b>	3.5" (90 mm) DIN rail support bracket (M6-1.0 screws included)	10	<--->
<b>DN-CLIP-FM4</b>	DIN rail mounting clip with M4 x 0.7 mm threaded hole (Screws not included)	40	<--->
<b>DN-CLIP-FM4-5</b>		5	<--->
<b>DN-CLIP-FM5</b>	DIN rail mounting clip with M5 x 0.8 mm threaded hole (Screws not included)	40	<--->
<b>DN-CLIP-FM5-5</b>		5	<--->



**DN-ASB1**



**DN-ASB2-10**



**DN-SSB25-10**



**DN-SSB50-10**



**DN-SSB70-10**



**DN-SSB90-10**






**DN-CLIP-FM4  
DN-CLIP-FM4-5**





**DN-CLIP-FM5  
DN-CLIP-FM5-5**

# DINnectors Brackets and Mounting Clips

## Dimensions mm [inches]

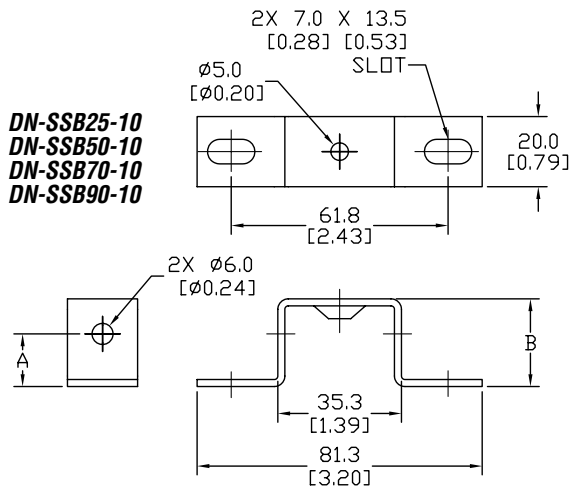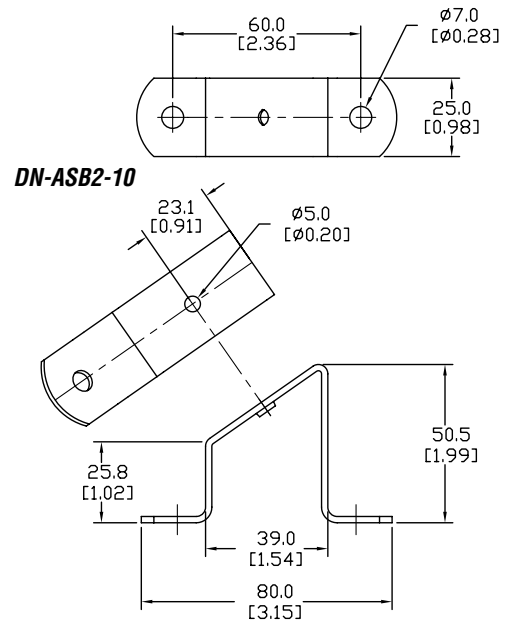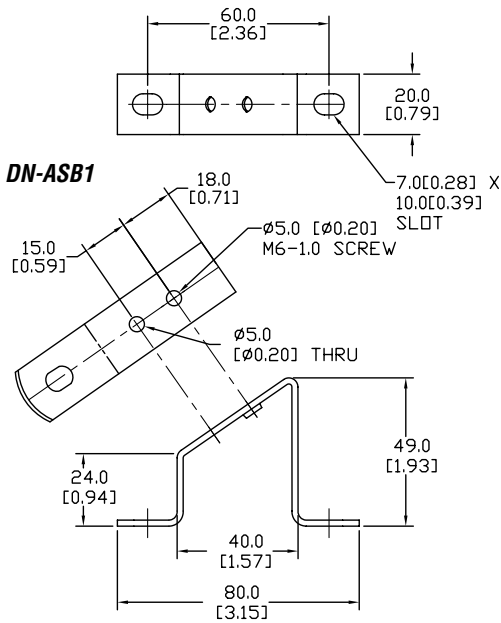

DIN Rail Support Brackets		
Part Number	DIM A mm [inches]	DIM B mm [inches]
<b>DN-SSB25-10</b>	15.0 [0.59]	25.0 [0.98]
<b>DN-SSB50-10</b>	40.0 [1.58]	50.0 [1.97]
<b>DN-SSB70-10</b>	60.0 [2.36]	70.0 [2.76]
<b>DN-SSB90-10</b>	80.0 [3.15]	90.0 [3.54]

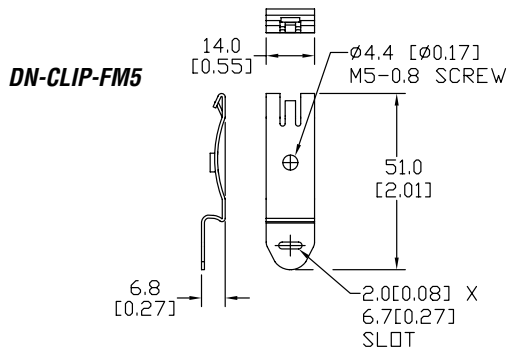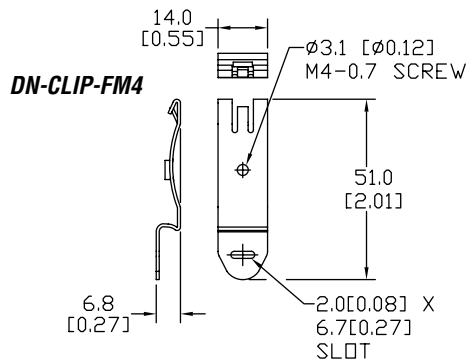

# DINnectors Accessories

## Jumpers






Multi-pole jumper bars for DINnector terminal blocks



Multi-pole Jumper Bars							
Part Number	Number of Poles	Voltage	Current Rating	Insulation Color	Works with Terminal Block Series	Pcs/Pkg	Price
<b>DN-2J2Y</b>	2	600V	25A	Orange	DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A	100	<-->
<b>DN-2J4Y</b>	2			Yellow	DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A	100	<-->
<b>DN-2J6Y</b>	2		30A	Green	DN-Q8-A	100	<-->
<b>DN-2J6</b>	2		65A	---	DN-T6	100	<-->
<b>DN-2JL14B-A</b>	2	300V	20A	Blue	DN-TL-A	100	<-->
<b>DN-2JL14-A</b>	2			Red	DN-TL-A	100	<-->
<b>DN-3J2Y</b>	3	600V	25A	Orange	DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A	100	<-->
<b>DN-3J4Y</b>	3			Yellow	DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A	100	<-->
<b>DN-3J6Y</b>	3		30A	Green	DN-Q8-A	100	<-->
<b>DN-3J6</b>	3		65A	---	DN-T6	100	<-->
<b>DN-3JL14B-A</b>	3	300V	20A	Blue	DN-TL-A	100	<-->
<b>DN-3JL14-A</b>	3			Red	DN-TL-A	100	<-->
<b>DN-4J6</b>	4	600V	65A	---	DN-T6	100	<-->
<b>DN-12J6Y</b>	12	600V	30A	Green	DN-Q8-A	10	<-->
<b>DN-12JL14B-A</b>	12	300V	20A	Blue	DN-TL-A	10	<-->
<b>DN-12JL14-A</b>	12			Red	DN-TL-A	10	<-->
<b>DN-24J2Y</b>	24	600V	25A	Yellow	DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A	5	<-->
<b>DN-24J4Y</b>	24			Yellow	DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A	5	<-->
<b>DN-24J8</b>	24		50A	Green	DN-T8	5	<-->
<b>DN-55J6</b>	55		65A	---	DN-T6	1	<-->

## Dimensions

mm [inches]

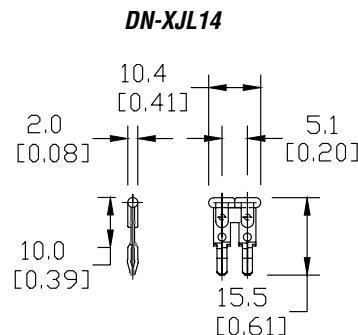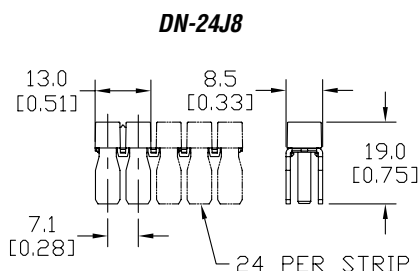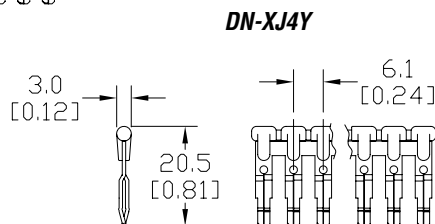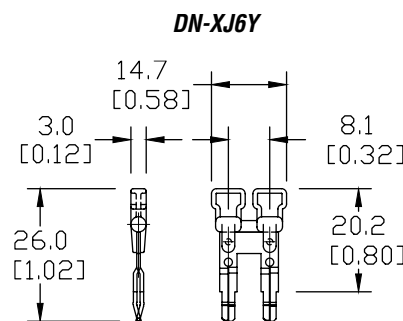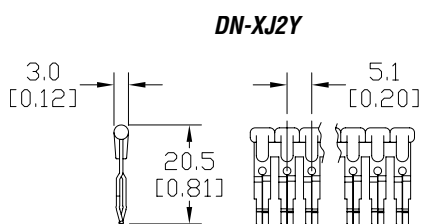

# DINnectors Accessories

## Modifying a DN-24J8 jumper bar to the required number of poles

- 1) Place the insulating part into the jumper bar and insert screws, based on number of poles required. (For instance, in the following example, 5 poles are required). Click into place.



- 2) Using a cutting tool, cut the insulating part at the edge of the jumper bar (see below).



- 3) Hold the metal jumper bar and insulating jumper with two hands, placing fingers to the left and right of the pole you wish to cut, repeatedly flexing up and down (1 or 2 times should be sufficient) until the jumper bar and insulating jumper break in two.



- 4) Remove the small remaining piece of jumper (see below). This is important to ensure appropriate insulation distance in the case of contiguously applied jumpers in sequence. This step also facilitates the placement of a separator terminal if the bridge is positioned as the last terminal of a group.



- 5) The jumpers now are ready to be screwed onto DN-T8 series terminal blocks.



## Cutting Tool

Cutting Tool for J8 EURO Jumpers			
Part Number	Description	Pcs/ Pkg	Price
<b>DN-J2CUT</b>	Cutting tool for DN-2J2Y, DN-3J2Y and DN-24J2Y jumpers. Cuts jumper and maintains protective covering	1	<--->
<b>DN-J4CUT</b>	Cutting tool for DN-2J4Y, DN-3J4Y and DN-24J4Y jumpers. Cuts jumper and maintains protective covering	1	<--->



**DN-J2CUT**




**DN-J4CUT**

# DINnectors Accessories

## Terminal Plugs



**DN-xxPLUG**

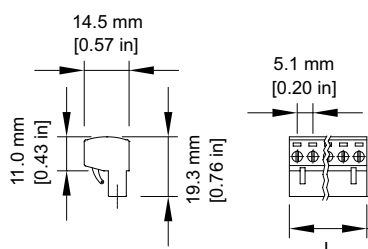

Note: Dimensions are in mm [inches]

Accessories – Terminal Plugs				
Plugs* Part Number	Number of Poles	Length	Pcs/Pkg	Price/Pkg
<b>DN-2PLUG</b>	2	L = 0.40 in [10.2 mm]	200	<--->
<b>DN-3PLUG</b>	3	L = 0.60 in [15.2 mm]	200	<--->
<b>DN-4PLUG</b>	4	L = 0.80 in [20.3 mm]	100	<--->
<b>DN-5PLUG</b>	5	L = 1.00 in [25.4 mm]	100	<--->
<b>DN-6PLUG</b>	6	L = 1.20 in [30.5 mm]	100	<--->
<b>DN-7PLUG</b>	7	L = 1.40 in [35.6 mm]	50	<--->
<b>DN-8PLUG</b>	8	L = 1.60 in [40.6 mm]	50	<--->
<b>DN-9PLUG</b>	9	L = 1.80 in [45.7 mm]	50	<--->
<b>DN-10PLUG</b>	10	L = 2.00 in [50.8 mm]	50	<--->
<b>DN-11PLUG</b>	11	L = 2.20 in [55.9 mm]	50	<--->
<b>DN-12PLUG</b>	12	L = 2.40 in [61.0 mm]	50	<--->


Terminal Plugs Ratings	
<b>Voltage/Current</b>	300V, 12A
<b>Wire Gauge</b>	14–22 AWG, CU only
<b>Torque</b>	Tightening Torque: 4.5 lb-in [0.51 Nm]
<b>Usage Temperature</b>	Ambient air temperature: -4°F to 221°F (-20°C to 105°C) Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C)
<b>Agency Approvals</b>	UL file #: E179129

\* DN-xxPLUGs fit all DN-EMXxx & DN-QEMXxx plug-in terminal blocks

## Disconnect blade



**DN-DIS-BLADE**

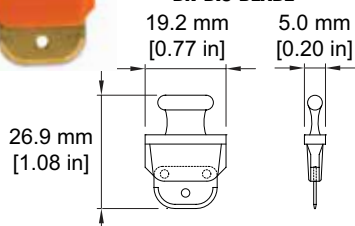


Disconnect Blade			
Part Number	Description	Pcs/Pkg	Price
<b>DN-DIS-BLADE</b>	Use instead of DN-SUPP-x for DN-FE or as replacement for DN-DIS.	50	<--->


## End Brackets




End Brackets			
Part Number	Description	Pcs/Pkg	Price/Pkg
<b>DN-EB15</b>	Terminal block end stop 7mm width screw clamping. Gray	100	<--->
<b>DN-EB15MN</b>		20	<--->
<b>DN-EB35</b>	Terminal block end stop 9mm width screw clamping. Gray	50	<--->
<b>DN-EB35MN</b>		20	<--->
<b>DN-EB35-A</b>	Terminal block end stop 6mm width screw clamping. Black	50	<--->
<b>DN-EB35-A-10</b>		10	<--->
<b>DN-QEB35</b>	Terminal block end stop 6mm width screwless clamping. Black	50	<--->
<b>DN-QEB35-10</b>		10	<--->




**DN-EB15**



**DN-EB35-A**



**DN-EB35**



**DN-QEB35**

For more information on accessories, see the "DINnectors Accessories" section of this chapter.

# DINnectors Accessories

## End Covers

Certain end covers can be used with multiple terminal block parts to cover and insulate the open side, or to put more space between adjacent blocks.

DINnector End Covers				
Part Number	Description	Works with terminal block series	Pcs/Pkg	Price
<b>DN-EC1210</b>	Covers open side of DN-T12-A and DN-T10-A series terminal blocks	DN-T10-A, DN-T12-A	100	<-->
<b>DN-EC1210MN</b>			25	<-->
<b>DN-EC86</b>	Covers open side of DN-T8 and DN-T6 series terminal blocks	DN-T8, DN-T6	100	<-->
<b>DN-EC86MN</b>			25	<-->
<b>DN-EC4</b>	Covers open side of DN-T4 series terminal blocks	DN-T4	50	<-->
<b>DN-EC1/0</b>	Covers open side of DN-T1/0 series terminal blocks	DN-T1/0	50	<-->
<b>DN-DEC10</b>	Covers open side of DN-D10 series double-level terminal blocks	DN-D10	100	<-->
<b>DN-EC14</b>	Covers open side of DN-TL14-A series terminal blocks	DN-TL14-A	25	<-->
<b>DN-EC14S</b>	Covers open side of DN-TL14S-A series terminal blocks	DN-TL14S-A	25	<-->
<b>DN-ECM10</b>	Covers open side of DN-M10-A series terminal blocks	DN-M10-A DN-M10B-A	100	<-->
<b>DN-ECM10MN</b>			25	<-->
<b>DN-ECKBD</b>	Covers open side of DN-KBD12 series disconnect blocks	DN-KBD12	100	<-->
<b>DN-EMXM1EC1</b>	Covers open side of DN-EMXM1 and DN-QEMXM1 terminal blocks	DN-EMXM1 DN-QEMXM1	25	<-->
<b>DN-EMXM1EC2</b>	Covers closed side of DN-EMXM1 and DN-QEMXM1 terminal blocks		25	<-->
<b>DN-EMXDVEC1</b>	Covers open side of DN-EMXDV and DN-QEMXDV terminal blocks	DN-EMXDV DN-QEMXDV	25	<-->
<b>DN-EMXDVEC2</b>	Covers closed side of DN-EMXDV and DN-QEMXDV terminal blocks		25	<-->
<b>DN-FESEP</b>	Covers closed side of DN-FE sockets and DN-DIS disconnects	DN-FE, DN-DIS	50	<-->
<b>DN-FESEP-10</b>			10	<-->
<b>DN-QEC12</b>	Covers open side of DN-Q12-A or DN-QG12-A series screwless terminal blocks	DN-Q12-A	50	<-->
<b>DN-QEC10</b>	Covers open side of DN-Q10-A or DN-QG10-A series screwless terminal blocks	DN-Q10-A	50	<-->
<b>DN-QEC8</b>	Covers open side of DN-Q8-A or DN-QG8-A series screwless terminal blocks	DN-Q8-A	50	<-->
<b>DN-QEC12-1-2</b>	Covers open side of DN-Q12-1-2-A and DN-QKBD12-A series screwless terminal blocks	DN-Q12-1-2-A DN-QKBD12	25	<-->
<b>DN-QEC12-2-2</b>	Covers open side of DN-Q12-2-2-A series screwless terminal blocks	DN-Q12-2-2-A	25	<-->
<b>DN-QDEC12</b>	Covers open side of DN-QD12-A series screwless terminal blocks	DN-QD12-A	25	<-->

## Spacers

Spacers are used to put more space between adjacent blocks.



DINnector Spacers				
Part Number	Description	Works with terminal block series	Pcs/Pkg	Price
<b>DN-S1210</b>	Spacer for DN-T12-A and DN-T10-A series terminal blocks	DN-T10-A, DN-T12-A	100	<-->
<b>DN-S1210MN</b>			25	<-->
<b>DN-S86</b>	Spacer for DN-T8 and DN-T6 series terminal blocks	DN-T8, DN-T6	100	<-->
<b>DN-EMXM1SPA1</b>	Spacer for single-level plug-in terminal blocks	DN-EMXM1, DN-QEMXM1	25	<-->
<b>DN-EMXDVSPA1</b>	Spacer for double-level plug-in terminal blocks	DN-EMXDV, DN-QEMXDV	25	<-->
<b>DN-FESPA</b>	Spacer for DN-FE sockets and DN-DIS disconnects	DN-FE, DN-DIS	50	<-->
<b>DN-FESPA-10</b>			10	<-->




# DINnectors Accessories

DINector End Covers and Spacers Dimensions			
Part Number	Length	Height	Thickness
<b>DN-EC1210</b>	44 mm [1.73 in]	35 mm [1.38 in]	1.5 mm [0.06 in]
<b>DN-EC1210MN</b>			
<b>DN-S1210</b>			
<b>DN-S1210MN</b>	55 mm [2.17 in]	44 mm [1.73 in]	
<b>DN-EC86</b>			
<b>DN-EC86MN</b>	50 mm [1.97 in]	43 mm [1.69 in]	
<b>DN-S86</b>			
<b>DN-EC4</b>			
<b>DN-EC1/0</b>	62 mm [2.44 in]	60 mm [2.36 in]	
<b>DN-DEC10</b>	72 mm [2.80 in]	55 mm [2.17 in]	
<b>DN-EC14</b>	78 mm [3.08 in]	55 mm [2.17 in]	
<b>DN-EC14S</b>	55 mm [2.17 in]	50 mm [1.97 in]	
<b>DN-ECM10</b>	32 mm [1.26 in]	27 mm [1.06 in]	
<b>DN-ECM10MN</b>			
<b>DN-ECKBD</b>	52 mm [2.05 in]	34.5 mm [1.36 in]	
<b>DN-EMXM1EC1</b>	as shown		
<b>DN-EMXM1EC2</b>			
<b>DN-EMXDVEC1</b>			
<b>DN-EMXDVEC2</b>			
<b>DN-EMXDVSPA1</b>			
<b>DN-EMXM1SPA1</b>			
<b>DN-FESPA</b>			
<b>DN-FESPA-10</b>			
<b>DN-FESEP</b>			
<b>DN-FESEP-10</b>			
<b>DN-QEC12</b>	50 mm [1.97 in]	23 mm [0.9 in]	1.5 mm [0.06 in]
<b>DN-QEC10</b>	57.4 mm [2.26 in]	33.6 mm [1.32 in]	
<b>DN-QEC8</b>	63 mm [2.48 in]	38.5 mm [1.52 in]	
<b>DN-QEC12-1-2</b>	68.5 mm [2.70 in]	28.5 mm [1.12 in]	
<b>DN-QEC12-2-2</b>	87.5 mm [3.44 in]	28.5 mm [1.12 in]	
<b>DN-QDEC12</b>	98 mm [3.86 in]	37 mm [1.46 in]	


**DN-EC1210, DN-EC1210MN  
DN-EC86, DN-EC86MN DN-EC4,  
DN-EC1/0, DN-ECKBD, DN-S1210,  
DN-S1210MN, DN-S86**




**DN-ECM10  
DN-ECM10MN**













**DN-EC14**



**DN-EC14S**




**DN-QEC12, DN-QEC10,  
DN-QEC8, DN-QEC12-1-2,  
DN-QEC12-2-2**



# Marking Accessories



**DN-LB (blank)**  
shown on left



**DN-LAB (blank)** shown on left;  
part of **DN-LA100** on right



**DN-LTA** marker shown top; **DN-LT60** marker  
shown middle;  
**DN-LTGND** shown bottom


## DN-L

- **Fits terminal block types:** All except, Screwless DINnectors, DN-T12-A, DN-M10-A, DN-MG, and DN-TL series
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence of 50 tags (i.e. 101-150) is printed 10 times in each package of 500 tags.
2. The DN-L tags fit all DINnectors 6mm wide and wider.
3. The DN-L tags fit all DINnectors 6mm wide and wider but will leave a gap between tags on blocks wider than 6mm.

### Dimensions



Marking Sequence	Part#	Pcs/Pkg	Price
1-50	<b>DN-L50</b>	500	<--->
51-100	<b>DN-L100</b>	500	<--->
101-150	<b>DN-L150</b>	500	<--->
151-200	<b>DN-L200</b>	500	<--->
201-250	<b>DN-L250</b>	500	<--->
251-300	<b>DN-L300</b>	500	<--->
301-350	<b>DN-L350</b>	500	<--->
351-400	<b>DN-L400</b>	500	<--->
401-450	<b>DN-L450</b>	500	<--->
Blank	<b>DN-LB</b>	500	<--->
L1, L2, L3, L, N, GND, +, -, COM, COM*	<b>DN-LS</b>	500	<--->


## DN-QL

- **Fits terminal block types:** Screwless DN-Q series
- **Material:** Thermoplastic with heat embossed black print. Packaged 100 labels per card, and five cards per box.

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.

### Dimensions



**DN-QLS Shown**

Marking Sequence	Part #	Pcs/Pkg	Price
1-100	<b>DN-QL100</b>	500	<--->
101-200	<b>DN-QL200</b>	500	<--->
201-300	<b>DN-QL300</b>	500	<--->
301-400	<b>DN-QL400</b>	500	<--->
401-500	<b>DN-QL500</b>	500	<--->
Blank Tags	<b>DN-QLB</b>	500	<--->
L1, L2, L3, L, N, GND, +, -, COM, COM*	<b>DN-QLS</b>	500	<--->


## DN-LA

- **Fits terminal block types:** DN-T12-A series
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.
2. The DN-T12-A series is 5mm wide, so the 6mm wide DN-L tags do not fit these blocks.
3. The DN-LA tags fit all DINnectors 5mm wide and wider but will leave a gap between tags on blocks wider than 5mm.

### Dimensions



Marking Sequence	Part#	Pcs/Pkg	Price
1-100	<b>DN-LA100</b>	500	<--->
101-200	<b>DN-LA200</b>	500	<--->
201-300	<b>DN-LA300</b>	500	<--->
301-400	<b>DN-LA400</b>	500	<--->
Blank Tags	<b>DN-LAB</b>	500	<--->
L1, L2, L3, L, N, GND, +, -, COM, COM*	<b>DN-LAS</b>	500	<--->


## DN-LAT

- **Fits terminal block types:** Triple level DN-TL14
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.

### Dimensions



Marking Sequence	Part #	Pcs/Pkg	Price
1-100	<b>DN-LAT100-A</b>	500	<--->
101-200	<b>DN-LAT200-A</b>	500	<--->
201-300	<b>DN-LAT300-A</b>	500	<--->
301-400	<b>DN-LAT400-A</b>	500	<--->
401-500	<b>DN-LAT500-A</b>	500	<--->
501-600	<b>DN-LAT600-A</b>	500	<--->
Blank Tags	<b>DN-LATB-A</b>	500	<--->
L1, L2, L3, L, N, GND, +, -, COM, COM*	<b>DN-LATS-A</b>	500	<--->


## DN-LT

- **Fits terminal block types:** All except Screwless DINnectors (see DN-QL series)
- **Material:** Thermoplastic with heat embossed black print

Note:

1. These marking tags allow the flexibility of creating custom marking sequences on site.
2. The DN-M10-A support a maximum of three digits (tags), while other DINnectors support up to four digits (tags)

### Dimensions



Marking Sequence	Part#	Pcs/Pkg	Price
1-5	<b>DN-LT15</b>	100	<--->
6-0	<b>DN-LT60</b>	100	<--->
1	<b>DN-LT1</b>	100	<--->
2	<b>DN-LT2</b>	100	<--->
3	<b>DN-LT3</b>	100	<--->
4	<b>DN-LT4</b>	100	<--->
5	<b>DN-LT5</b>	100	<--->
6	<b>DN-LT6</b>	100	<--->
7	<b>DN-LT7</b>	100	<--->
8	<b>DN-LT8</b>	100	<--->
9	<b>DN-LT9</b>	100	<--->
0	<b>DN-LT0</b>	100	<--->
Unprinted	<b>DN-LTBLNK</b>	100	<--->
A	<b>DN-LTA</b>	100	<--->
B	<b>DN-LTB</b>	100	<--->
C	<b>DN-LTC</b>	100	<--->
D	<b>DN-LTD</b>	100	<--->
E	<b>DN-LTE</b>	100	<--->
F	<b>DN-LTF</b>	100	<--->
G	<b>DN-LTG</b>	100	<--->
H	<b>DN-LTH</b>	100	<--->
I	<b>DN-LTI</b>	100	<--->
J	<b>DN-LTJ</b>	100	<--->
K	<b>DN-LTK</b>	100	<--->
L	<b>DN-LTL</b>	100	<--->
M	<b>DN-LTM</b>	100	<--->
N	<b>DN-LTN</b>	100	<--->
-	-	-	-
P	<b>DN-LTP</b>	100	<--->
Q	<b>DN-LTQ</b>	100	<--->
R	<b>DN-LTR</b>	100	<--->
S	<b>DN-LTS</b>	100	<--->
T	<b>DN-LTT</b>	100	<--->
U	<b>DN-LTU</b>	100	<--->
V	<b>DN-LTV</b>	100	<--->
W	<b>DN-LTW</b>	100	<--->
X	<b>DN-LTX</b>	100	<--->
Y	<b>DN-LTY</b>	100	<--->
Z	<b>DN-LTZ</b>	100	<--->
⊕	<b>DN-LTGND</b>	100	<--->
+	<b>DN-LTPOS</b>	100	<--->
-	<b>DN-LTNEG</b>	100	<--->
~	<b>DN-LTAC</b>	100	<--->
=	<b>DN-LTDC</b>	100	<--->

# DINnectors Accessories – Marking

## Terminal Marking Accessories



**DN-EMLBL1**



**DN-EMLBL2**




**DN-EMLBL3**

Part #	Description	For Use With	Pcs/Pkg	Price Each
<b>DN-EMLBL1</b>	Blank labels	DN-EMPEG1 pin protectors for DN-xEMXxx plug-in terminal blocks	100	<--->
<b>DN-EMLBL2</b>	Labels printed 1 – 12		100	<--->
<b>DN-EMLBL3</b>	Labels printed 13 – 24		100	<--->



**DN-MTA marking tag adapter**

### DN-MTA dimensions

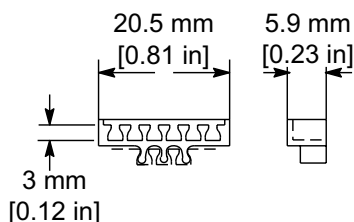

Part#	Description	Pcs/Pkg	Price Each
<b>DN-MTA</b>	Marking tag adapter holds up to six DN-LT tags	50	<--->

**Note:** DN-MTA adapter does not fit DN-T12-A terminal blocks.

## Marking Pen – for terminal and wire marking tags

- Permanent
- Smudge-proof
- Waterproof
- Weatherproof
- Lightfast (won't fade)
- Dries in seconds (excellent for left-handed users)
- Dry-safe (pen can be left uncapped for days without drying out)
- Low odor ink

Part#	Description	Pcs/Pkg	Price Each
<b>DN-MP</b>	Indelible black ink marking pen	1	<--->



**Marking pen**

## Wire Marking Accessories



**DN-WMTAG1 wire tags & DN-WM-x wire tag holders**

Part #	Description	For Use With	Pcs/Pkg	Price Each
<b>DN-WMTAG1</b>	Wire tag – blank	all DN-WM-x wire tag holders	525	<--->
<b>DN-WM-1</b>	Wire tag holder, clear, 12 mm length, 0.051–0.118 in diameter; for 22–16 AWG wire	DN-WMTAG1	200	<--->
<b>DN-WM-2</b>	Wire tag holder, clear, 12 mm length, 0.098–0.196 in diameter; for 16–11 AWG wire		200	<--->
<b>DN-WM-3</b>	Wire tag holder, clear, 12 mm length, 0.157–0.393 in diameter; for 13–5 AWG wire		100	<--->
<b>DN-WM-4</b>	Wire tag holder, clear, 12 mm length, 0.314–0.629 in diameter; for 5 AWG wire		100	<--->