

DC Input Modules

P2-32ND3

\$99.00

Discrete Input

The P2-32ND3 DC Input Module provides 32 sinking/sourcing 12–24 VDC inputs.



**No terminal block
sold for this module;
ZIPLink required.**

Input Specifications

Inputs per Module	32 (Sink/Source)
Rated Voltage	12–24 VDC
Operating Voltage Range	10.8–26.4 VDC
Input Current (typical)	2.5 mA @ 12VDC 5.0 mA @ 24VDC
Maximum Input Current @ Temp	6mA @ 60°C (26.4 VDC)
Input Impedance	4.7 kΩ @ 24VDC
ON Voltage Level*	≤4VDC sourcing ≥12.5 VDC sinking
OFF Voltage Level	>6VDC sourcing <8.5 VDC sinking
Minimum ON Current	2mA
Maximum OFF Current	1.5 mA
OFF to ON Response	2ms Max. 1ms Typical
ON to OFF Response	2ms Max. 1ms Typical
Status Indicators	Logic side (32 points)
Commons per Module	4 Isolated (8 points/common)
External DC Power Required*	24VDC (-20% / +25%) @ 150mA

Voltage Ratings

*External Supply Voltage	On Voltage Level
19.2 VDC	>9.0 VDC
24.0 VDC	>11.3 VDC
26.4 VDC	>12.5 VDC

General Specifications

Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 70°C (-4° to 158°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Field to Logic Side Isolation	1800VAC applied for 1 second
Insulation Resistance	>10MΩ @ 500VDC
Heat Dissipation	4000mW
Enclosure Type	Open Equipment
Module Keying to Backplane	Electronic
Module Location	Any I/O slot in a Productivity2000 System.
Field Wiring	Use ZIPLink Wiring System ONLY. See Wiring Solutions.
EU Directive	See the "EU Directive" topic in the Productivity Suite Help File. Information can also be obtained at: www.productivity2000.com
Weight	101g (3.56 oz)
Agency Approvals**	UL 61010-2-201 file E139594, Canada & USA CE (EMC: EN61131-2*, SAFETY: EN61010-2-201)

*Meets EMC and Safety requirements. See the Declaration of Conformity for details.

**To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific component part number web page.

CPU	Firmware	Productivity Suite
P2-550	Version 1.2.2.x or later	Version 2.3.x.x or later

See Wiring Solutions for part numbers of **ZIPLink** cables and connection modules required with this I/O module.



Connector Specifications


Connector Type	IDC style header with latch, Omron XG4A-4034
Number of Pins	40 point
Pitch	0.1 in (2.54 mm)

DC Input Modules

P2-32ND3 (cont'd)

Wiring Diagrams


Dual Supply

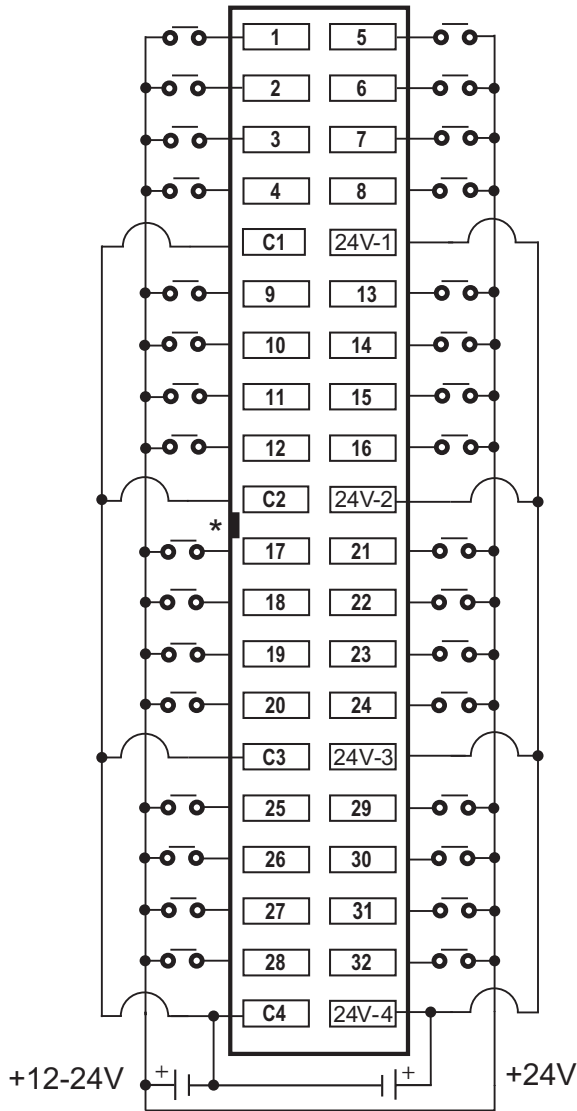




Sink

* Denotes key location of all associated ZIPLink cables.

Single Supply

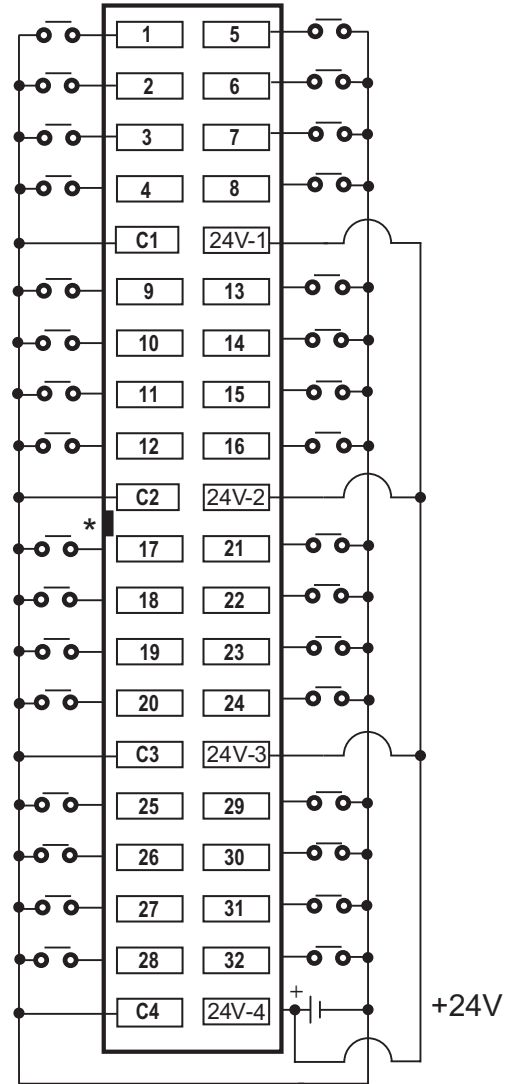

Source

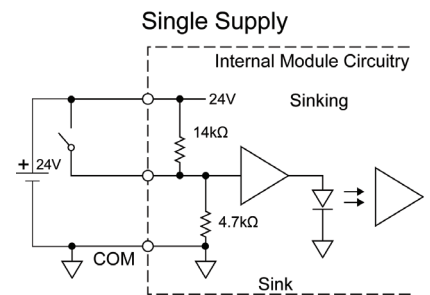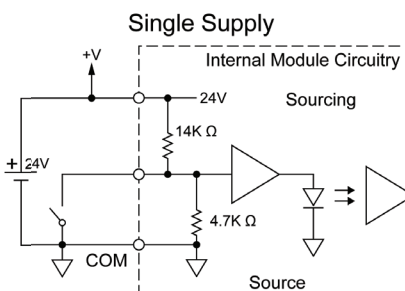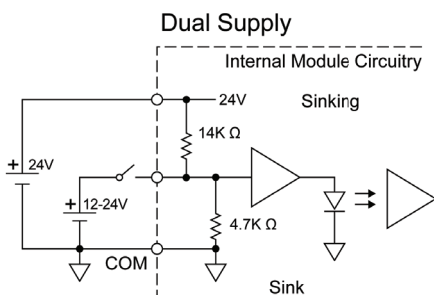

Wiring I/O Modules


There are two available methods for wiring most I/O modules: The **ZIPLink** wiring system or hand wiring to the optional removable I/O module terminal blocks.

Note: Thermocouple and RTD modules are not compatible with the **ZIPLink** system and are shipped with the optional terminal blocks included.

ZIPLinks Wiring Systems


For wiring I/O modules, we strongly recommend using pre-wired **ZIPLink** wiring systems, which eliminate the need for hand wiring modules to terminal blocks.

See the selection matrix guide on the following pages.

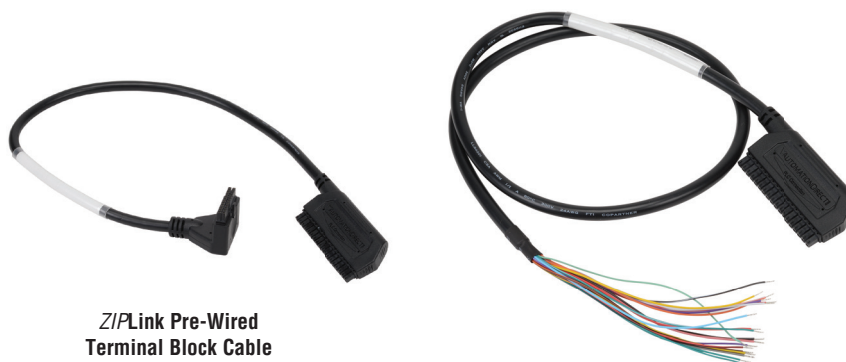

**ZIPLink Pre-Wired
Terminal Block Cable**

ZIPLink Pigtail Cable



ZIPLink Module


Removable Terminal Blocks

For most I/O modules you can also purchase a removable terminal block (part no. P2-RTB or P2-RTB-1).

Note: P2-RTB supplied with Thermocouple and RTD modules.



Removable Terminal Block P2-RTB



Removable Terminal Block P2-RTB-1

Terminal Block Removal





Wiring Solutions


Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end and terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the **ZIPLink** System ranging from

CPU I/O-to-**ZIPLink** Connector Modules that are ready for field termination, options for connecting to third party devices, GS Series, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of **ZIPLink** modules are provided with **ZIPLink** cables. See the following solutions to help determine the best **ZIPLink** system for your application.

Solution 1: DirectLOGIC, CLICK, Productivity2000 and Productivity3000 I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a **ZIPLink** connector module used in conjunction with a prewired **ZIPLink** cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

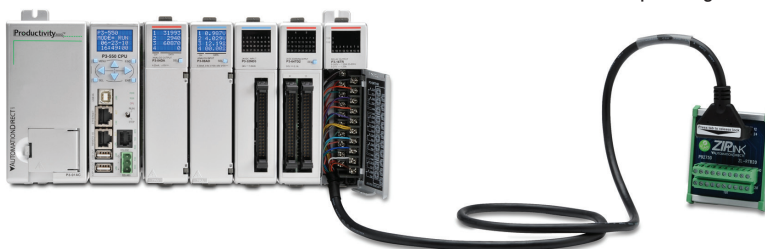

Use the CPU I/O Modules to **ZIPLink** Connector Modules selector tables located in the **ZIPLink** Wiring Solutions section to:

1. Locate your I/O module/CPU,
2. Select a **ZIPLink** Module, and
3. Select a corresponding **ZIPLink** Cable.

Solution 2: DirectLOGIC, CLICK, Productivity2000 and Productivity3000 I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the **ZIPLink** Pigtail Cables. **ZIPLink** Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.



Use the I/O Modules to 3rd Party Devices selector tables located in the **ZIPLink** Wiring Solutions section to:

1. Locate your CPU I/O module, and
2. Select a **ZIPLink** Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to CPUs, SureServo, SureStep, Stellar Soft Starter and AC drives. Add a **ZIPLink** communications module to quickly and easily set up a multi-device network.

Use the Drives Communication selector tables located in the **ZIPLink** Wiring Solutions section to:

1. Locate your Drive and type of communications, and
2. Select a **ZIPLink** cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with *DirectLOGIC*, *CLICK*, *Productivity2000* and *Productivity3000* CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-Sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the **Serial Communications Cables** selector table located in the **ZIPLink Wiring Solutions** section,

1. Locate your connector type
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, **ZIPLink Specialty Modules** are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-Sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIPLink Specialty Modules** selector table located in the **ZIPLink Wiring Solutions** section:

1. Locate the type of application.
2. Select a **ZIPLink** module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible **ZIPLink** Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Use the **Universal Connector Modules and Pigtail Cables** table located in the **ZIPLink Wiring Solutions** section to:

1. Select module type,
2. Select the number of pins,
3. Select cable.





CPU I/O Modules to ZIPLink Connector Modules - Productivity2000

Discrete Input Modules

Productivity2000 Input Module ZIPLink Selector				
I/O Input Module	ZIPLink			
	# of Terms	Component	Part No.	Cable Part No.
P2-08ND3	18	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-16ND3		Sensor/LED	ZL-LTB16-24-1	
P2-08NE3		Feedthrough	ZL-RTB20 (-1)	
P2-16NE3		Sensor/LED	ZL-LTB16-24-1	
P2-32ND3	40	Feedthrough	ZL-RTB40 (-1)	ZL-CBL40 *
		Sensor/LED	ZL-LTB32-24-1	
P2-32NE3	40	Feedthrough	ZL-RTB40 (-1)	ZL-CBL40 *
		Sensor/LED	ZL-LTB32-24-1	
P2-08NAS	8	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-16NA	18			

Specialty Modules

Productivity2000 Specialty & Motion Modules ZIPLink Selector				
I/O Module	ZIPLink			
	# of Terms	Component	Part No.	Cable Part No.
P2-HSI	40	Feedthrough	ZL-RTB40 (-1)	ZL-CBL40 *S
P2-HSO				
P2-08SIM	See Note 1			
P2-SCM				



Discrete Output Modules

Productivity2000 Output Module ZIPLink Selector				
I/O Output Module	ZIPLink			
	# of Terms	Component	Part No.	Cable Part No.
P2-08TD1S	8	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-08TD2S	8			
P2-15TD1	15			
P2-15TD2	15			
P2-08TD1P	18			
P2-08TD2P	18			
P2-08TRS	18			
P2-08TAS	18			
P2-16TA	18	Feedthrough	ZL-RTB20 (-1)	
		Fuse	ZL-RFU20 ²	
P2-16TD1P	18	Feedthrough	ZL-RTB20 (-1)	
		Relay (Sourcing)	ZL-RRL16-24-1 ZL-RRL16W-24-1 ZL-RRL16F-24-1 ZL-RRL16HDF-24-1	
P2-16TD2P	18	Feedthrough	ZL-RTB20 (-1)	
		Relay (Sinking)	ZL-RRL16-24-2 ZL-RRL16W-24-2 ZL-RRL16F-24-2 ZL-RRL16HDF-24-2	
P2-32TD1P	32	Feedthrough	ZL-RTB40 (-1)	ZL-CBL40 *
P2-32TD2P	32			
P2-16TR	18	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
		Fuse	ZL-RFU20 ²	

* Select the cable length by replacing the * with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

¹ These modules are not supported by the ZIPLink wiring system

² Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.



CPU I/O Modules to ZIPLink Connector Modules - Productivity2000

Analog Input Modules

Productivity2000 Analog Input Module ZIPLink Selector				
I/O Analog Module	ZIPLink			
	# of Terms	Component	Part No.	Cable Part No.
P2-04AD	18	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-08AD-1				
P2-08AD-2				
P2-08ADL-1				
P2-08ADL-2				
P2-16AD-1	24			ZL-P2-CBL24 *
P2-16AD-2				
P2-16ADL-1				
P2-16ADL-2				
P2-06RTD	Matched Only	See Note 1		
P2-08THM	T/C Wire Only	See Note 1		
P2-08NTC	Copper Conductors	See Note 1		

* Select the cable length by replacing the * with: Blank = 0.5 m, -1 = 1.0 m, or -2 = 2.0 m.

¹ These modules are not supported by the ZIPLink wiring system.

Analog Output Modules

Productivity2000 Analog Output Module ZIPLink Selector				
I/O Analog Module	ZIPLink			
	# of Terms	Component	Part No.	Cable Part No.
P2-04DA	18	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-04DAL-1				
P2-04DAL-2				
P2-08DA-1				
P2-08DA-2				
P2-08DAL-1	24	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL24 *
P2-08DAL-2				
P2-16DA-1				
P2-16DA-2				
P2-16DAL-1	18	Feedthrough	ZL-RTB20 (-1)	ZL-P2-CBL18 *
P2-16DAL-2				
P2-8AD4DA-1				
P2-8AD4DA-2				



I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in a Productivity2000 System. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number P2-FILL).

Discrete Input Modules

Productivity2000 Discrete Input Modules			
Part Number	Number of Inputs	Description	Price
<i>P2-08SIM</i>	8	Input Simulator Module	\$47.00
<i>P2-08ND3</i>	8	Sinking/Sourcing 12–24 VDC	\$46.00
<i>P2-08NE3</i>	8	Sinking/Sourcing 24V AC/DC	\$40.00
<i>P2-16ND3</i>	16	Sinking/Sourcing 12–24 VDC	\$69.00
<i>P2-16NE3</i>	16	Sinking/Sourcing 24V AC/DC	\$69.00
<i>P2-32ND3</i>	32	Sinking/Sourcing 24 VDC	\$99.00
<i>P2-32NE3</i>	32	Sinking/Sourcing 24V AC/DC	\$99.00
<i>P2-08NAS</i>	8	AC Isolated 100-120 VAC	\$77.00
<i>P2-16NA</i>	16	AC 100-240 VAC	\$105.00

Analog Input Modules

Productivity2000 Analog Input Modules			
Part Number	Number of Channels	Description	Price
<i>P2-04AD</i>	4	Analog Input (Voltage/Current)	\$195.00
<i>P2-08AD-1</i>	8	Analog Input (Current)	\$199.00
<i>P2-08AD-2</i>	8	Analog Input (Voltage)	\$219.00
<i>P2-08ADL-1*</i>	8	Analog Input (Current)	\$143.00
<i>P2-08ADL-2*</i>	8	Analog Input (Voltage)	\$157.50
<i>P2-16AD-1</i>	16	Analog Input (Current)	\$249.00
<i>P2-16AD-2</i>	16	Analog Input (Voltage)	\$275.00
<i>P2-16ADL-1*</i>	16	Analog Input (Current)	\$178.00
<i>P2-16ADL-2*</i>	16	Analog Input (Voltage)	\$196.00
<i>P2-06RTD</i>	6	Analog RTD Input	\$325.00
<i>P2-08THM</i>	8	Analog Thermocouple Input	\$329.00
<i>P2-08NTC</i>	8	Analog Thermistor Input	\$265.00

Analog Output Modules

Productivity2000 Analog Output Modules			
Part Number	Number of Channels	Description	Price
<i>P2-04DA</i>	4	Analog Output (Voltage/Current)	\$194.00
<i>P2-04DAL-1*</i>	4	Analog Output (Current)	\$110.00
<i>P2-04DAL-2*</i>	4	Analog Output (Voltage)	\$101.00
<i>P2-08DA-1</i>	8	Analog Output (Current)	\$269.00
<i>P2-08DA-2</i>	8	Analog Output (Voltage)	\$249.00
<i>P2-08DAL-1*</i>	8	Analog Output (Current)	\$202.00
<i>P2-08DAL-2*</i>	8	Analog Output (Voltage)	\$195.50
<i>P2-16DA-1</i>	16	Analog Output (Current)	\$354.00
<i>P2-16DA-2</i>	16	Analog Output (Voltage)	\$339.00
<i>P2-16DAL-1*</i>	16	Analog Output (Current)	\$253.00
<i>P2-16DAL-2*</i>	16	Analog Output (Voltage)	\$243.00

* Low resolution analog modules without OLED display.

Discrete Output Modules

Productivity2000 Discrete Output Modules			
Part Number	Number of Outputs	Description	Price
<i>P2-08TD1S</i>	8	Isolated Sinking	\$47.00
<i>P2-08TD2S</i>	8	Isolated Sourcing	\$47.00
<i>P2-15TD1</i>	15	Sinking	\$65.00
<i>P2-15TD2</i>	15	Sourcing	\$65.00
<i>P2-08TD1P</i>	8	Sinking Protected	\$41.00
<i>P2-08TD2P</i>	8	Sourcing Protected	\$41.00
<i>P2-16TD1P</i>	16	Sinking Protected	\$69.00
<i>P2-16TD2P</i>	16	Sourcing Protected	\$69.00
<i>P2-32TD1P</i>	32	Sinking Protected	\$99.00
<i>P2-32TD2P</i>	32	Sourcing Protected	\$99.00
<i>P2-08TAS</i>	8	Isolated AC	\$105.00
<i>P2-16TA</i>	16	100-240 VAC Output	\$129.00
<i>P2-08TRS</i>	8	Isolated Relay	\$51.00
<i>P2-16TR</i>	16	Relay	\$95.00

Productivity2000 Analog Input/Output Modules			
Part Number	Number of Channels	Description	Price
<i>P2-8AD4DA-1</i>	8/4	Analog Input/Output (Current)	\$310.00
<i>P2-8AD4DA-2</i>	8/4	Analog Input/Output (Voltage)	\$310.00

Specialty Modules


Productivity2000 Specialty Modules			
Part Number	Number of Channels	Description	Price
<i>P2-HSI**</i>	2	High-Speed Input	\$195.00
<i>P2-HSO**</i>	2	High-Speed Output	\$195.00
<i>P2-SCM</i>	4 ports	Serial Communications Module	\$165.00

** ZIPlink required.


I/O Module Installation Procedure

WARNING: Do not apply field power until the following steps are completed. See hot-swapping procedure for exceptions.


Step One: Align module catch with base slot and rotate module into connector.



Step Two: Pull top locking tab toward module face. Click indicates lock is engaged.

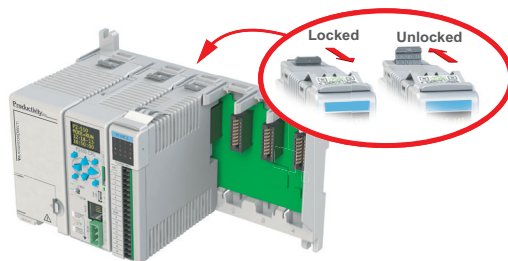

Step Three: Attach field wiring using removable terminal block or *ZIPLink* wiring system.

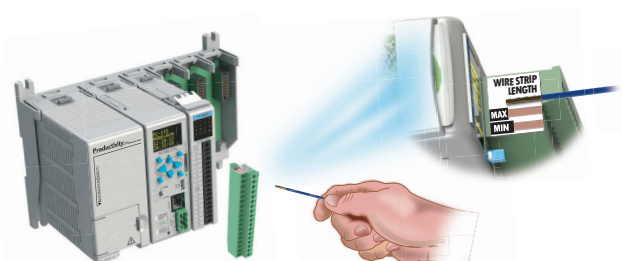

WARNING: Explosion hazard – Do not connect or disconnect connectors or operate switches while circuit is live unless the area is known to be non-hazardous. Do not hot-swap modules unless the area is known to be non-hazardous.